


12" Slim Surface Installation Instructions

IMPORTANT SAFETY INSTRUCTIONS

Instructions pertaining to a risk of fire, electric shock or injury to others.

WARNING

Installation must be done accordingly to local electrical codes.
Installation should be done by a certified electrician.

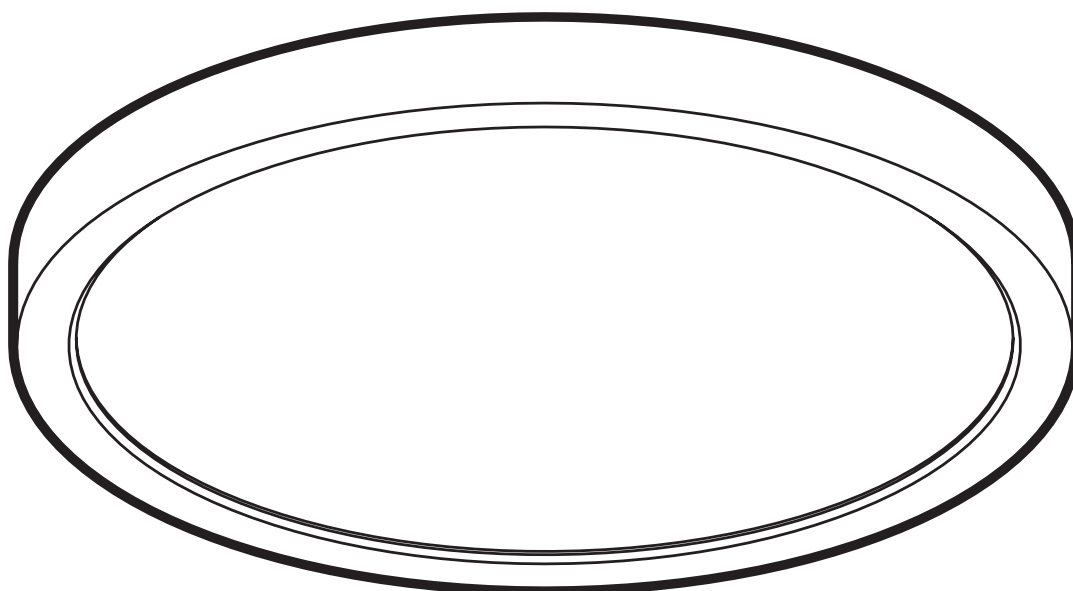

Integrated driver is dimmable with most regular dimmers
(low voltage electronic dimmer suggested) For best dimmability
see compatible dimmer list. Dimming range up to: 10% - 100%


12" Slim Surface Installation Instructions

Instructions Before Installations

WARNING • BEFORE STARTING INSTALLATION, SHUT THE LINE FEED POWER OFF USING THE CIRCUIT BREAKER • **WARNING**

Installation Instructions

1

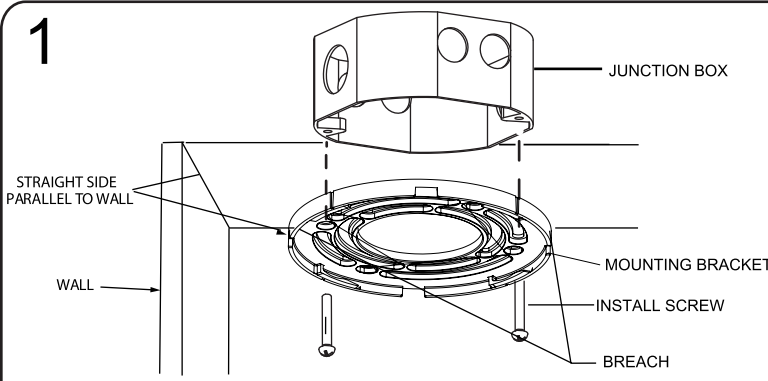

JUNCTION BOX

STRAIGHT SIDE PARALLEL TO WALL


WALL

MOUNTING BRACKET

INSTALL SCREW

BREACH


After Installation

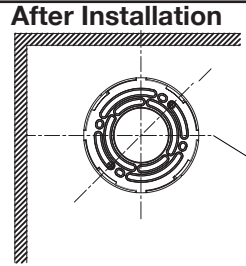

BREACH

Hold mounting bracket up to junction box with flange facing down. Align breach side of the mounting bracket parallel to nearest wall. Screw mounting bracket to J-box

2

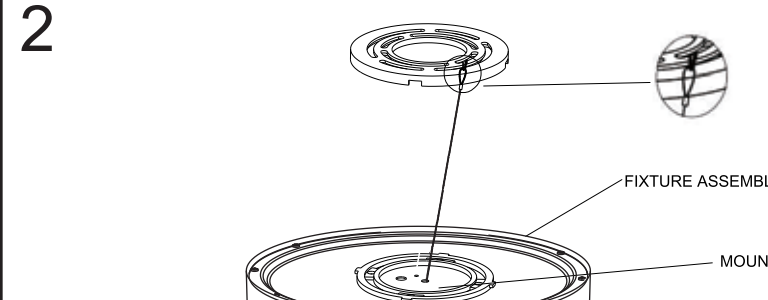


FIXTURE ASSEMBLY

MOUNTING TAB

Before connecting, attach to hook side of safety cable on mounting bracket.

3

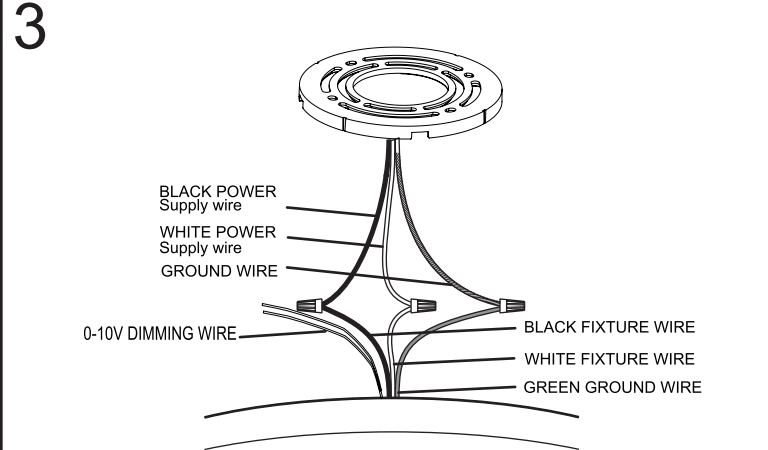

BLACK POWER Supply wire

WHITE POWER Supply wire

GROUND WIRE

0-10V DIMMING WIRE


BLACK FIXTURE WIRE

WHITE FIXTURE WIRE

GREEN GROUND WIRE

With Power OFF
Connect the green groundwire from the fixture to the bare copper groundwire from the junction box using a wirenut (if house wiring does not include a ground wire, consult your electrical code for approved grounding methods Use wirenuts to connect black fixture wire to the black power supply wire and white fixture wire to the white power supply.


4

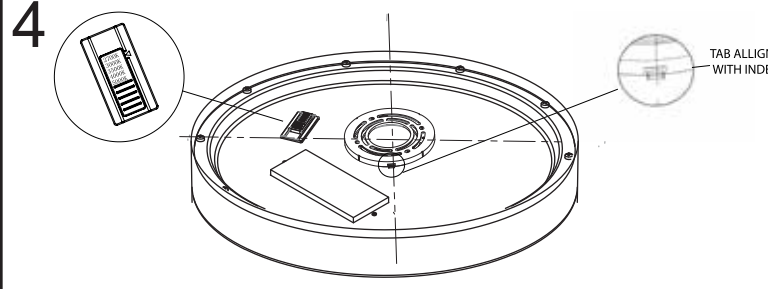

TAB ALLIGNED WITH INDENT

Attach provided to indents (opening) of the mounting tabs on back of the fixture with indents in the mounting bracket.

5

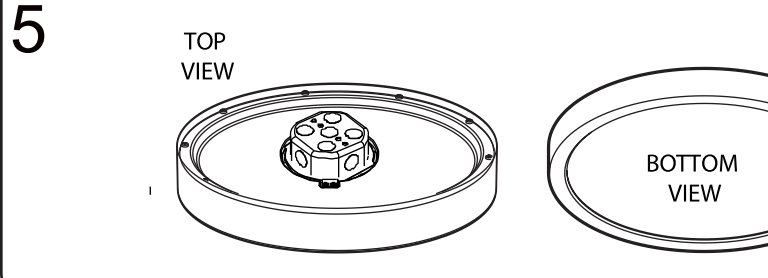

TOP VIEW

BOTTOM VIEW

Using sticker on the fixture (reference point for mounting tab) and on the ceiling as reference point, lift fixture up to the ceiling and rotate clockwise until fixture is secured (45° turn until it locks).