

LED Flood Light Installation Instructions

CAUTIONS:

1. Do not use an electric generator to test LED fixtures.
2. Please abide by related country, regional and local law and regulations when install this fixture.
3. Please turn off the power before installation or maintenance.
4. Proper earth grounding is required to ensure safety.

NOTICE:

1. To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge.
2. Please wear gloves to avoid injury before installation.
3. If any smoke or spark of the wire happened, please turn off the power immediately and notify relevant personnel.


ATTENTION:

1. Please check if there is any damage during shipping. If so, please contact manufacturer timely.
2. Please read the installation instruction carefully to check whether all the accessories are complete. After confirmation, then install the fixture according to installation steps.

INSTRUCTIONS:


1. This product has dimming function.
2. 2 dimming functions are available in this LED light:
 - (1). Constant current can be achieved by 0-10VDC dimming.
 - (2). Variation of resistance unit dimming (Please choose the appropriate dimming way according to your needs. You can also choose not to use this function).
3. Choose the wire connection ways, dimming ways and installation ways according to your needs and the led fixture purchased.

WIRING DIAGRAMS:

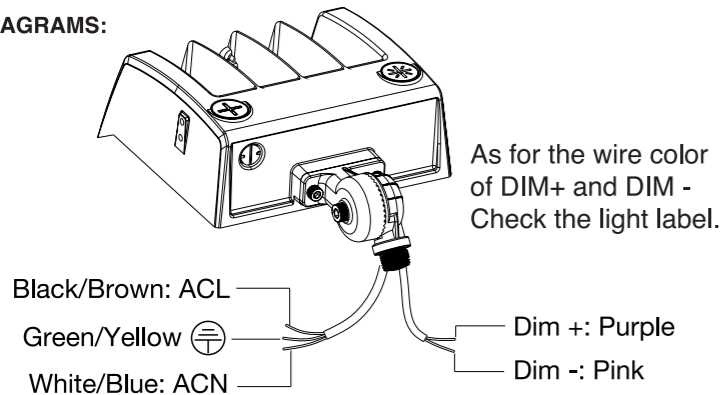


OPTIONAL BRACKET AND INSTALLATION INSTRUCTIONS:

There are 3 optional brackets for this fixture. The following is flood fixtures with different brackets.

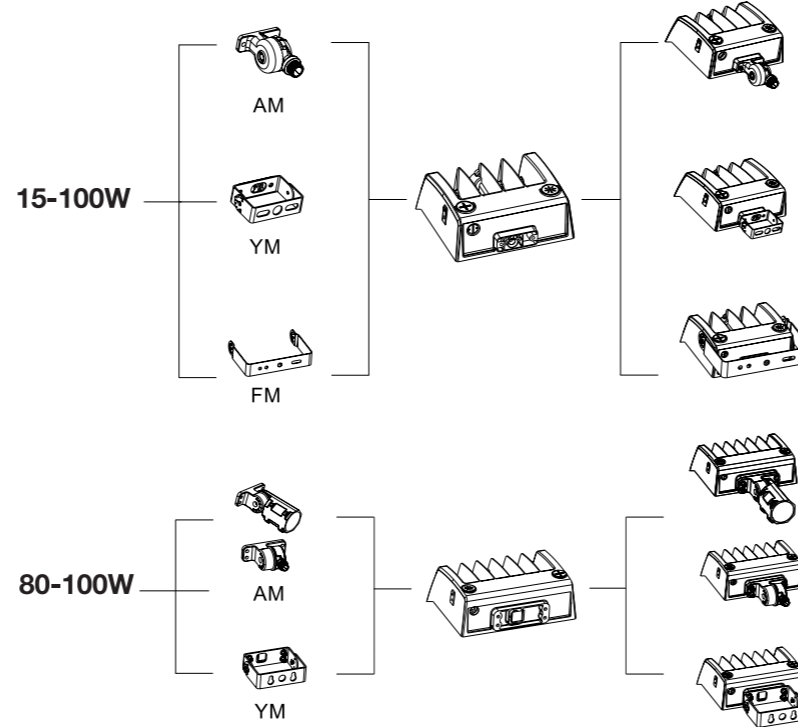

1.1 INSTALLED WITH 1/2 KNUCKLE MOUNT (SUITABLE FOR 15W, 30W, 60W, 80W, 100W) (AM)

- STEP 1: Take the fixture out of package.
 STEP 2: Match the hole of rubber mat with bracket, pass wire through and fix it with screws (Watch out not to scratch the wire); (Figure 1.1)
 STEP 3: Pass the wire through from the other bracket and fix it with screws. (Watch out not to scratch the wire); (Figure 1.2)

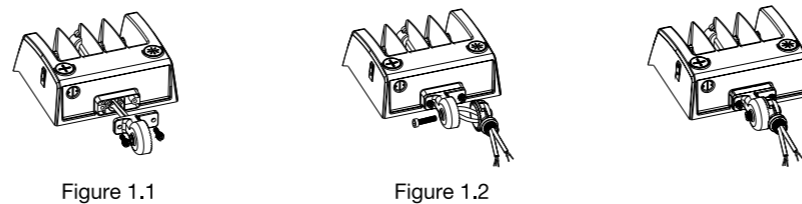


1.2 INSTALLED WITH WHOLE FIXTURE (SUITABLE FOR 15W, 30W, 60W, 80W, 100W)

- STEP 1: Take the fixture out of package.
 STEP 2: Finish the wire connection according to the right mode of connection (pay attention to positive wire, negative wire and ground wire), (Figure 1.3) then put wire into lamp pole (Figure 1.4)

STEP 3: Loosen screws, Adjust fixture angles as per actual demands and tighten screws later; Angles of the fixture is adjustable (pass the bracket through mounting surface, fix it with screws, then connect the wires as per proper wiring requirements.)(Figure 1.5)


Fixtures and Lanterns

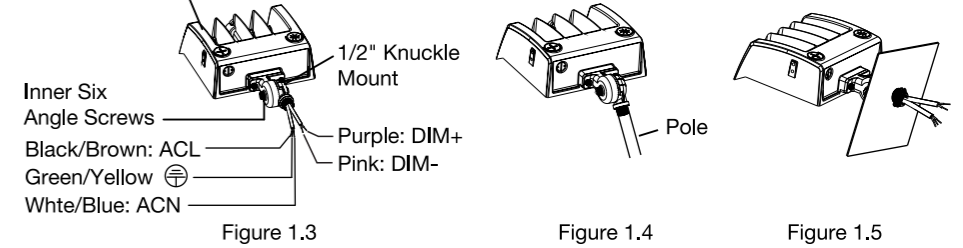

INSTALLATION 2: Slip Fitter Mount


2.1 INSTALLED WITH SLIP FITTER MOUNT (SUITABLE FOR 80W, 100W) (AM)

- STEP 1: Take the fixture out of package;
 STEP 2: Pass the rubber wire through the mounting head of the bracket and secure it with an inner hexagon screw.(Watch out not to scratch the wire); (Figure 2.1)
 STEP 3: Run the rubber wire through the other holder and tighten it with the hexagon socket screw. (Watch out not to scratch the wire). (Figure 2.2)

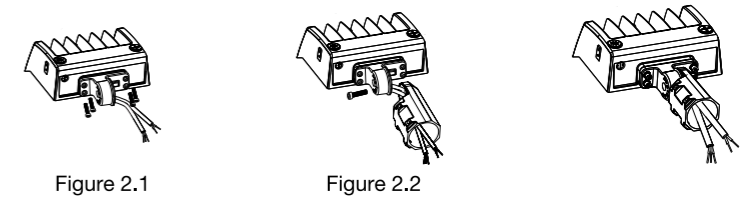

2.2 INSTALLED WITH WHOLE FIXTURE (SUITABLE FOR 80W, 100W)

- STEP 1: Take the fixture out of package;
 STEP 2: Finish the wire connection according to the right mode of connection (pay attention to positive wire, negative wire, and ground wire), and then put wire into lamp pole; (Figure 2.3)
 STEP 3: Loosen screws; Adjust fixture angles as per actual demands and tighten screws later; Angles of the fixture is adjustable (pass the bracket through mounting surface, fix it with screws, then connect the wires as per proper wiring requirements.) (Figure 2.4)

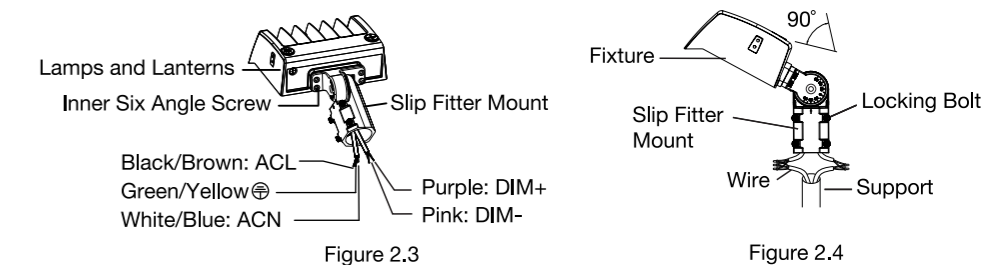

INSTALLATION 3: Slip Fitter Mount

3.1 INSTALLED WITH SLIP FITTER MOUNT (SUITABLE FOR 80W, 100W) (AM)

- STEP 1: Take the fixture out of package;
 STEP 2: Pass the rubber wire through the mounting head of the bracket and secure it with an inner hexagon screw.(Watch out not to scratch the wire); (Figure 3.1)
 STEP 3: Run the rubber wire through the other holder and tighten it with the hexagon socket screw. (Watch out not to scratch the wire). (Figure 3.2)




Figure 3.1

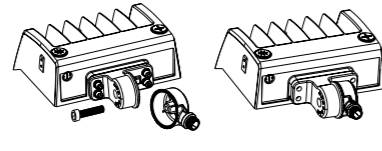


Figure 3.2

3.2 INSTALLED WITH WHOLE FIXTURE (SUITABLE FOR 80W, 100W)

- STEP 1: Take the fixture out of package;
 STEP 2: Finish the wire connection according to the right mode of connection (pay attention to positive wire, negative wire, and ground wire), and then put wire into lamp pole; (Figure 3.3)
 STEP 3: Loosen screws; Adjust fixture angles as per actual demands and tighten screws later;Angles of the fixture is adjustable (pass the bracket through mounting surface, fix it with screws, then connect the wires as per proper wiring requirements.)(Figure 3.4)

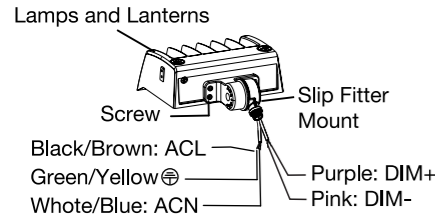


Figure 3.3

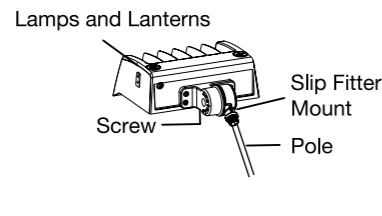


Figure 3.4

INSTALLATION 4: Yoke Mount

4.1 INSTALLED WITH YOKE MOUNT (SUITABLE FOR ALL POWER OF THIS SERIES) (SUITABLE FOR 15W, 25W, 60W, 80W, 100W) (d=FM)

- STEP 1: Take the fixture out of package (Figure 4.1)
 STEP 2: Tighten the brackets and screws (Figure 4.2)




Figure 4.1




Figure 4.2

4.2 INSTALLED WITH WHOLE FIXTURE (SUITABLE FOR ALL POWER OF THIS SERIES)

- STEP 1: Take the fixture out of package;
 STEP 2: Finish the wire connection according to the right mode of connection (pay attention to positive wire, negative wire, and ground wire).(Figure 4.3)
 STEP 3: Loosen screw; Adjust fixture angles as per actual demands and tighten screws later. (Figure 4.4),Tips:Angles of the fixture is adjustable

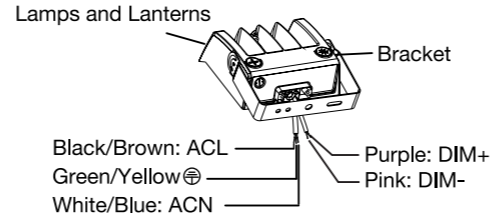


Figure 4.3




Figure 4.4

INSTALLATION 5: Trunnion Mount

5.1 INSTALLED WITH TRUNNION MOUNT (SUITABLE FOR ALL POWER OF THIS SERIES) (SUITABLE FOR 15W, 30W, 60W, 80W, 100W) (d=YM)

- STEP 1: Take the lamp out of package; (Figure 5.1)
 STEP 2: Tighten the brackets and screws. (Figure 5.2)




Figure 5.1





Figure 5.2



5.2 INSTALLED WITH WHOLE FIXTURE (SUITABLE FOR ALL POWER OF THIS SERIES)

- STEP 1: Take the lamp out of package
 STEP 2: Finish the wire connection according to the right mode of connection (pay attention to positive wire, negative wire, and ground wire). (Figure 5.3)
 STEP 3: Loosen screw; Adjust fixture angles as per actual demands and tighten screws later.(Figure 5.4), Tips:Angles of the fixture is adjustable

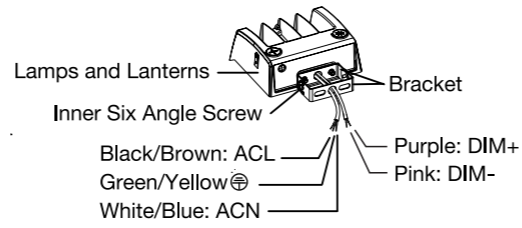


Figure 5.3




Figure 5.4

INSTALLATION 6: Function Adjustment

- STEP 1: Open the metal plug and plastic plug counterclockwise with a screwdriver
 STEP 2: (Figure 6.1), then slide the switch up and down to adjust the power controller, CCT controller or photocell controller in your demand. (Figure 6.2)




Figure 6.1

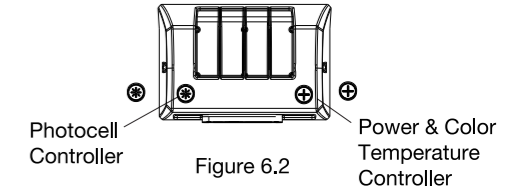


Figure 6.2

- STEP 3: After adjusting the required control function (Figure 6.3).
 Tighten the metal plug and the plastic plug clockwise (Figure 6.4)

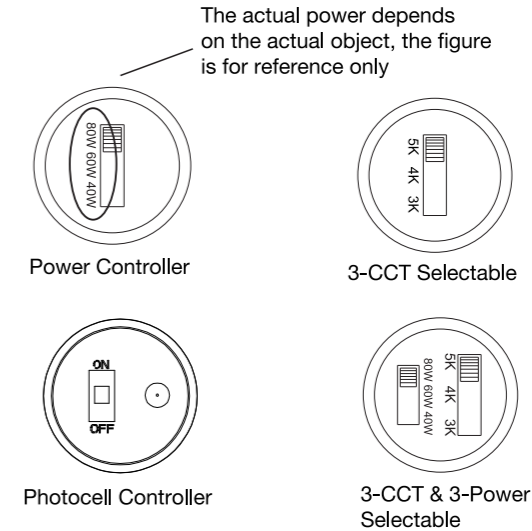


Figure 6.4

