


# In-desk USB A&C Charger 100W

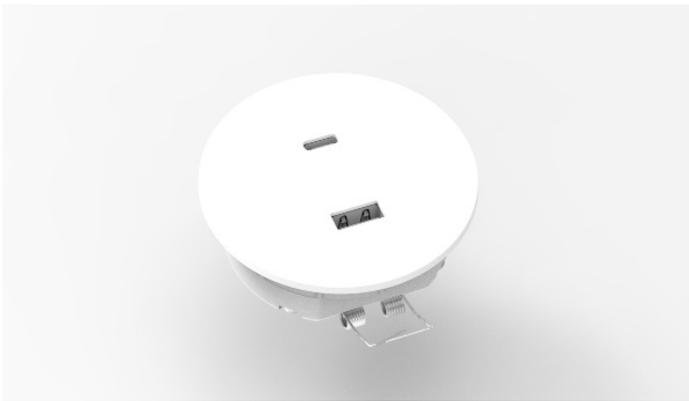


| Key features  | Materials & Standard finish  | Compliance  |
|---|--|---|
| <ul style="list-style-type: none"> <li>• Integrated overcurrent protection</li> <li>• Easy-to-install Spring Clip feature</li> <li>• Robust design</li> <li>• Small compact unit</li> </ul> | <p>Made from a PC-ABS bay blend, a self-extinguishing plastic specifically designed for electrical parts</p> <p>Standard finish in white and black (textured) other colours available on application dependant on quantity</p> | EMC Compliance and safety testing to: AS/NZS 62368.1:2018 |

| Specifications   | USB              | Output  |
|--|------------------|---|
| <p>Power: 100W</p> <p>Input Voltage: 21-24VDC 100W</p> <p>Output: see table</p> <ul style="list-style-type: none"> <li>• Made from a PC-ABS bay blend, a self-extinguishing plastic specifically designed for electrical parts</li> <li>• Face is 70mm dia with an overall height of 25mm, the USB A&amp;C in -desk 100w Charger can be located within the allocated zones on a worktop and sits slightly proud of the work surface at 2.5mm</li> <li>• Powered by a 21-24V DC power supply, supplied with unit</li> </ul> | A                | 5Vdc/3A, 9Vdc/3A, 12Vdc/2.5A  |
|  | C                | 5Vdc/3A, 9Vdc/3A, 12Vdc/3A, 15Vdc/3A, 20Vdc/5A                                |
|  | A + C (combined) | 5Vdc/3A, 9Vdc/3A, 12Vdc/2.5A, 5Vdc/3A, 9Vdc/3A, 12Vdc/3A, 5Vdc/3A 20Vdc/3.25A |

## Downloads

- [Product warranty](#)
- [Care & maintenance](#)

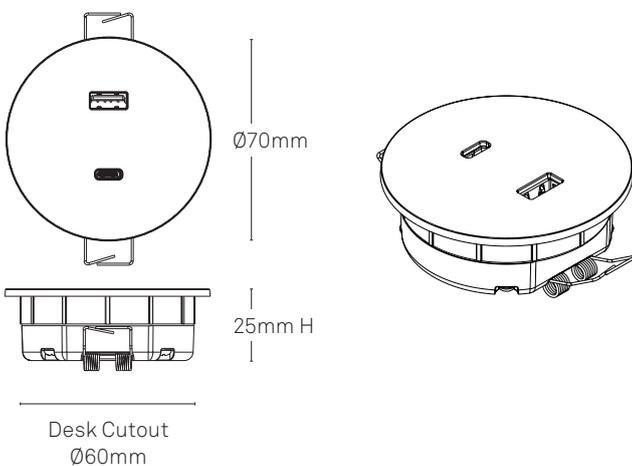

### Disclaimer:


The manufacturer reserves the right to change any details of the above Product/s without prior notice. All dimensions and weights stated within this document are nominal and/or approximate only and subject to variation.

# In-desk USB A&C Charger 100W

## Scenario A

100W USB A&C in desk charger is connected via a three pin plug from the power supply, this is plugged into a GPO located below the desk in a cable tray or wire basket.

USB A&C cables are clipped away under the desk using the P-Clips provided.

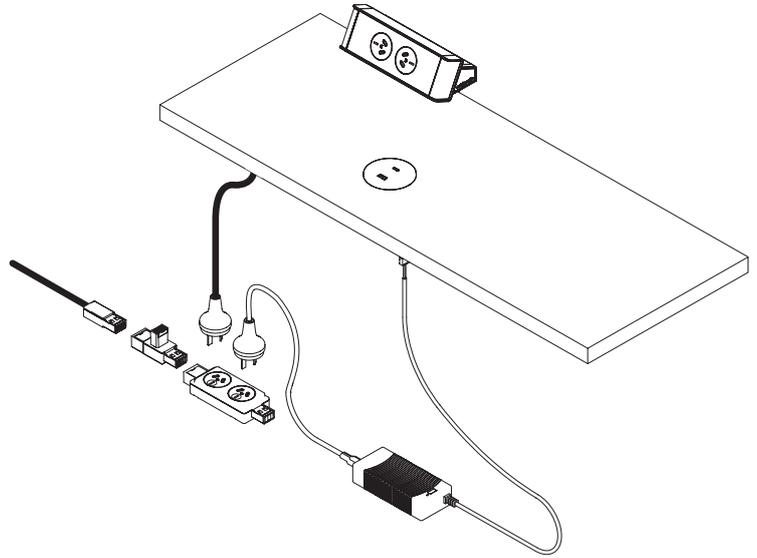

## Scenario B

100W USB A&C in desk charger is connected via an installation lead from the power supply into a junction located below the desk in a cable tray or wire basket.

USB A&C cables are clipped away under the desk using the P-Clips provided.

Image below showing P-Clips to secure cable back to wire basket.

