

Project: \_\_\_\_\_  
 Part#: \_\_\_\_\_  
 Type: \_\_\_\_\_

# Edge-Lit Emergency Exit Sign



Now available is the EnVision Edge-Lit LED Emergency Exit Sign. Available in a green and red light, with a single sided and double sided version, place these signs on walls or ceilings near exit locations. With a nickel cadmium battery, the charging time for this fixture is 24 hours, with a discharge time or backup time of 90 minutes. Make sure everything works correctly with a test switch and charge indicator.

**Applications:**

- Wall Mounting
- Ceiling Mounting

**Product Information:**

- Test switch and charge indicator
- Super bright SMD LED
- Film protectant for extra shatter protection (food industry OK)
- Non-Dimmable

**Additional Details:**

- Voltage: 120-277V
- Power Consumption: 3W Max
- Output: 1W Max
- Charging Time: 24 Hours
- Discharge Time: 90 Minutes
- Operating Temp: 0° C ~ 40° C
- Dimensions: 12.2" x 10" x 4.3"
- UL-94V-0 Flame rating, fire-resistant

LED - EM - EXT - EL - **Color/Sided**

1 2


**1**  
**LED-EM-EXT-EL** Edge-Lit Emergency Exit Sign  
 (Single and double sided)

**2**  
**Color/Sided**  
**G** Green (Single Sided)  
**R** Red (Single Sided)  
**G\*** Green (Single/Double Sided)  
**R\*** Red (Single/Double Sided)


*\*EXIT sign is interchangeable between being displayed single or double sided*

*Specs and model numbers are subject to change with or without notice*

## Features

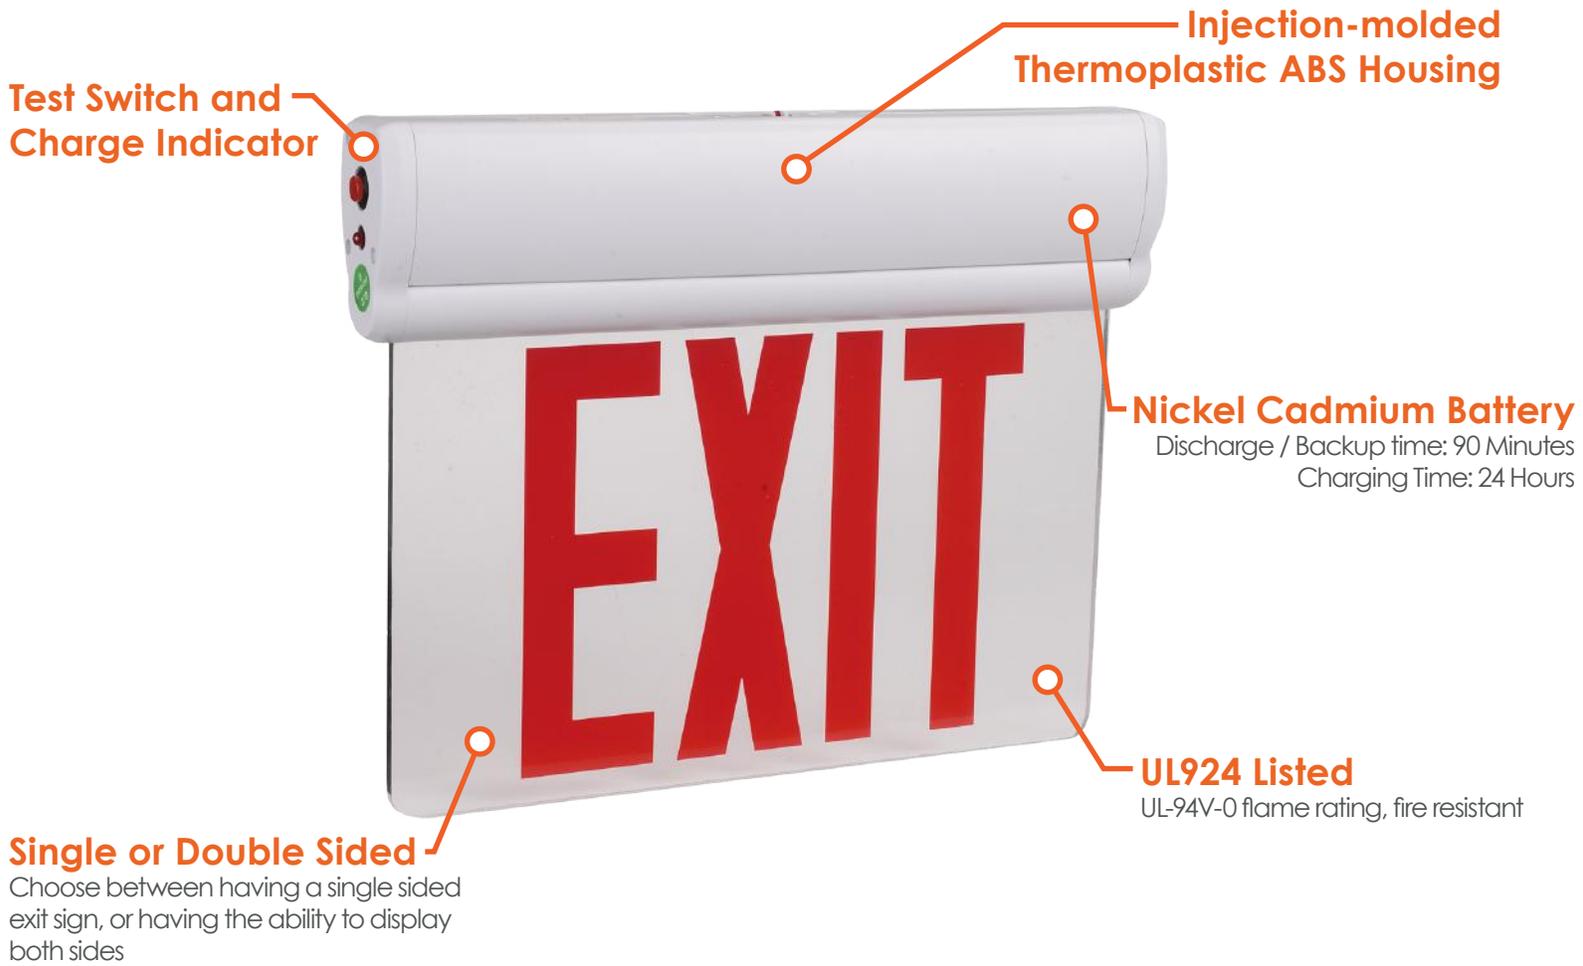

## Dimensions

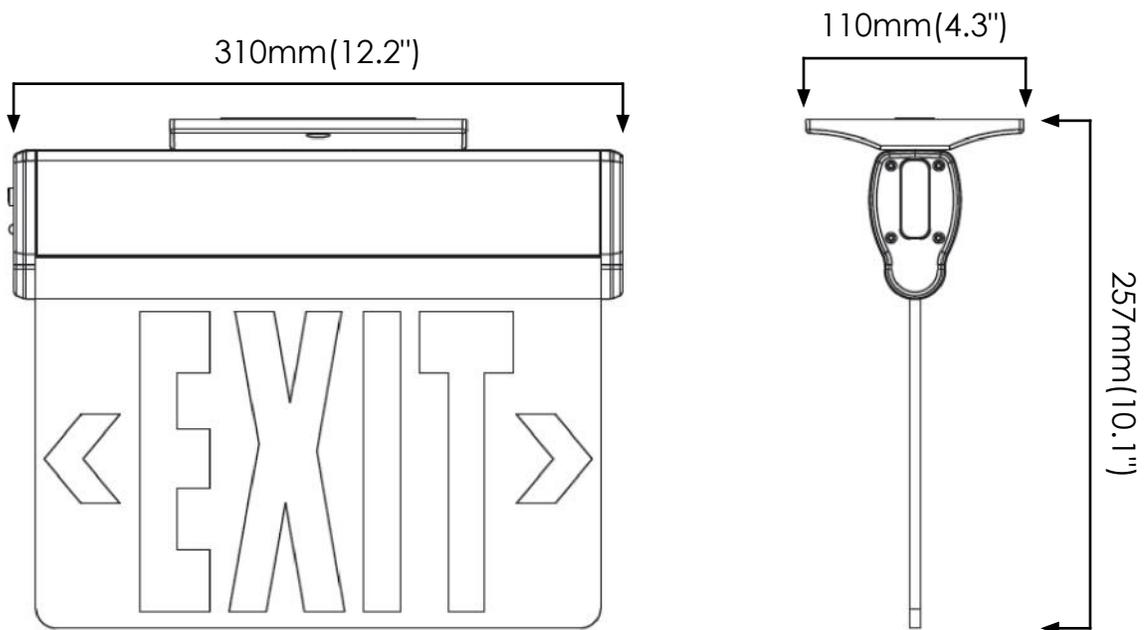

## Installation Guide: Ceiling and Wall Mounting

**NOTE: First turn off electricity**

**Step 1:** Place the sleeves onto the panel (Fig 1). Stick correct arrows on the panel (Fig 2), take off the sleeves.

**Step 2:** Pull out all AC wires from top of fixture for wall and ceiling mounting.

**Step 3:** Put the hole plug (in the packing bag) to the side of the fixture (Fig 4)




**Step 4:** Insert EXIT panel into main body assembly gently

**Step 5:** Feed AC supply wires through canopy center hole.

**Step 6:** Assemble canopy onto main body assembly with (2) Tapping screws (supplied) and make proper wire connections

**Step 7:** Use (2) PM4-40 screws tighten canopy to crossbar.

**Step 8:** The unit can be installed on any surface, you may rotate the EXIT panel in any angle from 0° to 180°, ceiling mounting rotate 90° become wall mounting.

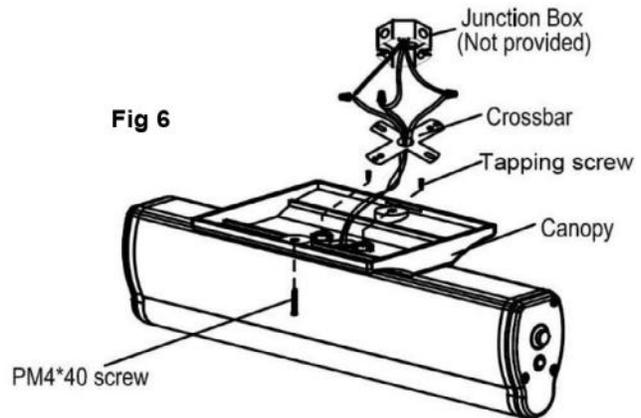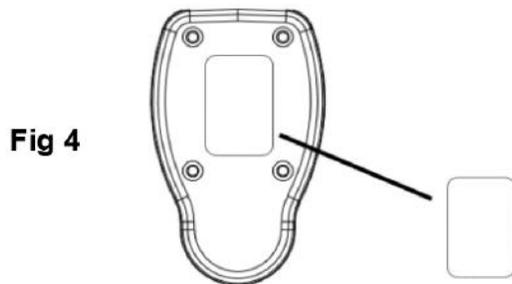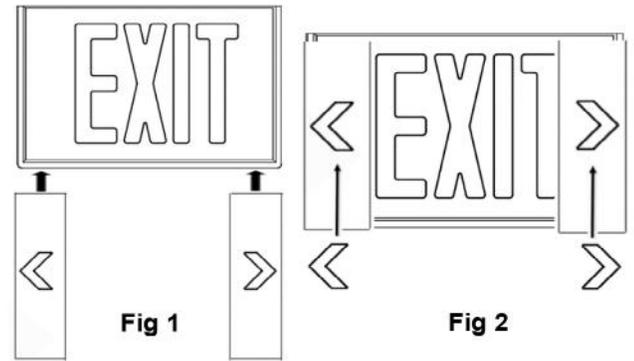

## Installation Guide: Surface End Mounting

**NOTE: First turn off electricity**

**Step 1:** Pull out all AC wires from side of the fixture for surface end mounting

**Step 2:** Reference step 1, 4-6 in surface ceiling & wall mounting above for surface end mounting.

