



Chain lubes price per litre




Chain lubes fling (lowest is best)

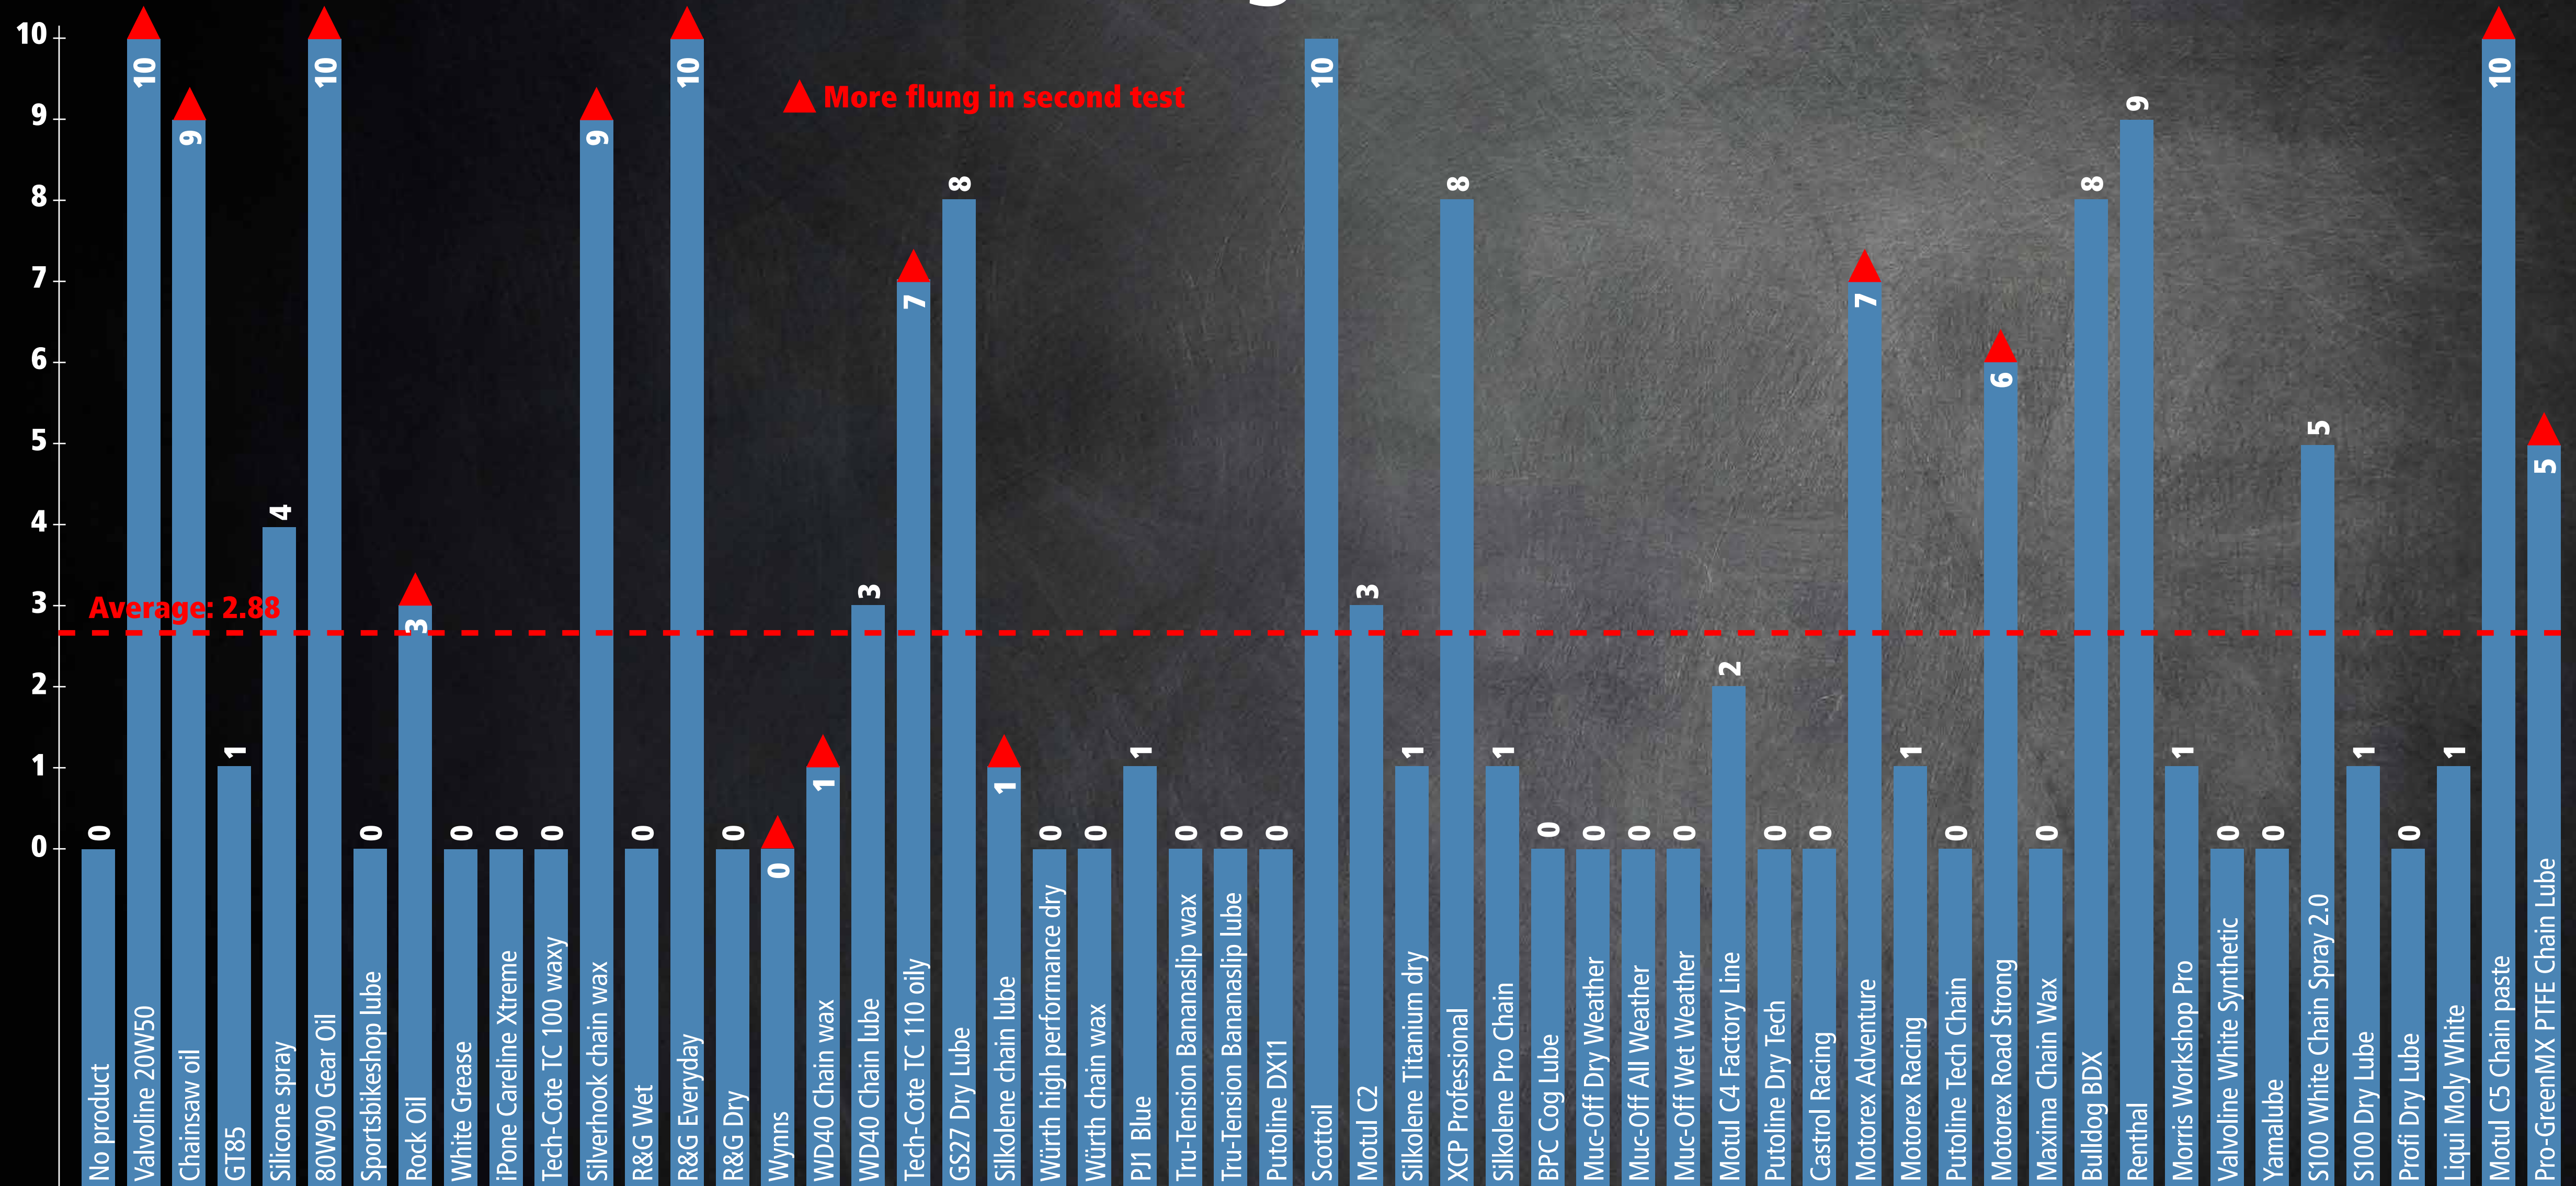


Sand retained in milligrams (lowest is best)

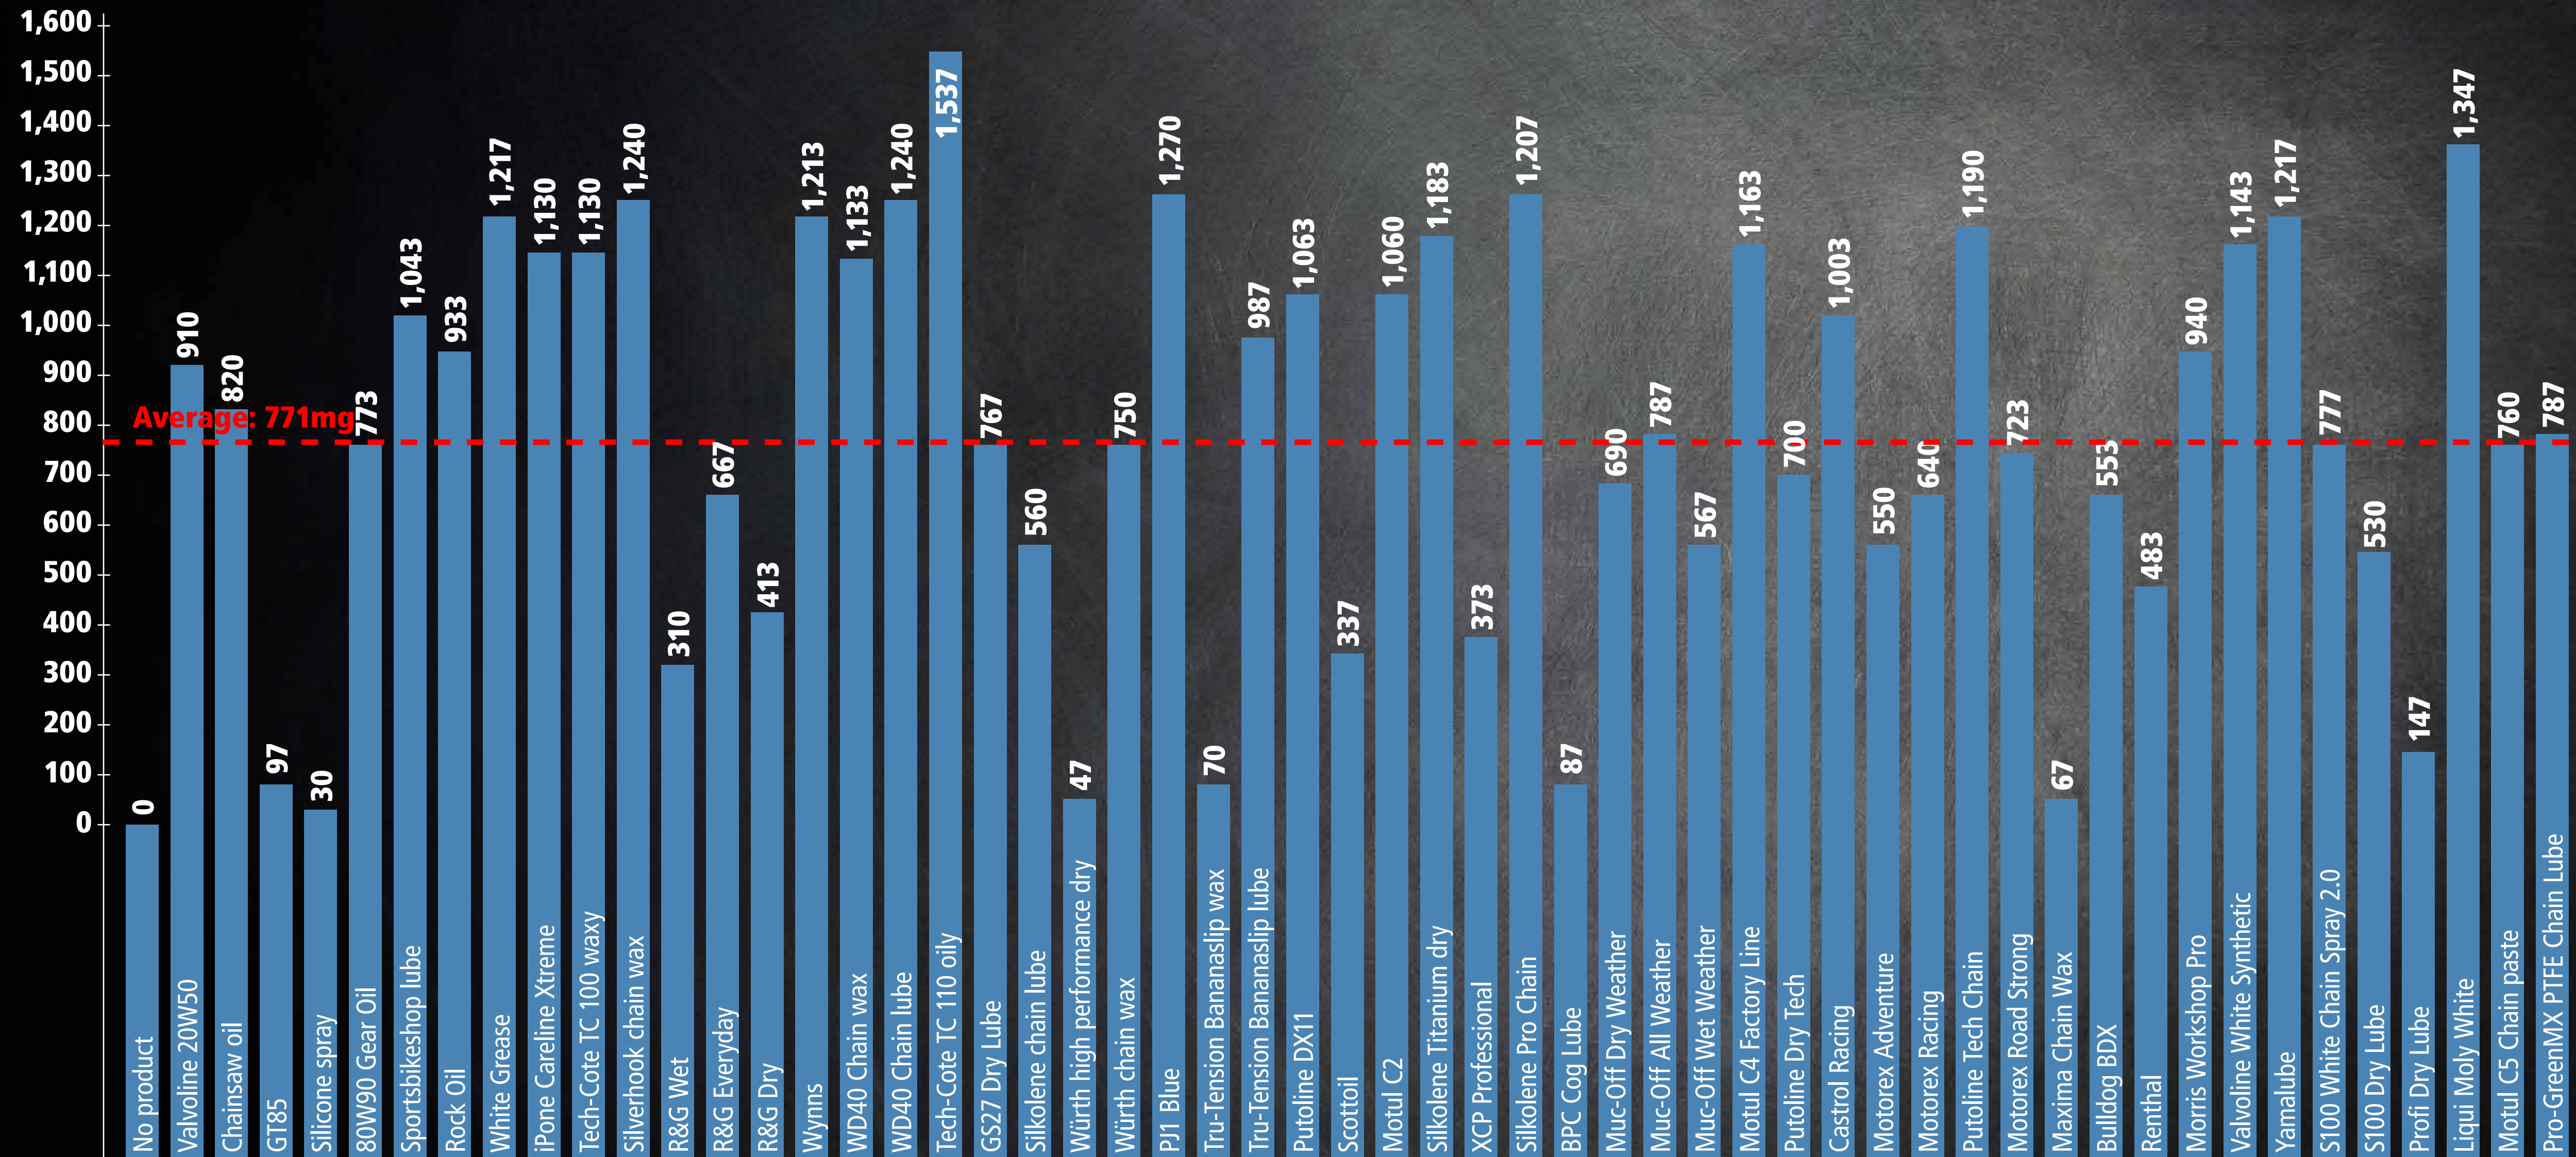


Overall ease to clean off (lowest is best)

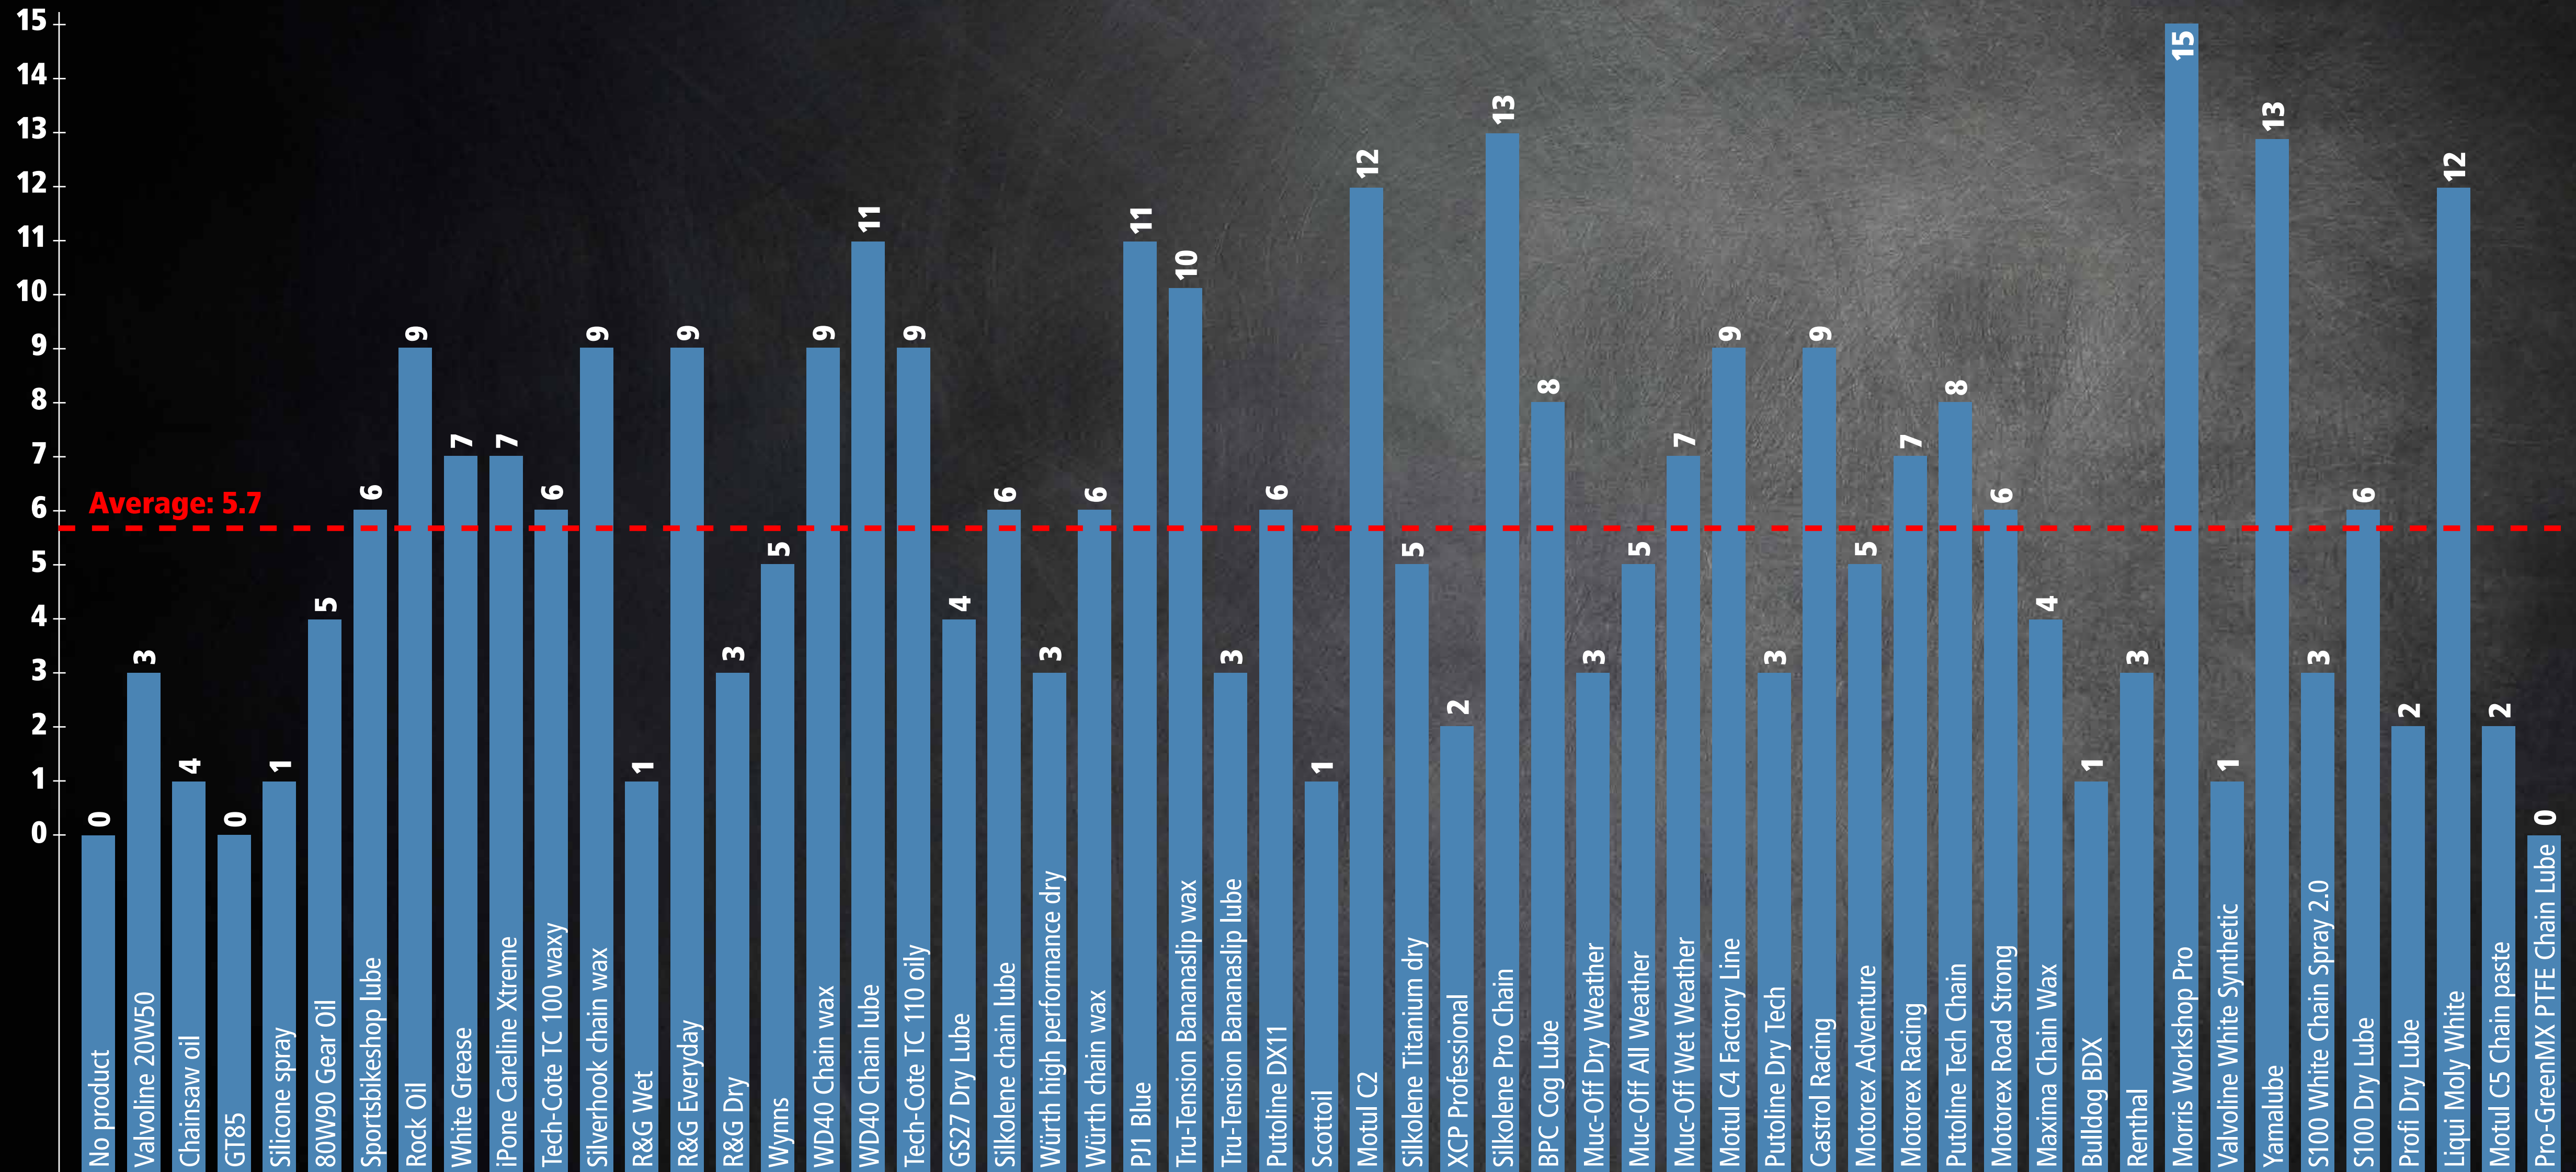

Corrosion protection (lowest is best)

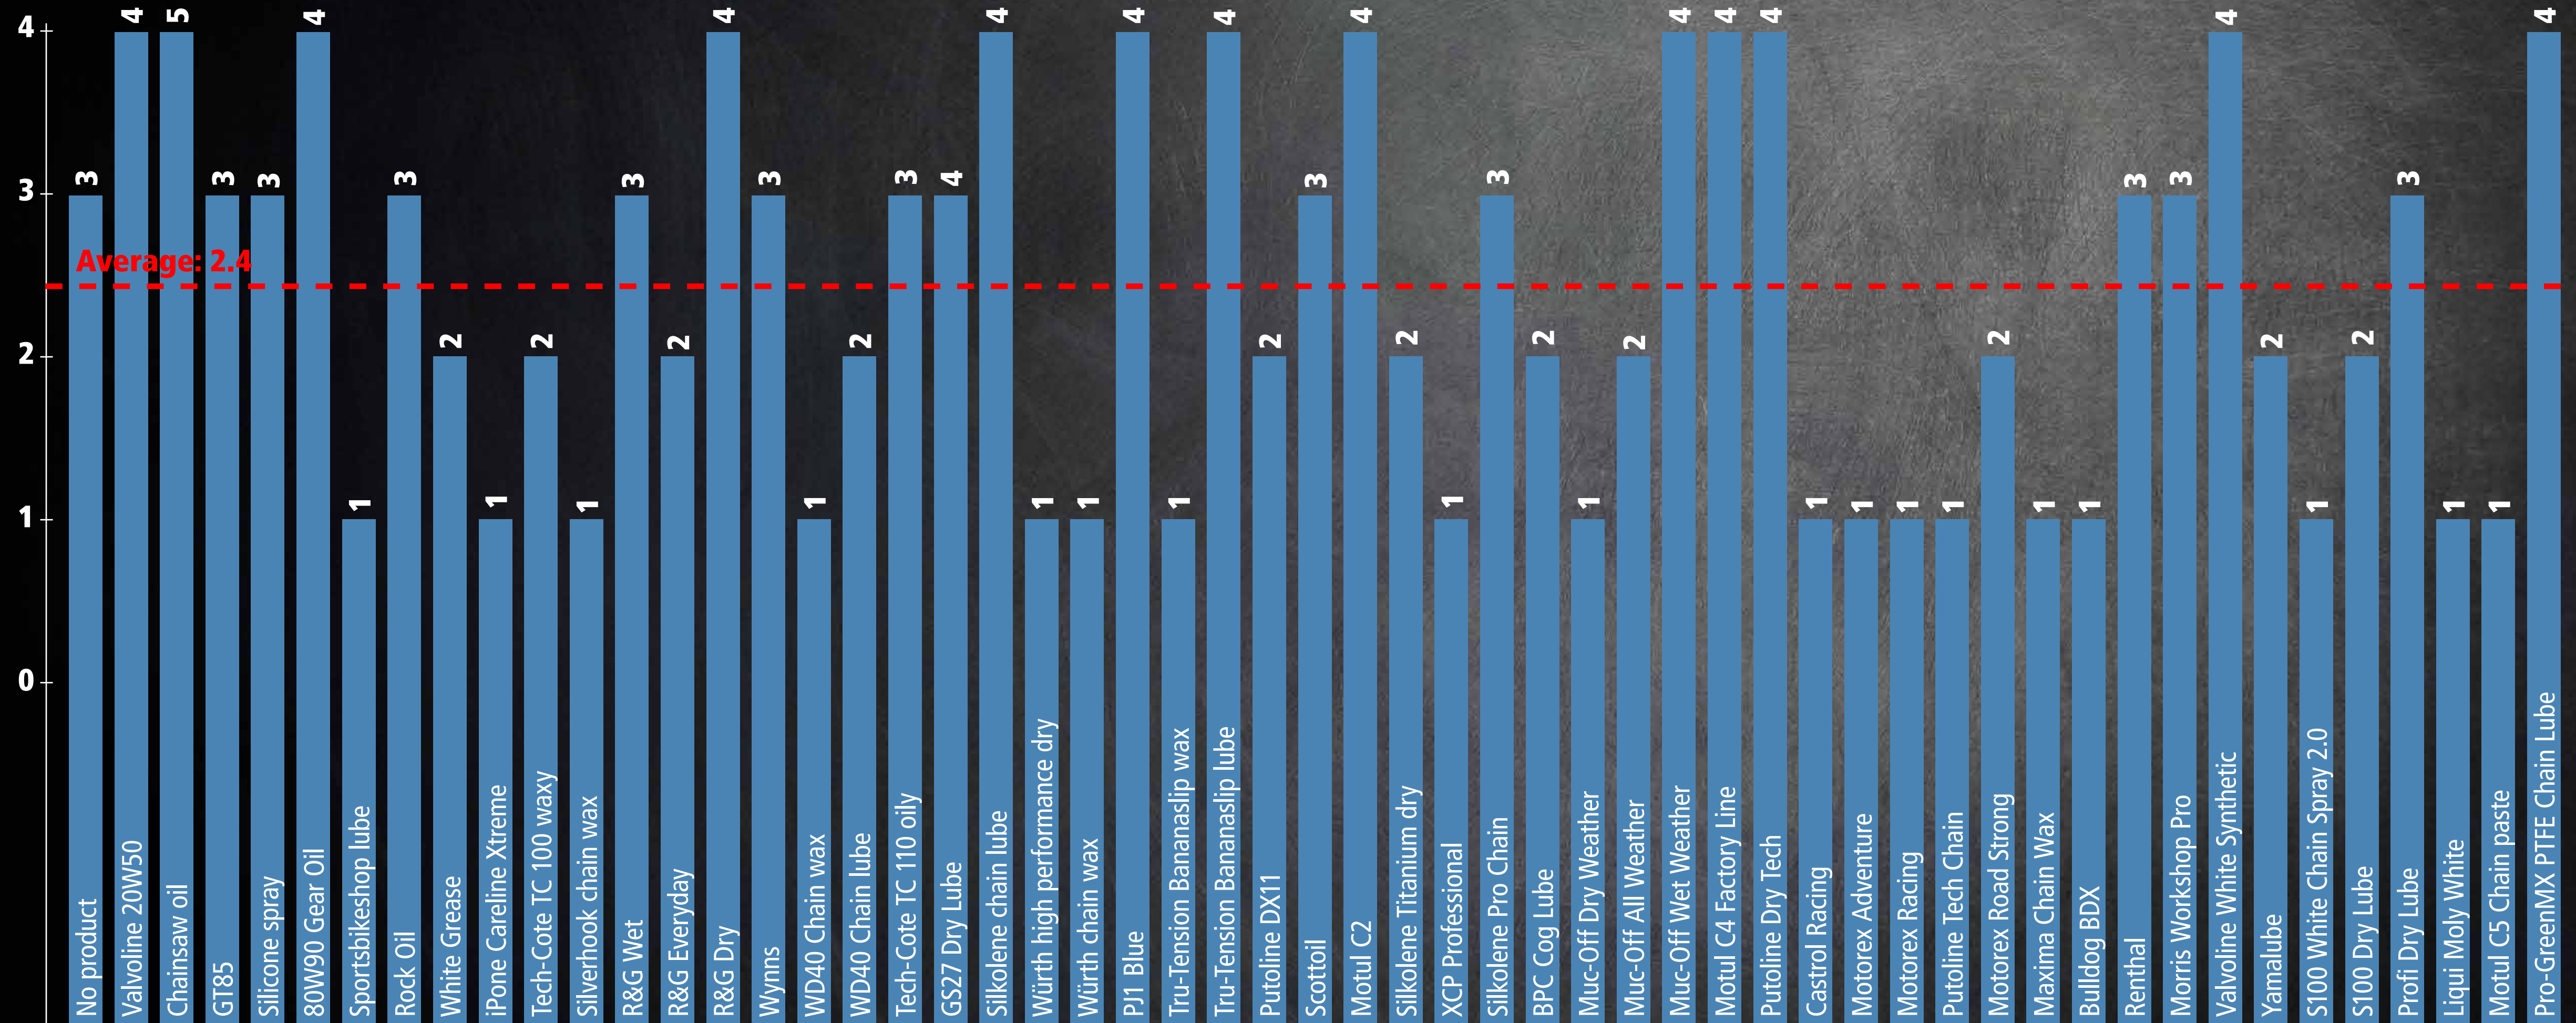

Appearance after four weeks (lowest is best)

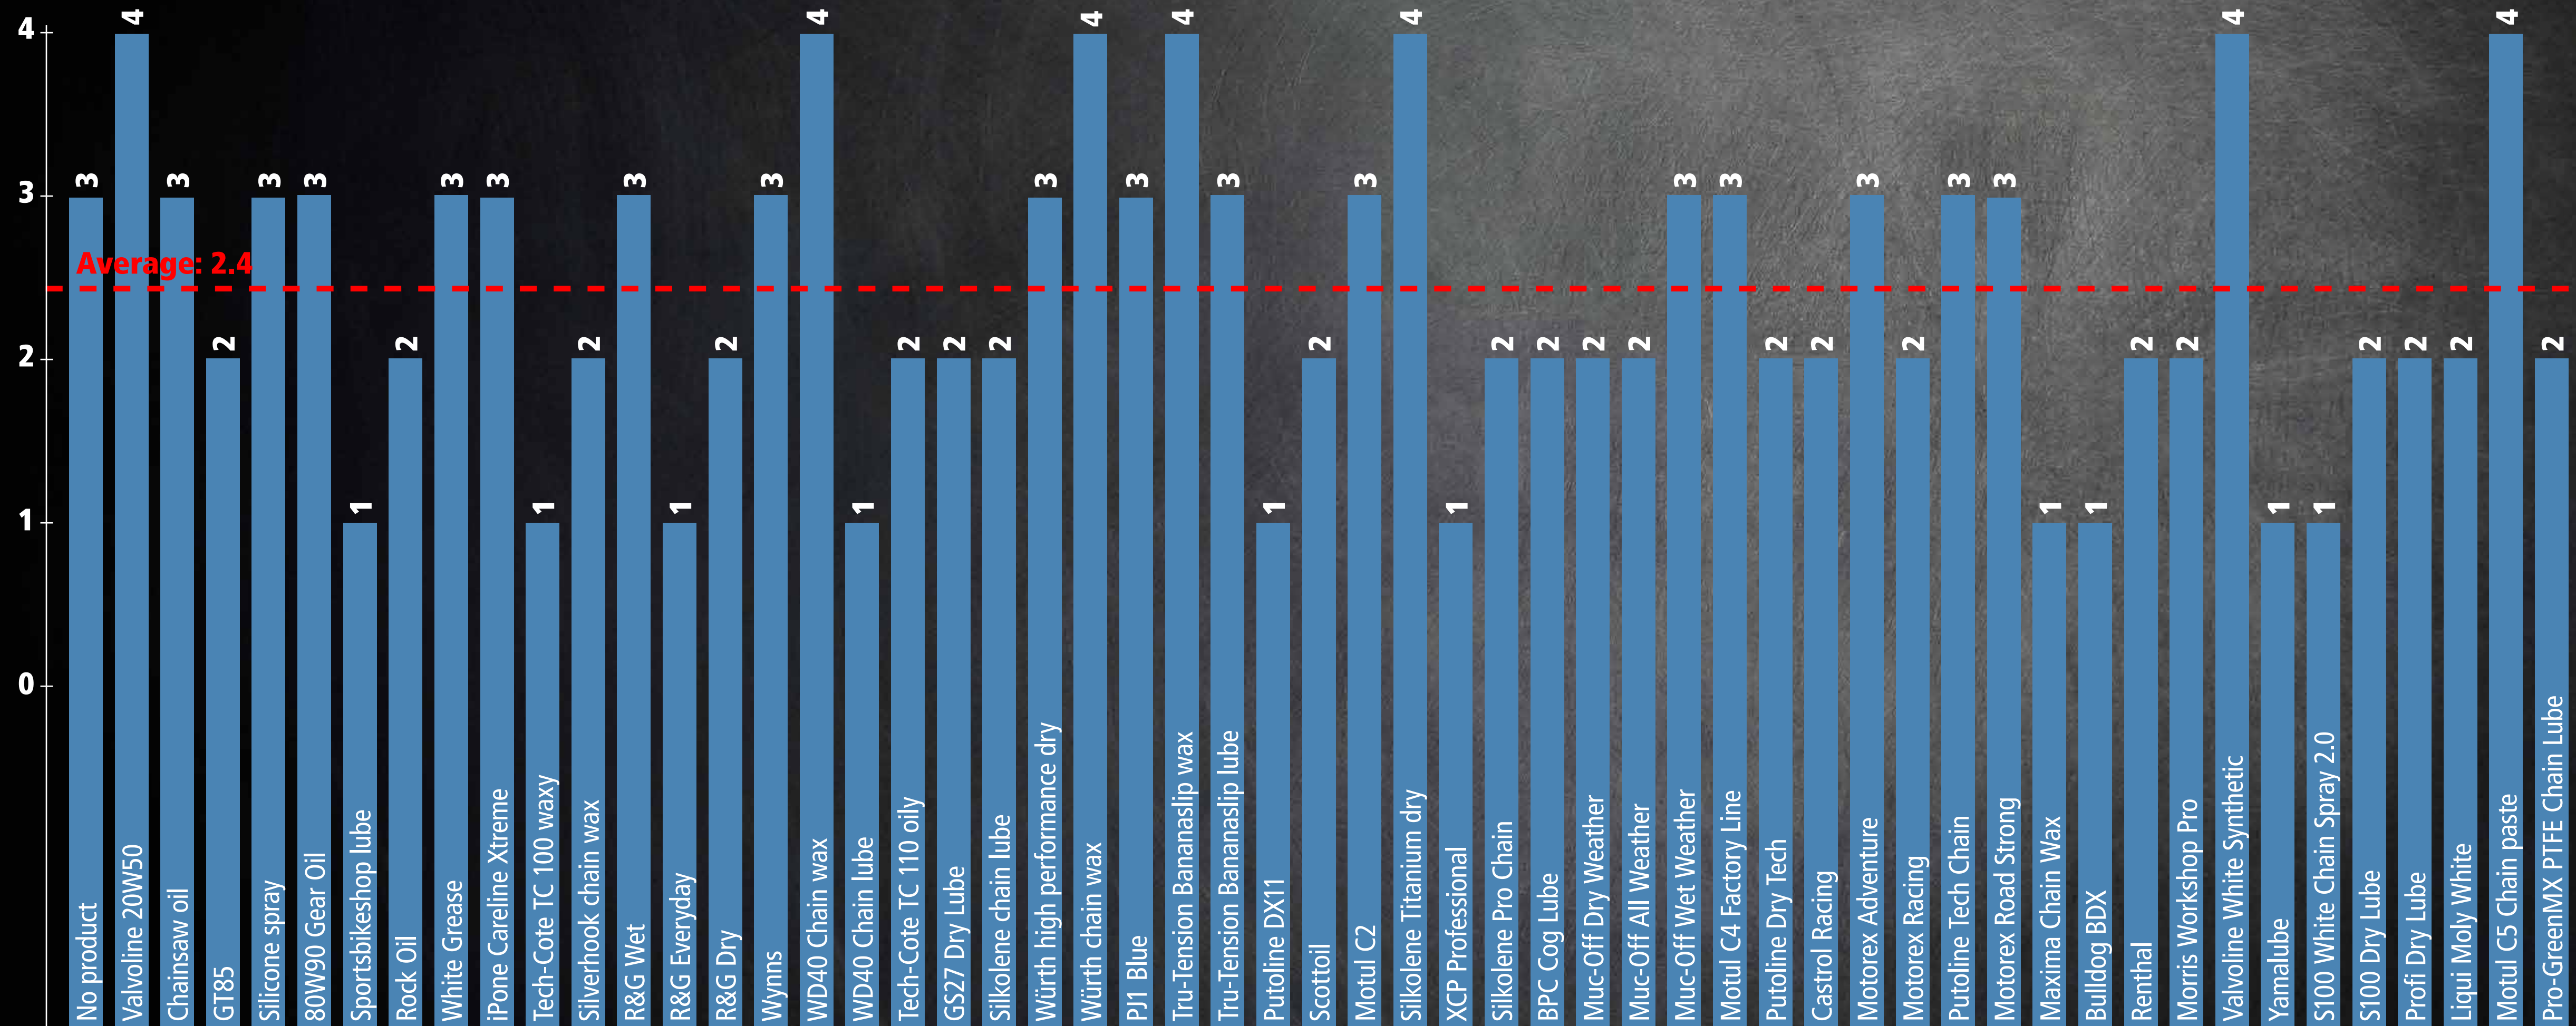

Weighted ratings for selection (lowest is best)




Weighted ratings for selection (lowest is best)




Four ball anti-wear test IP 239/14

Mean Wear Scar Diameter in mm (lowest is best)

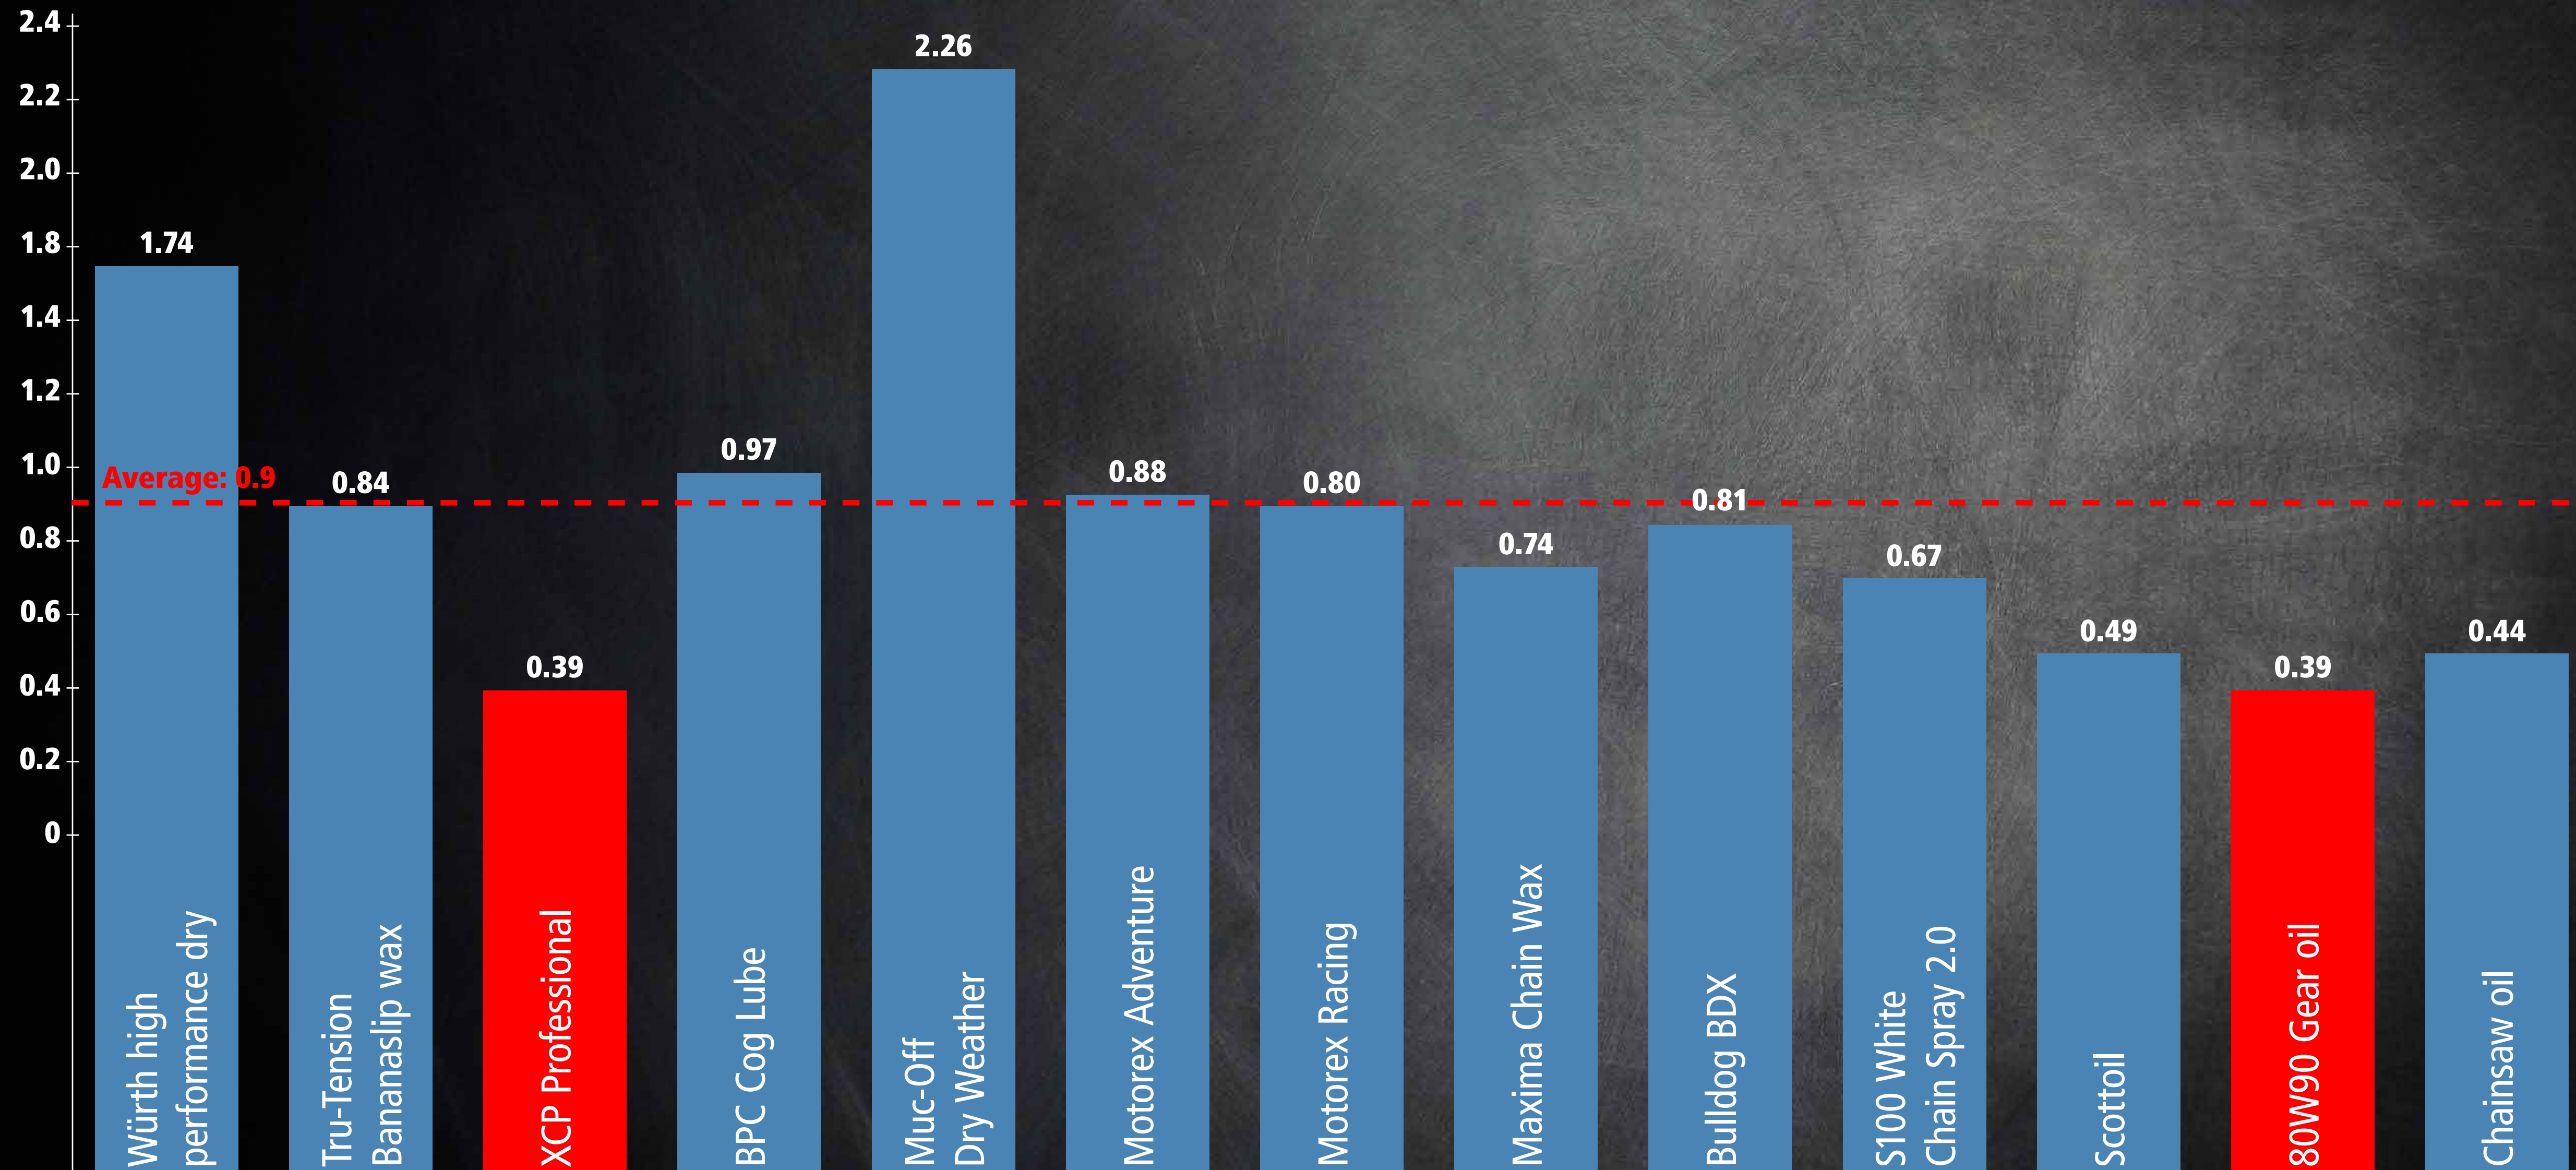

Four ball weld test IP 239/14

Extreme Pressure Characteristics in kg (highest is best)

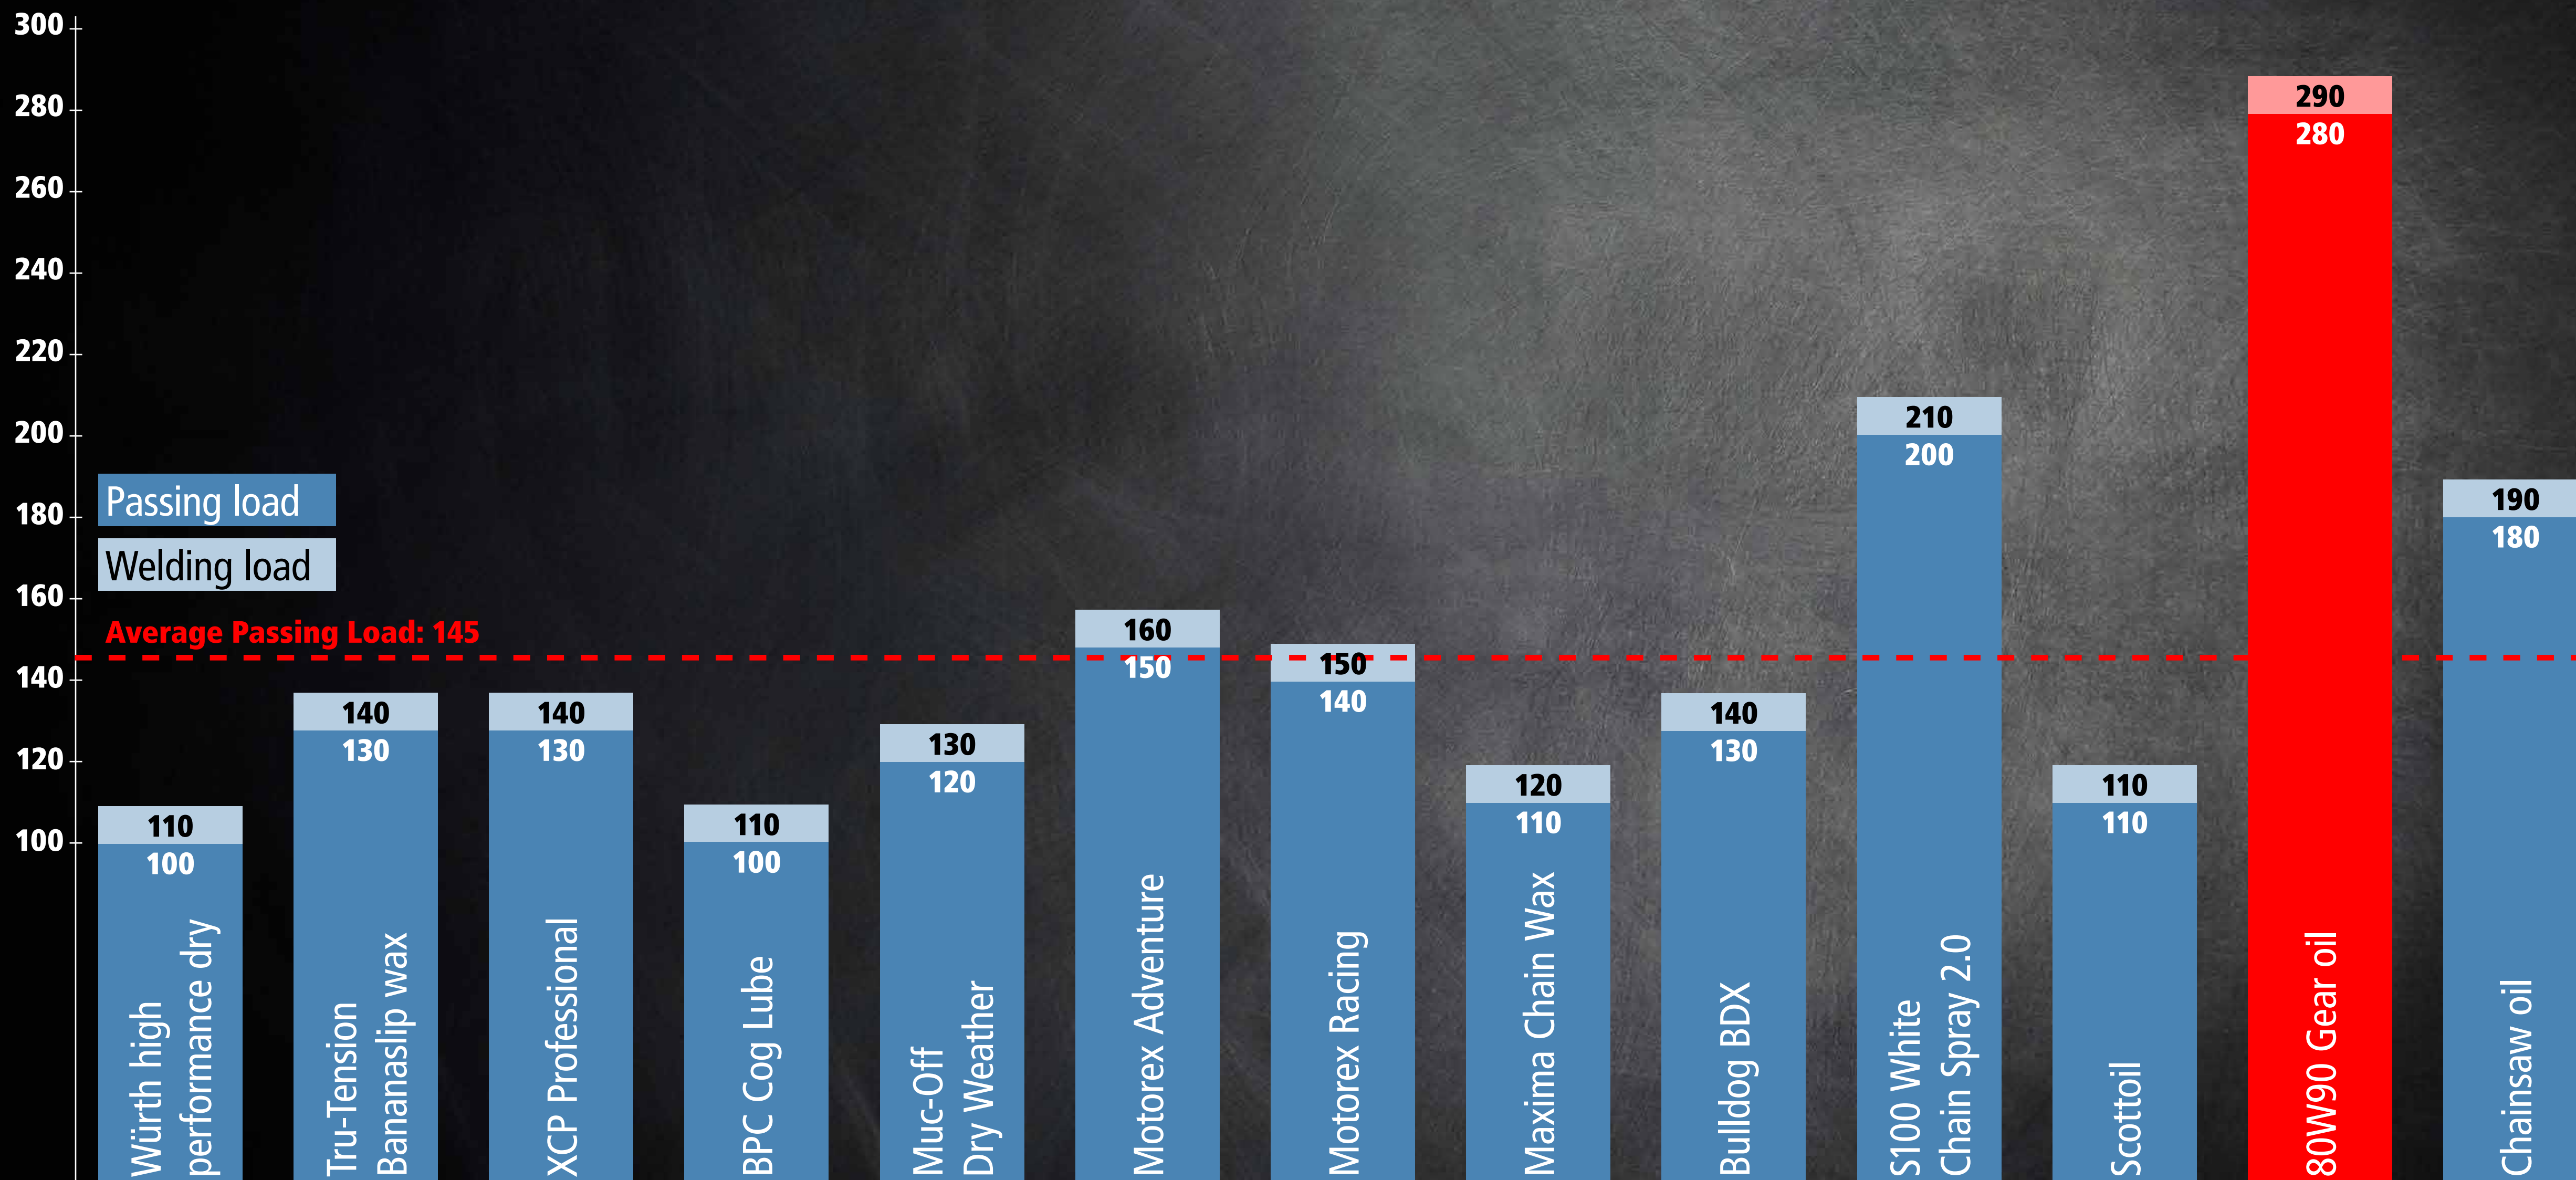

Total scores (lowest is best)

Fling+ sand retained+ ease to clean+ corrosion protection+ appearance+ MWSD+ (300-welding load)

