


SPRING BALANCER

ENDO



ENDO KOGYO CO., LTD.

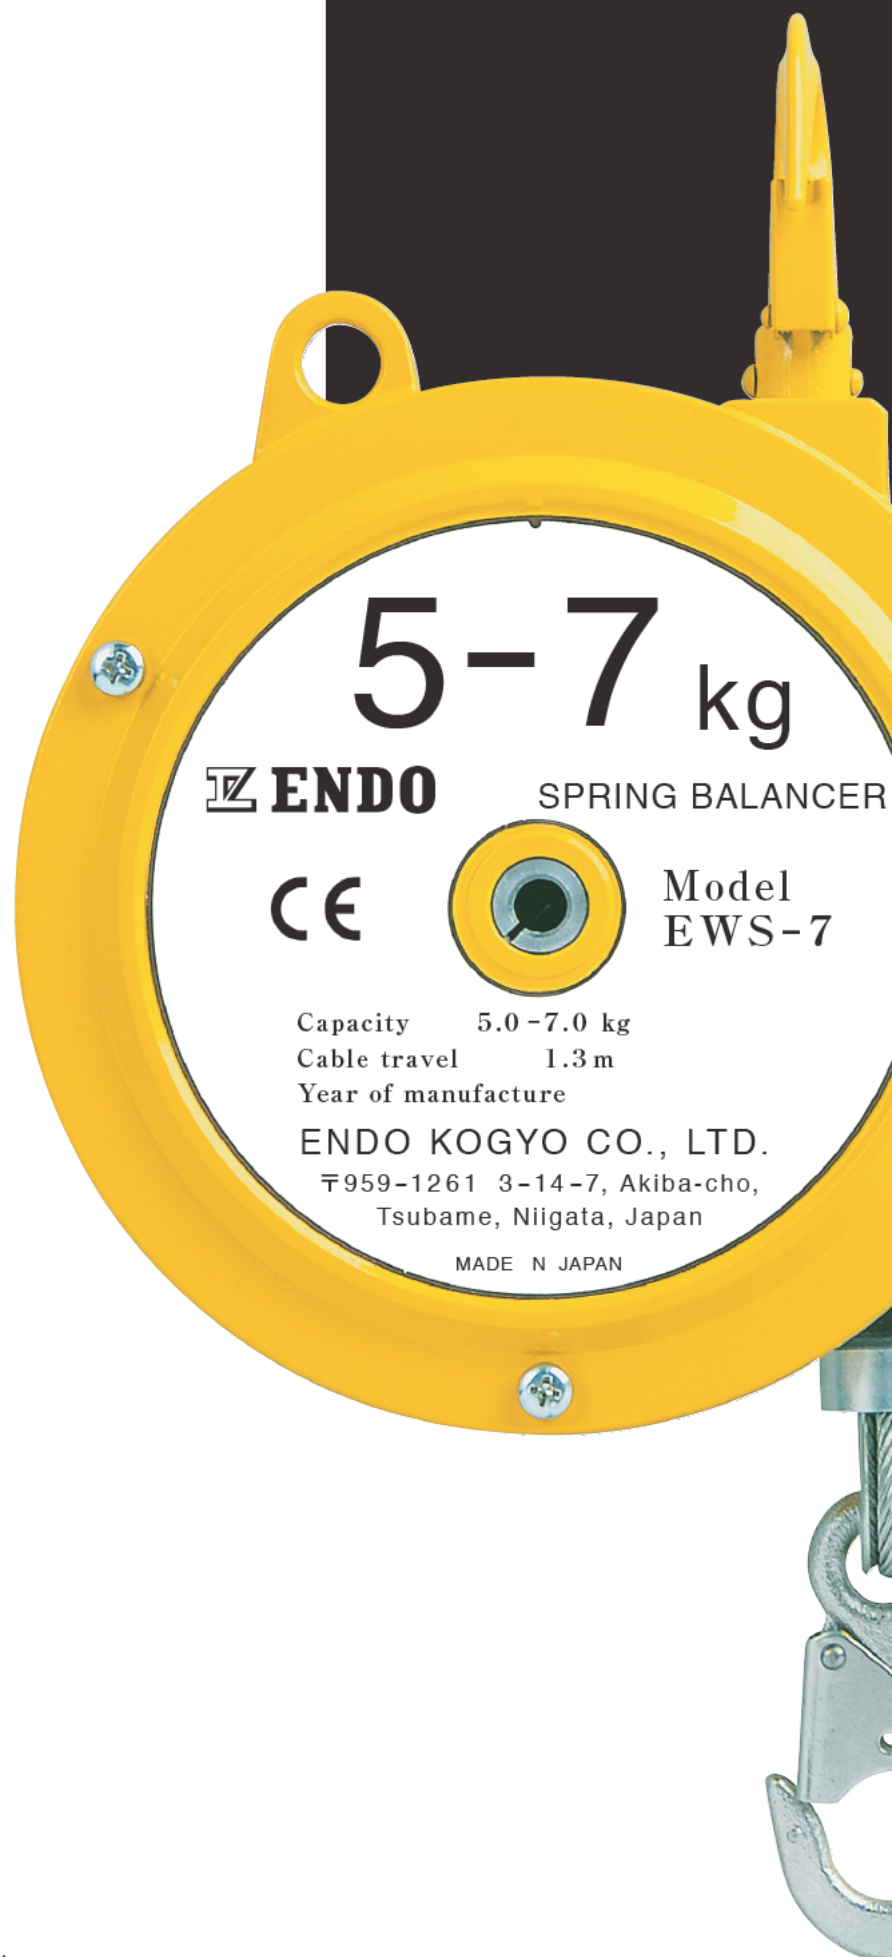

Search with ENDO KOGYO CO LTD on YouTube and check our movies.

SPRING BALANCER



What is Spring balancers?


The tension is kept stable on even if the cable is pulled out or retrieved because of the tapered drum. So Spring balancers can hold the tools suspended in hollow and work for flexible positioning of the tools. Workers can enjoy comfortable operation with less fatigue.

Location of use

- Suspending a tool for product assembly line.
- Frequent fastening screws, bolts and nuts.
- Suspending a jig, tool, welding gun etc.

Advantages

- The balancers improve working efficiency and diminish worker fatigue.
- The balancers make the position of a tool stable and contribute to accurate work.
- The balancers are available for keeping a tool not damaged.
- Any electric or pneumatic power is not required and safe working is achieved.

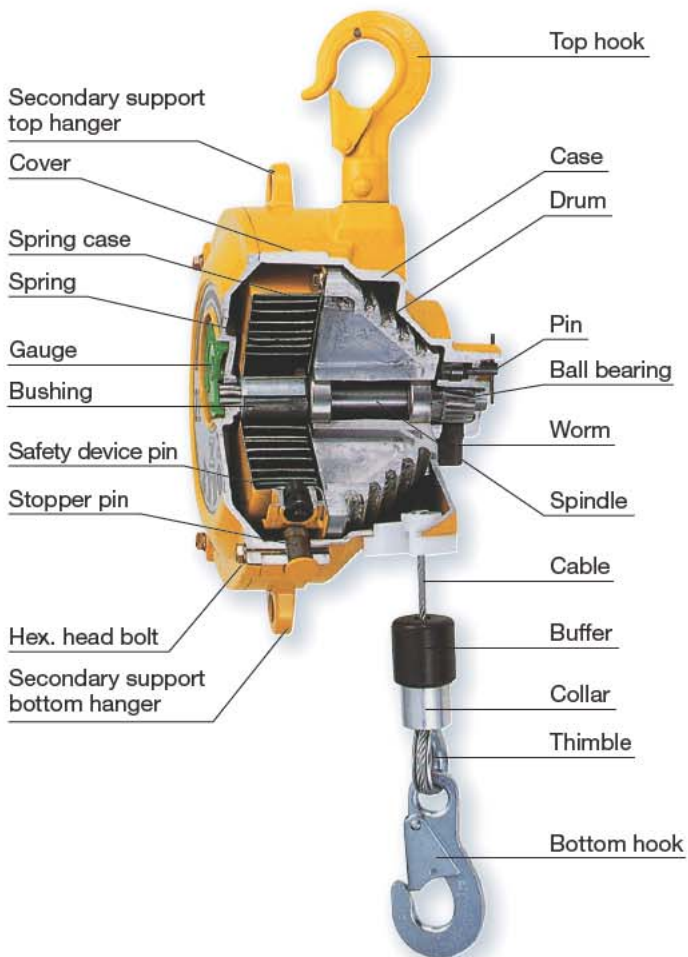

SPRING BALANCER

How to adjust spring tension

Worm gear system, Ratchet system or Handle system are available and dependent on the models. Clockwise adjustment increases the spring tension and Counter clockwise adjustment decreases the spring tension. (The spring tension has been set at the middle of capacity in advance prior to shipment)


Handle system	ERP model				
Ratchet system	EK-00,EK-0	EW-3,5	SBC	ER model	ATB model
Worm gear system	EWS model	EWF model	ELF model	RSB model	
	ETP model	THB model	ATR model	EWA model	





Handle system



Ratchet system

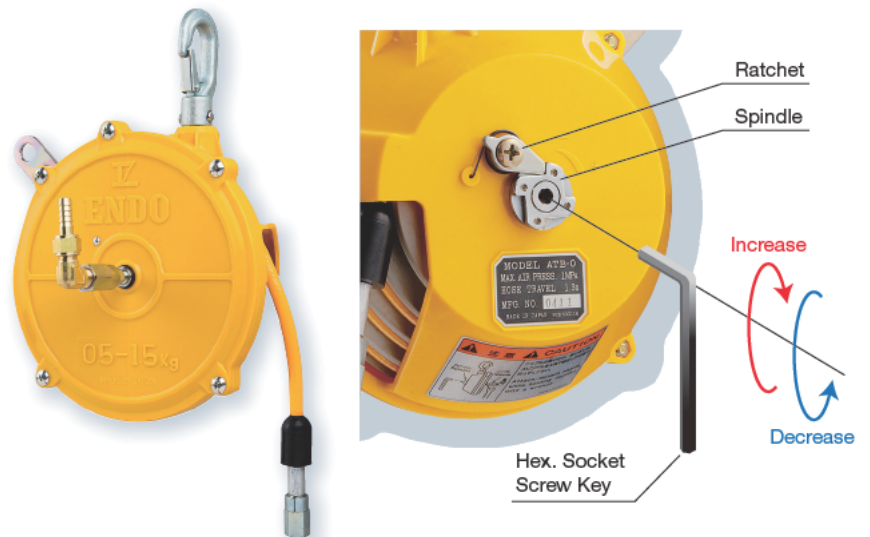

Worm gear system

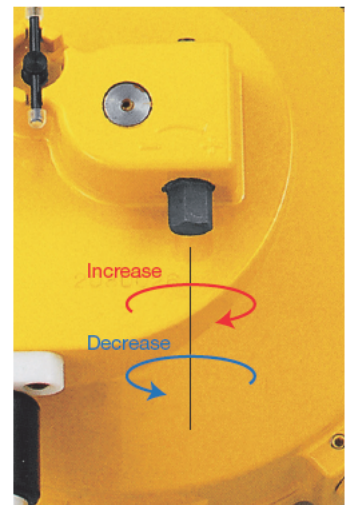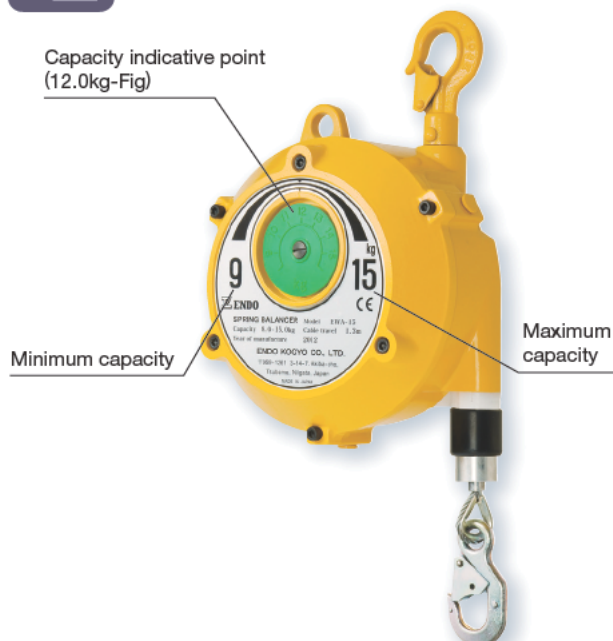

Read the instruction manual carefully for details.



Features

※All features are not always available on all balancers.



Fall arrest device

When spring brakes, safety pin pops out and collides with pin fixed or case to prevent the suspended tools from falling.

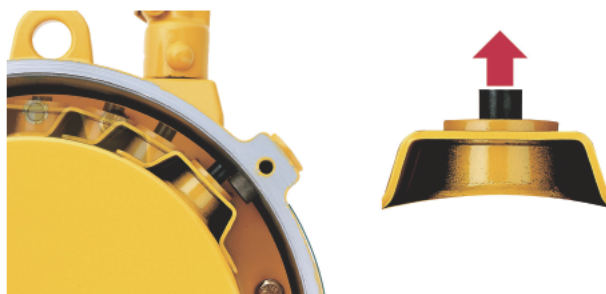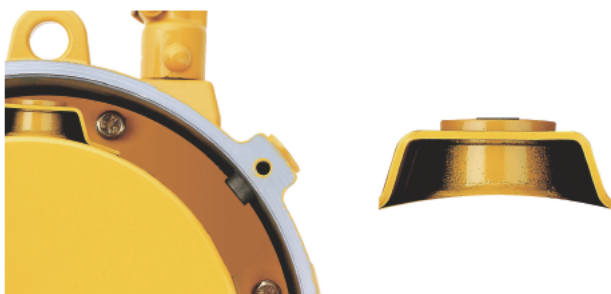


Drum lock device

By changing the position of the pin, you can lock the drum rotating. It provides easy tool/wire rope replacement.




Gauge

The gauge indication contributes to worker recognition on tension adjustment.

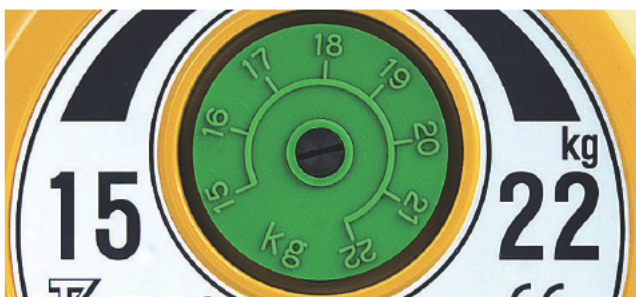


Secondary support hanger

The secondary support hanger is available on every model.

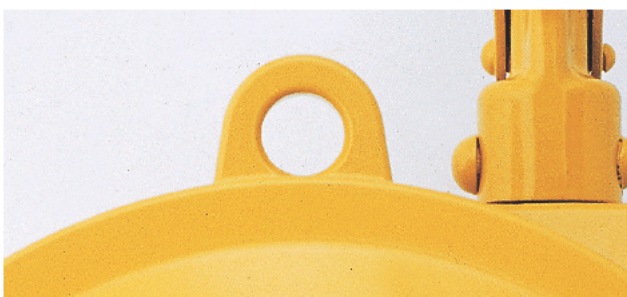

Cartridge spring assembly

Cartridge spring provides easy and safe spring replacement.

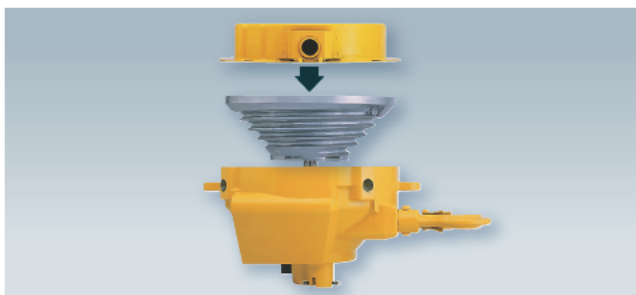

Wire rope replacement

The plug fixing system provides the easy cable replacement.



SPRING BALANCER

Summary

Type	Model	Capacity(kg)	Stroke (m)	Cable dia (φmm)	Mass (kg)	CE	
Light capacity	EK-00	0.5 - 1.5	0.5	2.0	0.2	○	Suitable for light weight tools like an electric driver. P.7 
	EK-0	0.5 - 1.5	1.0	3.0	0.5	○	
	ERP-06E	0.3 - 0.6	1.5	2.0	0.4	○	
	ERP-1E	0.5 - 1.0	1.5	2.0	0.4	○	
	ERP-2E	1.0 - 2.0	1.5	2.0	0.4	○	
Standard	EW-3	1.0 - 3.0	1.3	3.0	1.4	○	Most popular series for a welding gun, pneumatic tool etc. Many safety features are equipped. P.8 
	EW-5	2.5 - 5.0	1.3	3.0	1.5	—	
	EWS-3	1.5 - 3.0	1.3	3.0	1.9	○	
	EWS-5	3.0 - 5.0	1.3	3.0	2.1	○	
	EWS-7	5.0 - 7.0	1.3	3.0	2.1	○	
	EWF-9	4.5 - 9.0	1.3	4.0	3.5	○	
	EWF-15	9.0 - 15.0	1.3	4.0	3.8	○	
	EWF-22	15.0 - 22.0	1.5	4.76	7.3	○	
	EWF-30	22.0 - 30.0	1.5	4.76	7.7	○	
	EWF-40	30.0 - 40.0	1.5	4.76	9.7	○	
	EWF-50	40.0 - 50.0	1.5	4.76	10.1	○	
	EWF-60	50.0 - 60.0	1.5	4.76	11.1	○	
	EWF-70	60.0 - 70.0	1.5	4.76	11.4	○	
Large capacity	EWF-90	70.0 - 90.0	2.0	4.76	21.9	○	Suitable for heavy weight devices like a multiple nut runner. P.10 
	EWF-105	85.0 - 105.0	2.0	4.76	24.0	○	
	EWF-120	100.0 - 120.0	2.0	4.76	27.5	○	
	ETP-14	120.0 - 140.0	1.2	6.0	24.1	○	
	ETP-15	140.0 - 170.0	1.2	6.0	28.7	○	
	ETP-16	170.0 - 200.0	1.2	6.0	29.7	○	
Long stroke	ELF-3	1.5 - 3.0	2.5	3.0	4.6	○	Available for high ceiling applications. P.11 
	ELF-5	3.0 - 5.0	2.5	3.0	4.8	○	
	ELF-9	5.0 - 9.0	2.5	3.0	5.4	○	
	ELF-15	9.0 - 15.0	2.5	4.76	10.0	○	
	ELF-22	15.0 - 22.0	2.5	4.76	10.2	○	
	ELF-30	22.0 - 30.0	2.5	4.76	11.0	○	
	ELF-40	30.0 - 40.0	2.5	4.76	14.0	○	
	ELF-50	40.0 - 50.0	2.5	4.76	14.5	○	
	ELF-60	50.0 - 60.0	2.5	4.76	17.1	○	
	ELF-70	60.0 - 70.0	2.5	4.76	18.0	○	
With Ratchet	RSB-15	9.0 - 15.0	1.5	5.0	7.4	—	Available for holding suspend tool on the way of stroke mechanically. Even if no load is applied, its hook can be hold on the way of stroke. P.12 
	RSB-22	15.0 - 22.0	1.5	5.0	7.7	—	
	RSB-30	22.0 - 30.0	1.5	5.0	8.1	—	
	RSB-40	30.0 - 40.0	1.5	5.0	8.5	—	

Type	Model	Capacity(kg)	Stroke (m)	Cable/Hose dia (φ mm)	Mass (kg)	CE	
With cable snap back prevention device	EWA-15	9.0 - 15.0	1.3	4.0	4.7	○	Having device to arrest wire rope snap back in case that a wire rope is cut or suspended tool is disengaged. It will save worker from injury or dangerous occurred by such a situation. P.13 
	EWA-22	15.0 - 22.0	1.5	4.76	8.9	○	
	EWA-30	22.0 - 30.0	1.5	4.76	9.3	○	
	EWA-40	30.0 - 40.0	1.5	4.76	11.9	○	
	EWA-50	40.0 - 50.0	1.5	4.76	12.3	○	
	EWA-60	50.0 - 60.0	1.5	4.76	13.3	○	
	EWA-70	60.0 - 70.0	1.5	4.76	13.6	○	
With brake system	EWB-3B	1.5 - 3.0	1.3	3.0	4.7	○	Having one-way clutch lining braking system. Provide speedy and safe work by moving up tools slowly. P.14 
	EWB-5B	3.0 - 5.0	1.3	3.0	8.9	○	
	EWB-7B	5.0 - 7.0	1.3	3.0	9.3	○	
Air tool balancer	ATB-0	0.5 - 1.5	1.3	6.3	1.58	○	Having two function both hose reel and balancer. Urethane hose is wound and air tools can be easily moved up and down. P.15 
	ATB-1	1.5 - 3.0	1.3	6.3	1.66	○	
	ATB-2	3.0 - 5.0	1.3	3.6	1.73	—	
Tool hose balancer	THB-15	0.5 - 1.5	1.3	8.5	1.9	○	Inside diameter of hose is φ8.5mm.(bigger than ATB series) which supplies enough air to operate the suspended air tool or device. P.16 
	THB-25	1.5 - 2.5	1.3	8.5	2.0	○	
	THB-35	2.5 - 3.5	1.3	8.5	2.1	○	
	THB-50	3.5 - 5.0	1.3	8.5	2.1	○	
	THB-65	5.0 - 6.5	1.3	8.5	2.2	○	

Type	Model	Max tension N {kgf}	Stroke (m)	Cable/Hose dia (φ mm)	Mass (kg)	CE	
Air tool reel	ATR-5	4.9 {5.0}	2.0	10.0	3.8	○	Suitable for retracting hose into the device automatically. P.17 
	ATR-5-1	4.9 {5.0}	2.0	10.0	4.2	○	
Torque reel	ER-3A	18 {1.8}	3.0	2.38	1.4	○	Long travel cable is suitable for hanging pendant switch and so on. -A type has ratchet system that can be stopped on the way of cable travel. P.18 
	ER-3B	18 {1.8}	3.0	2.38	1.3	○	
	ER-5A	25 {2.5}	3.0	2.38	1.5	—	
	ER-5B	25 {2.5}	3.0	2.38	1.4	—	
	ER-10A	49 {5.0}	4.0	2.38	4.5	—	
	ER-10B	49 {5.0}	4.0	2.38	3.8	—	

They are suitable for the light weight tool like an electric driver.

EK-00

Light capacity

FUNCTION




Ratchet system
spring adjustment



CE Mark available



Model	Capacity(kg)	Stroke(m)	Cable dia(φmm)	Mass(kg)
EK-00	0.5-1.5	0.5	2.0	0.2

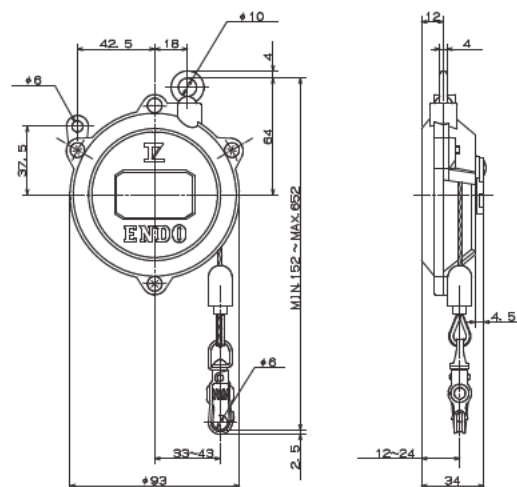

EK-0

Light capacity

FUNCTION




Ratchet system
spring adjustment



CE Mark available



Model	Capacity(kg)	Stroke(m)	Cable dia(φmm)	Mass(kg)
EK-0	0.5-1.5	1.0	3.0	0.5

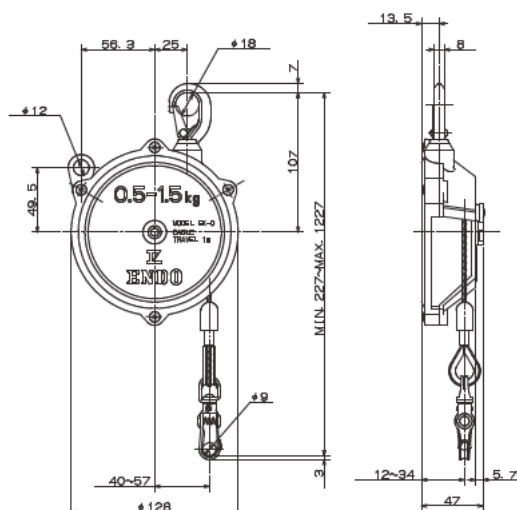

ERP-06E/1E/2E

Light capacity

FUNCTION




Handle system
spring adjustment



CE Mark available



Model	Capacity(kg)	Stroke(m)	Cable dia(φmm)	Mass(kg)
ERP-06E	0.3-0.6	1.5	2.0	0.4
ERP-1E	0.5-1.0	1.5	2.0	0.4
ERP-2E	1.0-2.0	1.5	2.0	0.4

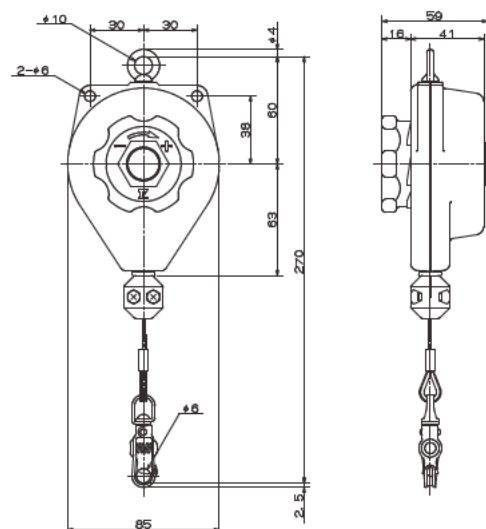

* A nylon rope is employed for CE market instead of a nylon coated cable.

Selection of suitable model

Always use a suitable model meeting the total weight of suspended tool or instrument. The balancer should be selected considering the weight of the tool and accessories.

Installation

- Install Spring balancers uneven not to hit each other when the balancers are installed in a line.
- Always employ a secondary support chain and leave the slack for smooth swivel.
- Always adjust the spring tension to meet the total weight of tool and the application.

Many safety features are equipped and they are most popular. For a welding gun, Pneumatic tool etc.

EW-3/5

Standard

FUNCTION



Plug type cable set



Ratchet system spring adjustment





CE Mark available

* Only EW-3 is available for CE Mark



Model	Capacity(kg)	Stroke(m)	Cable dia(φmm)	Mass(kg)
EW-3	1.0-3.0	1.3	3.0	1.4
EW-5	2.5-5.0	1.3	3.0	1.5

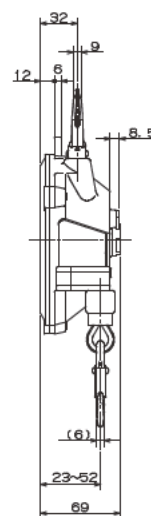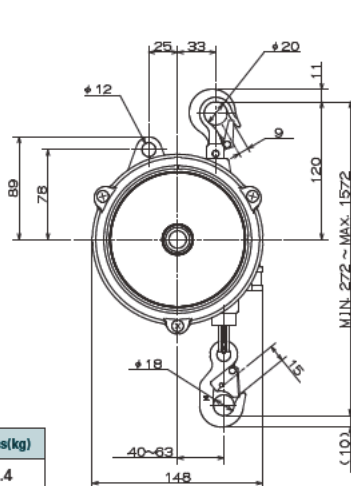

EWS-3/5/7

Standard

FUNCTION



Plug type cable set



Fall arrest device



Drum lock device





Worm gear spring adjustment



CE Mark available



Model	Capacity(kg)	Stroke(m)	Cable dia(φmm)	Mass(kg)
EWS-3	1.5-3.0	1.3	3.0	1.9
EWS-5	3.0-5.0	1.3	3.0	2.1
EWS-7	5.0-7.0	1.3	3.0	2.1

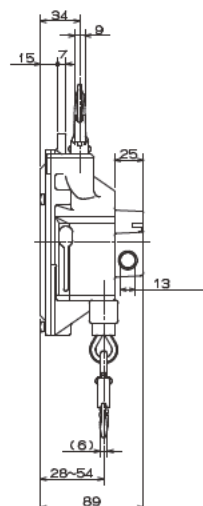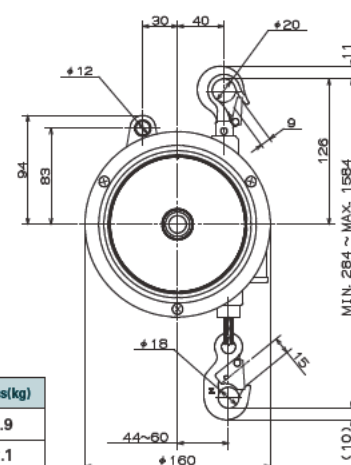

EWF-9/15

Standard

FUNCTION



Gauge



Cartridge spring assembly



Plug type cable set



Fall arrest device



Drum lock device





Worm gear spring adjustment



CE Mark available



Model	Capacity(kg)	Stroke(m)	Cable dia(φmm)	Mass(kg)
EWF-9	4.5- 9.0	1.3	4.0	3.5
EWF-15	9.0-15.0	1.3	4.0	3.8

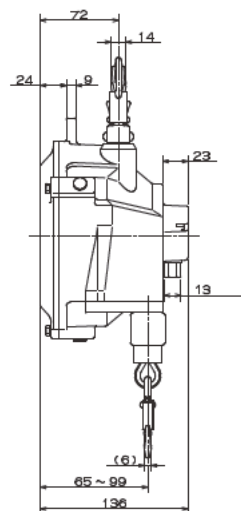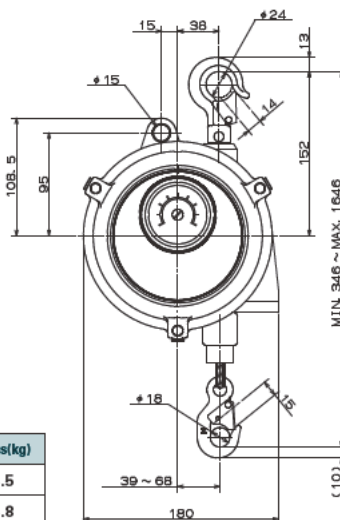

Selection of suitable model

Always use a suitable model meeting the total weight of suspended tool or instrument. The balancer should be selected considering the weight of the tool and accessories.

Installation

- Install Spring balancers uneven not to hit each other when the balancers are installed in a line.
- Always employ a secondary support chain and leave the slack for smooth swivel.
- Always adjust the spring tension to meet the total weight of tool and the application.

Many safety features are equipped and they are most popular. For a welding gun, Pneumatic tool etc.

EWF-22/30

Standard

FUNCTION



Gauge



Cartridge spring assembly



Plug type cable set



Fall arrest device



Drum lock device





Worm gear spring adjustment



CE Mark available



Model	Capacity(kg)	Stroke(m)	Cable dia(φmm)	Mass(kg)
EWF-22	15.0-22.0	1.5	4.76	7.3
EWF-30	22.0-30.0	1.5	4.76	7.7

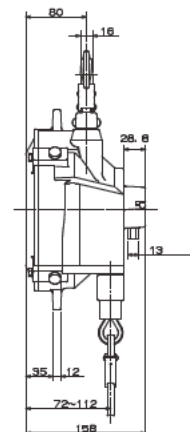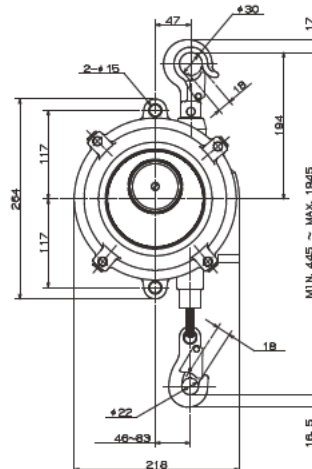

EWF-40/50

Standard

FUNCTION



Gauge



Cartridge spring assembly



Plug type cable set



Fall arrest device



Drum lock device





Worm gear spring adjustment



CE Mark available



Model	Capacity(kg)	Stroke(m)	Cable dia(φmm)	Mass(kg)
EWF-40	30.0-40.0	1.5	4.76	9.7
EWF-50	40.0-50.0	1.5	4.76	10.1

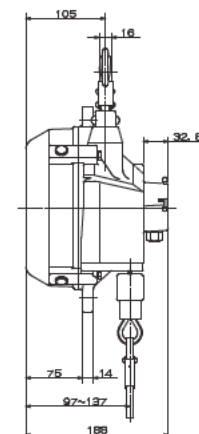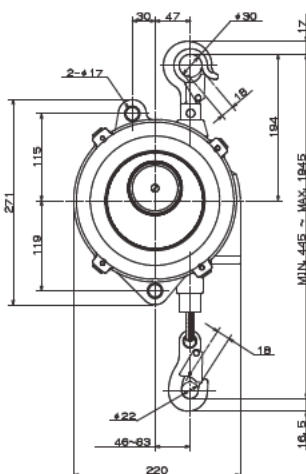

EWF-60/70

Standard

FUNCTION



Gauge



Cartridge spring assembly



Plug type cable set



Fall arrest device



Drum lock device





Worm gear spring adjustment



CE Mark available



Model	Capacity(kg)	Stroke(m)	Cable dia(φmm)	Mass(kg)
EWF-60	50.0-60.0	1.5	4.76	11.1
EWF-70	60.0-70.0	1.5	4.76	11.4

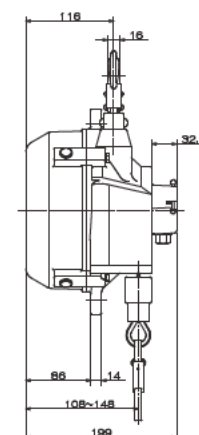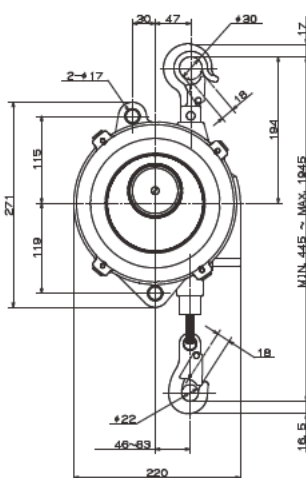

Selection of suitable model

Always use a suitable model meeting the total weight of suspended tool or instrument. The balancer should be selected considering the weight of the tool and accessories.

Installation

- Install Spring balancers uneven not to hit each other when the balancers are installed in a line.
- Always employ a secondary support chain and leave the slack for smooth swivel.
- Always adjust the spring tension to meet the total weight of tool and the application.

Large capacity^{EWF ETP}

They are suitable for a heavy weight device like multiple nut runner.

EWF-90/105/120

Large capacity

FUNCTION



Gauge



Cartridge spring assembly



Plug type cable set



Fall arrest device





Drum lock device



Worm gear spring adjustment



CE Mark available

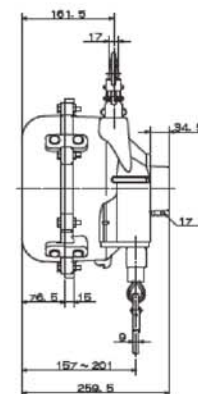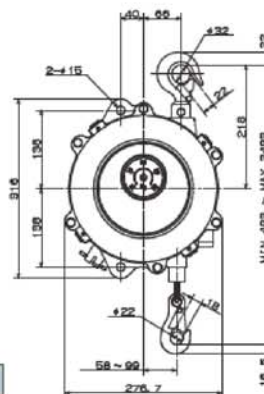

Model	Capacity(kg)	Stroke(m)	Cable dia(φmm)	Mass(kg)
EWF-90	70.0-90.0	2.0	4.76	21.9
EWF-105	85.0-105.0	2.0	4.76	24.0
EWF-120	100.0-120.0	2.0	4.76	27.5

ETP-14/15/16

Large capacity

FUNCTION





Fall arrest device



Worm gear spring adjustment



CE Mark available

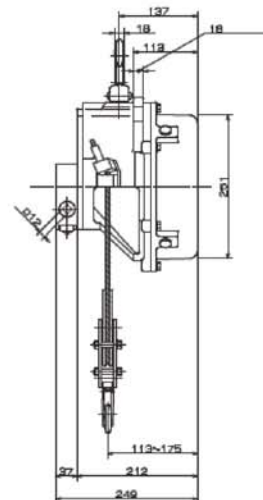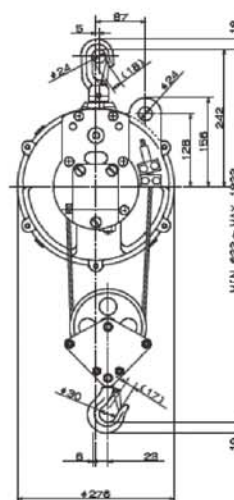

Model	Capacity(kg)	Stroke(m)	Cable dia(φmm)	Mass(kg)
ETP-14	120.0-140.0	1.2	6.0	24.1
ETP-15	140.0-170.0	1.2	6.0	28.7
ETP-16	170.0-200.0	1.2	6.0	29.7

Selection of suitable model

Always use a suitable model meeting the total weight of suspended tool or instrument. The balancer should be selected considering the weight of the tool and accessories.

Installation

- Install Spring balancers uneven not to hit each other when the balancers are installed in a line.
- Always employ a secondary support chain and leave the slack for smooth swivel.
- Always adjust the spring tension to meet the total weight of tool and the application.

ELF series are available for high ceiling application.

ELF-3/5/9



Long stroke

FUNCTION

-  Plug type cable set
-  Fall arrest device
-  Drum lock device
-  Worm gear spring adjustment
-  CE Mark available



Model	Capacity(kg)	Stroke(m)	Cable dia(φmm)	Mass(kg)
ELF-3	1.5-3.0	2.5	3.0	4.6
ELF-5	3.0-5.0	2.5	3.0	4.8
ELF-9	5.0-9.0	2.5	3.0	5.4

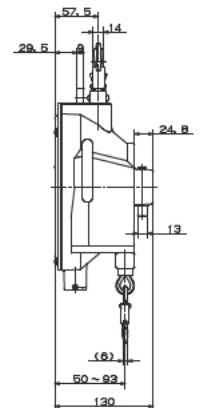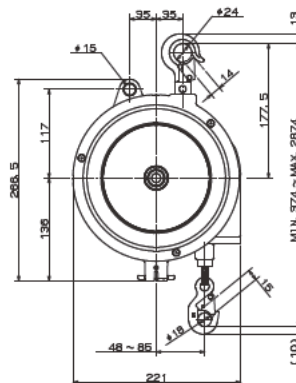

ELF-15/22/30



Long stroke

FUNCTION

-  Gauge
-  Cartridge spring assembly
-  Plug type cable set
-  Fall arrest device
-  Drum lock device
-  Worm gear spring adjustment
-  CE Mark available



Model	Capacity(kg)	Stroke(m)	Cable dia(φmm)	Mass(kg)
ELF-15	9.0-15.0	2.5	4.76	10.0
ELF-22	15.0-22.0	2.5	4.76	10.2
ELF-30	22.0-30.0	2.5	4.76	11.0

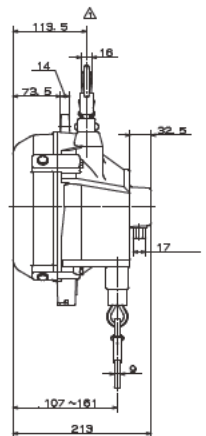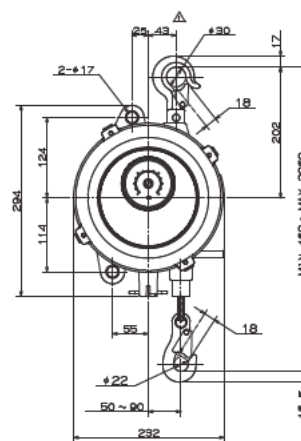

ELF-40/50



Long stroke

FUNCTION

-  Gauge
-  Cartridge spring assembly
-  Plug type cable set
-  Fall arrest device
-  Drum lock device
-  Worm gear spring adjustment
-  CE Mark available



Model	Capacity(kg)	Stroke(m)	Cable dia(φmm)	Mass(kg)
ELF-40	30.0-40.0	2.5	4.76	14.0
ELF-50	40.0-50.0	2.5	4.76	14.5

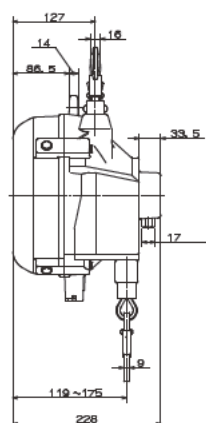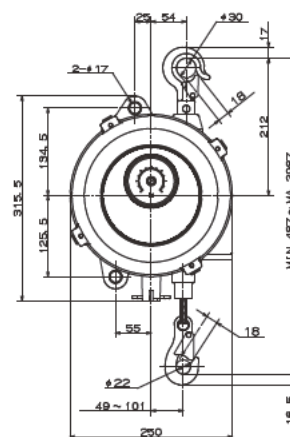

Selection of suitable model

Always use a suitable model meeting the total weight of suspended tool or instrument. The balancer should be selected considering the weight of the tool and accessories.

Installation

- Install Spring balancers uneven not to hit each other when the balancers are installed in a line.
- Always employ a secondary support chain and leave the slack for smooth swivel.
- Always adjust the spring tension to meet the total weight of tool and the application.

Spring balancer with cable snap back prevention device

Features

In case that a cable installed in a spring balancer is cut or a suspended tool is disengaged, the cable will snap back due to the tension of spring involved in a spring balancer, causing the dangerous situation such as the injury to personnel etc. This new device has developed to protect personnel from such the danger.

Description of the device

As soon as a cable is cut, a drum revolves rapidly winding a cable up. Rapid revolution of the drum generates centrifugal force. The centrifugal force makes a Ratchet on a spring case pushed out and the ratchet sticks in a wheel fixed on a cover, stopping the revolution of the drum.

Model	Capacity(kg)	Stroke(m)	Cable dia(φmm)	Mass(kg)
EWA-15	9.0-15.0	1.3	4.0	4.7
EWA-22	15.0-22.0	1.5	4.76	8.9
EWA-30	22.0-30.0	1.5	4.76	9.3
EWA-40	30.0-40.0	1.5	4.76	11.9
EWA-50	40.0-50.0	1.5	4.76	12.3
EWA-60	50.0-60.0	1.5	4.76	13.3
EWA-70	60.0-70.0	1.5	4.76	13.6

* The cable snap back protection device for 70kg to 120kg capacity is available on request.

FUNCTION



Gauge



Cartridge spring assembly



Plug type cable set



Fall arrest device



Snap back protection



Drum lock device





Worm gear spring adjustment





CE Mark available





EWA-15

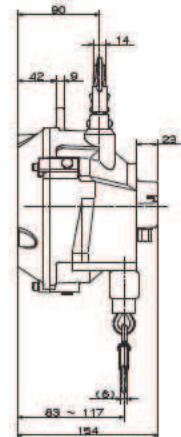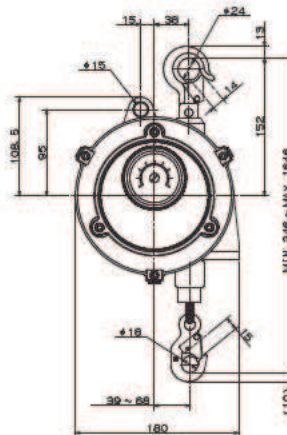

EWA-22/30

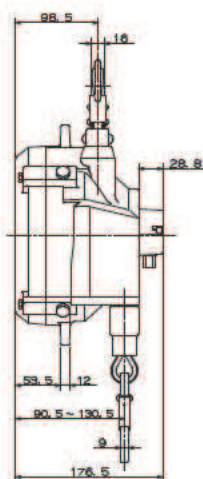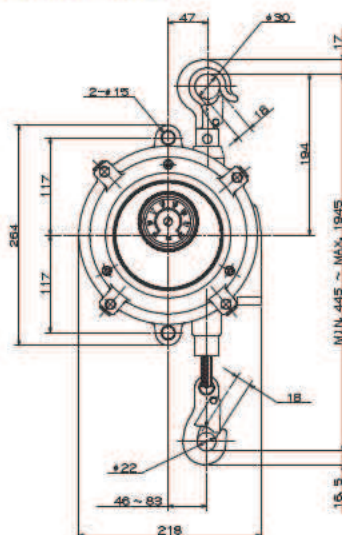

EWA-40/50/60/70

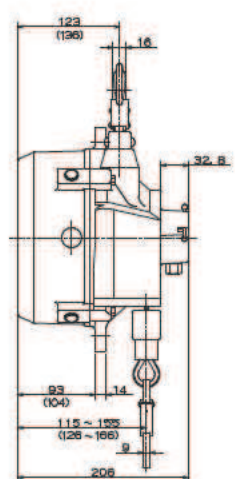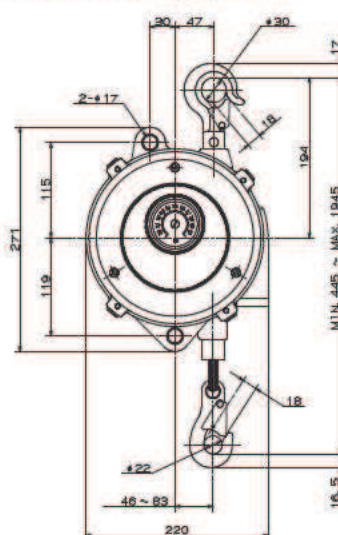

*() dimension shows EWA-60~70.

Spring balancer with brake system


Features

It uses one-way clutch lining braking system and it hangs up tools slowly.

Snap back with slow speed helps speedy and safe work for you.

Set brake free, you can use it as a normal balancer.

Model	Capacity(kg)	Stroke(m)	Cable dia(φmm)	Mass(kg)
EWF-3B	1.5-3.0	1.3	3.0	4.7
EWF-5B	3.0-5.0	1.3	3.0	8.9
EWF-7B	5.0-7.0	1.3	3.0	9.3

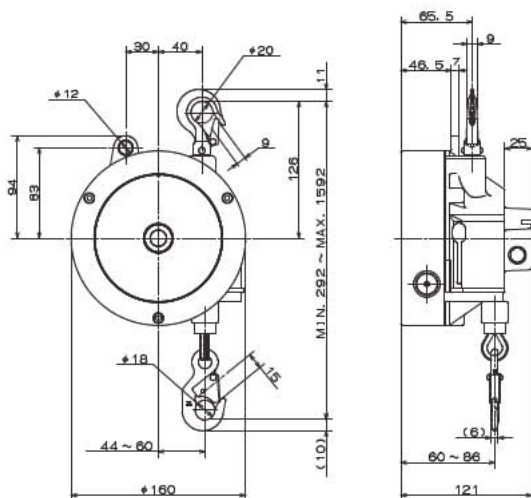

FUNCTION



Cartridge spring assembly



Plug type cable set



Fall arrest device



Drum lock device



Worm gear spring adjustment



CE Mark available

Features

Instead of the wire rope, the urethane hose is wound and air tools can be easily moved up and down.

Casing and drum are made of acrylonitrile butadiene-styrene resin and they are light.

The diameter of hose nipple is $\phi 9\text{mm}$ at inlet portion.


And swivel joint size Rc.1/4 at outlet portion.

Working conditions


- Application area : Indoor and normal atmospheric conditions
- Temperature rang : -10°C to $+40^{\circ}\text{C}$
- Application fluid : Air
- Maximum air pressure : 1.0MPa $\{10\text{kgf/cm}^2\}$

Model	Capacity(kg)	Hose travel (m)	Air Inlet.(ϕmm)	Mass(kg)
ATB-0	0.5-1.5	1.3	6.3	1.58
ATB-1	1.5-3.0	1.3	6.3	1.66
ATB-2	3.0-5.0	1.3	6.3	1.73

Flow characteristics

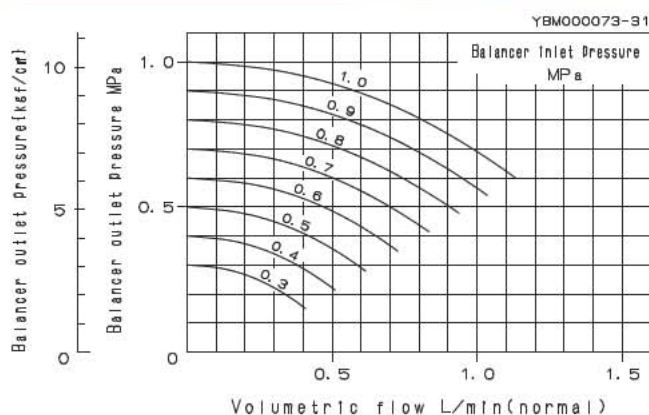

Dimensions(mm)

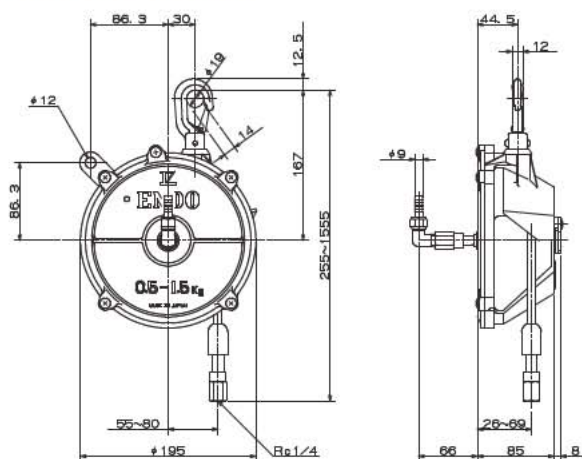

FUNCTION



Ratchet system
spring adjustment



Cushion cover
available



CE Mark available

※ATB-2 is not available for CE Mark.

Accessories

Protect wire set

Product number	Available model
LBP000794	ATB-0,1,2

The protector is available for tool fall protection caused by unintentionally detaching an air tool from a coupling.



Tool hose balancers THB

Features

Instead of the wire rope, the urethane hose is wound and air tools can be easily moved up and down.

When the spring failure is happened, the fall prevention device will operate and stop the suspended tool or device.


The inside diameter of hose is $\phi 8.5\text{mm}$ which supplies enough air to operate the suspended air tool or device.

Working conditions


- Application area : Indoor and normal atmospheric conditions
- Temperature rang : -10°C to $+40^{\circ}\text{C}$
- Application fluid : Air
- Maximum air pressure : 1.0MPa $\{10\text{kgf/cm}^2\}$

Model	Capacity(kg)	Hose travel (m)	Hose inside diameter. (φmm)	Mass(kg)
THB-15	0.5-1.5	1.3	8.5	1.9
THB-25	1.5-2.5	1.3	8.5	2.0
THB-35	2.5-3.5	1.3	8.5	2.1
THB-50	3.5-5.0	1.3	8.5	2.1
THB-65	5.0-6.5	1.3	8.5	2.2

Flow characteristics

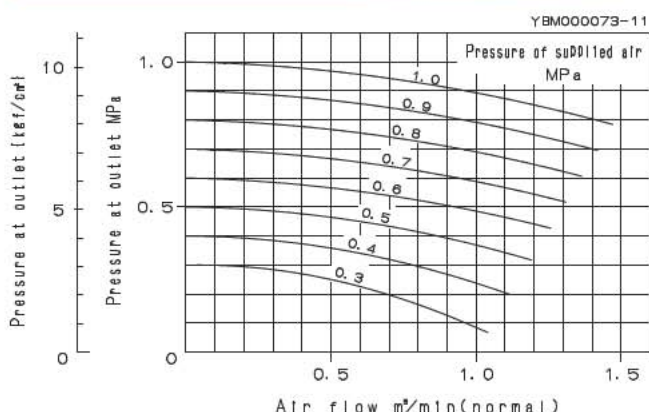

Dimensions(mm)

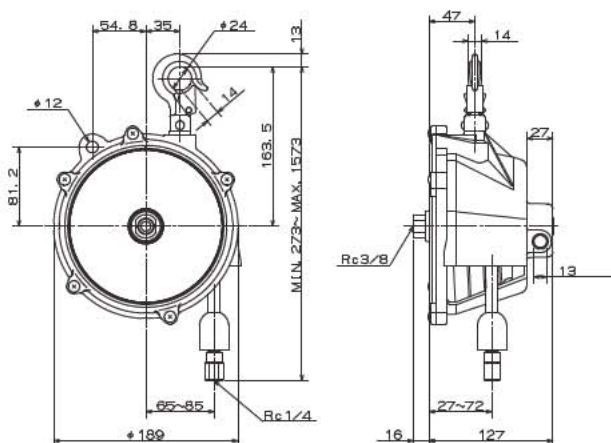

FUNCTION



Worm gear spring adjustment



Cushion cover available



Fall arrest device



CE Mark available

Special accessories

Swivel elbow fitting for air inlet (outer dia 10.5mm)

Parts No. LBP000654

Swivel Joint

Parts No. LBP000659

Protect wire

Parts No. LBP000801



Coupling socket (Outer dia 11.3mm)

Parts No. LBP000784



Adjustable hose stopper

Parts No. LBP000800

Special hose for an extended length (with a swivel joint ;1m)

Parts No. LBP000785
(max. 2m extension)

Features

An included spring works to retract a hose into the device automatically.

A contained hose solves the short of air consumption for air tool owing to a large inner diameter of 10φ.

A ratchet system applied for the device can keep a tool suspended at any position on the hose travel where you want.


※On-off work of ratchet system is available through knob operation.

The fall preventive system from the tool drop works when the included spring has been broken.


ATR-5 is installed with top hook and ATR-5-1 is installed with bracket.

Model	Max tension N (kgf)	Hose travel (m)	Air Inlet (φmm)	Mass(kg)
ATR-5	4.9 {5.0}	2.0	10.0	3.8
ATR-5-1	4.9 {5.0}	2.0	10.0	4.2

Flow characteristics

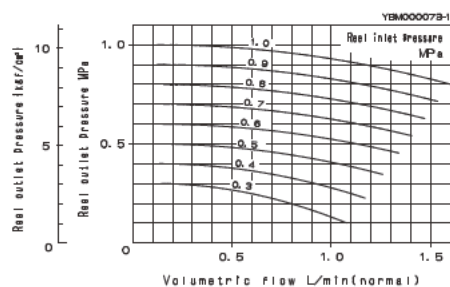

Tension curves

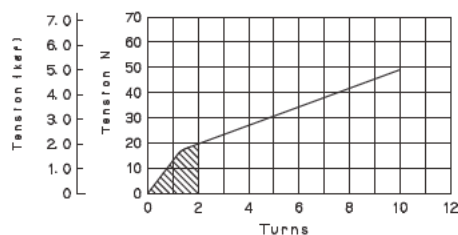

Accessories



**Special hose
for extended length
(with a swivel joint)**

1m Parts No. LBP000659

2m Parts No. LBP000664

3m Parts No. LBP000665




**Adjustable hose
stopper**

Parts No. LRP007933




Dimensions(mm)

ATR-5

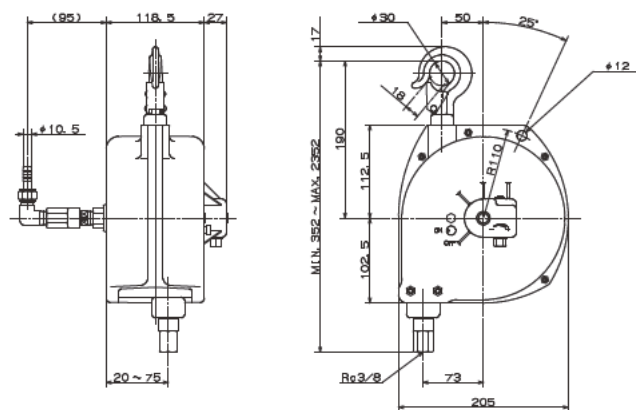

ATR-5-1

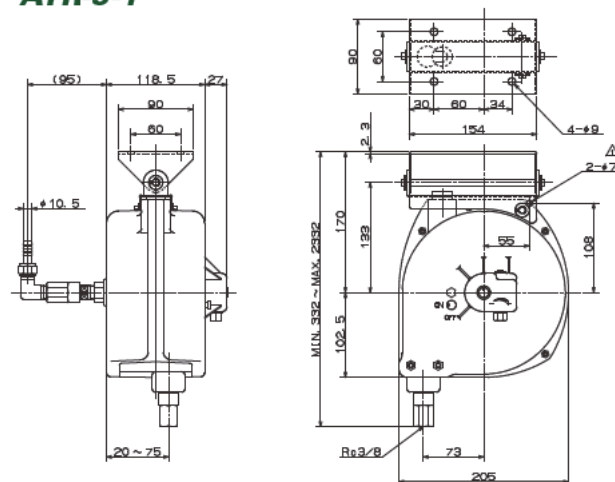

FUNCTION



Worm gear
spring adjustment



Ratchet device



Fall arrest device



CE Mark available

Features

This model can be stopped on the way of cable travel because of ratchet system.(-A type)

The jamming of the cable will not occur because of its cylindrical drum.

They has long cable travel (ER-3A/3B, ER-5A/5B=3m, ER-10A/10B=4m) and are designed light and compact.



FUNCTION



Ratchet system
spring adjustment



Cushion cover
available



CE Mark available
※Only ER 3A/ER 3B is available for
CE Mark

Model	Initial Max. tension (tension at retracted)		Active cable travel (m)	Tension build-up, full length of cable		the number of available spring winding	with or without ratchet	Diameter of cable (φmm)	Mass(kg)
	N	{kgf}		N	{kgf}				
ER-3A	18	1.8	3	12	1.2	about 16	○	2.38	1.4
ER-3B	18	1.8	3	12	1.2	about 16	×	2.38	1.3
ER-5A	25	2.5	3	25	2.5	about 13	○	2.38	1.5
ER-5B	25	2.5	3	25	2.5	about 13	×	2.38	1.4
ER-10A	49	5.0	4	49	5.0	about 13	○	2.38	4.5
ER-10B	49	5.0	4	49	5.0	about 13	×	2.38	3.8


(note) The tension increases gradually as the cable is pulled out. For example, on ER-5A, supporting that the tension of spring is adjusted at 25N (2.5kgf) when the cable is fully retracted, the tension of spring (when the cable is pulled out 3m) is equal to 50N (25+25) (2.5+2.5=5kgf)

Tension curves


The relation with the number of drum revolving and the length of winding cable

The length of winding cable per one revolving of drum **ER-3A/3B,5A/5B** ... about 350mm **ER-10A/10B** ... about 480mm


ER-3A/3B

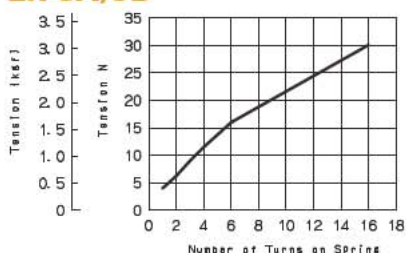



ER-5A/5B

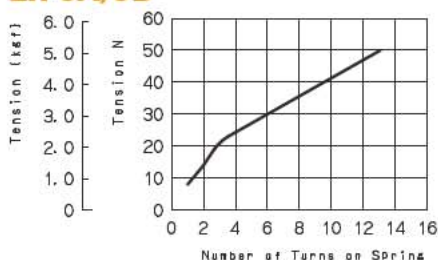



ER-10A/10B

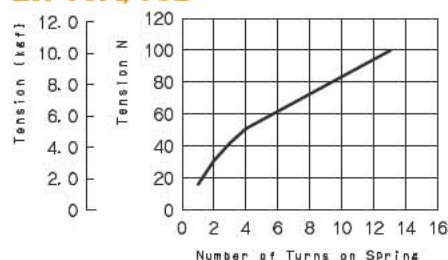

Dimensions(mm)

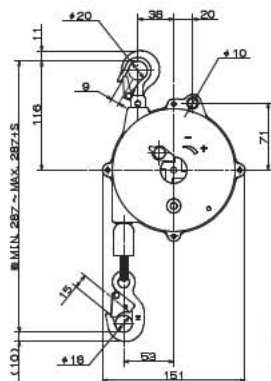


ER-3A/3B
ER-5A/5B

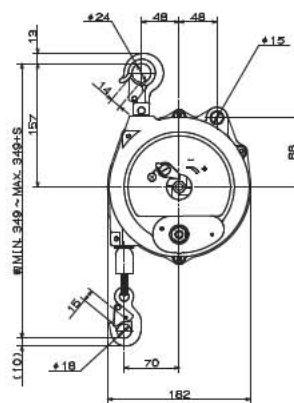

ER-10A/10B

Cushion

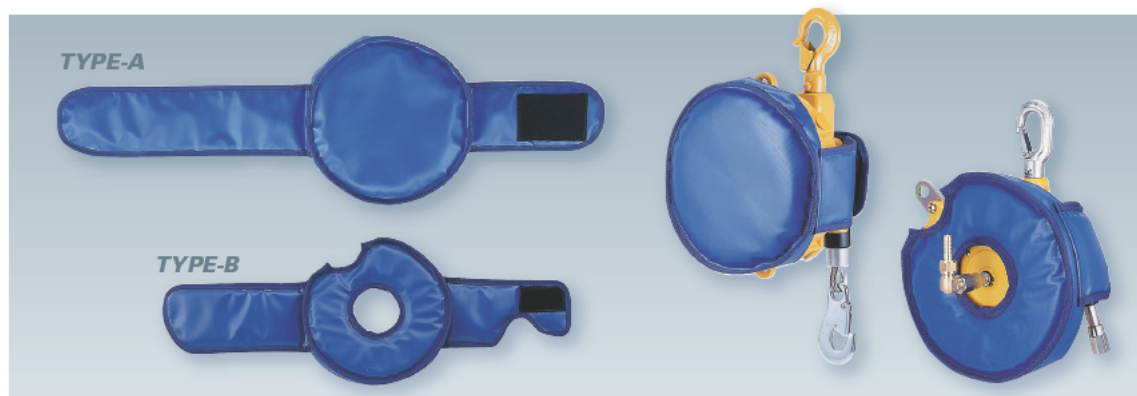

TYPE-A

Parts No. **P2B300789**

EWF-22 - 120

EWF-90A - 120A

TYPE-B

Parts No. **P2B300799**

ATB series

THB series

Insulation Hook




Parts No.	Diameter of cable (φmm)	Available model
LBP000145	4.0	EWF-9・15
LBP000146	4.76	EWF-22-70, EWA-22-70
LBP001185	4.76	EWF-90-120, EWF-90A-120A

Owing to insulation of holder, it becomes unnecessary to use the insulation made of ceramic (or others) which is casual at present.
This composes one set with special cable.



Adjustable cable stopper

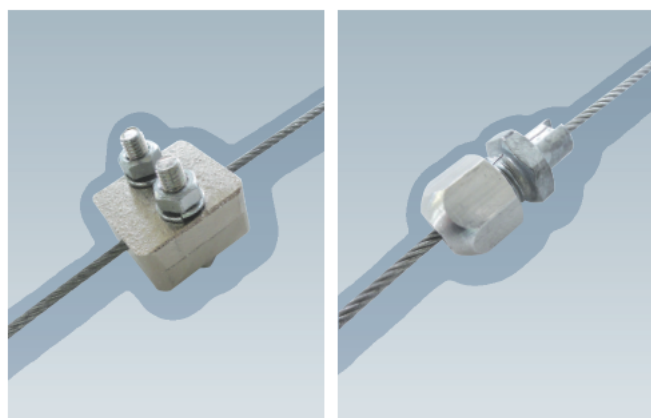


Split type

Plug-in type

Type	Parts No.	Available model
Split	LBP000127	RSB-15-40
	LBP000150	ER-3A/3B-ER-10A/10B
Plug-in	LBP000151	EW(EWS)-3-7, ELF-3-9
	LBP000131	EWF-9/15
	LBP000132	EWF-22-70, ELF-15-70, EWF-90-120, EWF-90A-120A

Karabina



Parts No.	Breaking load
P2S400104	16.7kN {1700kgf}

S Type hook



Model	Parts No.	Working load	Mass(kg)
SH-60	LBP000231	590N {60kgf}	0.16
SH-150	LBP000232	1470N {150kgf}	0.43



EWF-Type-X / EWF-Type-Y

Features

- The world's first "Eco-Friendly" spring balancer
- Synthetic food grade grease (H1 grade)
- High potential capability and endurance
- Flexible adaptability in a wide range of 1-120kg models

Specifications

	Treating Method					
Type	Y Type			X Type		
Casing	Unpainted			Unpainted		
Cover	Unpainted			Unpainted		
Upper Hook	Zinc plating			Zinc plating		
Rivet	Clear painting			Stainless steel		
Rope	Nylon rope	White	EW(EWS)-3Y-7Y	Nylon rope	White	White EW(EWS)-3X-7X
		Black	EW-9Y-15Y		Black	Black EWF-9X-15X
	SUS Wire rope		EW-22Y-120Y	SUS Wire rope		EW-22X-120X
Lower Hook	Standard(Zinc plated)			Stainless steel		
Pin(EWF-9-120)	Zinc plating			Zinc plating		
Plug	Standard			Stainless steel		
Bolts	Standard(Zinc plated)			Stainless steel		
Screws	Standard(Zinc plated)			Stainless steel		
Grease	Standard grease(on Spring)			Food grease(on Spring)		

For the next generation

Through the development of the product that is environmentally friendly,
we contribute to the sustainable development of community.

EWF-Type-C



Plastic Drum

Abrasion Powder is greatly reduced comparing with the existing model.



Fall Arrest Device

Drum lock system is equipped to prevent the tools in case of the spring breakage.



Replaceable Wire rope

Easy wire rope replacement is provided with the plug-in method.



Riveted Spring

Outer riveted spring helps safety replacement of the spring.



Specifications

Model	Capacity(kg)	Stroke(m)	Wire rope dia.(mm)	Mass(kg)
EWF-3C	1.5-3.0	1.3	φ3	1.7
EWF-5C	3.0-5.0	1.3	φ3	1.9
EWF-7C	5.0-7.0	1.3	φ3	1.9

ENDO



ISO9001 JP97/010458
SCOPE:Head office, Plant



ISO14001 JP10/070952
SCOPE:Head office, Plant

ENDO KOGYO CO., LTD.

<http://www.endo-kogyo.co.jp>

3-14-7, Akibacho, Tsubame, Niigata, Japan

Tel. 0256-62-5133 Fax. 0256-62-5772



ENDO KOGYO INDIA PVT., LTD.

<http://www.endo-india.co.in>

101, First Floor, Aditya Towers
Lulla Nagar, Off Kondhwa Road,
Pune – 411 040

Tel. +91-86-00042752 Mail. info@endo-india.co.in

※Items shown in this catalogue are subject to change without notice.

※Please note we do not have responsibility for missing and fault on the printing.