
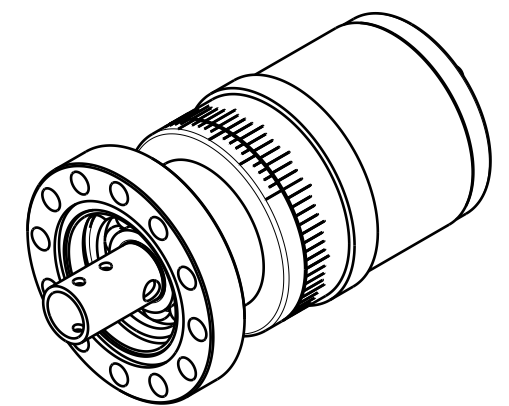
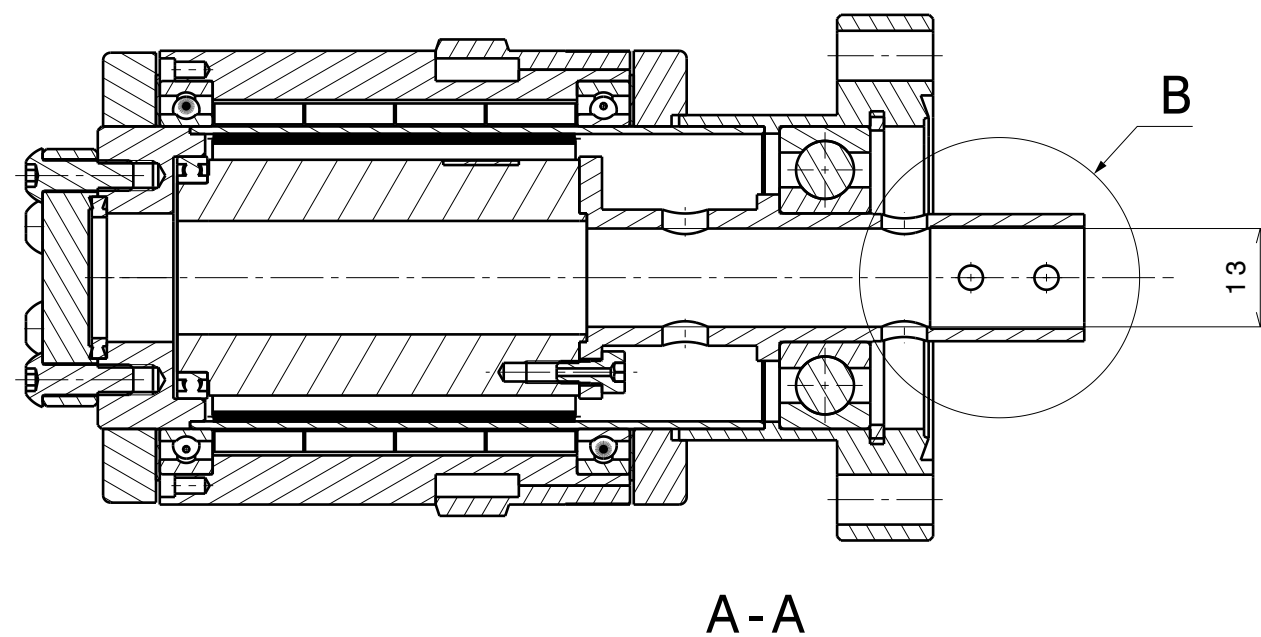
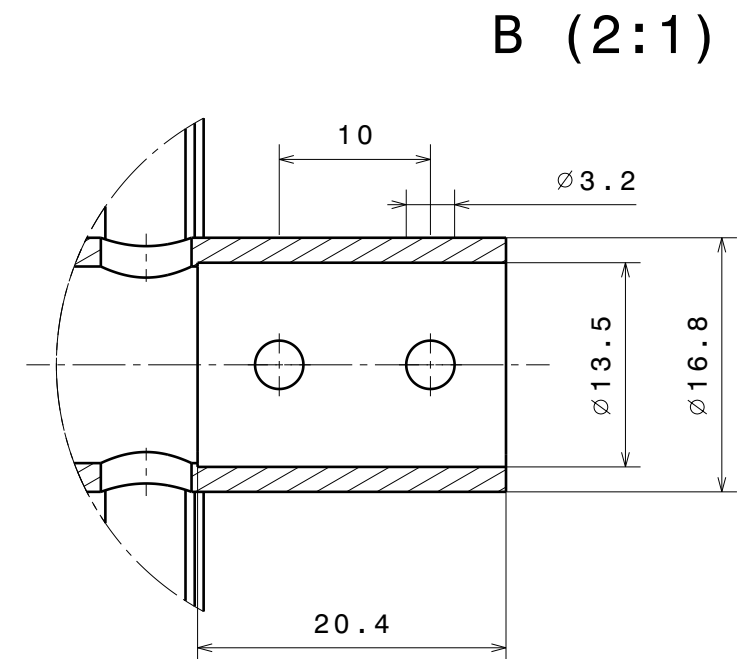


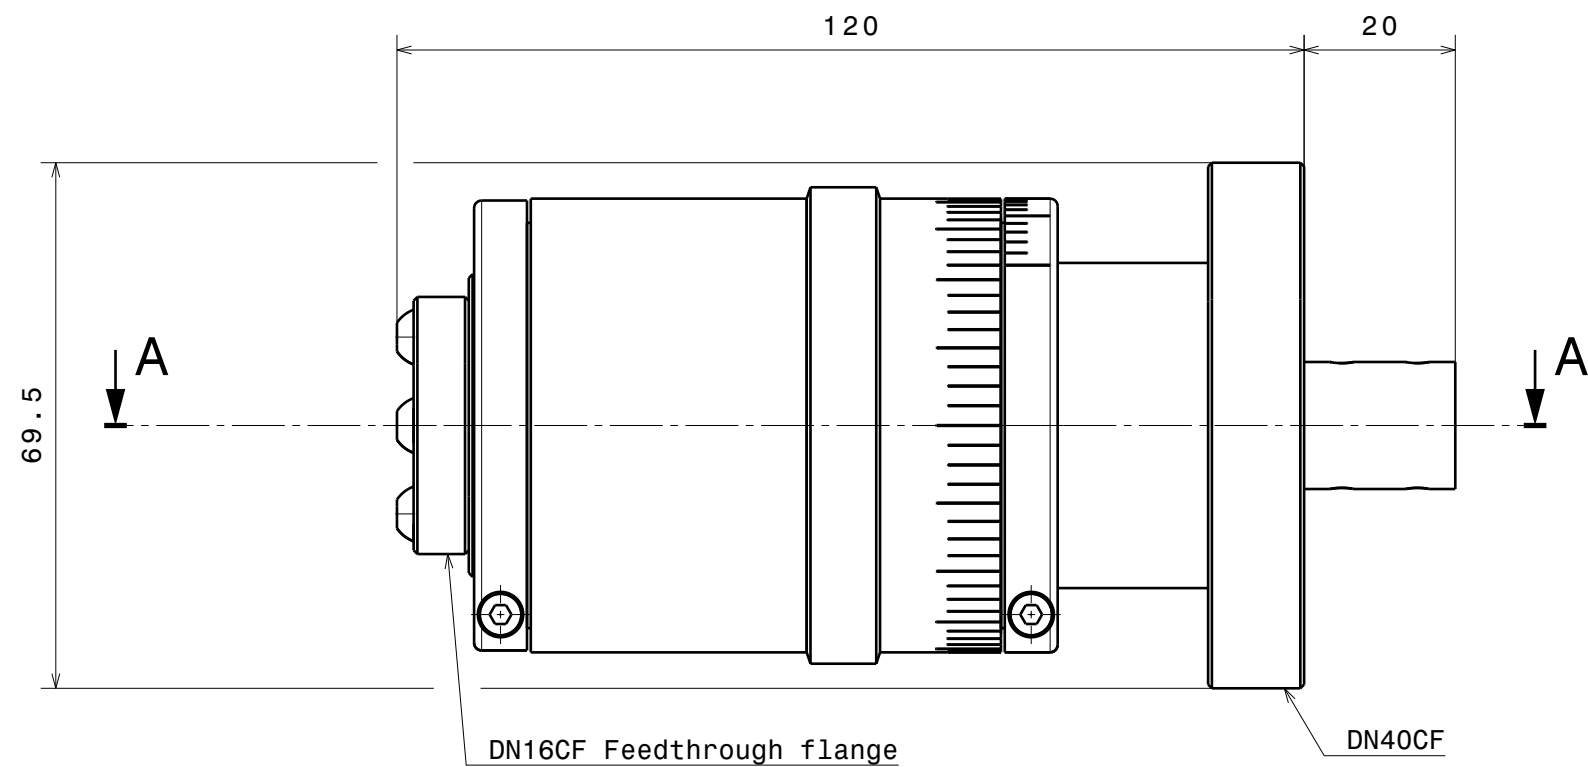

$\sqrt{Ra\ 0.8}$ (✓) $\begin{matrix} +0.2 \\ +0.1 \end{matrix}$ $\begin{matrix} -0.1 \\ -0.2 \end{matrix}$

Material: all UHV compatible

Rotary Feedthrough with hollow shaft

Ferrovac
CH-8050 Zurich

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERROVAC. ANY REPRODUCTION IN PART OR AS WHOLE WITHOUT OUR PERMISSION IS PROHIBITED.

nominal dimensions	≤30mm	DIN ISO 2768-f-H
	>30mm	DIN ISO 2768-m-K excluding Sym./Runout
Sym./Runout	>30mm	DIN ISO 2768-H
formed part dimensions		DIN ISO 2768-f-H
Scale	Drawn	M.Maier
	Date	20.08.2022
	Changed	28.08.2022 MM
1:1		RF40
Rev.	B	A3 sheet 1/1