



DN63CF Tapped M8

5 x DN16CF Tapped M4

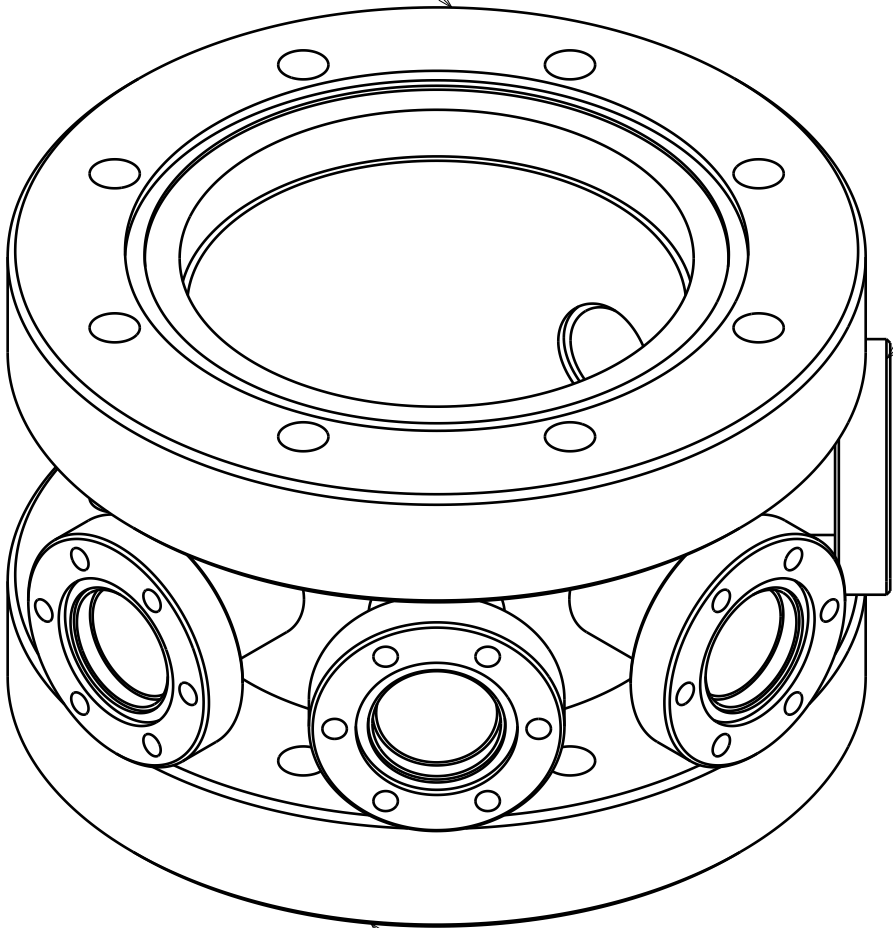


DN63CF Tapped M8

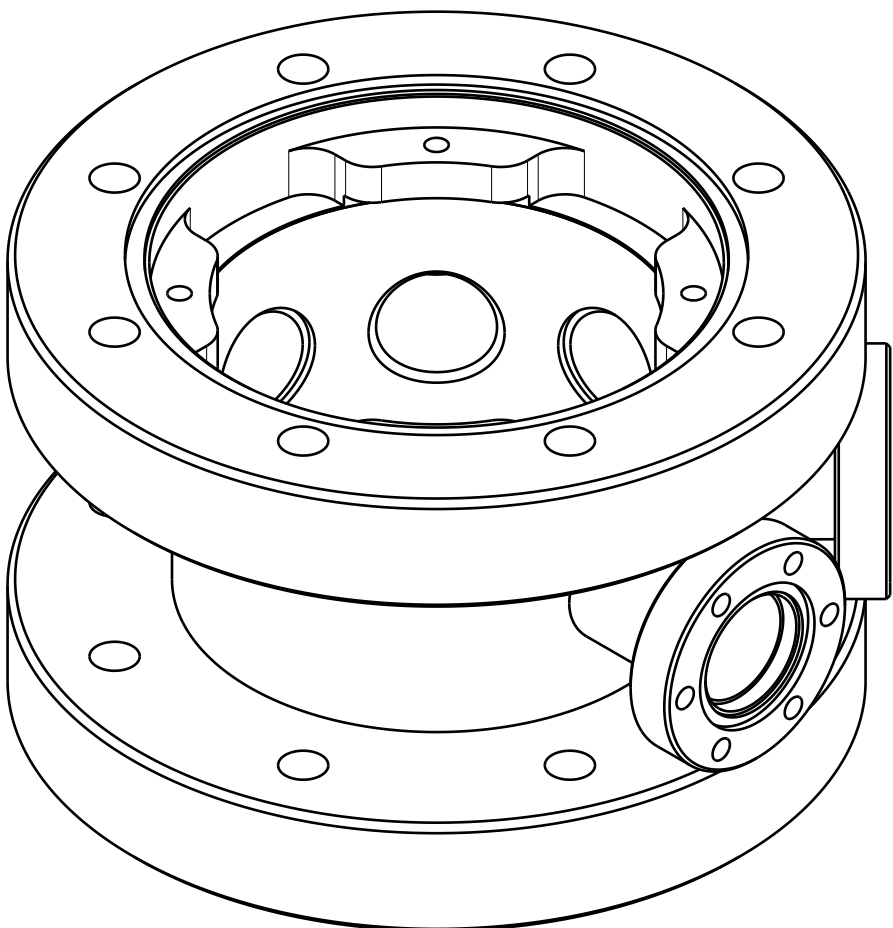

$\sqrt{Ra\ 0.8}$ ($\sqrt{}$) $\begin{matrix} +0.2 \\ +0.1 \end{matrix}$ $\begin{matrix} -0.1 \\ -0.2 \end{matrix}$
general tolerances ISO 2768-K

Material: 1.4301		nominal dimension	over up to	1	6	30	100	300	1000
Tapped Parallel Feedthrough Chamber		tolerance	$\pm$	6	30	100	300	1000	2000
				0.05	0.1	0.3	0.5	0.8	1.2
		Scale	Drawn		M.Maier				
		1 : 1	Date		17.10.2017				
			Changed		29.06.2018 CW				
Ferrovac GmbH CH-8050 Zurich		Rev.		B	MZFCCF63TCF63T 5XCF16T				
					A3 sheet 1/2				

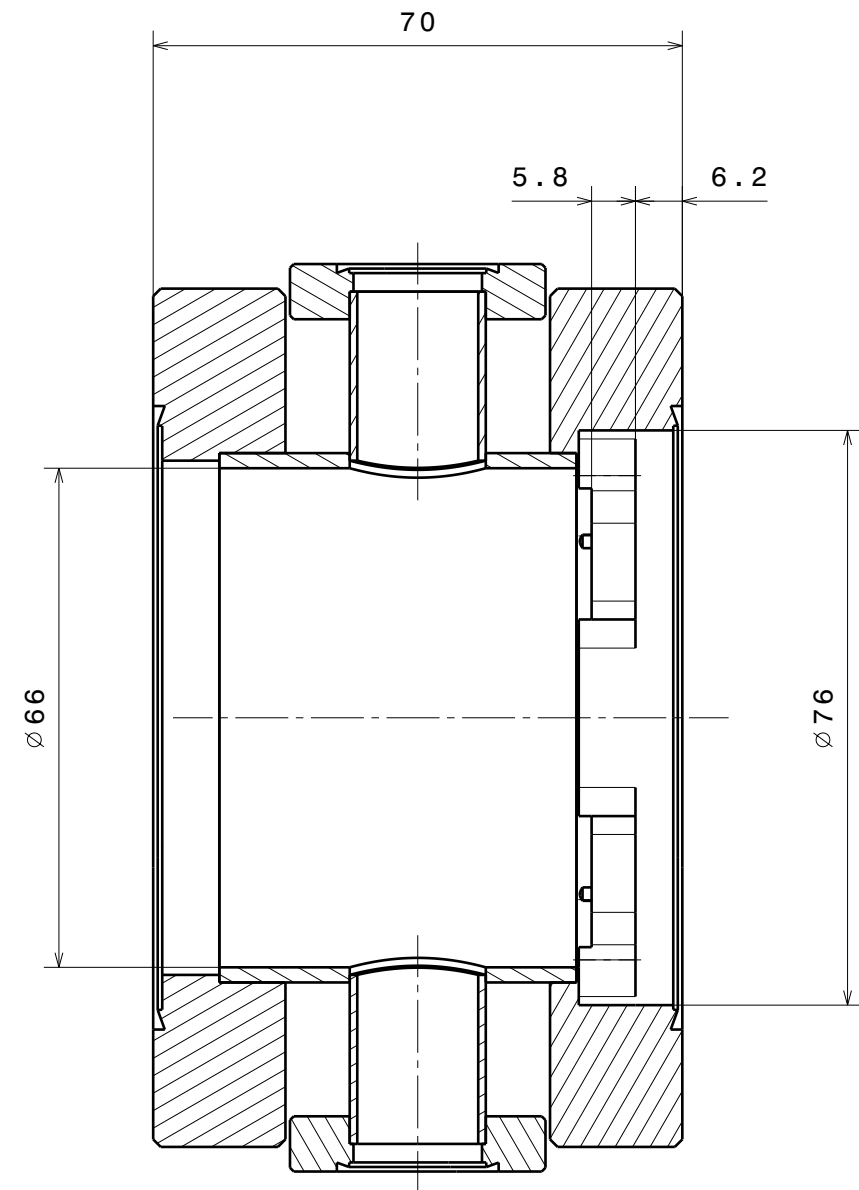

A-A
1:1

Material: 1.4301		nominal dimension		over	1	6	30	100	300	1000
Tapped Parallel Feedthrough Chamber		up to			6	30	100	300	1000	2000
		tolerance		±	0.05	0.1	0.3	0.5	0.8	1.2
		Scale		Drawn		M.Maier				
Ferrovac GmbH CH-8050 Zurich		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERROVAC GMBH. ANY REPRODUCTION IN PART OR AS WHOLE WITHOUT OUR PERMISSION IS PROHIBITED.		1 : 1		Date		17.10.2017		
						Changed		29.06.2018 CW		
						MZFCCF63TCF63T 5XCF16T A3 sheet 1/2				
		Rev.		B						