

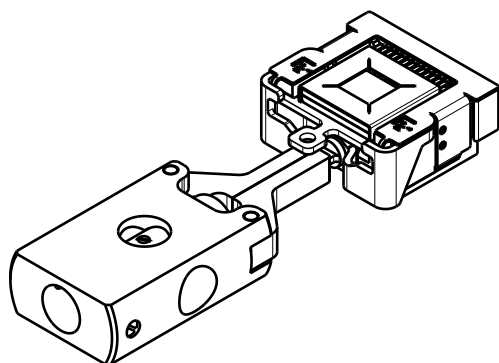
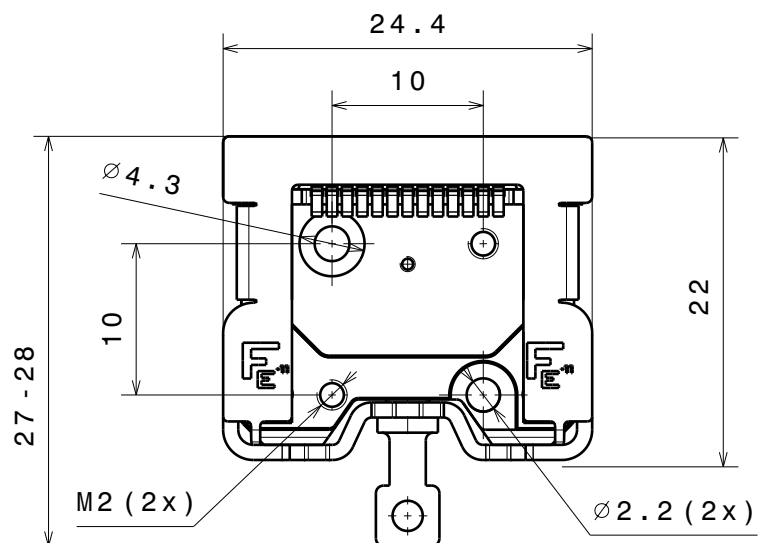
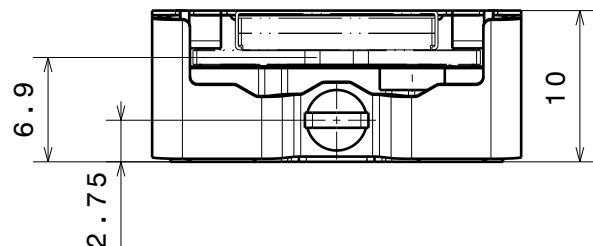
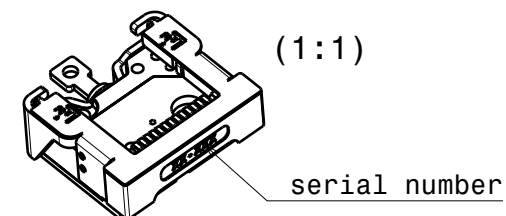

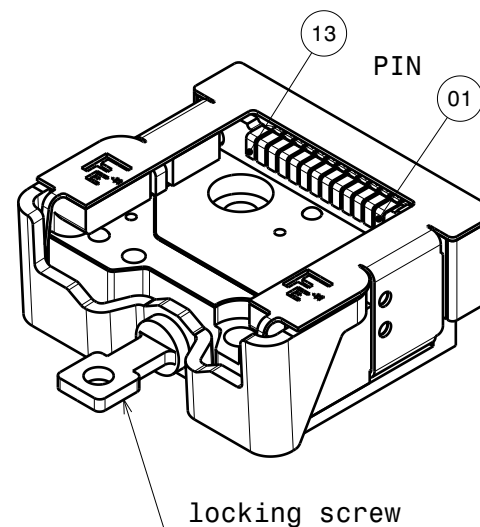



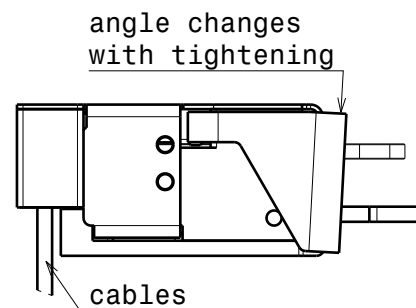

Operation with PGWMS(OM) or GRABSHOM end effector.

Sample Plate SHOME13 shown for visualisation.
Not included in delivery of receptacle.

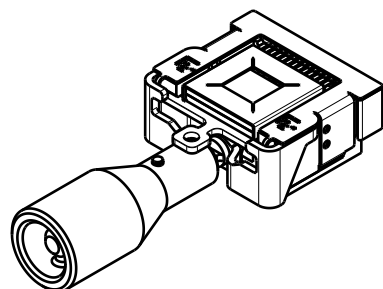

Material: All UHV compatible		nominal ≤30mm	DIN ISO 2768-f-H
		dimensions >30mm	DIN ISO 2768-m-K excluding Sym./Runout
		Sym./Runout >30mm	DIN ISO 2768-H
		formed part dimensions	DIN ISO 2768-f-H
		Scale	Drawn M. Müller
		2:1	Date 26.01.2021
		(1:1)	Changed 11.08.26 BUJA
		(5:1)	RECOMREC13V2
Ferrovac CH-8050 Zurich		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERROVAC. ANY REPRODUCTION IN PART OR AS WHOLE WITHOUT OUR PERMISSION IS PROHIBITED.	
Rev.	E	A4 sheet 1/1	