

**Recommended Operating,
Care (Maintenance) And
Inspection Manual**

For

Synthetic Web Tie Downs

WSTDA-T-2



© Web Sling & Tie Down Association 2017

© Web Sling & Tie Down Association. All rights reserved. No part of this publication may be produced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior permission of the Web Sling & Tie Down Association. This publication is circulated subject to the condition that it shall not, by way of trade or otherwise, be lent, sold, hired out or otherwise circulated without WSTDA's prior consent.

MANDATORY AND ADVISORY RULES

Mandatory rules are characterized by the use of the word “shall”. If a rule is of an advisory nature, it is indicated by the use of the word “should”, or it is stated as a recommendation.

The Web Sling & Tie Down Association has also formulated a Recommended Standard Specification for Synthetic Web Tie Downs as a guide for users, industry and government to assist in the proper use, maintenance and inspection of synthetic web tie downs.

The Association suggests the use of the Recommended Standard Specification for Synthetic Web Tie Downs WSTDA-T-1 by all synthetic web tie down users.

Figures shown in this standard are for illustrative purposes only and are not intended to represent usage, design or manufacturing processes.



Web Sling & Tie Down Association, Inc.

9 Newport Drive, Suite 200
Forest Hill, MD 21050 U.S.A
Tel. (443) 640-1070
Fax (443) 640-1031

Email: wstda@stringfellowgroup.net
Web Site www.wstda.com

First Published and Copyright 1995
First Revision 2000
Second Revision 2007
Third Revision 2017

TABLE OF CONTENTS

Introduction.....	1
Synthetic Web Tie Downs.....	2
Synthetic Web Tie Down Identification.....	2
Recommended Operating Practices	
Proper Selection.....	3
Use and Care.....	4
Environmental Considerations.....	5
Inspection, Removal, Repair	
Inspection.....	8
Removal from Service.....	9
Repair.....	11



INTRODUCTION

The Web Sling & Tie Down Association (WSTDA) is a tax-exempt, non-profit, technical association dedicated to the development and promotion of voluntary recommended standards and associated reference materials. Originally established in 1973 as the Web Sling Association (WSA), the WSA serviced the synthetic web sling industry. In 1988, the WSA further defined its purpose to include synthetic web tie downs and became the Web Sling & Tie Down Association. Today, members of the WSTDA include manufacturers and suppliers of synthetic web slings and tie downs, roundslings, synthetic webbing, fibers, thread and related components.

It is an industry organization of manufacturers of synthetic yarns, webbing, slings, tie downs and related components. These products are used in the manufacturing, transportation, recreation, construction and forestry industries and by the military and governmental agencies, for lifting, lowering, moving and securing loads.

The WSTDA's mission is to foster and further, in every lawful manner, the common interests of its members and industry. In pursuance of this mission, the association has prepared this manual. It is intended to serve as a general outline of recommended procedures and suggested operating practices and is not intended to be an all-inclusive list of procedures for specific products or applications.

Accordingly, the Web Sling & Tie Down Association, Inc. disclaims any responsibility for the actual use of any synthetic web tie down products. The user should consult the manufacturer for further information concerning the proper care and use of its products.

SYNTHETIC WEB TIE DOWNS

The use of “web tie down” throughout this publication shall be defined as a synthetic web tie down which is fabricated of synthetic webbing, with or without hardware, for the purpose of securing cargo. Web tie downs made from materials or construction other than those detailed in this Recommended Standard Specification shall be used in accordance with the recommendations of the web tie down manufacturer or qualified person.

Safety is the paramount consideration involved in the use of any web tie down. The appropriate web tie down shall be selected by the user for the specific application. Users of web tie downs shall have knowledge on the proper method of cargo securement. Users shall also be knowledgeable about federal, state, provincial, local and industry regulations applicable to cargo securement.

Figures shown in this standard are for illustrative purposes only and are not intended to represent usage, design or manufacturing processes.

SYNTHETIC WEB TIE DOWN IDENTIFICATION

EACH WEB TIE DOWN ASSEMBLY (OR SUB UNIT, IF IT IS INTENDED THAT PARTS BE SEPARABLE) SHALL BE DURABLY MARKED OR LABELED BY THE MANUFACTURER USING AN IDENTIFICATION TAG, STENCIL OR OTHER MEANS WITH THE FOLLOWING REQUIRED INFORMATION:

- A. Name and/or trademark of the web tie down manufacturer
- B. Working load limit in pounds and kilograms

RECOMMENDED OPERATING PRACTICES

Proper Selection

Select a web tie down having suitable characteristics for the type of load, environment and attachment to vehicle anchor point. Fittings shall be the proper shape and size to ensure that they will attach properly to the vehicle and cargo anchor / attachment points.

Identify the working load limit (WLL) marked on the web tie down. Identify the working load limit (WLL) of the vehicle and cargo anchor / attachment points. If no rating is visible contact the owner or vehicle manufacturer for tie down instructions. The lesser rated working load limit (WLL), whether that is the anchor point or the web tie down, shall determine the working load limit (WLL) of the entire securement system.

Determine the proper number of web tie downs required based on the weight of the cargo, the type of commodity, the aggregate working load limit of the securement system and the length/weight ratio of the cargo being secured. The tie down angle should also be considered.

Determine the proper number of web tie downs required based upon the weight of the cargo, the type of commodity, the aggregate working load limit of the securement system and the length/weight ratio of the cargo being secured.

Additionally, end users and enforcement personnel are required to know commodity-specific rules governing proper web tie down determination as published by the Federal Motor Carrier Safety Administration Standard for Protection Against Shifting and Falling Cargo; Final Rule effective June 22, 2006 or latest ruling, and/or Canadian Council of Motor Transport Administrators, National Safety Code Standard 10, amended June 2013 or current regulations in effect.


Use and Care

Web tie downs shall not be loaded in excess of the working load limit provided by the manufacturer. Consideration shall be given to the angle from the horizontal (web tie down to trailer) that affects the downward pressure.

⚠ WARNING

Tie downs shall not be loaded in excess of the working load limit (WLL) provided by the manufacturer. Consideration should be given to the tie down angle, from the horizontal (tie down to trailer) that affects the downward pressure of the tie down(s).

Effect of Angle - Example: If using web tie downs at 30 degrees the effective downward pressure is reduced to 50% of the vertical strap assembly efficiency. Multiply the working load limit (WLL) by 50% to get the reduced effectiveness of the web tie down and add additional web tie downs necessary to secure the load properly. The effectiveness examples pictured below are only true of indirect tie downs.

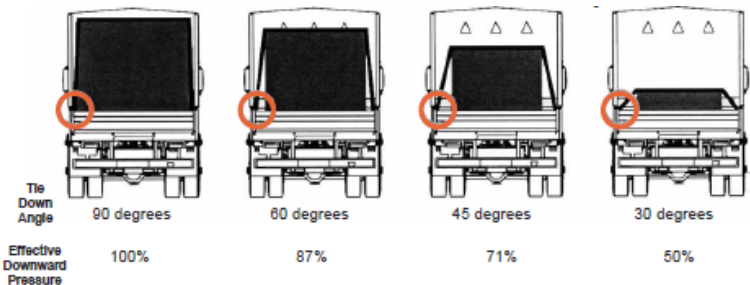

Web tie downs shall be attached to the vehicle and positioned in accordance with applicable regulations for the commodity being transported to prevent shifting and/or loss of cargo.

Web tie downs shall always be protected from corners, edges, protrusions and abrasive surfaces with edge protection that resists abrasion, cutting or crushing.

Web tie downs shall not be shortened, joined, repaired or lengthened by being tied in knots.

Web tie downs designed to secure cargo shall not be used for lifting, lowering or suspending cargo or for towing.

When using winch or ratchet straps, a minimum of two (2) and a maximum of four (4) wraps of webbing shall be on the winch or ratchet mandrel. Excessive wraps of webbing on the mandrel may reduce the working load limit of the web tie down and may interfere with proper operation. Not enough wraps and the webbing may not reach optimal tension.

Before operating any web tie down, the user shall secure his/her footing to prevent slipping or falling. In adverse weather conditions, including freezing temperatures, additional caution should be exercised.

Web tie downs shall be used, inspected and adjusted during the transportation of cargo per applicable federal, state, provincial, local and industry regulations.

Web tie downs should not be pulled from under cargo when the cargo is resting on the web tie down.

Web tie downs should not be dropped or dragged on the floor, ground or any abrasive surface.

Environmental Considerations

Web tie downs should be stored in a cool, dry and dark place when not in use to prevent loss of strength through exposure to ultra-violet light.

Chemically-active environments can affect the strength of web tie downs in varying degrees ranging from little to total degradation. The web tie down manufacturer, or qualified person, should be consulted before any web tie down is used or stored in chemically-active environments.

Web tie downs incorporating aluminum fittings shall not be used where fumes, vapors, sprays, mists or liquids of alkalis and/or acids are present.

Acids

Nylon is subject to degradation in acids ranging from little to total degradation.

Polyester is resistant to many acids but is subject to degradation ranging from little to moderate with some acids.

Each application shall be evaluated, taking into consideration the following:

- a. Type of acid
- b. Exposure conditions
- c. Concentration
- d. Temperature

Alkalis

Polyester is subject to degradation in alkalis ranging from little to total degradation.

Nylon is resistant to many alkalis but is subject to degradation ranging from little to moderate with some alkalis.

Each application shall be evaluated, taking into consideration the following:

- a. Type of alkalis
- b. Exposure conditions
- c. Concentration
- d. Temperature

Temperatures

Web tie downs using nylon or polyester webbing shall not be used at temperatures in excess of 194 degrees F (90 degrees C) or below -40 degrees F (-40 degrees C).

Web tie downs using nylon or polyester webbing shall not come in contact with any object with a temperature in excess of 194 degrees F (90 degrees C) or below -40 degrees F (-40 degrees C). This includes the cargo being secured, the vehicle and the anchor points.

Ultra-Violet Light

Environments in which web tie downs are continuously exposed to ultra-violet light affect the strength of the web tie downs in varying degrees ranging from slight to total degradation.

Factors that affect the degree of strength loss:

1. Length of time of continuous exposure
2. Webbing construction and design
3. Other environmental factors such as weather conditions and geographic location

Suggested procedures to minimize the effects of ultra-violet light:

1. Store web tie downs in a cool, dry and dark place when not in use
2. Consult web tie down manufacturer for coatings that may be applied to the webbing

Some visual indications of possible ultra-violet light degradation are:

1. Bleaching out of webbing color
2. Increased stiffness of webbing
3. Surface abrasion in areas not normally in contact with the load

CAUTION: Degradation can take place without visible indications. If in doubt, contact the web tie down manufacturer for a possible proof load test or simply remove from service.

Web tie downs and associated hardware may be subjected to dirt, mud, snow, road salt, cleaning solutions, etc. Frequent inspection, cleaning and lubrication as appropriate will help ensure proper operating condition. Aluminum fittings should not be cleaned with chlorine-based cleaning agents or used in high chlorine environments.

Washing of tie down webbing (including pressure washing) is not recommended as any washing can cause accelerated degradation of the webbing and loss of strength due to mechanical/chemical damage.

INSPECTION, REMOVAL AND REPAIR

For the purpose of this chapter, a designated person is defined as personnel selected or assigned by the employer as being competent to perform specific duties.

A qualified person is one who by possession of a recognized degree, certificate of professional standing or by extensive knowledge, training and experience has successfully demonstrated the ability to solve or resolve problems related to the subject matter and work.

Type of Inspections

Initial Inspection

Prior to use, web tie downs shall be inspected by a designated person to verify compliance with the applicable provisions of this chapter.

Frequent Inspection

(a) A visual inspection for damage shall be performed by the user or other designated person before each use.

(b) Conditions such as those listed in the removal from service criteria shall cause a web tie down to be removed from service. Web tie downs removed shall not be returned to service until approved by a qualified person.

Periodic Inspection

(a) A complete inspection for damage to the web tie down shall be performed periodically by a qualified person. Each web tie down shall be examined individually, taking care to expose and examine all surfaces and components. The web tie down shall be examined for conditions such as those listed in the removal from service criteria.

(b) Frequency of a periodic inspection shall be based on, but not limited to:

- 1) Frequency of web tie down use
- 2) Severity of service conditions
- 3) Experience gained on the service life of web tie downs used in similar applications

(c) A written record of periodic inspections should be kept on file. These records should show a description of the web tie down, the condition at the time of the inspection, the date the inspection was performed and the qualified person who performed the inspection.

Removal from Service

A web tie down shall be removed from service if any of the following are visible:

- a. Holes, tears, cuts, snags or embedded particles which cause doubt as to the strength of the web tie down.
- b. Broken or worn stitching in load-bearing stitch patterns.
- c. Abrasion wears.
- d. Knots in any part of the webbing.
- e. Melting, charring or weld spatter on any part of the webbing.
- f. Acid or alkali burns.
- g. Signs of ultra-violet light degradation.
- h. Pitting, corrosion, cracked, distorted or broken buckles or end fittings.
- i. The working load limit assigned by the web tie down manufacturer is no longer visible.
- j. Any other visible damage which causes doubt as to the strength of the web tie down.

FIGURES – DAMAGED SYNTHETIC WEB TIE DOWNS

Figure 1
Holes, Tears
Cuts, Snags




Figure 2
Broken Or Worn Stitching
In Load Bearing Sew
Patterns



Figure 3
Excessive
Abrasive Wear



Figure 4
Knots In The
Tie Down



Figure 5
Melting Or Charring
Of The Tie Down,
Or Weld Spatter
On The Tie Down



Figure 6
Chemical
Burns



Figure 7
Damaged Loop



Figure 8
Tear In Webbing
At The Fitting



Figure 9
Other Apparent Damages
That May Affect Strength
Ratings; Such As Crushed
Webbing, Etc.



Repairs of Synthetic Web Tie Downs

No repairs of webbing, fittings, buckles or stitching/sew patterns shall be permitted.

Web tie downs may be re-webbed utilizing existing hardware if the tie down manufacturer determines the hardware is reusable.

Each web tie down re-webbed utilizing used hardware shall be proof load tested to one and one half (1.5) times the working load limit. The web tie down manufacturer performing the re-web shall conduct this proof test and a certificate shall be provided to the user with a copy kept on file by the web tie down manufacturer.

When re-webbed, the web tie down shall be marked with a label to identify when the re-web was performed and the name or trademark of the web tie down manufacturer that performed the work.

Temporary repairs of webbing, fittings or stitching shall not be permitted.

OTHER WEB SLING & TIE DOWN ASSOCIATION PUBLICATIONS

Recommended Standard Specifications:

Synthetic Web Slings	WSTDA-WS-1
(Spanish) Synthetic Web Slings	WSTDA-WS-1S
Synthetic Polyester Roundslings	WSTDA-RS-1
High Performance Yarn (HPY) Roundslings	WSTDA-RS-1HP
Webbing for Synthetic Web Slings	WSTDA-WB-1
Sewing Threads for Slings & Tie Downs	WSTDA-TH-1
Web Tie Downs	WSTDA-T-1
(Spanish) Web Tie Downs	WSTDA-T-1S
Winches Used With Web Tie Downs	WSTDA-T-3
Synthetic Webbing Used for Tie Downs	WSTDA-T-4
Load Binders Used with Chain Tie Downs	WSTDA-T-6

Recommended Test Methods:

Strength & Elongation Test Method for Sling & Tie Down Webbing	WSTDA-TM-1
--	------------

Operating & Inspection Manuals

Synthetic Web Slings	WSTDA-WS-2
(Spanish) Synthetic Web Slings	WSTDA-WS-2S
Synthetic Polyester Roundslings	WSTDA-RS-2
Web Tie Downs	WSTDA-T-2

Illustrated Wall Chart

Inspection of Web Slings & Roundslings	WSTDA-WSWC-1
--	--------------

UV Degradation Reports

Summary Report UV Degradation	WSTDA-UV-Sling-2003
UV Degradation Mini Manual	WSTDA-UV-MM-2005
UV Degradation Report	WSTDA-UVDR-1981 (Revised 2005)

Training CD-Rom

North America Cargo Securement Standard	WSTDA-CD-TP-2003
---	------------------

Warning Labels

Web Slings	WSWT-1
Tie Downs	TDWT-1
Roundslings	RSWT-1

Safety Bulletins

Web Slings	WSSB-1
Roundslings	RSSB-1
Tie Downs	TDSB-1

**All WARNING LABELS and SAFETY BULLETINS are available
in three languages: English, Spanish and French**

For ordering information and prices, contact the association office or visit our website:

Web Sling & Tie Down Association, Inc.

9 Newport Drive, Suite 200
Forest Hill, Maryland 21050
Phone (443) 640-1070
Fax (443) 640-1031

Email: wstda@stringfellowgroup.net
Web Site: www.wstda.com



This recommended manual has been formulated as a guide to users, industry and government to assist in the proper use, maintenance and inspection of synthetic web tie downs. The existence of this recommended manual does not however prevent members of the Web Sling & Tie Down Association, Inc. and other manufacturers from manufacturing or selling products not conforming to this manual.