

MODULE 6.0 S BLACK

For sewage applications and industrial waters


DESCRIPTION

- Filtration module with ceramic flat membranes suitable for submerged applications
- Multi ceramic plate configuration with exchangeable single ceramic plates
- Internal filtered water piping
- Module housing fully made of glass fiber reinforced resin – free of any steel parts
- Out-to-in filtration and in-to-out backwash



SPECIFICATIONS

Product Code	CFT-SMSEC0-2022 CFT-BMSEC0-2022
Module Housing Material	SABIC NORYL™ resin 30% glass fiber reinforced blend of PPE/PS
Dimensions (L x W x H)	710 x 576 x 160 mm 28.0 x 22.7 x 6.3 in
Dry weight	~ 37 kg / 81.6 lbs
Pore Size	0.1 - 0.5 µm
No. of single ceramic plates	34
Avg. distance between ceramic plates	6.7 mm / 0.26 in
Filter active area	6.0 m ² / 64.6 ft ²
Max. negative (suction) pressure	-0.7 bar / -10.2 psi
Max. positive (backwash) pressure	1.2 bar / 17.4 psi
Max. operating temperature	40 °C / 104 °F

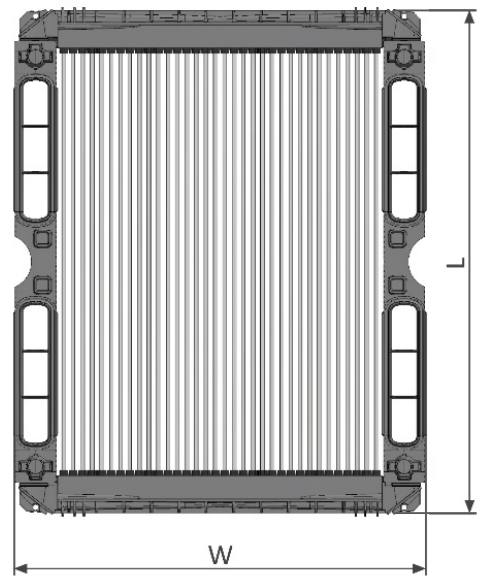

Contact us:



Cerafiltec Group
contact@cerafiltec.com
www.cerafiltec.com

WATER
FILTRATION
REDEFINED