


# MODULE 6.0 S BLACK

For sewage applications and industrial waters


## DESCRIPTION

- Filtration module with ceramic flat membranes suitable for submerged applications
- Multi ceramic plate configuration with exchangeable single ceramic plates
- Internal filtered water piping
- Module housing fully made of glass fiber reinforced resin – free of any steel parts
- Out-to-in filtration and in-to-out backwash

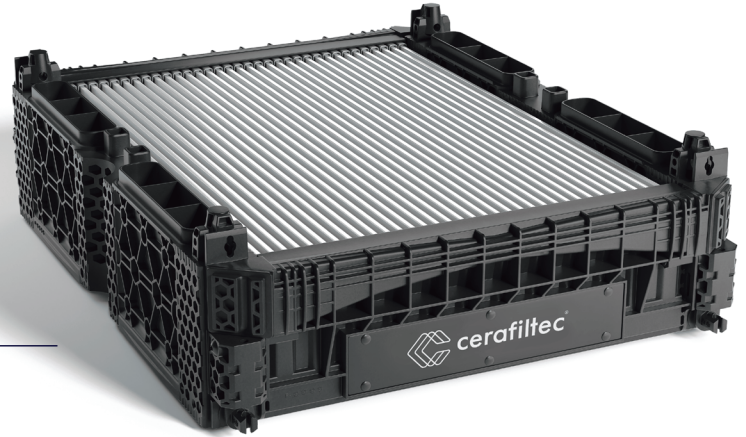

## SPECIFICATIONS

Product Code	CFT-SMSEC0-2022 CFT-BMSEC0-2022
Module Housing Material	SABIC NORYL™ resin 30% glass fiber reinforced blend of PPE/PS
Dimensions (L x W x H)	710 x 576 x 160 mm 28.0 x 22.7 x 6.3 in
Dry weight	~ 36 kg / 79.4 lbs
Pore Size	0.1 µm
No. of single ceramic plates	34
Avg. distance between ceramic plates	6.7 mm / 0.26 in
Filter active area	6.0 m <sup>2</sup> / 64.6 ft <sup>2</sup>
Max. negative (suction) pressure	-0.7 bar / -10.2 psi
Max. positive (backwash) pressure	1.2 bar / 17.4 psi
Max. operating temperature	40 °C / 104 °F

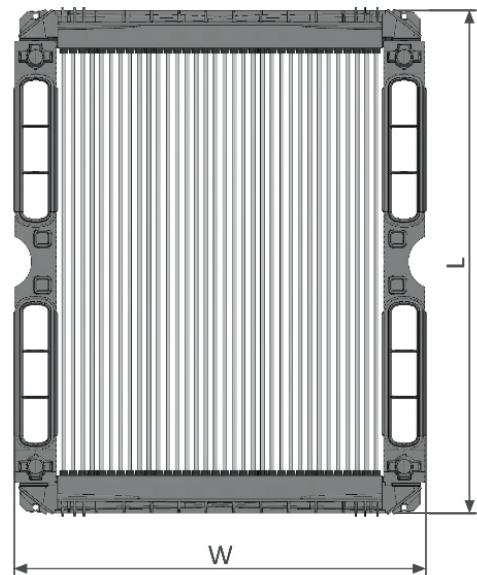

Contact us:



Cerafiltec Group  
[contact@cerafiltec.com](mailto:contact@cerafiltec.com)  
[www.cerafiltec.com](http://www.cerafiltec.com)

WATER  
 FILTRATION  
 REDEFINED