READYMADE
Verklighet för drömmar

Turnado

650142

Assembly instructions

Montageanleitung • Montagevejledning





80 cm


3+





2


3 H



Ø150 x 80 cm


Installation guide K102 "PLATFORMO"

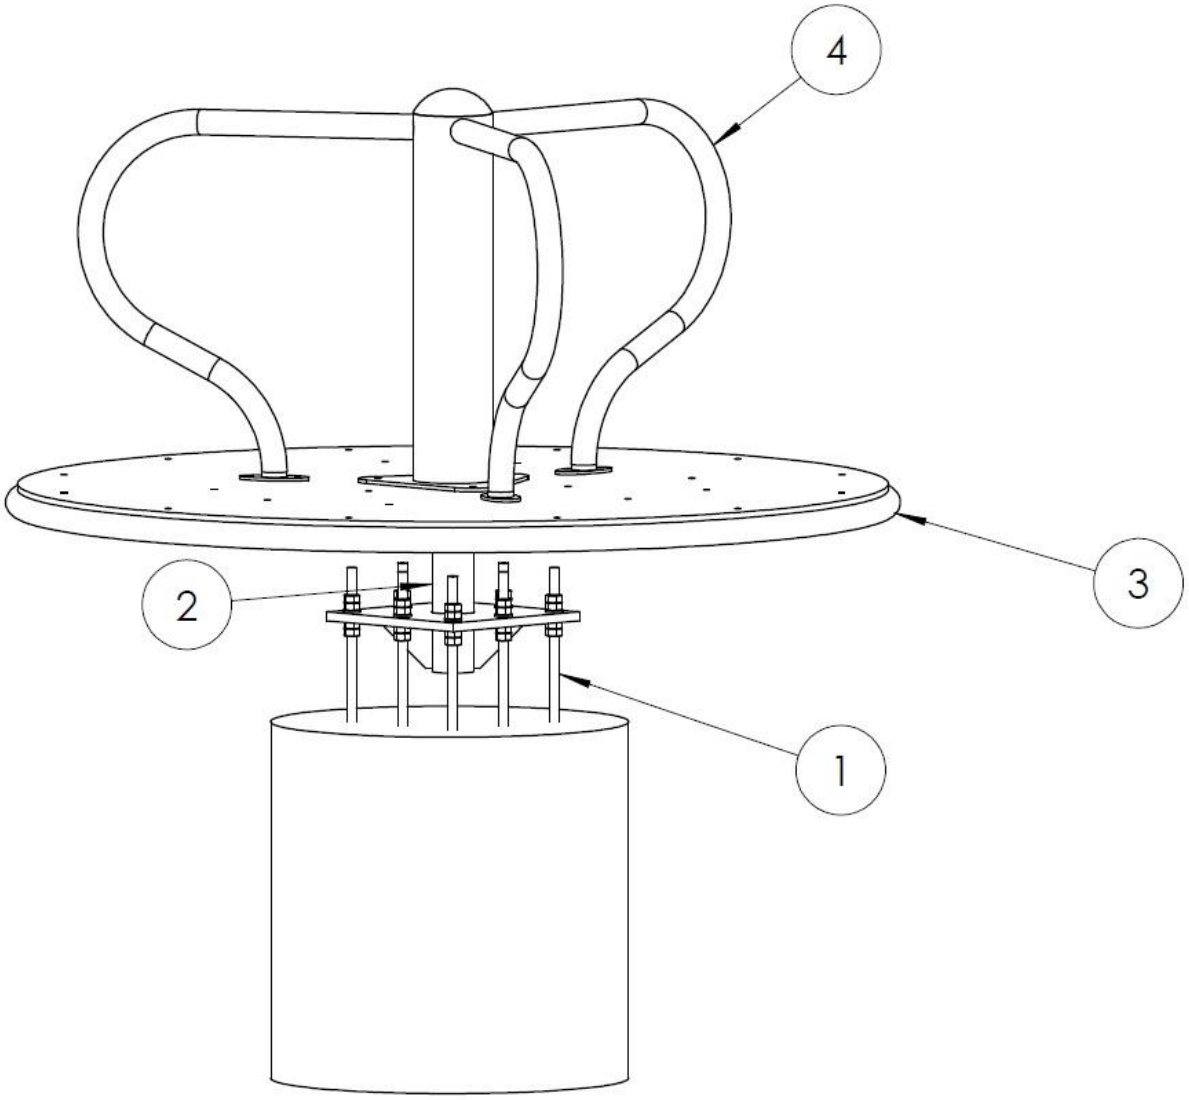


List of parts for installation:

Number of part	Part name	Quantity
1	The foundation of carousel	1
2	The shaft of carousel	1
3	The lower frame of carousel	1
4	The upper frame of carousel	1

Marking of foundation depth:

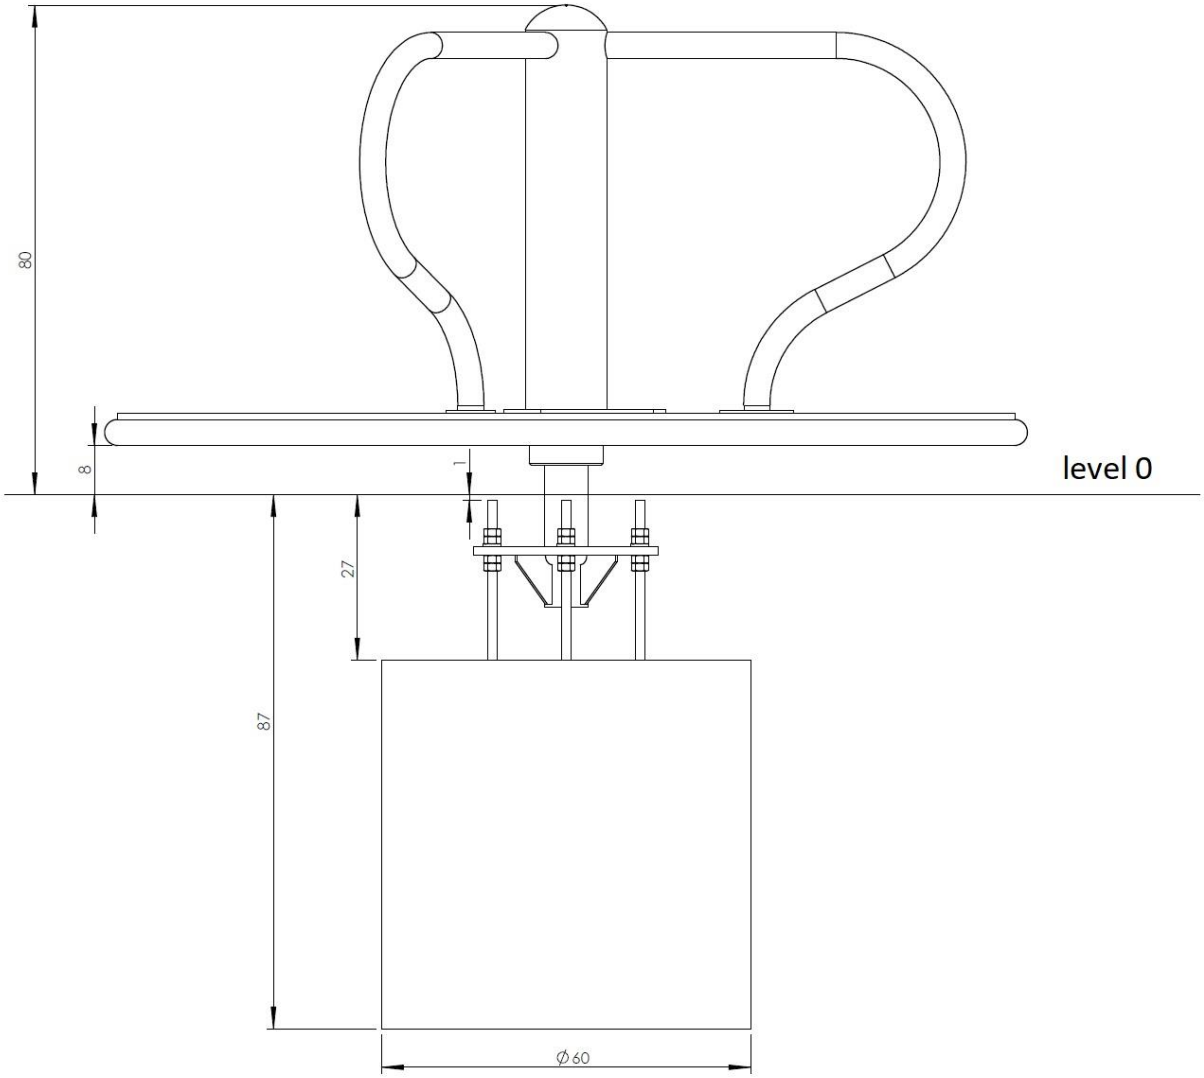

Marking of the safety zone:

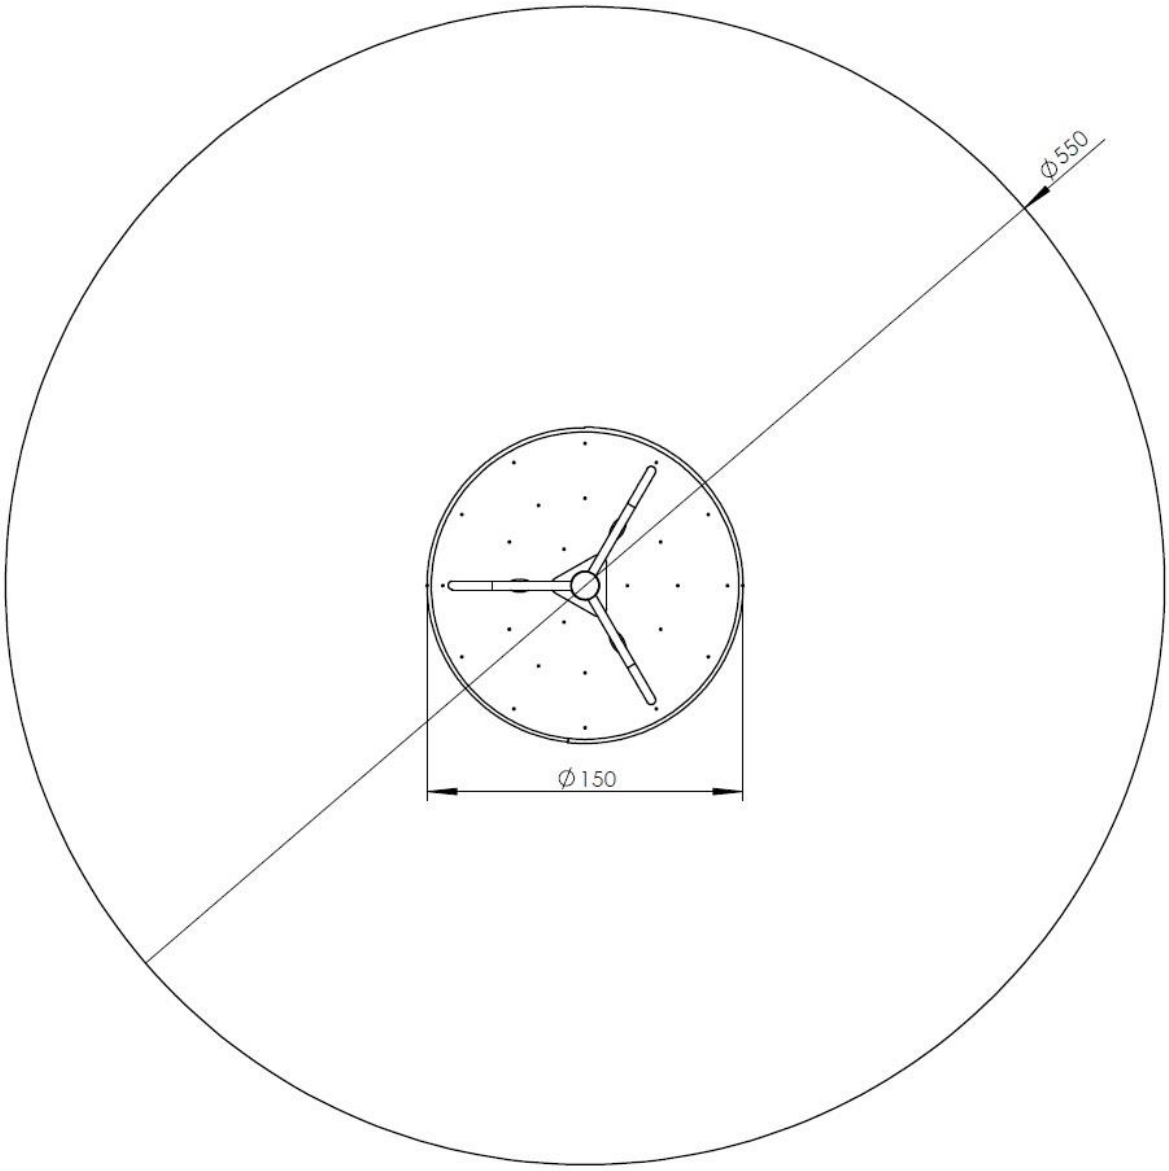

During assembly, pay attention to:

1) Vertical adjustment of the carousel shaft

2) Tightening all screws and fixings.

3) Protection and marking of the assembly site.

Before putting the device into use it should be stability of all elements, remove the security tape and check the level and condition of the surface damping the fall.

INSTALLATION OF THE SHAFT OF THE FOUNDATION:

Installation:

1) Concreting the carousel foundation according to the diagram.

ATTENTION! After concreting, secure the foundation and leave for 48 hours.


2) Put two M16 nuts for each of the rods, leaving 7cm section of the rod over the nuts.

3) Put the shaft on the nuts.

4) Use screws to adjust the vertical shaft position.

5) Screw two M16 nuts for each foundation pin.

6) Tighten the nuts under and above the shaft plate by controlling the vertical.

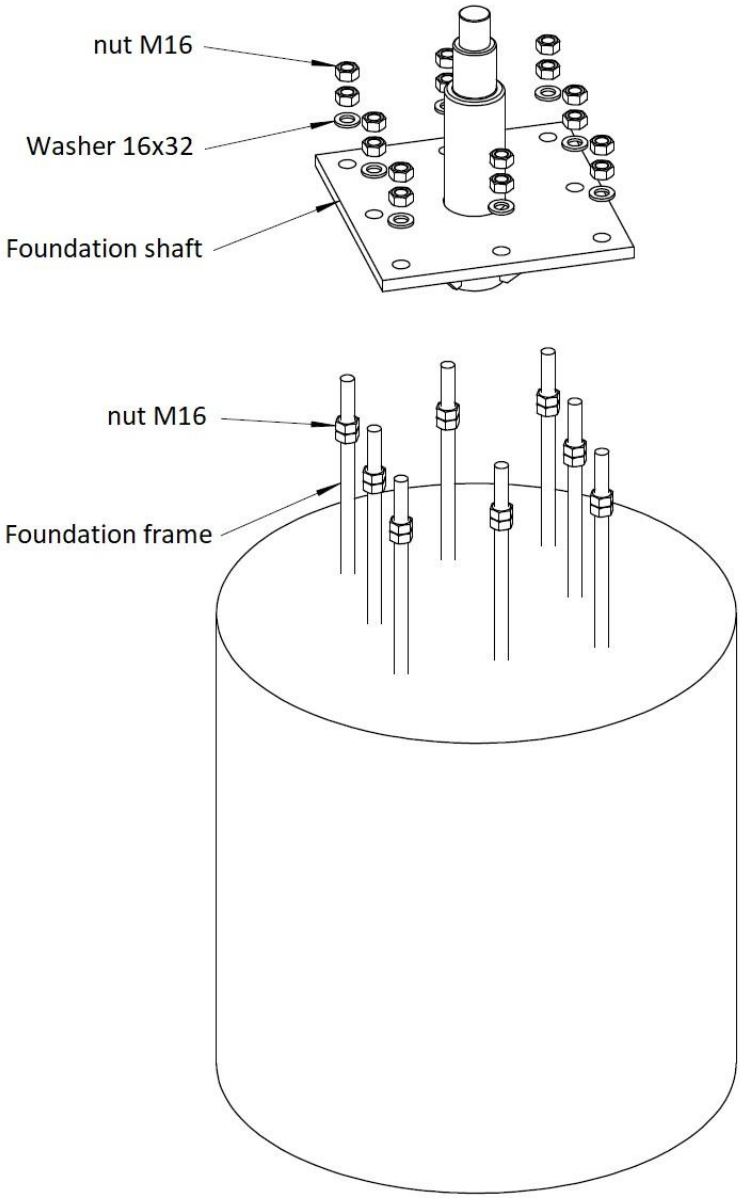

INSTALLATION OF THE SHAFT OF THE ROUNDABOUT:

1) Disassemble the top carousel frame.

2) Settle the carousel.

3) Place the washer on the upper bearing and tighten with the M36 nut, in such a way that the carousel rotates with little resistance.

4) Secure the nut with the securing screw.

5) The carousel should rotate without any resistance or looseness. If the resistance is still noticeable, go back to point 2.

