Tiptiptap OÜ

INCLUSIVE LABYRINTH

USER GUIDE

V.1.0.2021



READYMADE

Verklighet för drömmar

2. DEVICE STRUCTURE

Materials:

Construction: steel profiles with epoxy primer, painted and powder coated
Upper surface: 3mm steel sheet with epoxy primer, painted and powder coated
Foundation requirements: concrete class min . B-15

Dimensions and parameters:


External dimensions (W x L x H) : 828 x 794 x 994 mm
Height from the ground: 994 mm
Range of swing: 7 degrees
Weight (without foundations) : 40 kg
Outer diameter of the column cross-section: 101.6 mm


Other dimensions of the device:


Free fall height : none
Functional area: 1500 mm from the outer edge of the device.
Substructure depth: 470 mm
Safety zone area dimensions: 11.8 m ^ 2

The dimension of the longest element: Labyrinth - 1194 mm

Weight of the heaviest element: Labyrinth - 40 kg

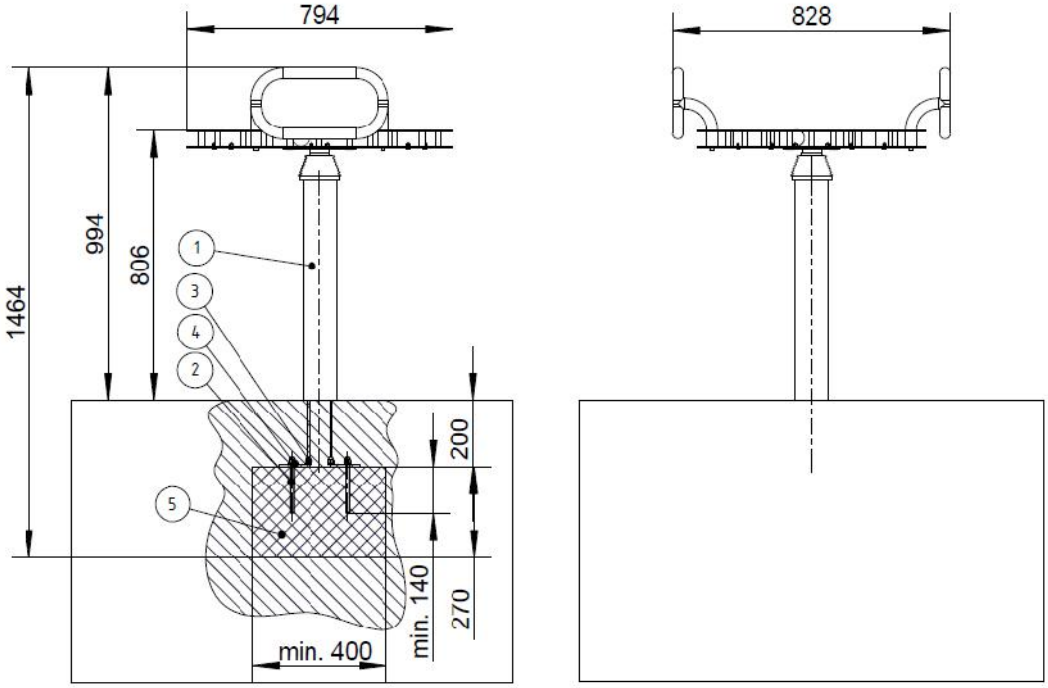



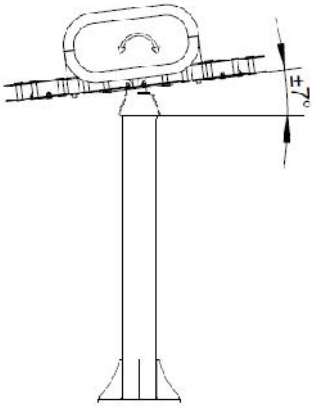

READYMADE

Verklighet för drömmar

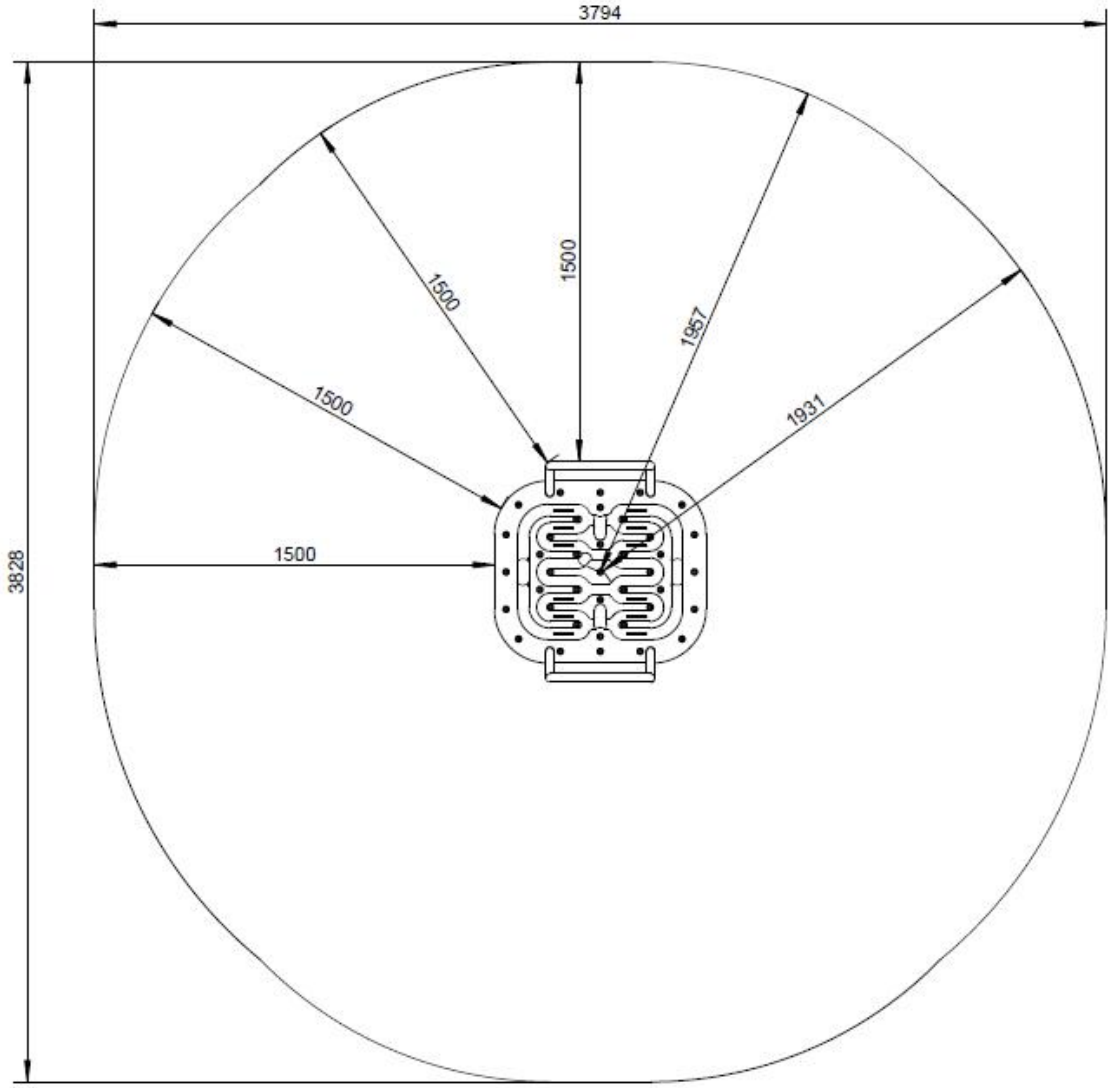


Fig. Top view of the device with its safety zone

Inclusive Labyrinth must be permanently embedded in the ground. In order to embed the device in the ground specially prepared by the manufacturer concrete blocks can be used. Dimensions of concrete block 400x20x270 mm and a weight of about 30 kg each. Foundations should be placed at a depth of min. 20 cm below the ground level.



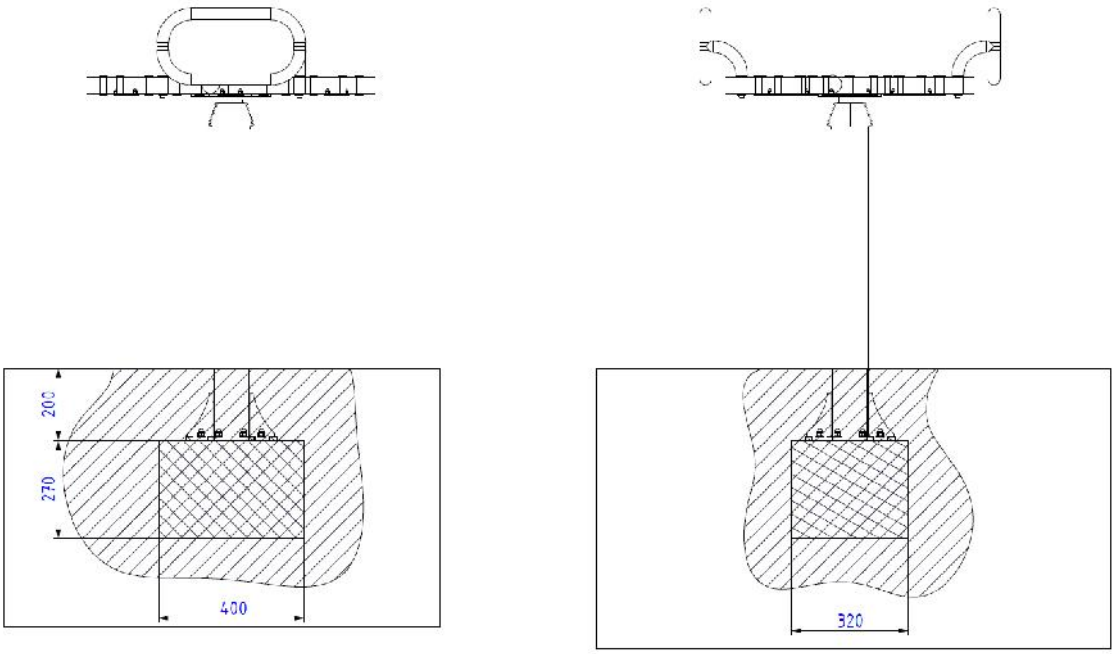


Fig. Foundation dimensions

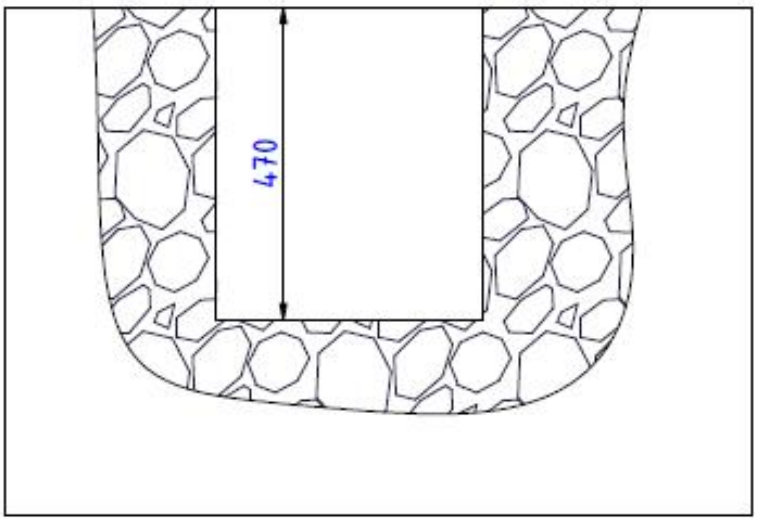

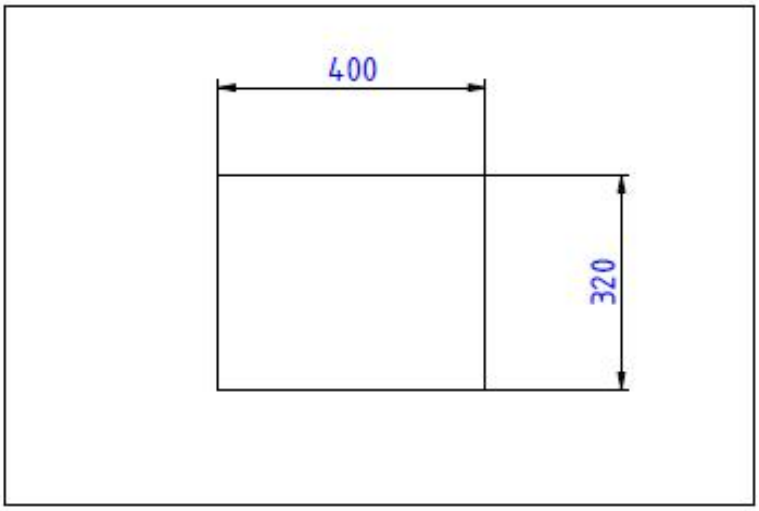

READYMADE

Verklighet för drömmar