


# Sport Rear Seat Installation Instructions

## Tools Needed:

1. Hammer
2. Pliers/Side Cutters
3. Flathead Screwdriver
4. Cutting Wheel
5. Spray Glue
6. Hog Rings and Hog Ring Pliers



## Step 1 Remove Original Upholstery and Foam

*Before you begin to install your new upholstery, you must first remove your old covers and foam.*




*1. Remove hog rings from the old upholstery using pliers or side cutters.*




*2. Peel both upholstery and foam from frame*

## Step 2 Remove Springs

*Use a hammer to bend down the metal tabs on the seat frame and use pliers to release the top side of the springs off of the frame.*

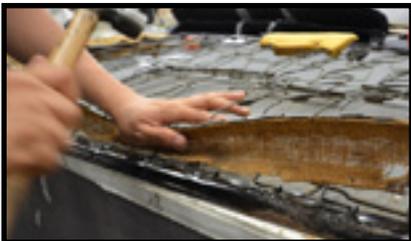

*For the other side, it's a little different and not as easy to release the springs from the tab. You can use a flat-head screwdriver to pry the tabs out but this can take a long time. A quicker solution would be to use large wire cutters or a grinder/cutting wheel to cut the springs out of the tabs.*

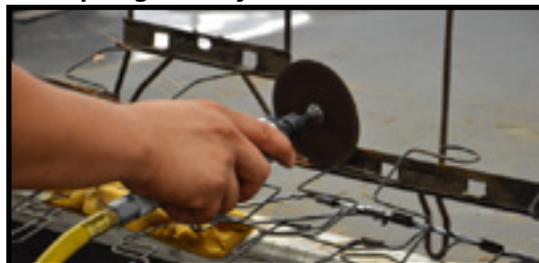

## Step 3 Installing Foam

Use a spray adhesive on both ends of the frame and on the back of the seat foam to prevent from shifting during upholstery installation. Be sure to line up the foam to the frame before applying too much pressure on the foam.



## Step 4 Installing Upholstery

1. First install listing wires into listing channels on backside of upholstery.




2. Hog ring listing wires of upholstery to the listing wires in the foam.




3. Roll upholstery over the foam and hog ring ends to the seat frame. The process is the same for both the bottom and the backrest.



4. You can use a steam machine to remove wrinkles and loosen the upholstery to allow it to stretch more and makes for an easier install.

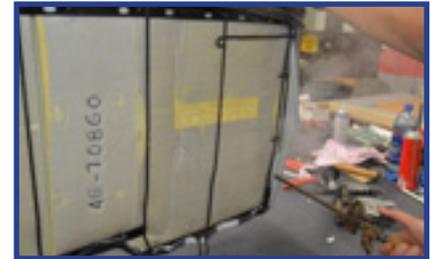

If you have the sport seat kit that fits with the console, the process is the same as the steps above. The only difference being, that you'll need to hog ring around one of the rails of the seat frame. Do not worry about the wrinkles on the inside, it will be hidden by the console.

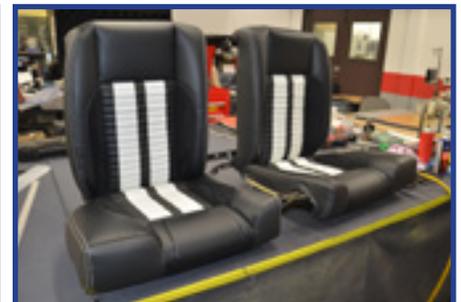

## Step 5 Re-Install Rear Seat

Now that your upholstery is installed onto the frames, you can now re-install the rear seat, quarter trim panels, and package tray into the car. If you have the version with the console, you will install the console after the package tray.



Thank you for choosing TMI, for more information on our product line, please visit our website at , [www.tmiproducts.com](http://www.tmiproducts.com) or feel free to call us at (800)624-7960

Part #99-0078-000

QP 09-266 Rev. 01