

Reign Safety

A One Stop Solution For
All Your Safety Gear Needs



OUR PRODUCTS

- Complete Rescue Kit
- Complete PPE kit
- Full Body Harness
- Lanyards
- Working Position Belt
- Lifting Ropes
- Ropes Access and Connectors
- Grip Descenders and Rope Grabs
- Pulleys
- Anchorages
- Safety Boots
- Helmets
- Reflector Jackets

GET STARTED

+254-724-053-050

sales@reignsafety.com

www.reignsafety.com

**Revlon Plaza, Biashara St,
3rd Floor, Shop 9**

   **@reignsafety**

100M RESCUE KIT



- 100m x Rope - Semi-static Rope 10.5mm EN1891
- 4 x Connector - Steel Oval Carabiner EN362
- 1 Grip Descender EN12841 / EN341
- 1 Flat(round) Sling EN354 / EN795
- 1 Open Anchor Sling EN795
- 1 Ratchet - Rescue Sling EN354 / SANS50354
- 1 Rope Grab - EN 353-2
- 1 x Bag - Rescue kit Rope Bag

- Advanced Body Harness - EN358, EN361, EN813
- Double hook lanyard with a shock absorber (1.5M) - EN355
- Work positioning rope with grip adjuster - EN358



+



+



COMPLETE PPE KIT

FULL BODY HARNESS

- Fall arrest and Rope Access Harness
- Advanced harness with speed buckle for easy fitting
- Padded shoulder straps, leg loops and work positioning belt
- Front and rear EN361 attachment points, Marked with an "A"
- Padded shoulder straps, leg loops and work positioning belt
- Two pre-shaped gear loops on waist belt
- Easy-adjust buckles for sizing
- A personal identifier for user name and company
- Certification: EN361, EN358, EN813 CE

FBH-56



Superio 3



+254-724-053-050

sales@reignsafety.com

www.reignsafety.com



@reignsafety

LANYARDS

Double Lanyard

- Made of 44mm wide polyester webbing
- With energy absorber
- 2 scaffold hooks
- Max length 2mtrs
- Conforms to: EN 355



Work Positioning Lanyard

- Made of 12mm diameter Polyamide Kernmantle rope
- Manual ring-type adjuster for work position & length adjustment.
- Easy to connect Steel Karabiner at both ends for attachment
- Max length 2mtrs
- Conforms to: EN 358



WORKING POSITION BELT



- Conforms to: EN 358
- Fully Adjustable
- Width of back pad: 21cm
- Two lateral D-rings for Work Positioning
- Tool-holding webbing loops
- Wide comfort pad to provide lumbar support for long working hours



+254-724-053-050

sales@reignsafety.com

www.reignsafety.com

[f](#) [@reignsafety](#)

LIFTING ROPES



100m Rope

- 10.5mm/12mm dia braided Polyamide Rope
- One side Karabiner and the other side stop knot.
- Available lengths 100m

200m Rope

- 10.5mm/12mm dia braided Polyamide Rope
- One side Karabiner and the other side stop knot.
- Available lengths 200m



+254-724-053-050

sales@reignsafety.com

www.reignsafety.com



@reignsafety

ROPE ACCESS & CONNECTORS

Ascender Handle (right)

- Material: Aluminum Alloy
- For use on single rope 9-10mm
- Conforms to: EN 567



Karabiners

- Material: Alloy Steel
- Finish: Silver/Golden Yellow Galvanized
- Conforms to: EN 362-2
- Carries up to 23kN.

Croll

- Material: Aluminium Alloy
- Rope compatibility: 10 to 12 mm
- Conforms: EN 567



+254-724-053-050

sales@reignsafety.com

www.reignsafety.com



@reignsafety

GRIP DESCENDER



Normal Descender

- Ideal for descendant on a single rope
- Works on 10-11mm diameter Kernmantle rope
- Conforms to EN 341-Class A

Anthron Lory Safe Descender

- Multifunctional control device providing a one stop solution for working at height.
- Rope Compatibility: 9 – 12 mm
- Conforms to EN 15151; EN341 Class A; EN892



ROPE GRAB

- For use on a 14mm or 16mm Anchorage Line of Polyester Twisted Rope
- Easily detachable from the Anchorage line
- Connector: Stell Karabiner
- Gravity Locking System
- Double Security locking System
- Conforms to EN 353-2, 352-2



@reignsafety

PULLEYS



Non-return Pulley

- Material: Aluminium Alloy
- Conforms to: EN 12278 & EN 567
- Can be used on a Rope/wire of 10mm-12mm dia

Single Pulley

- Material: Aluminium Alloy
- Conforms to: EN 12278
- Carries up to 36kN.

+254-724-053-050

sales@reignsafety.com

www.reignsafety.com

@reignsafety



ANCHORAGES



Closed Anchorage Sling

- Made of 44mm wide Polyester Webbing
- Max length:1.5m
- Conforms to: EN 795

Open Anchorage Sling

- Made of 30mm wide Polyester Webbing
- Max length:1.5m
- Conforms to: EN 795



+254-724-053-050

sales@reignsafety.com

www.reignsafety.com

SAFETY SHOES

- Conforms to: EN 20345
- Slip Resistant hard wearing sole
- Functional breathable linen
- Steel toe cap
- Water Resistant leather
- Heel Grip
- Antistatic
- Heat resistant
- Oil Resistant



+254-724-053-050

sales@reignsafety.com

www.reignsafety.com



@reignsafety



@reignsafety

HELMETS




- **Conforms to: EN 397**
- **ANSI/ISEA Z89.1**
- **Type I Class C**
- **Strong chin strap, very comfortable to wear**

Work at height helmet



- **Conforms to: EN 397+A1**
- **Allen Cooper Heavy duty**
- **Knob for easy adjustment**
- **Padding for comfort and sweat reduction**

Safety Helmets

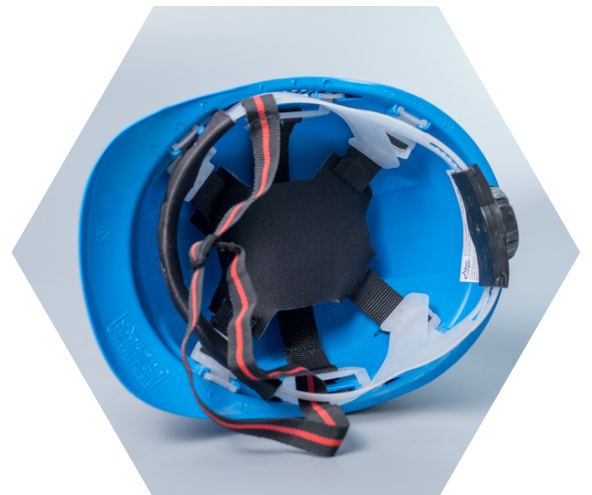

REFLECTOR JACKETS



sales@reignsafety.com
www.reignsafety.com
+254-724-053-050



@reignsafety