


## Protect 200 (NV200) Protect 330 (NV330)

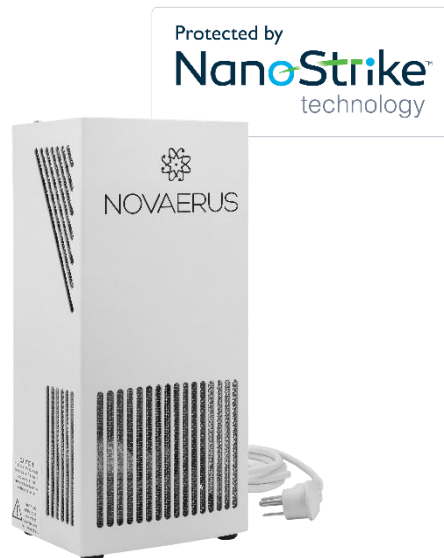

### MODEL

NV200 | NV330

Wall mountable or countertop unit,  
1-NanoStrike coil, supplied with 1.6m power cord  
(minimum length).

### CONSTRUCTION + COLOUR

#### NV200

Precision-cut fabricated metal casing in a white  
anti-bacterial powder coat finish

#### NV330

Precision-cut fabricated metal casing in a silver  
anti-bacterial powder coat finish

### DIMENSIONS

283 mm (h) x 132 mm (w) x 108 mm (d)  
11.1" (h) x 5.2" (w) x 4.3" (d)

### WEIGHT

3.4kg | 7.5lbs

### ELECTRICAL RATING

Single Phase, 220-240 VAC | 100-130 VAC, 50-60 Hz  
Fuse Rated at 250 VAC, 3 Amps, Listed

### POWER CONSUMPTION RANGE†

220-240 VAC model:

12.7W – 18.3W

100-130 VAC model:

12.9W – 21.8W

### ELECTRICAL CONNECTION

Switched and fused with a grounded, moulded power cord

### OPERATING CONDITIONS

10-35°C | 50-95°F, 10-75% Relative Humidity

### SHIPPING/STORAGE CONDITIONS

5-50°C | 41-122°F, Maximum 95% Relative Humidity

### FAN AIR FLOW VOLUME

80 m³/hr | 47 CFM

### NOISE LEVEL‡

35 dB

### QUALITY + SAFETY

Manufactured under ISO 9001, ISO 14001 & OHSAS 45001

IEC 60601-1

IEC 60601-1-2

IEC 60335-1

IEC 60335-2-65

Conforms to Low Voltage Directive (LVD) 2014/35/EU

CE

UL 867

FCC

CSA C22.2 NO. 187:20

CARB

China Disinfection WS/T 648

KCC

JQA S-Mark



† Power consumption depends on voltage and frequency of network in particular country

‡ Measured at the unit.