

LOFT X modular system of armchairs and sofas. Each element consists of seat and back, with and without armrest, it is carefully upholstered and can be installed on the base with sound-absorbing panels, structure with metal armrests or a simple metal base.




**COMPOUND ELEMENTS**




- |  |                            |
|--|----------------------------|
| 1 . Unique seater ottoman                          | L 75 P 75 H 44             |
| 2 . Single armchair with steel armrests            | L 82/75 P 75/60 H 78/44    |
| 3 . Single armchair high sides without armrests    | L 81/75 P 75/60 H 139/44   |
| 4 . 2 seater bench                                 | L 150 P 75 H 44            |
| 5 . 2 seater sofa with steel armrests              | L 157/150 P 75/60 H 78/44  |
| 6 . 2 seater sofa with upholstered armrests        | L 150/120 P 75/60 H 78/44  |
| 7 . 2 seater sofa high sides without armrests      | L 156/150 P 75/60 H 139/44 |
| 8 . 2 seater sofa high sides upholstered armrests  | L 156/120 P 75/60 H 139/44 |
| 9 . 3 seater bench                                 | L 225 P 75 H 44            |
| 10 . 3 seater sofa with steel armrests             | L 232/225 P 75/60 H 78/44  |
| 11 . 3 seater sofa with upholstered armrests       | L 225/195 P 75/60 H 78/44  |
| 12 . 2 seater sofa high sides without armrests     | L 231/225 P 75/60 H 139/44 |
| 13 . 2 seater sofa high sides upholstered armrests | L 231/195 P 75/60 H 139/44 |

**COMPOUND SINGOLAR ELEMENTS**

---

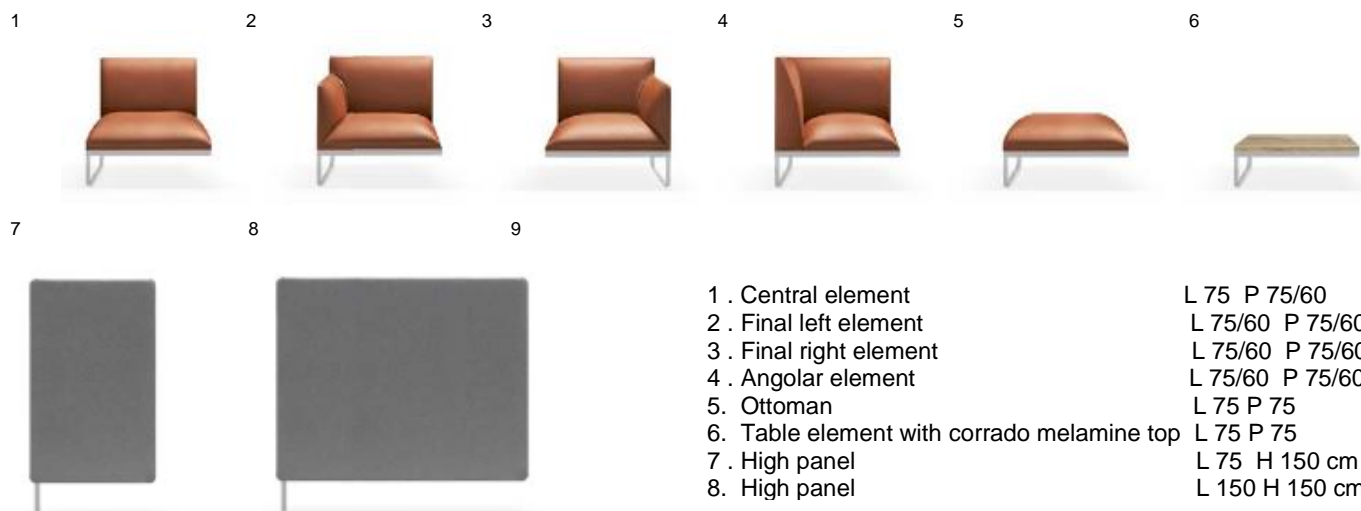

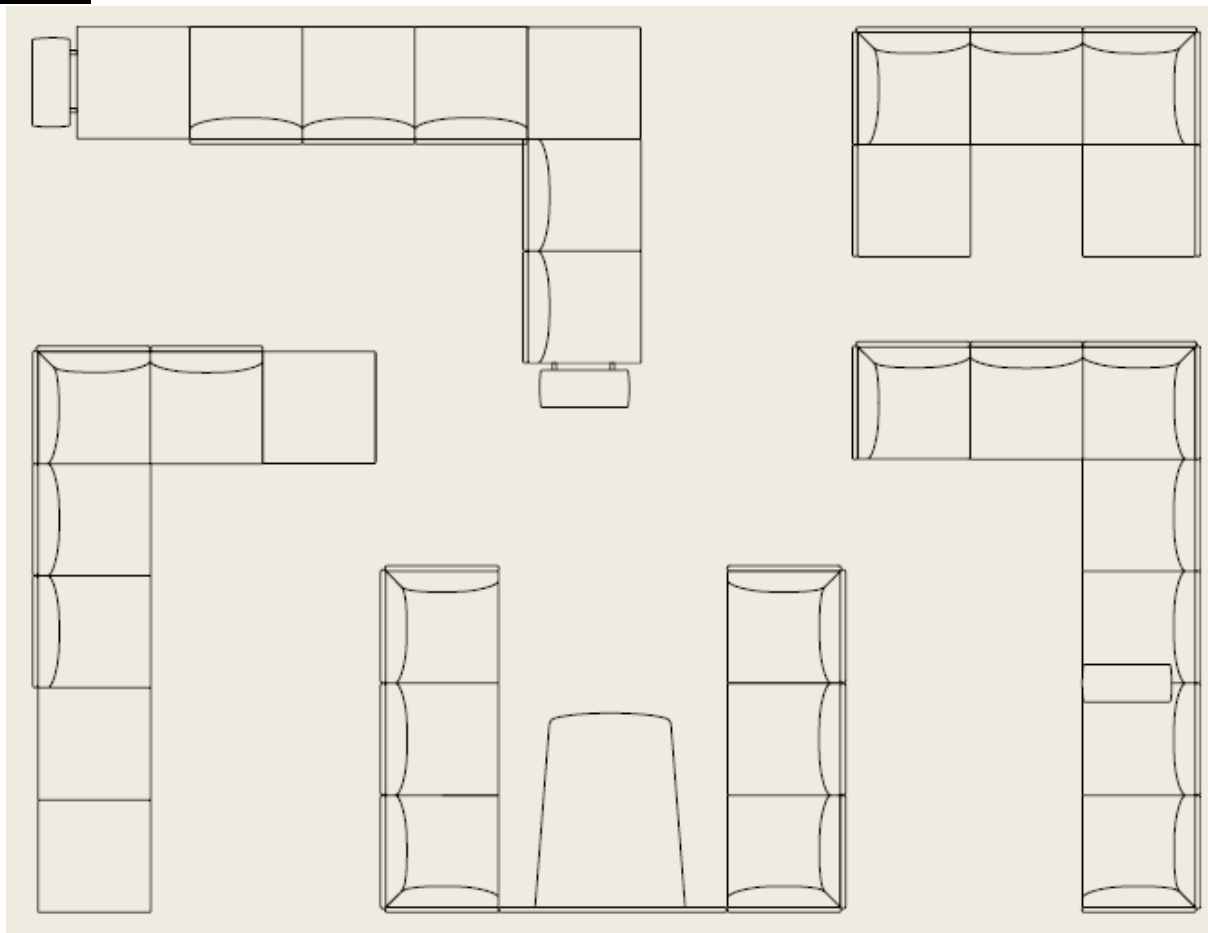

## ARMRESTS

---

Loft X is available

- Without armrests
- With steel open armrests
- With upholstered armrests



## ACCESSORIES

---

1

2

3



1. Upholstered intermediate armrest applied to the structure by means of 2 black or white painted metal supports.
2. Final armrest upholstered and covered applied to the structure through 2 metal supports painted black or white.
3. Connecting panel complete with fixed table in trapezoidal Rovere Corrado melamine to facilitate access. Fixed leg in white or black painted elliptical tubular metal

## **ELECTRIFICATION**

---

On the central or final armrest it is possible to apply the PICKR electrical wiring system with 2 USB 5V sockets



## **STRUCTURE AND PADDING**

---

The internal structure of LOFT X is entirely made of wood, equipped with elastic straps to increase the comfort of the seat, and adequately upholstered with variable density tires. Vertical panels made with wood core external upholstery in polyurethane rubber 15mm thick and coated.

Also available with fireproof tires 1IM approved

## **BASE**

---

The structure is in steel dim 50x30 mm painted black or white.  
The legs are made of tubular steel painted black or white diam 22 mm



**UPHOLSTERY**

---

**BIO-EXPO**  
**CATEGORY 2**  
300 gr/mt2  
100% Propitex FR bacteriostatic  
Class 1 UNI EN ISO 354:2003  
100.000 +/- 10% cycles Martindale

**EXTREME**  
**CATEGORY 2**  
350 gr/mtl  
100% Xtreme FR  
Class 1, EN 1021-1/2  
100.000 +/- 10% cycles Martindale

**LASER**  
**CATEGORY 2**  
560 gr/mtl  
100% Polyester FR  
Class 1  
80.000 +/- 10% cycles Martindale

**ECOPELLE**  
**CATEGORY 2**  
630 gr/mt2  
83% PVC, 17% Synthetic  
ISO 379-DIN75200-CSERF4/83 10%  
cycles Martindale

**ERA**  
**CATEGORY 3**  
448 gr/mtl  
100% Trevira CS  
Class 1 UNI EN ISO 354:2003  
100.000 +/- 10% cycles Martindale

**LASER PLUS**  
**CATEGORY 3**  
630 gr/mtl  
100% Polyester FR Trevira  
Classe 1, 4.000 +/- cycles Martindale

**ECOPELLE SOUL**  
**CATEGORY 3**  
760 gr/mt2  
Superficies 100% POLIURETANO,  
Base Polyester 85%, 17% Cotton  
EN1021-1/BS5852 PART 1  
>100.000 EN ISO 5470-2

**MELANGE**  
**CATEGORY 3**  
390 g/lin.m  
100% Trevira CS  
Class 1  
80.000 +/- 10% cycles Martindale

**JET**  
**CATEGORY 3**  
365 +/- 5% g/lin.m  
100% Polyester FR  
Class 1  
80.000 +/- 10% cycles Martindale

**ECOPELLE SISTEMA PRO**  
**CATEGORY 3**  
710 gr/mt2  
Surface 93% PVC  
Base Polyester 28%  
CLASSE 1  
100.000 CICLI

**ECOPELLE VITAX**  
**CATEGORY 3**  
850 gr/mt2  
Surface 98% PVC 2% PU  
Base cotton 100%  
CLASSE 1  
100.000 CICLI

**ONE RECICLE**  
**CATEGORY 3**  
525 gr/mt2  
100% recycled polyester  
Base cotton 100%  
CLASSE 1IM  
100.000 CICLI

**LANA**  
**CATEGORY 5**  
500 gr/mt2  
75% Lana, 25% polyamide  
Class 1  
100.000 cycles Martindale

**PELLE**  
**CATEGORY 5/6**  
620 g/lin.m  
100% Cow leather  
Class 1, EN 1021-1/2

**PIED POULE**  
**CATEGORY 6**  
550 g/lin.m  
66% cotton, 34% Polyester  
35.000 % cycles Martindale

**EUROPOST 2**  
**CATEGORY 6**  
710 g/lin.m  
63% PU, 16% CO, 21% PL  
Ini1975 CLASS1emme,UNI9175/FA  
50.000% cycles Martindale

**PREMIUM /ELEGANCE**  
**CATEGORY 7**  
100% First quality cow leather  
Thickness 1,2/1,4 mm  
EN1021-1/2

**STEELCUT TRIO**  
**CATEGORY 7**  
770 g/lin.m  
90% New wool worsted, 10% Nylon  
Class 1, EN 1021-1/2  
100.000 % cycles Martindale

**REMIX**  
**CATEGORY 7**  
415 g/lin.m  
90% New wool worsted, 10% Nylon  
Class 1, EN 1021-1/2  
100.000 % cycles Martindale

**VELLUTO DECONTRACTE'**  
**CATEGORY 7**  
590 g/lin.m  
19% CO, 61% PC, 10% PL, 10% VI  
40.000 % cycles Martindale

**MERIT**  
**CATEGORY 7**  
500g/lin.m  
76% Polyester Recycled  
24% Polyester  
EN 1021-1/2  
85.000 % cycles Martindale

**VELLUTO**  
**CATEGORY 8**  
600 g/lin.m  
100.000 % PL Flame retardant

**PELLE SOFT**  
**CATEGORY 8**  
100% Cow leather Thickness, 8-2 mm  
Aniline treatment – First quality  
EN1021-1/2

## USAGE AND MAINTENANCE

---

In order to have an optimal maintenance of the products and to preserve the characteristics of the materials by which they are made, it is recommended the following course of action.

### FABRICS

Cleaning: check the dedicated selection written on the color Swatch card.

Usage: it is recommended to pay careful attention to the fabrics as they can be cut or ripped easily.

### WOODS

Cleaning: clean using a soft cloth, soaked in tepid water. Dry always after the cleaning. Remove immediately any liquid substances or other residue in order to prevent the absorption.

Usage: wooden surfaces, being a natural material, might be subjected to color alterations with sun exposure and use over time. It is reminded that wooden surfaces cannot endure direct heat sources.

### METALS

Cleaning: both steel and aluminum surfaces, and the painted ones, have to be cleaned using a soft cloth soaked in tepid water. For the most persistent stains it is possible to dilute mild soap with water moderately. Dry always after the cleaning, using a soft cloth of deer-hide. Do not use cleaning products for steel, chlorine, bleach or other strong products. It is not recommended to use abrasive, scourers, which can scratch the metal surfaces.

Usage: pay attention to the food stains as coffee, coke, fruit juices that can make indelible marks on the surfaces.

### WARRANTY

QUINTI guarantees the products will maintain their properties for 6 years from delivery, except normal usury and provided that they will be used according to the guidelines given. QUINTI will replace, free of charge, any product found non-compliant with this warranty, without incurring any other liability of sort. Components, external accessories or materials supplied by the buyer and applied to the products in order to customize them will not be supported by the guarantee. For an optimal maintenance of the products and to keep unchanged the characteristics of the materials with which they are made, some simple attentions are necessary.