

DEEP POLTRONCINA DesignArchirivolto

Quinti®

Visitors armchair with integrated armrests. Great for meeting areas, waiting rooms and restaurants.

Base

Available different types of bases:

1. 4 metal chromed or painted legs structure
2. 4 cone-shaped metal or gold painted legs Vintage
3. Cantilever metal chromed structure
4. 'Star' 4 spones on feet Base
5. Painted or chromed thread or gold satined structure
6. Swivel structure with 4 natural or moka wooden oak
7. Super light 5 die-cast aluminum from 700 mm spoke Base on castors (R05 as standard)
8. Super light 4 die-cast aluminum from 700 mm spoke Base on castors (R05 as standard)
9. Rocking base in black finish

Castors

Double tread with diameter 65 mm., standard or rubberized, they can be free [as standard] or with brake.

Elevation

All Quinti gas columns are conforming to DIN 4550 norm and exceed the 4° level.

Armrests

The armchair is available with or without integrated armrests in foamed polyurethane completely upholstered.

Seat & backrest


Seat and backrest are entirely made in foamed polyurethane rubber with metal core.

CERTIFIED 1 IM



DIMENSIONS

DEEP POLTRONCINA DesignArchirivolto

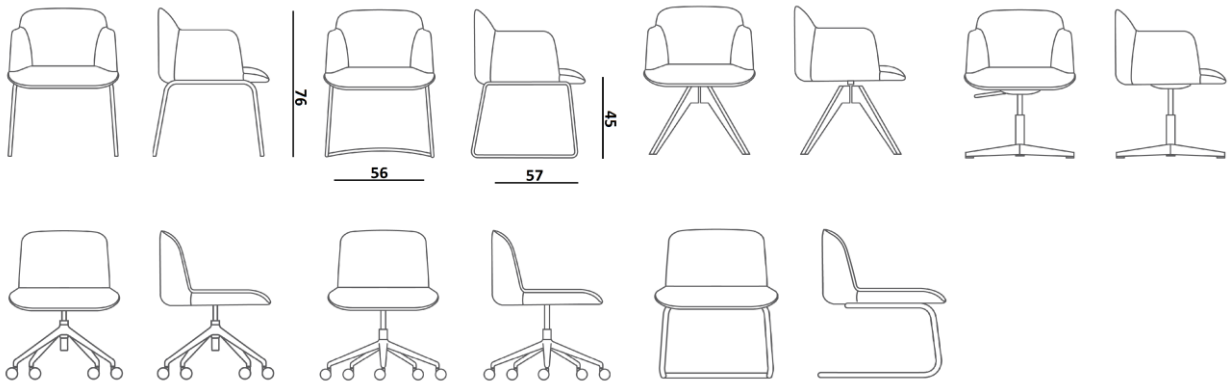

UPHOLSTERY

BIO-EXPO

CATEGORY 2

300 gr/mt2
100% Propitex FR bacteriostatic
Class 1 UNI EN ISO 354:2003
100.000 +/- 10% cycles Martindale

EXTREME

CATEGORY 2

350 gr/mtl
100% Xtreme FR
Class 1, EN 1021-1/2
100.000 +/- 10% cycles Martindale

LASER

CATEGORY 2

560 gr/mtl
100% Polyester FR
Class 1
80.000 +/- 10% cycles Martindale

ECOPELLE

CATEGORY 2

630 gr/mt2
83% PVC, 17% Synthetic
ISO 379-DIN75200-CSERF4/83 10%
cycles Martindale

ERA

CATEGORY 3

448 gr/mtl
100% Trevira CS
Class 1 UNI EN ISO 354:2003
100.000 +/- 10% cycles Martindale

LASER PLUS

CATEGORY 3

630 gr/mtl
100% Polyester FR Trevira
Class 1, 4.000 +/- cycles Martindale

ECOPELLE SOUL

CATEGORY 3

760 gr/mt2
Superficies 100% POLYURETHANE,
Base Polyester 85%, 17% Cotton
EN1021-1/BS5852 PART 1
>100.000 EN ISO 5470-2

MELANGE

CATEGORY 3

390 g/lin.m
100% Trevira CS
Class 1
80.000 +/- 10% cycles Martindale

JET

CATEGORY 3

365 +/- 5% g/lin.m
100% Polyester FR
Class 1
80.000 +/- 10% cycles Martindale

ECOPELLE SISTEMA PRO

CATEGORY 3

710 gr/mt2
Surface 93% PVC
Base Polyester 28%
CLASS 1
100.000 CYCLES

ECOPELLE VITAX

CATEGORY 3

850 gr/mt2
Surface 98% PVC 2% PU
Base cotton 100%
CLASS 1
100.000 CYCLES

ONE RECYCLE

CATEGORY 3

525 gr/mt2
100% recycled polyester
Base cotton 100%
CLASS 1IM
100.000 CYCLES

LANA

CATEGORY 5

500 gr/mt2
75% Lana, 25% polyamide
Class 1
100.000 cycles Martindale

PELLE

CATEGORY 5/6

620 g/lin.m
100% Cow leather
Class 1, EN 1021-1/2

PIED POULE

CATEGORY 6

550 g/lin.m
66% cotton, 34% Polyester
35.000 % cycles Martindale

EUROPOST 2

CATEGORY 6

710 g/lin.m
63% PU, 16% CO, 21% PL
Ini1975 CLASS1emme,UNI9175/FA
50.000% cycles Martindale

PREMIUM /ELEGANCE

CATEGORY 7

100% First quality cow leather
Thickness 1,2/1,4 mm
EN1021-1/2

STEELCUT TRIO

CATEGORY 7

770 g/lin.m
90% New wool worsted, 10% Nylon
Class 1, EN 1021-1/2
100.000 % cycles Martindale

REMIX

CATEGORY 7

415 g/lin.m
90% New wool worsted, 10% Nylon
Class 1, EN 1021-1/2
100.000 % cycles Martindale

VELLUTO DECONTRACTE'

CATEGORY 7

590 g/lin.m
19% CO, 61% PC, 10% PL, 10%VI
40.000 % cycles Martindale

MERIT

CATEGORY 7

500g/lin.m
76% Polyester Recycled
24% Polyester
EN 1021-1/2
85.000 % cycles Martindale

VELLUTO

CATEGORY 8

600 g/lin.m
100.000 % PL Flame retardant

PELLE SOFT

CATEGORY 8

100% Cow leather Thickness, 8-2 mm
Aniline treatment – First quality
EN1021-1/2

USAGE AND CARE

For a proper maintenance of the products and to maintain unchanged the characteristics of the materials, we recommend to follow some very simple care instructions.

FABRICS

Cleaning: check the dedicated selection written on the color Swatch card. Usage: it is recommended to pay attention to the fabrics as they can be easily cut or ripped.

LEATHERS

Cleaning: clean with a white wet cloth with water. We recommend to use high quality products for the cleaning of the leather and to follow carefully the instructions of the manufacturer. In doubt, try out the product on a hidden part and wait at least 24 hours for the occurrence of any problems. Usage: remember that the leather is a delicate material therefore, it is recommended to pay particular attention while using.

WOODS

Cleaning: clean with a soft and wet cloth with warm water. We always recommend to dry immediately after the cleaning process. All liquids or other residue must be removed in order to avoid the absorption. Usage: wooden surfaces, being a natural material, could be affected by an alteration of the color shade during time and use. We also remind that wooden surfaces cannot bear with high temperatures if placed directly on the wooden top.

METALS

Cleaning: both steel or aluminum surfaces, and painted ones, must be cleaned with a soft and wet cloth with hot water. For the most persistent stains, a small amount of liquid soap diluted in water may be used. We always recommend to dry immediately with a soft cloth or a leather one after the cleaning process. Never using cleaning products for steel, chlorine, bleach or other strong detergents. It is not recommended to use abrasive creams, score pads and abrasive sponges that can scratch the metal surfaces. Usage: pay attention to the stains of food such as coffee, coke, fruit juices that can leave indelible marks on the surface.

WARRANTY

QUINTI guarantees the products will maintain their properties for 6 years from delivery, except normal usury and provided that they will be used according to the guidelines given. QUINTI will replace, free of charge, any product found non-compliant with this warranty, without incurring any other liability of sort. Components, external accessories or materials supplied by the buyer and applied to the products in order to customize them will not be supported by the guarantee. For an optimal maintenance of the products and to keep unchanged the characteristics of the materials with which they are made, some simple attentions are necessary.