

EVOQUE 3.0

Quinti®

Advanced operative chair of Quinti Sedute collection with mesh backrest.

The seat greatly exceed the minimum requirements of DL 626/94, and DL.81. Corresponding to EN1335A.

Base

1. Black polypropylene Base "PENTA". [d. 680]
2. Polished aluminium Base "PENTA". [d. 680]

Castors & feet

Double tread with diameter 65mm., standard [as standard] or rubber, they can be both free [as standard] or with brake. Also available POLO rubber castorsD.65 [optional]. Black nylon feet are interchangeable to the castors with the same fixing pin to the base.

Elevation

All Quinti gas columns are corresponding to the DIN 4550 norm and exceed the 4° level.

On Evoque is assembled the new Soft Lift as standard, the-state-of-the-art gas column with slow motion mechanism and self-cleaning.

Mechanisms

Evoque is proposed in 3 mechanisms:

M1, Aluminium synchron self. Seat height adjustment, synchronized back and seat inclination adjustment with shock proof system lockable in 4 different position. Angle back tilt 20°, seat tilt 6,5°. Tilt tightness adjustment.

M15, Integrated self mechanism system without levers with three buttons. Seat Height adjustment, synchronized back and seat inclination adjustment with shock proof system lockable in 4 different position. Angle tilt backrest 20°, seat tilt mechanism 6,5°. Tilt tightness adjustment.

M11, Aluminium synchron self. Seat height adjustment, synchronized back and seat inclination adjustment with shock proof system lockable in 4 different position. Angle tilt backrest 20°, tilt seat mechanism 6,5° and change of trim 5° Tilt tightness adjustment.

Armrests

Available armrests:

1. Pair of fixed black polypropylene or die-cast aluminium armrests.
2. Pair of nylon armrests with height adjustment.
3. Pair of 4d aluminium armrests with adjustment.
- 4.

Seat & backrest

Seat. Made with polypropylene internal structure density T40 with strong resistance with 2 steel bars inside.

The cushion is made of polyurethane crushproof rubber with thickness 60. The main characteristic of the chairs is the assembly and the easy removal without screws.


The seat is always equippe with aa sideshift.

Backrest. Available only in the Gabriel or Goal mesh version in the colors Swatch card , it is equipped with lumbar support with height adjustment.



EVOQUE 3.0

DIMENSIONS

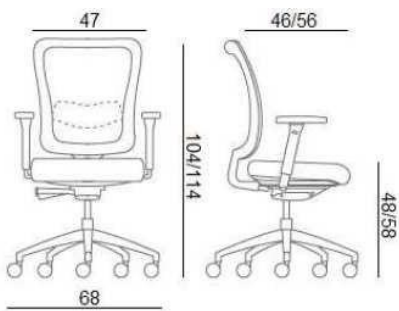

EVOQUE 3.0

Quinti®

UPHOLSTERY

CREPE' CATEGORY 1

350 gr/mtl
100% Polyester Class 1 ,EN1021/1-2
50.000 +/- 10% cycles

BIO-EXPO CATEGORY 2

300 gr/mt2
100% Propitex FR bacteriostatic
Class 1UNI EN ISO 354:2003
100.000 +/- 10% cycles Martindale

EXTREME CATEGORY 2

350 gr/mtl
100% Xtreme FR
Class 1 , EN 1021-1/2
100.000 +/- 10% cycles Martindale

LASER CATEGORY 2

560 gr/mtl
100% Polyester FR
Class 1
80.000+/- 10% cycles Martindale

ECOPELLE CATEGORY 2

630 gr/mt2
83% PVC, 17% Synthetic
ISO 379-DIN75200-CSERF4/83 10%
cycles Martindale

ERA CATEGORY 3

448 gr/mtl
100% Trevira CS
Class 1UNI EN ISO 354:2003
100.000 +/- 10% cycles Martindale

LASER PLUS CATEGORY 3

630 gr/mtl
100% Polyester FR Trevira
Classe1 , 4.000 +/- cycles Martindale

ECOPELLE SOUL CATEGORY 3

760 gr/mt2
Superficies 100% POLIURETANO,
Base Polyester 85%,17% Cotton
EN1021-1/BS5852 PART 1
>100.000 EN ISO 5470-2

GABRIEL MESH

510 gr. gr/mtl
100% Polyester / Polyester
BS EN 1021-1:2014
70.000 / rub

MELANGE CATEGORY 3

390 g/lin.m
100% Trevira CS
Class 1
80.000 +/- 10% cycles Martindale

JET CATEGORY 3

365+/- 5% g/lin.m
100% Polyester FR
Class 1
80.000+/- 10% cycles Martindale

ECOPELLE SISTEMA PRO CATEGORY 3

710 gr/mt2
Surface 93% PVC
Base Polyester 28%
CLASSE1
100.000 CICLI

ECOPELLE VITAX CATEGORY 3

850 gr/mt2
Surface 98% PVC 2% PU
Base cotton 100%
CLASSE 1
100.000 CICLI

ONE RECICLE CATEGORY 3

525 gr/mt2
100% recycled polyester
Base cotton 100%
CLASSE 1IM
100.000 CICLI

LANA CATEGORY 5

500 gr/mt2
75% Lana, 25% polyamide
Class 1
100.000 cycles Martindale

PELLE CATEGORY 5/6

620 g/lin.m
100% Cow leather
Class 1, EN 1021-1/2

PIED POULE CATEGORY 6

550 g/lin.m
66% cotton, 34% Polyester
35.000 % cycles Martindale

EUROPOST 2 CATEGORY 6

710 g/lin.m
63% PU, 16% CO, 21% PL
Ini1975 CLASS1emme,UNI9175/FA
50.000% cycles Martindale

PREMIUM /ELEGANCE CATEGORY 7

100% First quality cow leather
Thickness 1,2/1,4 mm
EN1021-1/2

STEELCUT TRIO CATEGORY 7

770 g/lin.m
90% New wool worsted, 10% Nylon
Class 1, EN 1021-1/2
100.000 % cycles Martindale

REMIX CATEGORY 7

415 g/lin.m
90% New wool worsted, 10% Nylon
Class 1, EN 1021-1/2
100.000 % cycles Martindale

VELLUTO DECONTRACTE' CATEGORY 7

590 g/lin.m
19% CO, 61% PC,10% PL, 10%VI
40.000 % cycles Martindale

MERIT CATEGORY 7

500g/lin.m
76% Polyester Recycled
24% Polyester
EN 1021-1/2
85.000 % cycles Martindale

VELLUTO CATEGORY 8

600 g/lin.m
100.000 % PL Flame retardant

PELLE SOFT CATEGORY 8

100% Cow leather Thickness,8-2 mm
Aniline treatment – First quality
EN1021-1/2

EVOQUE 3.0

GOAL MESH

350 gr/ mq
100% Polyester CL. 1
100.000 Martindale cycles

USAGE AND MAINTENANCE

In order to have an optimal maintenance of the products and to preserve the characteristics of the materials by which they are made, it is recommended the following course of action.

FABRICS

Cleaning: check the dedicated selection written on the color Swatch card.

Usage: it is recommended to pay careful attention to the fabrics as they can be cut or ripped easily.

WOODS

Cleaning: clean using a soft cloth, soaked in tepid water. Dry always after the cleaning. Remove immediately any liquid substances or other residue in order to prevent the absorption.

Usage: wooden surfaces, being a natural material, might be subjected to color alterations with sun exposure and use over time. It is reminded that wooden surfaces cannot endure direct heat sources.

METALS

Cleaning: both steel and aluminum surfaces, and the painted ones, have to be cleaned using a soft cloth soaked in tepid water. For the most persistent stains it is possible to dilute mild soap with water moderately. Dry always after the cleaning, using a soft cloth of deer-hide. Do not use cleaning products for steel, chlorine, bleach or other strong products. It is not recommended to use abrasive, scourers, which can scratch the metal surfaces.

Usage: pay attention to the food stains as coffee, coke, fruit juices that can make indelible marks on the surfaces.

WARRANTY

QUINTI guarantees the products will maintain their properties for 6 years from delivery, except normal usury and provided that they will be used according to the guidelines given. QUINTI will replace, free of charge, any product found non-compliant with this warranty, without incurring any other liability of sort. Components, external accessories or materials supplied by the buyer and applied to the products in order to customize them will not be supported by the guarantee. For an optimal maintenance of the products and to keep unchanged the characteristics of the materials with which they are made, some simple attentions are necessary.