



Operative armchair with mesh backrest by Quinti Sedute collection. The seat, 1IM certified, exceeds the minimum requirements of DL 626/94, and DL.81.

Base

1. Black polypropylene base "TREND". [d. 680]
2. Polished aluminum base "TREND". [d. 680]

Castors & feet.

Double-tread nylon castors, with 50mm diameter. Variants: standard or rubberized. Both can be self-braking or can move freely.

Elevation

All Quinti gas columns are conforming to DIN 4550 norm and exceed the 4° level.

Mechanics

LINK is created in only one version of mechanism:

M12 The Synchron Mechanism is available in black steel. It enables the adjustment in height, the synchronized adjustment of the backrest inclination with the anti-shock system, lockable in 4 positions. The rigidity of the oscillation is adjustable using a pommel, under the seat.

Armrests

Available armrest :

1. Pair of stable black polypropylene armrests.
2. Pair of nylon armrests, adjustable in height.
3. Pair of 3D armrests, with polyurethane pad.


Seat & backrest

Seat: upholstered without seams, with an internal wooden support which is stuffed with non-deformable polyurethane foam, thickness 60mm and density T40

Backrest. Available in the standard Gabriel mesh version, and in the sample colours. It is provided with adjustable lumbar support. The structure is made of black polypropylene.



DIMENSIONS

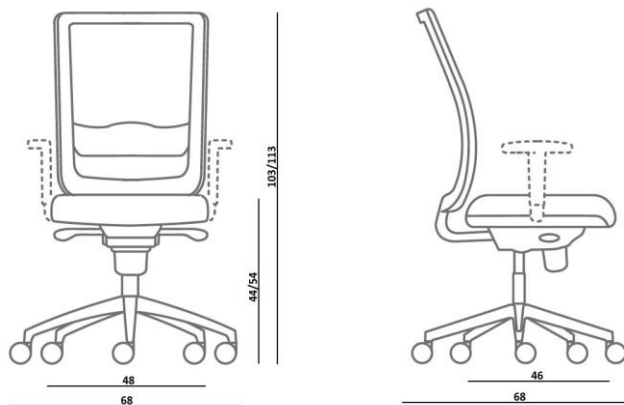

CREPE'**CATEGORY 1**

350 gr/mtl

100% Polyester Class 1 ,EN1021/1-2
50.000 +/- 10% cycles**BIO-EXPO****CATEGORY 2**

300 gr/mt2

100% Propitex FR bacteriostatic
Class 1UNI EN ISO 354:2003
100.000 +/- 10% cycles Martindale**EXTREME****CATEGORY 2**

350 gr/mtl

100% Xtreme FR
Class 1 , EN 1021-1/2
100.000 +/- 10% cycles Martindale**LASER****CATEGORY 2**

560 gr/mtl

100% Polyester FR
Class 1
80.000+/- 10% cycles Martindale**ECOPELLE****CATEGORY 2**

630 gr/mt2

83% PVC, 17% Synthetic
ISO 379-DIN75200-CSERF4/83 10%
cycles Martindale**ERA****CATEGORY 3**

448 gr/mtl

100% Trevira CS
Class 1UNI EN ISO 354:2003
100.000 +/- 10% cycles Martindale**LASER PLUS****CATEGORY 3**

630 gr/mtl

100% Polyester FR Trevira
Classe1 , 4.000 +/- cycles Martindale**ECOPELLE SOUL****CATEGORY 3**

760 gr/mt2

Superficies 100% POLIURETANO,
Base Polyester 85%,17% Cotton
EN1021-1/BS5852 PART 1
>100.000 EN ISO 5470-2**GABRIEL MESH**

510 gr. gr/mtl

100% Polyester / Polyester
BS EN 1021-1:2014
70.000 / rub**GOAL MESH**

350 gr/mq

100%Polyester
100.000 Martindale cycles**MELANGE****CATEGORY 3**

390 g/lin.m

100% Trevira CS
Class 1
80.000 +/- 10% cycles Martindale**JET****CATEGORY 3**

365+/- 5% g/lin.m

100% Polyester FR
Class 1
80.000+/- 10% cycles Martindale**ECOPELLE SISTEMA PRO****CATEGORY 3**

710 gr/mt2

Surface 93% PVC
Base Polyester 28%
CLASSE 1
100.000 CICLI**ECOPELLE VITAX****CATEGORY 3**

850 gr/mt2

Surface 98% PVC 2% PU
Base cotton 100%
CLASSE 1
100.000 CICLI**ONE RECICLE****CATEGORY 3**

525 gr/mt2

100% recycled polyester
Base cotton 100%
CLASSE 1M
100.000 CICLI**LANA****CATEGORY 5**

500 gr/mt2

75% Lana, 25% polyamide
Class 1
100.000 cycles Martindale**PELLE****CATEGORY 5/6**

620 g/lin.m

100% Cow leather
Class 1, EN 1021-1/2**PIED POULE****CATEGORY 6**

550 g/lin.m

66% cotton, 34% Polyester
35.000 % cycles Martindale**EUROPOST 2****CATEGORY 6**

710 g/lin.m

63% PU, 16% CO, 21% PL
Ini1975 CLASS1emme,UNI9175/FA
50.000% cycles Martindale**PREMIUM /ELEGANCE****CATEGORY 7**100% First quality cow leather
Thickness 1,2/1,4 mm
EN1021-1/2**STEELCUT TRIO****CATEGORY 7**

770 g/lin.m

90% New wool worsted, 10% Nylon
Class 1, EN 1021-1/2
100.000 % cycles Martindale**REMIX****CATEGORY 7**

415 g/lin.m

90% New wool worsted, 10% Nylon
Class 1, EN 1021-1/2
100.000 % cycles Martindale**VELLUTO DECONTRACTE'****CATEGORY 7**

590 g/lin.m

19% CO, 61% PC,10% PL, 10%VI
40.000 % cycles Martindale**MERIT****CATEGORY 7**

500g/lin.m

76% Polyester Recycled
24% Polyester
EN 1021-1/2
85.000 % cycles Martindale**VELLUTO****CATEGORY 8**

600 g/lin.m

100.000 % PL Flame retardant

PELLE SOFT**CATEGORY 8**100% Cow leather Thickness,8-2 mm
Aniline treatment – First quality
EN1021-1/2

USAGE AND MAINTENANCE

In order to have an optimal maintenance of the products and to preserve the characteristics of the materials by which they are made, it is recommended the following course of action.

FABRICS

Cleaning: check the dedicated selection written on the color Swatch card.

Usage: it is recommended to pay careful attention to the fabrics as they can be cut or ripped easily.

WOODS

Cleaning: clean using a soft cloth, soaked in tepid water. Dry always after the cleaning. Remove immediately any liquid substances or other residue in order to prevent the absorption.

Usage: wooden surfaces, being a natural material, might be subjected to color alterations with sun exposure and use over time. It is reminded that wooden surfaces cannot endure direct heat sources.

METALS

Cleaning: both steel and aluminum surfaces, and the painted ones, have to be cleaned using a soft cloth soaked in tepid water. For the most persistent stains it is possible to dilute mild soap with water moderately. Dry always after the cleaning, using a soft cloth of deer-hide. Do not use cleaning products for steel, chlorine, bleach or other strong products. It is not recommended to use abrasive, scourers, which can scratch the metal surfaces.

Usage: pay attention to the food stains as coffee, coke, fruit juices that can make indelible marks on the surfaces.

WARRANTY

QUINTI guarantees the products will maintain their properties for 6 years from delivery, except normal usury and provided that they will be used according to the guidelines given. QUINTI will replace, free of charge, any product found non-compliant with this warranty, without incurring any other liability of sort. Components, external accessories or materials supplied by the buyer and applied to the products in order to customize them will not be supported by the guarantee. For an optimal maintenance of the products and to keep unchanged the characteristics of the materials with which they are made, some simple attentions are necessary.