

# P PLUS Quinti®



Operative armchair from Quinti collection with high backrest with gas column according to DIN4550, it lays on a 5 spokes base of diam. 650 mm, in polypropylene with steel cone, swivel castors ad double tread. Quinti is Made in Italy warranty, certified n° 290.058.V.

## Base

---

1. 5 spokes base, "LOOP" type in black polypropylene
2. 5 spokes base, "LOOP" type in aluminum
3. 5 spokes base, "PUNTA" type in grey polypropylene
4. 5 spokes base, "TREND" type in white polypropylene.

## Castors

---

Double tread diam 50 mm, standard or rubberized, both can be free [standard] and self-braking. The feet in polyamide are interchangeable to the castors with the same locking pin at the base.

## Elevation

---

All Quinti's gas columns are in accordance with the DIN 4550 norm and they exceed the fourth level.

## Mechanics

---

P.PLUS has 2 types of mechanics:

1. **M6**, permanent contact in steel, covered in black polyurethane. It allows a regulation in height and depth of the seat. Adjustable backrest with wheel.
2. **M12** synchron mechanism in black steel with the regulation of seat height, backrest and synchronized regulation of the backrest tilt, seat with anti-shock system blockable in 5 positions.

## Armrests

---

1. Couplet of armrests in black polyurethane with a steel insert.
2. Couplet of fixed armrests in black, grey or white nylon.
3. Couplet of adjustable height armrests, in black, grey and white nylon.

## Seat & Backrest

---

The seat is innerly provided with two steel rods, which make it stable and strong even with the use of armrests. The backrest is adjustable in height. The seat exceed the **minimum requirement of DL. 81**.

## Upholsters

---


Polyurethanic non-deformable rubber, with a tickness of 45 and a density of T35.

**Homologated 1IM**

# P PLUS **Quinti**<sup>®</sup>

DIMENSIONS

---

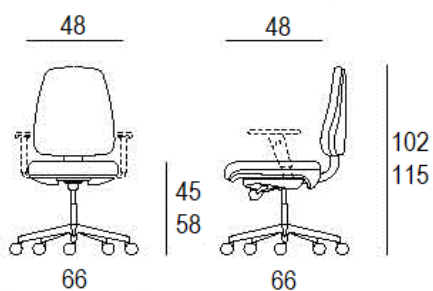

## COATINGS

Quinti Sedute Srl  
Parco il Granaio 21/22\_CESA [Ar]  
Partita IVA 02138850512 T. +39 057 566 970 F. +39 057 566 836  
www.quinti.com - [info@quinti.com](mailto:info@quinti.com)

# P PLUS **Quinti**<sup>®</sup>

## **BIO-EXPO**

### **CATEGORY 2**

300 gr/mt2  
100% Propitex FR batteriosattico  
Classe 1UNI EN ISO 354:2003  
100.000 +/- 10% Maltindale rubs

## **EXTREME**

### **CATEGORY 2**

350 gr/mtl  
100% Xtreme FR  
Classe , EN 1021-1/2  
100.000 +/- 10% Maltindale rubs

## **LASER**

### **CATEGORY 2**

560 gr/mtl  
100% Poliestere FR  
Classe 1  
80.000+/- 10% Maltindale rubs

## **LEATHERETTE**

### **CATEGORY 2**

630 gr/mt2  
83% PVC, 17% Syntetic  
ISO 379-DIN75200-CSERF4/83 10%  
Maltindale rubs

## **ERA**

### **CATEGORY 3**

448 gr/mtl  
100% Trevira CS  
Classe 1UNI EN ISO 354:2003  
100.000 +/- 10% Maltindale rubs

## **LASER PLUS**

### **CATEGORY 3**

630 gr/mtl  
100% Poliestere FR Trevira  
Classe1 , 4.000 +/- Maltindale rubs

## **SOUL LEATHERETTE**

### **CATEGORY 3**

760 gr/mt2  
Surface 100% POLIURETANO,  
Base Poliestere 85%,17% Cotone  
EN1021-1/BS5852 PART 1  
>100.000 EN ISO 5470-2

## **MELANGE**

### **CATEGORY 3**

390 g/lin.m  
100% Trevira CS  
Classe 1  
80.000 +/- 10% Maltindale rubs

## **JET**

### **CATEGORY 3**

365+/- 5% g/lin.m  
100% Poliestere FR  
Classe 1  
80.000+/- 10% Maltindale rubs

## **PRO SYSTEM LEATHERETTE**

### **CATEGORY 3**

710 gr/mt2  
Surface 93% PVC  
Base Poliestere 28%  
CLASSE1  
100.000 RUBS

## **WOOL**

### **CATEGORY 5**

500 gr/mt2  
75% Wool, 25% poliammide  
Classe 1  
100.000 Maltindale rubs

## **LEATHER**

### **CATEGORY 5/6**

620 g/lin.m  
100% Bovine leather  
Classe 1, EN 1021-1/2

## **PIED POULE**

### **CATEGORY 6**

550 g/lin.m  
66% cotton, 34% Poliestere  
35.000 % Maltindale rubs

## **EUROPOST 2**

### **CATEGORY 6**

710 g/lin.m  
63% PU, 16% CO, 21% PL  
Ini1975 CLASSE1emme,UNI9175/FA  
50.000% Maltindale rubs

## **MERIT**

### **CATEGORY 7**

500g/lin.m  
76% Poliestere Recycled  
24% Poliestere  
EN 1021-1/2  
85.000 % Maltindale rubs

## **PREMIUM /ELEGANCE**

### **CATEGORY 7**

100% Bovine leather Primo fiore  
Spessore 1,2/1,4 mm  
EN1021-1/2

## **STEELCUT TRIO**

### **CATEGORY 7**

770 g/lin.m  
90% New woolworsted, 10% Nylon  
Classe 1, EN 1021-1/2  
100.000 % Maltindale rubs

## **REMIX**

### **CATEGORY 7**

415 g/lin.m  
90% New woolworsted, 10% Nylon  
Classe 1, EN 1021-1/2  
100.000 % cicli Maltindale

## **DECONTRACTE' VELVET**

### **CATEGORY 7**

590 g/lin.m  
19% CO, 61% PC,10% PL, 10%VI  
40.000 % Maltindale rubs

## **VELVET**

### **CATEGORY 8**

600 g/lin.m  
100.000 % PL Flameretardant

## **SOFT LEATHER**

### **CATEGORY 8**

100% Bovine leather THICKNESS1,8-2 mm  
Primo fiore CONCIA ALL'ANILINA  
EN1021-1/2

For a proper maintenance of the products and to maintain unchanged the characteristics of the materials, we recommend to follow some very simple care instructions.

### **FABRICS**

Cleaning: check the dedicated selection written on the color Swatch card. Usage: it is recommended to pay attention to the fabrics as they can be easily cut or ripped.

### **LEATHERS**

Cleaning: clean with a wet white cloth with water. We recommend to use high quality products for the cleaning of the leather and to follow carefully the instructions of the manufacturer. In doubt, try out the product on a hidden part and wait at least 24 hours for the occurrence of any problems. Usage: remember that the leather is a delicate material therefore it is recommended to pay particular attention while using.

### **WOODS**

Cleaning: clean with a soft and wet cloth with warm water. We always recommend to dry immediately after the cleaning process. All liquids or other residue must be removed in order to avoid the absorption. Usage: wooden surfaces, being a natural material, could be affected by an alteration of the color shade during time and use. We also remind that wooden surfaces cannot bear with high temperatures if placed directly on the wooden top.

### **METALS**

Cleaning: both steel or aluminum surfaces, and painted ones, must be cleaned with a soft and wet cloth with hot water. For the most persistent stains, a small amount of liquid soap diluted in water may be used. We always recommend to dry immediately with a soft cloth or a leather one after the cleaning process. Never using cleaning products for steel, chlorine, bleach or other strong detergents. It is not recommended to use abrasive creams, score pads and abrasive sponges that can scratch the metal surfaces. Usage: pay attention to the stains of food such as coffee, coke, fruit juices that can leave indelible marks on the surface.

### **WARRANTY**

QUINTI guarantees the products will maintain their properties for 6 years from delivery, except normal usury and provided that they will be used according to the guidelines given. QUINTI will replace, free of charge, any product found non-compliant with this warranty, without incurring any other liability of sort. Components, external accessories or materials supplied by the buyer and applied to the products in order to customize them will not be supported by the guarantee. For an optimal maintenance of the products and to keep unchanged the characteristics of the materials with which they are made, some simple attentions are necessary.