

Armchair for conference, illustrated in the figure, is created with beech wood monoshell, characterized by its divided backrest and its die-cast aluminum structure. It is stackable up to 50 pieces, and appropriated for contract areas, waiting and community.

The seat exceeds requirements for the test report EN 1728

Base

The structure has 4 die-cast aluminum with anti-noise rubber-pads. It is made with a section which enable the "infinite" stacking.

The base is produced with die-cast polished aluminum, available with or without armrests, and armchair with anti-panic writing table, made of black polypropylene.



Seat and backrest

Bridge is available in two versions.

Exposed multiplayer beech monocoque is also available in approved CL1 version.

The illustrated single-shell, made of multiplayer beech, is stuffed with polyurethane foam, thickness 2cm. d 35, and covered. It is available also with fire-retardant rubber, approved 1M

The seat exceeds requirements for the test report EN 16139

The 2-3-4 seats bench is available on both versions. The seats are hooked, with specific supports, to a metal beam with section 80x40 mm, anchored on polished die-cast aluminum trestle legs.

Dimensions bench L120-175-238 /46 P 61/40 H 81/47



ACCESSORIES

Aluminum armrest with writing table made by black polypropylene and anti-panic hook.



Practical chromatic plate which connects the two edges of backrests. It functions also as a handle, which makes all the structure more prehensible.



Trolley useful for the chairs storage.



Hook, used to align chairs, is created with chromed wire, 5mm diameter, and it is set with two nylon elements under the seat. It allows alignment with both chairs with writing table and without. The hook is resealable if not used, to allow the stacking of the chairs.




65 cm space between two chairs hooked without armrests

Spacer-rows plate is a laser cut plate with a bent flange, thickness 2,5mm. On the flange there is a hole for a 4mm self-threading screw, placed on the inside of the leg. It allows the bare to be attached to the frame. This version creates 900 mm space between each row.



DIMENSIONS

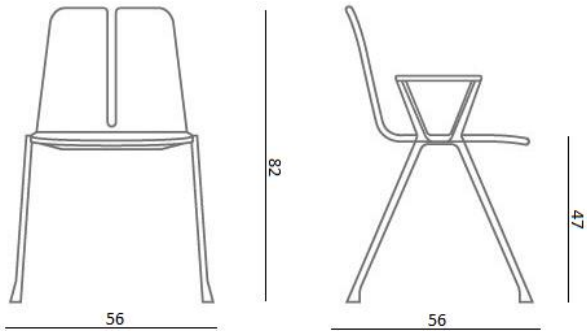

UPHOLSTERY

CREPE'

CATEGORY 1

350 gr/mtl
100% Polyester Class 1 ,EN1021/1-2
50.000 +/- 10% cycles

BIO-EXPO

CATEGORY 2

300 gr/mt2
100% Propitex FR bacteriostatic
Class 1UNI EN ISO 354:2003
100.000 +/- 10% cycles Martindale

EXTREME

CATEGORY 2

350 gr/mtl
100% Xtreme FR
Class 1 , EN 1021-1/2
100.000 +/- 10% cycles Martindale

LASER

CATEGORY 2

560 gr/mtl
100% Polyester FR
Class 1
80.000+/- 10% cycles Martindale

ECOPELLE

CATEGORY 2

630 gr/mt2
83% PVC, 17% Synthetic
ISO 379-DIN75200-CSERF4/83 10%
cycles Martindale

ERA

CATEGORY 3

448 gr/mtl
100% Trevira CS
Class 1UNI EN ISO 354:2003
100.000 +/- 10% cycles Martindale

LASER PLUS

CATEGORY 3

630 gr/mtl
100% Polyester FR Trevira
Classe1 , 4.000 +/- cycles Martindale

ECOPELLE SOUL

CATEGORY 3

760 gr/mt2
Superficies 100% POLYURETHANIC,
Base Polyester 85%,17% Cotton
EN1021-1/BS5852 PART 1
>100.000 EN ISO 5470-2

MELANGE

CATEGORY 3

390 g/lin.m
100% Trevira CS
Class 1
80.000 +/- 10% cycles Martindale

JET

CATEGORY 3

365+/- 5% g/lin.m
100% Polyester FR
Class 1
80.000+/- 10% cycles Martindale

ECOPELLE SISTEMA PRO

CATEGORY 3

710 gr/mt2
Surface 93% PVC
Base Polyester 28%
CLASS 1
100.000 CYCLES

ECOPELLE VITAX

CATEGORY 3

850 gr/mt2
Surface 98% PVC 2% PU
Base cotton 100%
CLASS 1
100.000 CYCLES

ONE RECYCLE

CATEGORY 3

525 gr/mt2
100% recycled polyester
Base cotton 100%
CLASS 1IM
100.000 CYCLES

LANA

CATEGORY 5

500 gr/mt2
75% Lana, 25% polyamide
Class 1
100.000 cycles Martindale

PELLE

CATEGORY 5/6

620 g/lin.m
100% Cow leather
Class 1, EN 1021-1/2

PIED POULE

CATEGORY 6

550 g/lin.m
66% cotton, 34% Polyester
35.000 % cycles Martindale

EUROPOST 2

CATEGORY 6

710 g/lin.m
63% PU, 16% CO, 21% PL
Ini1975 CLASS1emme,UNI9175/FA
50.000% cycles Martindale

PREMIUM /ELEGANCE

CATEGORY 7

100% First quality cow leather
Thickness 1,2/1,4 mm
EN1021-1/2

STEELCUT TRIO

CATEGORY 7

770 g/lin.m
90% New wool worsted, 10% Nylon
Class 1, EN 1021-1/2
100.000 % cycles Martindale

REMIX

CATEGORY 7

415 g/lin.m
90% New wool worsted, 10% Nylon
Class 1, EN 1021-1/2
100.000 % cycles Martindale

VELLUTO DECONTRACTE'

CATEGORY 7

590 g/lin.m
19% CO, 61% PC, 10% PL, 10%VI
40.000 % cycles Martindale

MERIT

CATEGORY 7

500g/lin.m
76% Polyester Recycled
24% Polyester
EN 1021-1/2
85.000 % cycles Martindale

VELLUTO

CATEGORY 8

600 g/lin.m
100.000 % PL Flame retardant

PELLE SOFT

CATEGORY 8

100% Cow leather Thickness,8-2 mm
Aniline treatment – First quality
EN1021-1/2

USAGE AND MAINTENANCE

In order to have an optimal maintenance of the products and to preserve the characteristics of the materials by which they are made, it is recommended the following course of action.

FABRICS

Cleaning: check the dedicated selection written on the color Swatch card.

Usage: it is recommended to pay careful attention to the fabrics as they can be cut or ripped easily.

WOODS

Cleaning: clean using a soft cloth, soaked in tepid water. Dry always after the cleaning. Remove immediately any liquid substances or other residue in order to prevent the absorption.

Usage: wooden surfaces, being a natural material, might be subjected to color alterations with sun exposure and use over time. It is reminded that wooden surfaces cannot endure direct heat sources.

METALS

Cleaning: both steel and aluminum surfaces, and the painted ones, have to be cleaned using a soft cloth soaked in tepid water. For the most persistent stains it is possible to dilute mild soap with water moderately. Dry always after the cleaning, using a soft cloth of deer-hide. Do not use cleaning products for steel, chlorine, bleach or other strong products. It is not recommended to use abrasive, scourers, which can scratch the metal surfaces.

Usage: pay attention to the food stains as coffee, coke, fruit juices that can make indelible marks on the surfaces.

WARRANTY

QUINTI guarantees the products will maintain their properties for 6 years from delivery, except normal usury and provided that they will be used according to the guidelines given. QUINTI will replace, free of charge, any product found non-compliant with this warranty, without incurring any other liability of sort. Components, external accessories or materials supplied by the buyer and applied to the products in order to customize them will not be supported by the guarantee. For an optimal maintenance of the products and to keep unchanged the characteristics of the materials with which they are made, some simple attentions are necessary.