

## DEEP LOUNGE – Archirivolto Design

Series of upholstered sofas and armchairs part of the Deep collection.

### VERSIONS

- Armchair with different kind of structure
- 2 seats sofa with 4 legs structure



### STRUCTURE AND RUBBER

The internal structure of the Deep Lounge system is entirely made of Plastitex, patented fireproof eco-friendly material which its weight is lower than 70% compared to the traditional stems.

It is upholstered with polyurethane rubber, variable density and resinated in order to confer great comfort to the sofa and the armchair.

The coating can be made in all colors and coatings and can be chosen on the Quinti Colours System Swatch card.

### FINISHING AND BASE

There are three types of structures characterizing the armchair:

1. 4 spoke white painted or polished aluminum Base on feet
2. 4 metal white painted legs Base
3. 4 wooden natural or tempered oak legs


There are two types of structures supporting the sofa:

1. 4 metal white painted legs
2. 4 natural or tempered oak legs

### CERTIFIED 1IM

## DEEP LOUNGE – Archirivolto Design

### DIMENSIONS

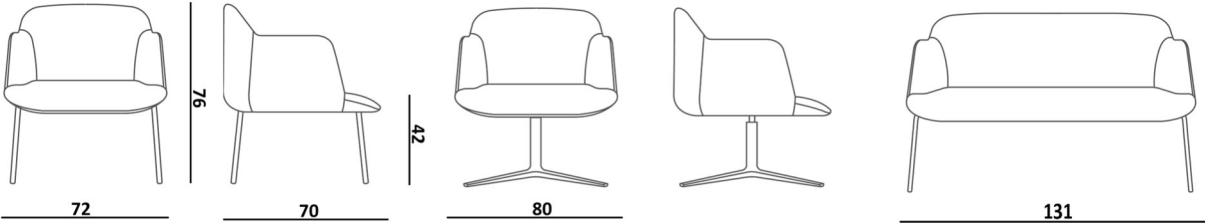

## UPHOLSTERY

---

### **BIO-EXPO CATEGORY 2**

300 gr/mt2  
100% Propitex FR bacteriostatic  
Class 1 UNI EN ISO 354 :2003  
100.000 +/- 10% cycles Martindale

### **LASER CATEGORY 2**

560 gr/mtl  
100% Polyester FR  
Class 1  
80.000 +/- 10% cycles Martindale

### **ECOPELLE CATEGORY 2**

630 gr/mt2  
83% PVC, 17% Synthetic  
ISO 379-DIN75200-CSERF4/83 10%  
cycles Martindale

### **ERA CATEGORY 3**

448 gr/mtl  
100% Trevira CS  
Class 1 UNI EN ISO 354 :2003  
100.000 +/- 10% cycles Martindale

### **LASER PLUS CATEGORY 3**

630 gr/mtl  
100% Polyester FR Trevira  
Class 1, 4.000 +/- cycles Martindale

### **ECOPELLE SOUL CATEGORY 3**

760 gr/mt2  
Superficies 100% POLYURETHANE,  
Base Polyester 85%, 17% Cotton  
EN1021-1/BS5852 PART 1  
>100.000 EN ISO 5470-2

### **MELANGE CATEGORY 3**

390 g/lin.m  
100% Trevira CS  
Class 1  
80.000 +/- 10% cycles Martindale

### **JET CATEGORY 3**

365 +/- 5% g/lin.m  
100% Polyester FR  
Class 1  
80.000 +/- 10% cycles Martindale

### **ONE RECYCLED CATEGORY 3**

525 gr/mt2  
100% recycled polyester  
Base cotton 100%  
CLASS 1IM  
100.000 CYCLES

### **ECOPELLE SISTEMA PRO CATEGORY 3**

710 gr/mt2  
Surface 93% PVC  
Base Polyester 28%  
CLASS 1  
100.000 CYCLES

### **VELOURS CATEGORY 3**

100% Polyester.  
BASE: 100% Polyester  
EN 14465:2006  
CLASS 1

### **ECOPELLE VITAX CATEGORY 3**

850 gr/mt2  
Surface 98% PVC 2% PU  
Base cotton 100%  
CLASS 1  
100.000 CYCLES

### **LANA CATEGORY 5**

500 gr/mt2  
75% Lana, 25% polyamide  
Class 1  
100.000 cycles Martindale

### **COCON CATEGORY 5**

43% Viscous 33% Cotton  
15% Linen 9% Polyester  
EN ISO 12945-2 EN ISO 12947-2  
Class 1

### **PELLE CATEGORY 5/6**

620 g/lin.m  
100% Cow leather  
Class 1, EN 1021-1/2

### **STEELCUT TRIO CATEGORY 7**

770 g/lin.m  
90% New wool worsted, 10% Nylon  
Class 1, EN 1021-1/2  
100.000 % cycles Martindale

### **MERIT CATEGORY 7**

500g/lin.m  
76% Polyester Recycled  
24% Polyester  
EN 1021-1/2  
85.000 % cycles Martindale

### **PREMIUM CATEGORY 7**

100% First quality cow leather  
Thickness 1,2/1,4 mm  
EN1021-1/2

### **VELLUTO DECONTRACTE' CATEGORY 7**

590 g/lin.m  
19% CO, 61% PC, 10% PL, 10%VI  
40.000 % cycles Martindale

### **VELLUTO CATEGORY 7/8**

600 g/lin.m  
100.000 % PL Flame retardant

### **PELLE ELEGANCE CATEGORY 7**

100% Cow leather Thickness, 8-2 mm  
Aniline treatment – First quality  
EN1021-1/2

### **PELLE SETA CATEGORY 8**

100% Cow leather Thickness, 8-2 mm  
Crome treatment – First quality  
EN1021-1/2

## USAGE AND CARE

---

In order to have an optimal maintenance of the products and to preserve the characteristics of the materials by which they are made, it is recommended the following course of action.

### FABRICS

Cleaning: check the dedicated selection written on the color Swatch card.

Usage: it is recommended to pay careful attention to the fabrics as they can be cut or ripped easily.

### WOODS

Cleaning: clean using a soft cloth, soaked in tepid water. Dry always after the cleaning. Remove immediately any liquid substances or other residue in order to prevent the absorption.

Usage: wooden surfaces, being a natural material, might be subjected to color alterations with sun exposure and use over time. It is reminded that wooden surfaces cannot endure direct heat sources.

### METALS

Cleaning: both steel and aluminum surfaces, and the painted ones, have to be cleaned using a soft cloth soaked in tepid water. For the most persistent stains it is possible to dilute mild soap with water moderately. Dry always after the cleaning, using a soft cloth of deer-hide. Do not use cleaning products for steel, chlorine, bleach or other strong products. It is not recommended to use abrasive, scourers, which can scratch the metal surfaces.

Usage: pay attention to the food stains as coffee, coke, fruit juices that can make indelible marks on the surfaces.

### WARRANTY

QUINTI guarantees the products will maintain their properties for 6 years from delivery, except normal usury and provided that they will be used according to the guidelines given. QUINTI will replace, free of charge, any product found non-compliant with this warranty, without incurring any other liability of sort. Components, external accessories or materials supplied by the buyer and applied to the products in order to customize them will not be supported by the guarantee. For an optimal maintenance of the products and to keep unchanged the characteristics of the materials with which they are made, some simple attentions are necessary.

---