
Quinti



Base

The base is made of reinforced polyamide with steel black painted cone. [d. 600] LOOP type.

Castors

Double tread with 60mm diameter, available standard or rubberized version. Both can be self-braking or move unobstructedly. The polyamide feet are interchangeable to the castors with the same pivot of base assembling.

Elevation

All Quinti gas columns are conforming to DIN 4550 norm and exceed the 4° level.

Mechanics

Quick is created in only one version of mechanism:

M6, The Permanent Contact mechanism, made of steel, is covered with black polyurethane. it allows the adjustment in height and depth of the chair. The backrest is adjustable through a wheel.

Armrests

The chair is available both with or without fixed or adjustable armrests. They are created in order to combine the best aesthetic result with high resistance. The armrests are directly attached to the seat. [see price list]

Seat & backrest

The seat exceeds the most rigorous resistance test being made of injected polypropylene. In its inside there are two metal bars which ensure high performances. Seat and backrest, injection printed, are protected by a protection-carter


Stuffing

The standard stuffings are made of polyurethane, density 40. It is also available the 1IM certified version.



Quinti[®]

DIMENSIONS

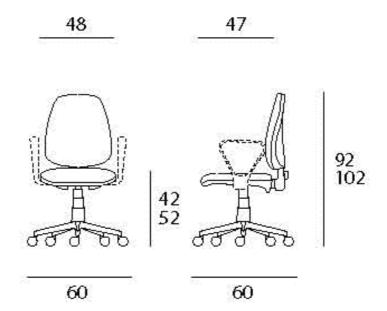

UPHOLSTERY

Quinti

LASER CATEGORY 2

560 gr/mtl 100% Polyester FR Class 1 80.000+/- 10% cycles Martindale

ECOPELLE CATEGORY 2

630 gr/mt2 83% PVC, 17% Synthetic ISO 379-DIN75200-CSERF4/83 10% cycles Martindale

JET CATEGORY 3

365+/- 5% g/lin.m 100% Polyester FR Class 1 80.000+/- 10% cycles Martindale

ONE RECYCLED CATEGORY 3

525 gr/mt2 100% recycled polyester Base cotton 100% CLASS 1IM 100.000 cycles Martindale

ERA CATEGORY 3

448 gr/mtl 100% Trevira CS Class 1UNI EN ISO 354 :2003 100.000 +/- 10% cycles Martindale

CHILI CATEGORY 3

470 gr/mtl 100% post-consu

100% post-consumer recycled polyester Classe1 - 60.000 +/- cycles Martindale

ECOPELLE SOUL CATEGORY 3

760 gr/mt2 Superficies 100% POLYURETHANE, Base Polyester 85%,17% Cotton EN1021-1/BS5852 PART 1 >100.000 EN ISO 5470-2

LYRA CATEGORIA 3

550 g/lin.m 100% polyester Class 1 60.000 +/- 10% cycles Martindale

MELANGE CATEGORY 3

390 g/lin.m 100% Trevira CS Class 1 80.000 +/- 10% cycles Martindale

VELOURS CATEGORY 3

100% Polyester. BASE: 100% Polyester EN 14465:2006 CLASS 1

ECOPELLE SISTEMA PRO

CATEGORY 3
710 gr/mt2
Surface 93% PVC
Base Polyester 28%
CLASS1
100.000 cycles Martindale

COCOON CATEGORY 5

43% Viscous 33% Cotton 15% Linen 9% Polyester EN ISO 12945-2 EN ISO 12947-2 Class 1

WOOL

CATEGORY 5 500 gr/mt2 75% Lana, 25% polyamide Class 1 100.000 cycles Martindale

GLAMOUR CATEGORY 5

700 g/lin.m 100% Recycled Polyester EN 1021-1/2 80.000 % cycles Martindale

PELLE CATEGORIA 5/6

620 g/lin.m 100% Cow leather Class 1, EN 1021-1/2

VELLUTO DECONTRACTE

CATEGORY 7 590 g/lin.m 19% CO, 61% PC,10% PL, 10%VI 40.000 % cycles Martindale

PREMIUM /ELEGANCE CATEGORY 7

100% Cow leather Thickness,8-2 mm Aniline treatment – First quality EN1021-1/2

STEELCUT TRIO CATEGORY 7

770 g/lin.m 90% New wool worsted, 10% Nylon Class 1, EN 1021-1/2 100.000 % cycles Martindale

BOUCLET CATEGORIA 7

860 g/lin.m 40% PC, 25%PL,20%VI, 15% CO Class 1, EN 1021-1/2 50.000 % cycles Martindale

MERIT CATEGORY 7

600 g/lin.m 100.000 % PL Flame retardant

VELLUTO CATEGORIA 8

600 g/lin.m 100.000 % PL Flame retardant

PELLE SETA

100% Cow leather Thickness,8-2 mm Crome treatment – First quality EN1021-1/2

ZERO CATEGORY 8

750g/lin.m 65% CO, 20% PAN, 15% PES 70.000 % cycles Martindale

USAGE AND CARE



In order to have an optimal maintenance of the products and to preserve the characteristics of the materials by which they are made, it is recommended the following course of action.

FARRICS

Cleaning: check the dedicated selection written on the color Swatch card.

Usage: it is recommended to pay careful attention to the fabrics as they can be cut or ripped easily.

WOODS

Cleaning: clean using a soft cloth, soaked in tepid water. Dry always after the cleaning. Remove immediately any liquid substances or other residue in order to prevent the absorption.

Usage: wooden surfaces, being a natural material, might be subjected to color alterations with sun exposure and use over time. It is reminded that wooden surfaces cannot endure direct heat sources.

METALS

Cleaning: both steel and aluminum surfaces, and the painted ones, have to be cleaned using a soft cloth soaked in tepid water. For the most persistent stains it is possible to dilute mild soap with water moderately. Dry always after the cleaning, using a soft cloth o deer-hide. Do not use cleaning products for steel, chlorine, bleach or other strong products. It is not recommended to use abrasive, scourers, which can scratch the metal surfaces.

Usage: pay attention to the food stains as coffee, coke, fruit juices that can make indelible marks on the surfaces.

WARRANTY

QUINTI guarantees the products will maintain their properties for 6 years from delivery, except normal usury and provided that they will be used according to the guidelines given. QUINTI will replace, free of charge, any product found non-compliant with this warranty, without incurring any other liability of sort. Components, external accessories or materials supplied by the buyer and applied to the products in order to customize them will not be supported by the guarantee. For an optimal maintenance of the products and to keep unchanged the characteristics of the materials with which they are made, some simple attentions are necessary.