Quinti

HANAMI

1807-1806-1805-1801

Advanced executive armchair of Quinti collection made in polyurethane foam. Available in two versions: soft and wrinkles

Base

Die cast aluminium 700 mm., "Boch"

Castors

Double tread with 65mm diameter, standard or rubber , they can be free [as standard] or with brake.

Gas Lift

All Quinti gas columns are compliant to DIN 4550 norm and exceed the 4thlevel.

Mechanism

M1 Aluminium selfweight Synchron allows the synchronized back and set inclination adjustment with shock proof system, to lock in 4 different positions. Seat and backrest height adjustment.

M14 Black Aluminium Synchron allows the synchronised back and seat inclination adjustment with shock proof system, lockable in 4 different positions. Seat and backrest height adjustment.

Armrests

The armchair is characterised by polyurethanic foamed upholstered armrests.

Seat & backrest


Seat and backrest are entirely foamed. In the lumbar part two straps guarantee a better comfort. Three heights of backrest are available, high, medium, low.

Quinti is synonymous with Made in Italy, certificate nº 290.058.V.



HANAMI

Quinti

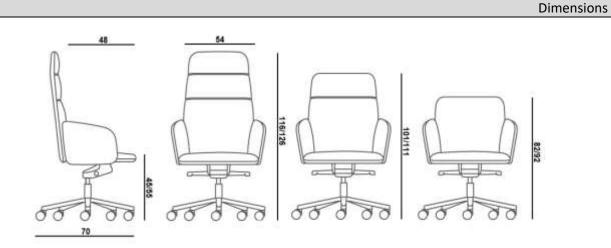

UPHOLSTERIES

LASER CATEGORY 2 560 gr/mtl 100% Polyester FR Class 1 80.000+/- 10% Maltindale cycles

ECOPELLE CATEGORY 2

630 g/lin.m 83% PVC 17% Synthetic Class 1 30.000 +/- 10% Maltindale cycles

JET CATEGORY 3 365+/- 5% g/lin.m 100% Polyester FR Class 1 80.000+/- 10% Maltindale cycles

ONE RECICLED CATEGORY 3 525 gr/mt2 100% recycled poliester CLASS 1IM 100.000 CYCLES

ERA CATEGORY 3 448 gr/mtl 100% Trevira CS Class 1UNI EN ISO 354:2003 100.000 +/- 10% Maltindale cycles

CHILI CATEGORY 3 470 gr/mtl 100% post-consumer recycled polyester Class1 - 60.000 +/- Maltindale cycles MELANGE CATEGORY 3 390 g/lin.m 100% Trevira CS Class 1 80.000 +/- 10% cycles Martindale

VELOURS CATEGORY 3 611 gr/mtl 100% Polyester Oeko test 50.000 +/- 10% Maltindale cycles

COCOON CATEGORY 5 980 gr/mtl 43% viscosa 33% cotone 24% li-pl 35.000 +/- 10% Maltindale cycles

LANA CATEGORY 5 500 gr/mt2 75% wool, 25% polyamide Class 1 100.000 Maltindale cycles

GLAMOUR CATEGORY 5 700 g/lin.m 100% Polyester Recycled EN 1021-1/2 80.000 % Maltindale cycles

LEATHER CATEGORY 5/6 620 g/lin.m 100% cow leather Class 1, EN 1021-1/2 STEELCUT TRIO CATEGORY 7 770 g/lin.m 90% New wool worsted, 10% Nylon Class 1, EN 1021-1/2

100.000 % Maltindale cycles

BOUCLET CATEGORY 7 860 g/lin.m 40% PC, 25%PL,20%VI, 15% CO Class 1, EN 1021-1/2 50.000 % Maltindale cycles

MERIT CATEGORY 8 500g/lin.m 76% Polyester Recycled 24% Polyester EN 1021-1/2 85.000 % Maltindale cycles

VELLUTO CATEGORY 8 600 g/lin.m 100.000 % PL Flame retardant

LEATHER SETA CATEGORY 8 100% Leather bovina THICKNESS1,8-2 mm Grained cow leather aniline tannage

EN1021-1/2

ZERO CATEGORY 8 750g/lin.m

HANAMI

ECOPELLE SOUL CATEGORY 3 760 gr/mt2 SURFACE 100% POLYURETHANE, Base Polyester 85%,17% Cotton EN1021-1/BS5852 PART 1 >100.000 EN ISO 5470-2

LYRA CATEGORY 3 550 g/lin.m 100% Polyester Class 1 60.000 +/- 10% Maltindale cycles VELLUTO DECONTRACTE' CATEGORY 7 590 g/lin.m 19% CO, 61% PC,10% PL, 10%VI 40.000 % Maltindale cycles

PREMIUM /ELEGANCE CATEGORY 7 100% Grained cow leather Thickness 1,2/1,4 mm EN1021-1/2

USE E MAINTEINANCE

For a proper maintenance of the products and to maintain unchanged the characteristics of the materials, we recommend to follow some very simple care instructions.

FABRICS

Cleaning: check the dedicated selection written on the color Swatch card. Usage: it is recommended to pay attention to the fabrics as they can be easily cut or ripped.

LEATHERS

Cleaning: clean with a white wet cloth with water. We recommend to use high quality products for the cleaning of the leather and to follow carefully the instructions of the manufacturer. In doubt, try out the product on a hidden part and wait at least 24 hours for the occurrence of any problems. Usage: remember that the leather is a delicate material therefore, it is recommended to pay particular attention while using.

WOODS

Cleaning: clean with a soft and wet cloth with warm water. We always recommend to dry immediately after the cleaning process. All liquids or other residue must be removed in order to avoid the absorption. Usage: wooden surfaces, being a natural material, could be affected by an alteration of the color shade during time and use. We also remind that wooden surfaces cannot bear with high temperatures if placed directly on the wooden top.

METALS

Cleaning: both steel or aluminum surfaces, and painted ones, must be cleaned with a soft and wet cloth with hot water. For the most persistent stains, a small amount of liquid soap diluted in water may be used. We always recommend to dry immediately with a soft cloth or a leather one after the cleaning process. Never using cleaning products for steel, chlorine, bleach or other strong detergents. It is not recommended to use abrasive creams, score pads and abrasive sponges that can scratch the metal surfaces. Usage: pay attention to the stains of food such as coffee, coke, fruit juices that can leave indelible marks on the surface.

WARRANTY

QUINTI guarantees the products will maintain their properties for 6 years from delivery, except normal usury and provided that they will be used according to the guidelines given. QUINTI will replace, free of charge, any product found non-compliant with this warranty, without incurring any other liability of sort. Components, external accessories or materials supplied by the buyer and applied to the products in order to customize them will not be supported by the guarantee. For an optimal maintenance of the products and to keep unchanged the characteristics of the materials with which they are made, some simple attentions are necessary.

65% CO, 20% PAN, 15% PES 70.000 % Maltindale cycles

Duinti