



Operative armchair with mesh backrest by Quinti Sedute collection. The seat, 1IM certified, exceeds the minimum requirements of DL 626/94, and DL.81.

Base

1. Black polypropylene base "TREND". [d. 680]
2. Polished aluminum base "TREND". [d. 680]

Castors & feet.

Double-tread nylon castors, with 50mm diameter. Variants: standard or rubberized. Both can be self-braking or can move freely.

Elevation

All Quinti gas columns are conforming to DIN 4550 norm and exceed the 4° level.

Mechanics

LINK is created in only one version of mechanism:

M12 The Synchron Mechanism is available in black steel. It enables the adjustment in height, the synchronized adjustment of the backrest inclination with the anti-shock system, lockable in 4 positions. The rigidity of the oscillation is adjustable using a pommel, under the seat.

Armrests

Available armrest :

1. Pair of stable black polypropylene armrests.
2. Pair of nylon armrests, adjustable in height.
3. Pair of 3D armrests, with polyurethane pad.


Seat & backrest

Seat: Made with FSC beech plywood inside and black polypropylene under the seat. Polyurethane rubber padding. Indeformable thickness 50 mm. Double seam coated and stitched.

Backrest. Available in the standard Gabriel mesh version, and in the sample colours. It is provided with adjustable lumbar support. The structure is made of black polypropylene.



DIMENSIONS

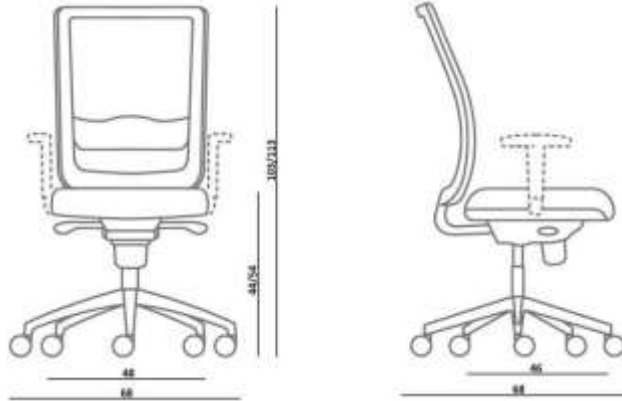

USAGE & MAINTENANCE

In order to have an optimal maintenance of the products and to preserve the characteristics of the materials by which they are made, it is recommended the following course of action.

FABRICS

Cleaning: check the dedicated selection written on the color Swatch card.

Usage: it is recommended to pay careful attention to the fabrics as they can be cut or ripped easily.

WOODS

Cleaning: clean using a soft cloth, soaked in tepid water. Dry always after the cleaning. Remove immediately any liquid substances or other residue in order to prevent the absorption.

Usage: wooden surfaces, being a natural material, might be subjected to color alterations with sun exposure and use over time. It is reminded that wooden surfaces cannot endure direct heat sources.

METALS

Cleaning: both steel and aluminum surfaces, and the painted ones, have to be cleaned using a soft cloth soaked in tepid water. For the most persistent stains it is possible to dilute mild soap with water moderately. Dry always after the cleaning, using a soft cloth of deer-hide. Do not use cleaning products for steel, chlorine, bleach or other strong products. It is not recommended to use abrasive, scourers, which can scratch the metal surfaces.

Usage: pay attention to the food stains as coffee, coke, fruit juices which can make indelible marks on the surfaces.

WARRANTY

QUINTI guarantees the products will maintain their properties for 6 years from delivery, except normal usury and provided that they will be used according to the guidelines given. QUINTI will replace, free of charge, any product found non-compliant with this warranty, without incurring any other liability of sort. Components, external accessories or materials supplied by the buyer and applied to the products in order to customize them will not be supported by the guarantee. For an optimal maintenance of the products and to keep unchanged the characteristics of the materials with which they are made, some simple attentions are necessary.

UPHOLSTERIES

LASER

CATEGORY 2
560 gr/mtl
100% Polyester FR
Class 1
80.000+/- 10% Maltindale cycles

ECOPELLE

CATEGORY 2

630 g/lin.m
83% PVC 17% Synthetic
Class 1
30.000 +/- 10% Maltindale cycles

JET

CATEGORY 3
365+/- 5% g/lin.m
100% Polyester FR
Class 1
80.000+/- 10% Maltindale cycles

ONE REICLED

CATEGORY 3
525 gr/mt2
100% recycled poliester
CLASS 1IM
100.000 CYCLES

ERA

CATEGORY 3
448 gr/mtl
100% Trevira CS
Class 1UNI EN ISO 354:2003
100.000 +/- 10% Maltindale cycles

CHILI

CATEGORY 3
470 gr/mtl
100% post-consumer recycled polyester
Class1 - 60.000 +/- Maltindale cycles

ECOPELLE SOUL

CATEGORY 3
760 gr/mt2
Surface 100% POLYURETHANE,
Base Polyester 85%,17% Cotton
EN1021-1/BS5852 PART 1
>100.000 EN ISO 5470-2

LYRA

CATEGORY 3
550 g/lin.m
100% Polyester
Class 1
60.000 +/- 10% Maltindale cycles

MELANGE

CATEGORY 3
390 g/lin.m
100% Trevira CS
Class 1
80.000 +/- 10% Maltindale cycles

VELOURS

CATEGORY 3
611 gr/mtl
100% Polyester
Oeko test
50.000 +/- 10% Maltindale cycles

ECOPELLE SISTEMA PRO

CATEGORY 3
710 g/lin.m
93% PVC 7% polyester
Class 1
100.000 +/- 10% Maltindale cycles

COCOON

CATEGORY 3
980 gr/mtl
43% viscose 33% cotton 24% li-pl
35.000 +/- 10% Maltindale cycles

LANA

CATEGORY 5
500 gr/mt2
75% wool, 25% polyamide
Class 1
100.000 Maltindale cycles

GLAMOUR

CATEGORY 5
700 g/lin.m
100% Polyester Recycled
EN 1021-1/2
80.000 % Maltindale cycles

PELLE

CATEGORY 5/6
620 g/lin.m
100% Cowhide
Class 1, EN 1021-1/2

VELLUTO DECONTRACTE'

CATEGORY 7
590 g/lin.m
19% CO, 61% PC,10% PL, 10%VI
40.000 % Maltindale cycles

PREMIUM /ELEGANCE

CATEGORY 7
100% Cowhide Primo fiore
Thickness 1,2/1,4 mm
EN1021-1/2

STEELCUT TRIO

CATEGORY 7
770 g/lin.m
90% New wool worsted, 10% Nylon
Class 1, EN 1021-1/2
100.000 % Maltindale cycles

BOUCLET

CATEGORY 7
860 g/lin.m
40% PC, 25%PL,20%VI, 15% CO
Class 1, EN 1021-1/2
50.000 % Maltindale cycles

MERIT

CATEGORY 8
500g/lin.m
76% Polyester Recycled
24% Polyester
EN 1021-1/2
85.000 % Maltindale cycles

VELLUTO

CATEGORY 8
600 g/lin.m
100.000 % PL Flame retardant

PELLE SETA

CATEGORY 8
100% Cowhide THICKNESS1,8-2 mm
First flower TANNING WITH ANILINE
EN1021-1/2

ZERO

CATEGORY 8
750g/lin.m
65% CO, 20% PAN, 15% PES
70.000 % Maltindale cycles