Technica Information

Pack




FSTP131224NOSW

Interactive tech sheet

This interactive tech sheet contains clickable links and QR codes that provide instant access to specific information related to Fisher[™] Spas or Swim Spas.

Simply click or scan these QR codes to dive deeper into the features, maintenance tips, and expert advice tailored just for you.

When you see these icons, you can click or scan:

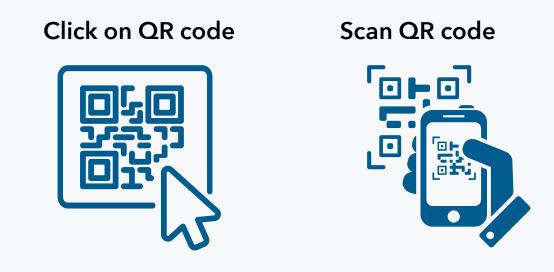

We hope you find the information helpful. Please get in touch if you have any questions about any Fisher[™] Spas product. We are here to help!

From the Fisher[™] Spas Team.





භි	JETS	16
2	SEATING	2 seats
	DIMENSIONS	1.65 x 1.65 x 0.74m

SPECIFICATIONS

Dry weight	186 kg
Water capacity	519 litres
Filled weight	713 kg
SmartFlo™ jet pump(s)	2.5hp
SmartFlo™ circulation pump	1
Electrical requirements	10 amp*
* Check with electrician about dedicated circuit requi	rements

FEATURES

- FisherFrame™ timber-free frame
- DuraClad[™] long life cabinet
- FisherBase[™] high impact moulded ABS base
- HeatSeal[™] perimeter insulation
- HeatSeal[™] base insulation
- QuadCore[™] shell construction
- UV automatic water steriliser
- Ozone automatic water clarifier
- SpaNet SV Mini™ control system
- FisherFlex™ plumbing system
- SoftTouch[™] head rest
- Stainless steel jets
- FisherGlow™ in-spa illumination
- FisherGlow™ LED perimeter lighting
- Intelligent Thermal Tuning[™]
- Integrated heat pump control

OPTIONAL UPGRADES

• SpaNet[™] EcoCube[™] heat pump

WARRANTIES

FisherFrame™	Lifetime
Non-Pro-rata Structural	
Non-Pro-rata Acrylic Surface	5yrs
Plumbing, Heater & Jets	5yrs
Pumps & Equipment	2yrs


** Conditions apply. Specifications may change without notice. May be pictured with some options included.









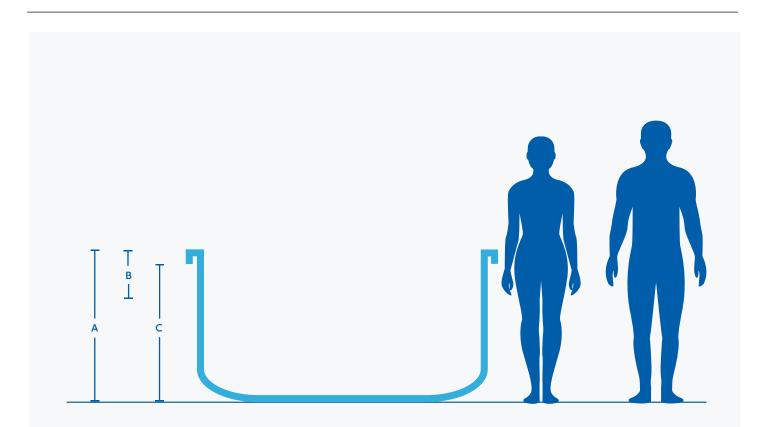

		Fisher 2
	Model dimensions	1.65(L) x 1.65(W)m
Α	Total height	0.74m
в	Recommended deck height. From top shell. No lower than	400mm
с	Product height under lip +-20mm	645mm



Heights



Water capacity	519L
Dry weight	186kg
Filled weight (including cover)	713kg
Lift weight**	236kg
Intuitive spa controller	SVM1
Programmable circulation pump	1
Jet pumps	1
Variable speed air blower	NO
Variable output heater	1.5kW
Recommended electrical supply	10Amps


* Conditions apply. Specifications may change without notice. Pictures may show options not available on all models.

** The specified lift weights in the table above include the spa's dry weight, packaging, hard cover and water, but not the pallet weight. These are approximate weights and are intended as a guide only. All weights must be checked by the crane operator prior to the lift. (Cranes have the ability to check the weight)





Jet Specifications

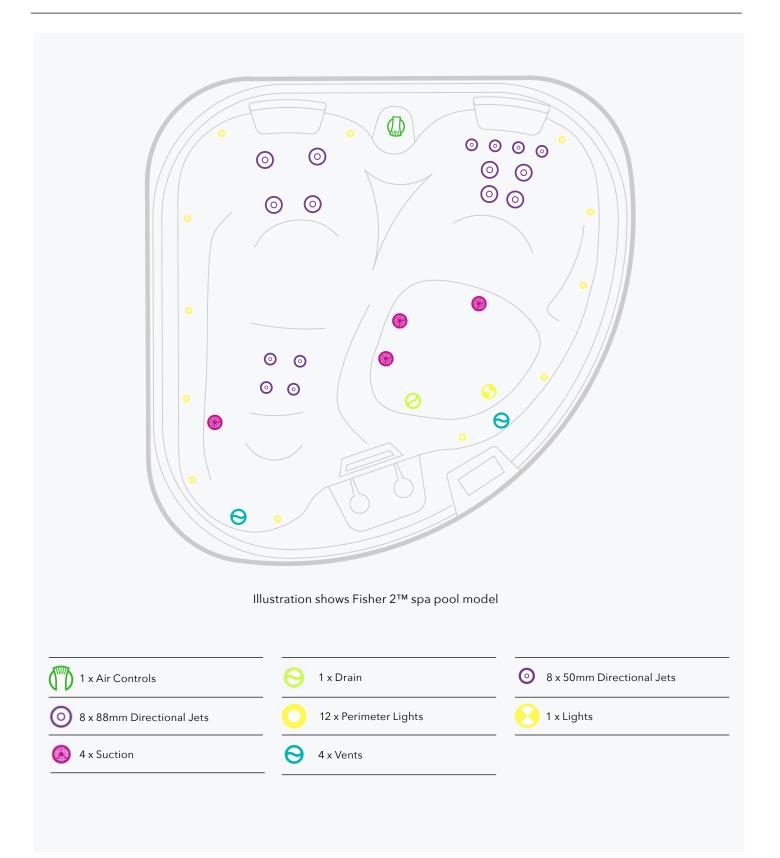





Equipment Location




* Conduit access should be no more than 100mm high above the concrete slab.

Note: This model has a rigid base, and if you choose to bring the piping conduit in from the bottom through the base, you will need to cut a hole into the base on-site before installation. The factory does not provide this hole. Please see the diagram above to find the location where you can drill the hole.





Standard Spa Cover

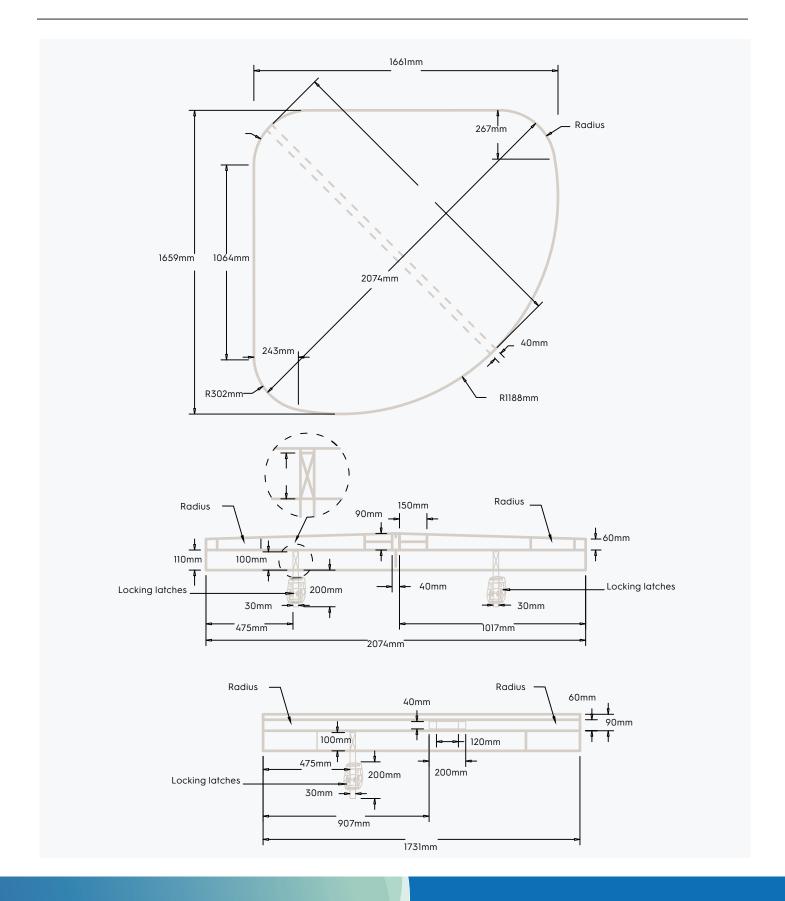





Certificates

To access the Fisher[™] Portable Spas Generic Concrete Slab Certificate/ Plumbing Certificate/ Structural Certificate, please click or scan the QR code bellow.

Click on QR code



Fisher™ Portable Spas Generic Concrete Slab Certificate



Fisher 2™ Structural Certificate



Scan QR code



Fisher 2™ Plumbing Certificate







To access the Fisher[™] Spas Owner's Manual / Audio WiFi Kit Manual/ EcoCube[™] Heat Pump Installation and User Manual/ Fisher[™] Spas Warranty, please click or scan the QR codes bellow.

Click on QR code



Fisher™ Spas Owner's Manual



SpaNet™ SV Series Heat Pump Installation and Instruction Manual



Scan QR code



Fisher™ Spas Audio WiFi kit



Fisher™ Spas Warranty









FSTP131224NOSW