


## 2" LED Trimless Gimbal Downlight

5 CCT Selectable: 27/30/35/40/50K

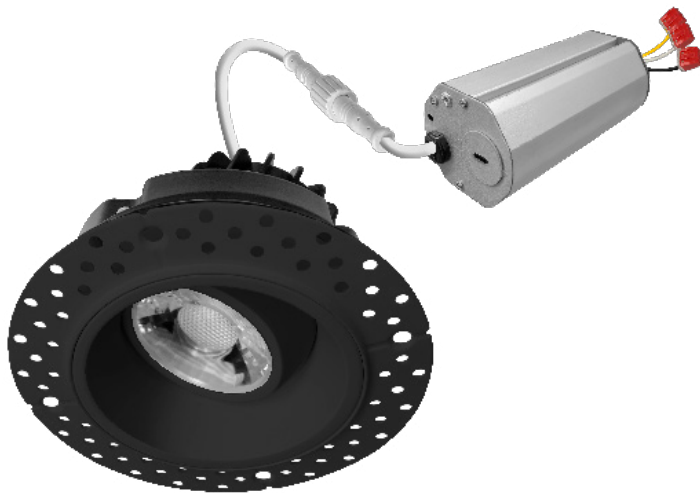

### Detail Specification:

- Wet Location Rated
- Wet Location Rated
- CRI 90 COB LED Chip, R9>50
- 120V Driver
- 38° Beam Angle
- Operating Temperature: 0°F ~ +113°F
- PF >0.9
- Triac and ELV Dimmable Down to 5%

### Applications:

- Residential or Commercial Lighting
- New Construction or Remodel Use
- General Recessed Lighting

### Product Information:

- Di-cast aluminum housing for better heat dissipation
- Available in white & black finish
- Optional Emergency Backup Available: delivers full lumens in EM mode
- L70 @ 50,000 Hours lumen maintenance

### Mounting:

- No can needed in remodel applications
- Pre-wired junction box with circuit wiring built in (3 inc / 3 out)
- New construction rough-in plate or mounting plate with joist bars available

### Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- IC Rated and ASTM-E283 Air-Tight
- CA Title 24 JA8-2019 CEC Listed


### What's included:

- LED Fixture
- Junction Box Mounting Plate
- Mounting Screws
- Installation Guide


LED-DLJBX-TML-GMB-2-8W-5CCT- Color - EMB - Warranty  
 1 2 3 4 5 6 7

1 Product	2 Size	3 Watts	4 Color	5 Color	6 EMB	7 Warranty
LED-DLJBX-TML-GMB	2 Inches	8W 600lm	5CCT 27/30/35/40/50K	BLK WH Black White	Emergency Backup	(Blank) 5 Years (incl.) 10YR 10 Years

Specs and model numbers are subject to change with or without notice.

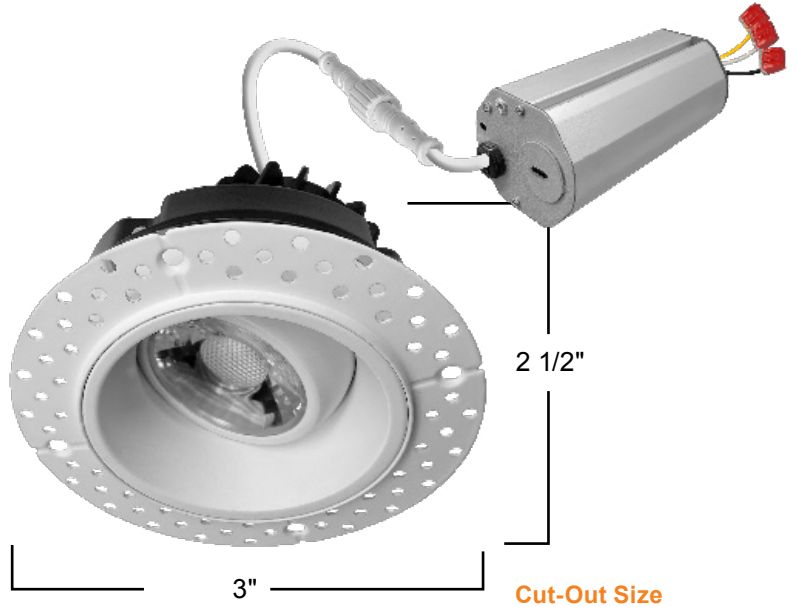

**Cut-Out Size**  
• 2" Gimbal Round: 3"

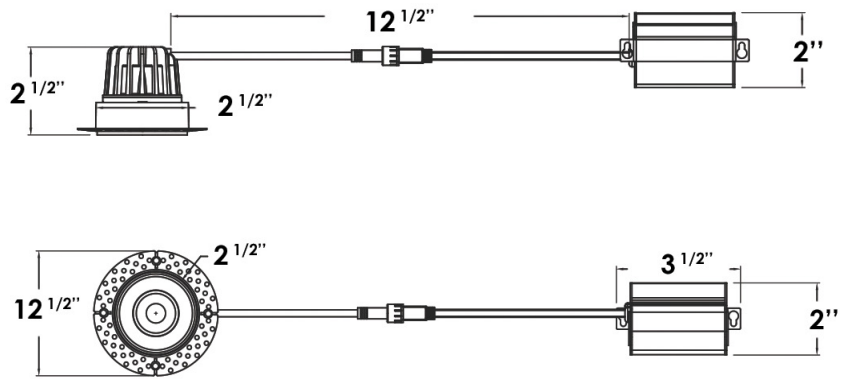

**Durable Aluminum Body**


Eliminate heat with a diecast aluminum heatsink

**Trimless Mud Frame**

Designed to be plastered over for a flush, smooth trimless look

**360° Rotation & 30° Tilt**

Rotate and tilt in any angle you choose.

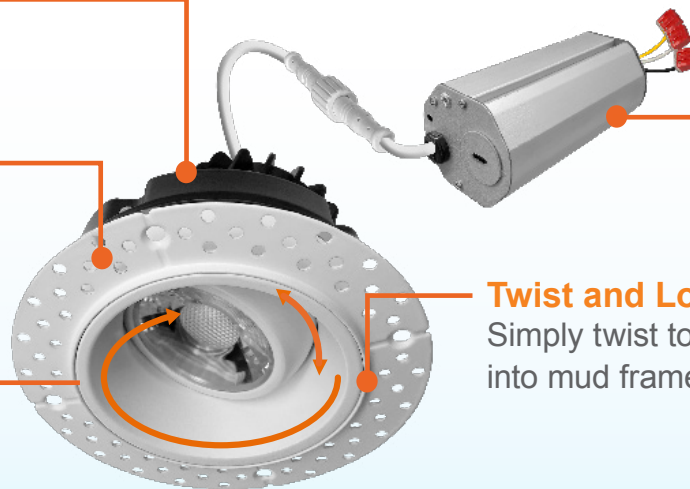


**JBox**

Insert through hole in ceiling

**Twist and Lock Design**

Simply twist to lock in ceiling into mud frame

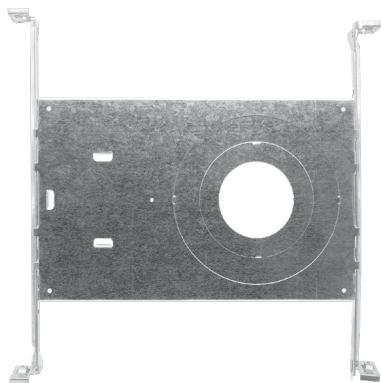

**CUNV-NC-ICAT**  
**Universal Pre-Mounting Plate**  
 5 3/10" x 14 1/2"



**EMB**  
**Emergency Backup**



**JBX-EXT**  
**Extension Cable (6' / 10')**

DIMMER COMPATIBILITY				
Brand	Series	Model	Load	Dimmability
Lutron	Ariadni	AYCL-153P	150W	OK
Lutron	Diva	DV-600PR	600W	OK
Lutron	Diva	DVCL-153P	150W	OK
Lutron	Maestro	MACL-153MH	600W	OK
Lutron	Maestro Wireless	MRF2-6CL	150W	OK
Lutron	Rotary	D-600P	600W	OK
Lutron	Electronic (ELV)	NTELV-300P	600W	OK
Lutron	Skylark	S-600P	600W	OK
Lutron	Skylark Contour	CT-600P	600W	OK
Lutron	Skylark Contour	CTCL-153P	150W	OK
Lutron	Toggler	TG-600P	600W	OK
Lutron	Toggler	TGCL-153P	150W	OK
Leviton	Sureslide	6633	600W	OK
Leviton	Sureslide Decora	6674	600W	OK
Leviton	Trimatron	6672	600W	OK
Leviton	Sureslide	6613	600W	OK
Legrand	Adorne	DLV703	700W	20-100%
Legrand	Harmony	H703PTW	700W	OK
Cooper	Aspire	9530	1000W	OK
Cooper	Devine	DAL03P	300W	OK

Accessory Model	Description
CUNV-NC-ICAT	2/4/6" New Construction Plate
LED-EMB-25W-HV-0/10V	Emergency Back-up
JBX-EXT-6'	6' Extension Cable
JBX-EXT-10'	10' Extension Cable

### 5CCT Selectable

ETA: 11/2021

Model	Voltage	Watts	Lumens	Color	CRI
<b>NEW</b> LED-DLJBX-TML-2R-8W-5CCT-WH	120V	8w	600	50/40/35/30/27k	>80
<b>NEW</b> LED-DLJBX-TML-2R-8W-5CCT-BLK	120V	8w	600	50/40/35/30/27k	>80
<b>NEW</b> LED-DLJBX-TML-2R-15W-5CCT-WH	120V	15w	1000	50/40/35/30/27k	>80
<b>NEW</b> LED-DLJBX-TML-2R-15W-5CCT-BLK	120V	15w	1000	50/40/35/30/27k	>80



Box Qty: 18



### 2" LED Trimless Gimbal Downlight

#### 5CCT Selectable

ETA: 12/2021

Model	Voltage	Watts	Lumens	Color	CRI
<b>NEW</b> LED-DLJBX-TML-GMB-2-8W-5CCT-WH	120V	8w	600	50/40/35/30/27k	>80
<b>NEW</b> LED-DLJBX-TML-GMB-2-8W-5CCT-BLK	120V	8w	600	50/40/35/30/27k	>80



Box Qty: 18



### 4" LED Trimless Round Downlight

#### 5CCT Selectable

ETA: 12/2021

Model	Voltage	Watts	Lumens	Color	CRI
<b>NEW</b> LED-DLJBX-TML-4R-15W-5CCT-WH	120V	15w	1000	50/40/35/30/27k	>80
<b>NEW</b> LED-DLJBX-TML-4R-15W-5CCT-BLK	120V	15w	1000	50/40/35/30/27k	>80



Box Qty: 18

