



Warehouse Locations

- Bell, CA (HQ)
- Dallas, TX
- S. Windsor, CT
- Midland, NC
- Freehold, NJ
- Cincinnati, OH

About Envision LED Lighting

Established in 2010, Envision LED Lighting, Inc. is a Los Angeles based LED lighting leader that provides the market with an array of LED lighting products. Our series of high efficiency, low energy consuming LED products have been skillfully developed by our engineers to suit a range of clients both in the residential and commercial application.

EnVision LED's objective is very simple; to provide superior LED lighting products and service at the highest level of quality and performance in the industry. Our USA team of lighting professionals that strive to develop innovative techniques to manufacture the most efficient LED lighting products. This allows users to save money and create a brighter future for the environment.

What's New?

Pricing: Some prices have changed due to unstable raw material and transportation costs. EnVision has tried to absorb as much as the costs as possible.

Customization: EnVision has always been a believer in adding controls to our fixtures. Now we have added the cost on our price sheet for easier quoting.

10 Year Warranty: EnVision is now offering a 10 year optional warranty on most of our products.

Freight Allowed: EnVision has updated their Free Freight Allowed policy.

Best of all, our new catalog features hundreds of new SKUs that are now available. Check out **"NEW"** throughout the catalog!

Please contact EnVision LED or your local rep for more information on what's new!

Envision LED Affiliated Organizations



American Lighting Association

Envision LED Lighting Inc is a proud member of ALA.



Safety Certification Listings



All EnvisionLED products carry either a UL or ETL nationally recognized safety certification listing to ensure the highest level of safety.



Performance Certification Listing

Products which carry DLC qualified listings are shown in each product specification table.



Energy Star

Products which carry Energy Star qualified listings are shown in each product specification table.



JA8 Title 24 Compliance

Look for the JA8 icon for products that have been qualified and listed in California's JA8 MAEDBS database provided to help comply with California Title 24 requirements.

Envision LED Product Features



Selected Color Temperature

A specification for white light sources used to describe the dominant color tone along the dimension from warm (yellows and reds) to cool (blue).



Select-N-Switch Technology

EnVisions technology which allows you to choose your desired lumen and CCT. Just Select-N-Switch!"



Twist-C Control

EnVision's new Twist-C technology allows for an easy sensor installation without any wiring necessary! Purchase any Twist-C control ready fixture and simply twist the sensor

Table of Contents

NEW Wall Packs	1-3
NEW Area Lights	4-8
NEW Sports Light	9
NEW Bollard Light	10
NEW Aquarium Lights	11
NEW Grow Light	12
NEW Linear Highbay	13
NEW UFO Highbay	14
Canopy Lights	15-16
NEW Panels	17-20
Troffers	21
NEW Tubes	22-23
Wraps	24
NEW Strips	25
NEW Vapor Tights	26
1" Mini Downlights	27
NEW Trimless Downlights	28
NEW Canless Downlights	29-35
EXT SnapTrim Downlight Accessories	36
NEW Commercial Downlights	37-38
NEW J-Box Downlights	39
Smart Downlights	40
Fire Rated LED Cans	41
Retrofit Downlights	41-46
NEW Surface Mounts	47-52
NEW Undercabinet Fixtures	53-54
Puck Lights	55
NEW Step Lights	56
NEW Emergency Exit Signs	57-58
Corn Bulbs	59
PL Lamps	60
Fluorescent Bulbs	61-63
LED Bulbs	64-66
NEW LED Striplights	67-69
Magnetic & Electronic Transformers	70
Sensors	71
Emergency Battery Backups	72



Mini Wall Pack - w/ Photocell

- Frosted polycarbonate lens will not yellow over time
- Photocell is optional and can be disconnected

3CCT Selectable



Box Qty: 20



Model	Voltage	Watts	Lumens	Color	CRI
LED-WPM-20W-TRI-F-BZ-PC	120-277V	20w	2,600	30/40/50k	>80

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.



Small Body Wall Pack - w/ Photocell

- Frosted polycarbonate lens will not yellow over time
- Photocell is optional and can be disconnected

3CCT Selectable



Box Qty: 4



Model	Voltage	Watts	Lumens	Color	CRI
LED-WPS-29W-TRI-BZ-PC	120-277V	29w	3,799	30/40/50k	>80

Single CCT



Model	Voltage	Watts	Lumens	Color	CRI
LED-WPS-60W-40K-BZ-PC	120-277V	60w	7,860	4000k	>80
LED-WPS-60W-50K-BZ-PC	120-277V	60w	7,860	5000k	>80

Pre-Instaled Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (Internal 20W)

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.



Regular Wall Pack

- Thick glass lens wall pack will not yellow over time
- Fully weatherproof IP67-rated housing

3CCT & 5 Power Selectable w/ Photocell



Box Qty: 1



Model	Voltage	Watts	Lumens	Color	CRI
LED-WPF-5P100-TRI-BZ-PC	120/277V	100/80/60/40/20w	145 lm/w	30/40/50k	>80

Single CCT



Box Qty: 1

Model	Voltage	Watts	Lumens	Color	CRI
LED-WPF-40W-40K-BZ	120/277V	40w	5,600	4000k	>80
LED-WPF-40W-50K-BZ	120/277V	40w	5,600	5000k	>80
LED-WPF-60W-40K-BZ	120/277V	60w	8,400	4000k	>80
LED-WPF-60W-50K-BZ	120/277V	60w	8,400	5000k	>80
LED-WPF-80W-40K-BZ	120/277V	80w	11,200	4000k	>80
LED-WPF-80W-50K-BZ	120/277V	80w	11,200	5000k	>80
LED-WPF-120W-40K-BZ	120/277V	120w	16,800	4000k	>80
LED-WPF-120W-50K-BZ	120/277V	120w	16,800	5000k	>80

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

Slim Wall Pack

- Thick glass lens wall pack will not yellow over time
- Fully weatherproof IP67-rated housing

3CCT & 5 Power Selectable w/ Photocell



Box Qty: 1




Model	Voltage	Watts	Lumens	Color	CRI
LED-WPF-SL-3P60-TRI-BZ-UNV-PC	120-277V	60/40/30w	7,800/5,200/3,900	30/40/50k	>80
LED-WPF-SL-3P120-TRI-BZ-UNV-PC	120-277V	120/100/80w	15,600/13,000/10,400	30/40/50k	>80
LED-WPF-SL-3P60-TRI-BZ-HV-PC	277-480V	60/40/30w	7,800/5,200/3,900	30/40/50k	>80
LED-WPF-SL-3P120-TRI-BZ-HV-PC	277-480V	120/100/80w	15,600/13,000/10,400	30/40/50k	>80

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

Accessory Model	Description
WPF-SHIELD	Cut Off Shield for WPF Wall Packs
WPF-WG	Wire Guard for WPF Wall Packs
WPF-SL-SHIELD	Cut Off Shield for WPF-SL Wall Packs

Pre-Instaled Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (Internal 20W)
Add '-PC' to model #	Photocell
Add '-BMS' to model #	Bi-Level Motion + Daylight Sensor
Add '-SBT' to model #	Bluetooth Control
Add '-HV' to model #	347-480V Driver for Fixture

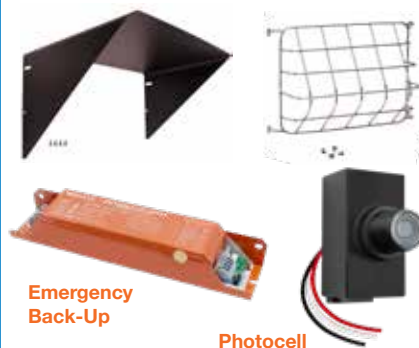

Emergency
Back-Up

Photocell

Rotating Wall Pack, Single Module

- Optical lens on individual LED chips, full forward throw light
- Upgraded housing design includes back cover allowing for more installation applications
- Dark sky compliant
- Full 360° rotating in any angle
- Toolless rotation and locking system

3CCT Selectable

Box Qty: 4

Model	Voltage	Watts	Lumens	Color	CRI
LED-WPROT2-25WS-TRI-BZ	120-277V	25w	3,600	30/40/50k	>80

Single CCT

Box Qty: 4

Model	Voltage	Watts	Lumens	Color	CRI
LED-WPROT2-40WS-30K-BZ	120-277V	40w	4,890	3000k	>80
LED-WPROT2-40WS-40K-BZ	120-277V	40w	4,890	4000k	>80
LED-WPROT2-40WS-50K-BZ	120-277V	40w	4,890	5000k	>80

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Rotating Wall Pack, Double Module

3CCT Selectable

Box Qty: 2

Model	Voltage	Watts	Lumens	Color	CRI
LED-WPROT2-60WD-TRI-BZ	120-277V	60w	8,280	30/40/50k	>80

Single CCT

Box Qty: 2

Model	Voltage	Watts	Lumens	Color	CRI
LED-WPROT2-80WD-30K-BZ	120-277V	80w	10,875	3000k	>80
LED-WPROT2-80WD-40K-BZ	120-277V	80w	10,875	4000k	>80
LED-WPROT2-80WD-50K-BZ	120-277V	80w	10,875	5000k	>80

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (Internal 20W)
Add '-PC' to model #	Photocell
Add '-BMS' to model #	Bi-Level Motion Sensor
Add '-SBT' to model #	Bluetooth Control

Full Cut Off Wall Packs Adjustable

- Optical lens on individual LED chips, full forward throw light
- Slim and architectural IP67-rated housing
- Dark sky compliant
- Adjustable up to 90° with an easy lock system

3CCT & 3 Power Selectable

Box Qty: 2

Model	Voltage	Watts	Lumens	Color	CRI
LED-WPFC-ADJ-30W-TRI-BZ	120-277V	30W	145LM/W	30/40/50k	>80
LED-WPFC-ADJ-3P50W-TRI-BZ	120-277V	30/40/50W	145LM/W	30/40/50k	>80
LED-WPFC-ADJ-3P80W-TRI-BZ	120-277V	60/70/80W	145LM/W	30/40/50k	>80

Single CCT

Model	Voltage	Watts	Lumens	Color	CRI
LED-WPFC-ADJ-35W-50K-BZ	120-277V	35w	3,998	5000k	>80
LED-WPFC-ADJ-55W-50K-BZ	120-277V	55w	6,150	5000k	>80

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (Internal 20W)
Add '-PC' to model #	Photocell
Add '-BMS' to model #	Bi-Level Motion Sensor
Add '-SBT' to model #	Bluetooth Control



360°



360°



Emergency Back-Up



Photocell



Final Production

Final Production



Emergency Back-Up



Photocell



ETA: 6/2022

NEW



NEW

Full-Cutoff Wall Pack

- Durable die-cast aluminum housing with integrated heatsink
- Optical lens on individual LED chips for full forward throw light
- Dark sky compliant
- Photocell is optional and can be disconnected.

3CCT & 5 Power Selectable w/ Photocell




Box Qty: 1



Model	Voltage	Watts	Lumens	Color	CRI
LED-WPFC-FL-5P60W-TRI-BZ-PC	120-277V	20/30/40/50/60w	145 lm/w	30/40/50k	>80
LED-WPFC-FL-5P120W-TRI-BZ-PC	120-277V	80/90/100/110/120w	145 lm/w	30/40/50k	>80

Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (Internal 20W)
Add '-PC' to model #	Photocell
Add '-BMS' to model #	Bi-Level Motion + Daylight Sensor
Add '-SBT' to model #	Bluetooth Control

Watts	Lumens	Watts	Lumens
20W	2,900	80W	11,600
30W	4,350	90W	13,050
40W	5,800	100W	14,500
50W	7,250	110W	15,950
60W	8,700	120W	17,400

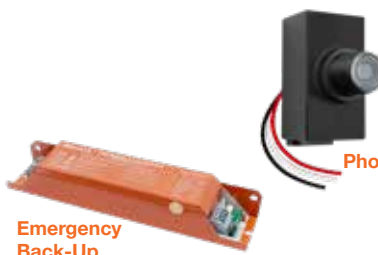

Photocell

Emergency Back-Up



Full-Cutoff Wall Pack

- Durable die-cast aluminum housing with integrated heatsink
- Optical lens on individual LED chips for full forward throw light
- Dark sky compliant
- Photocell is optional and can be disconnected.

3CCT & 5 Power Selectable w/ Photocell



Box Qty: 1



Model	Voltage	Watts	Lumens	Color	CRI
LED-WPFC-5P80W-TRI-BZ-PC	120-277V	16/32/48/64/80w	145 lm/w	30/40/50k	>80
LED-WPFC-5P150W-TRI-BZ-PC	120-277V	30/60/90/120/150w	145 lm/w	30/40/50k	>80

Watts	Lumens
16W	2,320
30W	4,350
32W	4,640
48W	6,960
60W	8,700
64W	9,280
80W	11,600
90W	13,050
120W	17,400
150W	21,750

Final Production

Final Production

Final Production

Final Production


Single CCT



Model	Voltage	Watts	Lumens	Color	CRI
LED-WPFC-80W-40K-BZ	120-277V	80w	9,974	4000k	>80
LED-WPFC-80W-50K-BZ	120-277V	80w	9,974	5000k	>80
LED-WPFC-120W-40K-BZ	120-277V	120w	14,529	4000k	>80
LED-WPFC-120W-50K-BZ	120-277V	120w	14,529	5000k	>80


*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (Internal 20W)
Add '-PC' to model #	Photocell
Add '-BMS' to model #	Bi-Level Motion + Daylight Sensor
Add '-SBT' to model #	Bluetooth Control
Add '-HV' to model #	347-480V Driver for Fixture

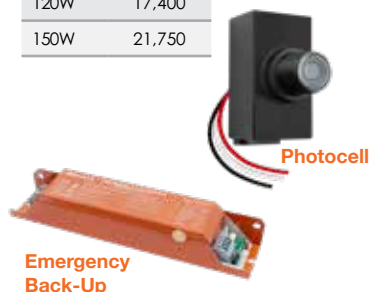

Photocell

Emergency Back-Up



KN-Knuckle

3 CCT Button

KN-Knuckle

3 CCT Button

TR-Trunnion

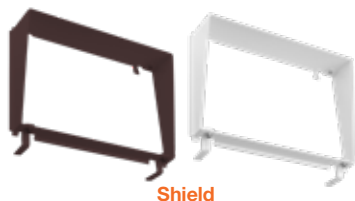3 CCT Button

SFA Bracket works as a straight arm or slip fitter mount

Shield

-WG Wire Guard

Mini Area Flood Lights

- Knuckle option is 1/2"
- All bracket options fully adjust up and down
- Corrosion-resistant bronze powder coat
- Full weatherproof IP67 Rating Housing

15W 3CCT Selectable

SELECT SWITCH IP67 RATED DLC LISTED cUL US LISTED **Box Qty: 8**

Model	Voltage	Watts	Lumens	Color	CRI
LED-ARL-15W-TRI-BZ-TR	120-277V	15w	2,100	30/40/50k	>80
LED-ARL-15W-TRI-BZ-KN	120-277V	15w	2,100	30/40/50k	>80
LED-ARL-15W-TRI-WH-KN	120-277V	15w	2,100	30/40/50k	>80



30W 3CCT Selectable

SELECT SWITCH IP67 RATED DLC LISTED cUL US LISTED **Box Qty: 8**

Model	Voltage	Watts	Lumens	Color	CRI
LED-ARL-30W-TRI-BZ-TR	120-277V	30w	3,819	30/40/50k	>80
LED-ARL-30W-TRI-BZ-KN	120-277V	30w	3,819	30/40/50k	>80
LED-ARL-30W-TRI-WH-KN	120-277V	30w	3,819	30/40/50k	>80



50W 3CCT Selectable

SELECT SWITCH 0-10V DIMMABLE MOTION SENSOR IP67 RATED DLC LISTED cUL US LISTED **Box Qty: 6**

Model	Voltage	Watts	Lumens	Color	CRI
LED-ARL-50W-TRI-BZ-TR	120-277V	50w	7,000	30/40/50k	>80
LED-ARL-50W-TRI-BZ-KN	120-277V	50w	7,000	30/40/50k	>80
LED-ARL-50W-TRI-WH-KN	120-277V	50w	7,000	30/40/50k	>80



80W 3CCT Selectable

SELECT SWITCH 0-10V DIMMABLE MOTION SENSOR IP67 RATED DLC LISTED cUL US LISTED **Box Qty: 5**

Model	Voltage	Watts	Lumens	Color	CRI
LED-ARL-80W-TRI-BZ-KN	120-277V	80w	11,200	30/40/50k	>80
LED-ARL-80W-TRI-WH-KN	120-277V	80w	11,200	30/40/50k	>80
LED-ARL-80W-TRI-BZ-TR	120-277V	80w	11,200	30/40/50k	>80
LED-ARL-80W-TRI-BZ-SFA	120-277V	80w	11,200	30/40/50k	>80



*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Accessory Model	Accessory Description
ARL-15/30W-SHIELD-BZ	Area Light 15W Shield
ARL-15/30W-SHIELD-WH	Area Light 15W Shield
ARL-15/30W-WG	Area Light 15W Wire Guard
ARL-50W-SHIELD-BZ	Area Light 50W Shield
ARL-50W-SHIELD-WH	Area Light 50W Shield
ARL-50W-WG	Area Light 50W Wire Guard
ARL-80W-SHIELD-BZ	Area Light 80W Shield
ARL-80W-SHIELD-WH	Area Light 80W Shield
ARL-80W-WG	Area Light 80W Wire Guard

Pre-Instaled Accessory Model	Description
Add '-PC' to model #	Photocell (50W & 80W Only)

Custom
White
Finish

Watts	Lumens	Watts	Lumens
60W	8,700	180W	26,100
80W	11,600	210W	30,450
100W	14,500	240W	34,800
120W	17,400	260W	37,700
135W	19,575	280W	40,600
150W	21,750	300W	43,500

Large Area Light Gen 2

- Five changable bracket options
- Type III optics standard, other optics available
- 0-10V Dimmable
- Twist-C technology
- 10Kv Surge Protector Built In

3CCT & 3 Power Selectable



Box Qty: 1



Model	Voltage	Watts	Lumens	Color	CRI
LED-ARL2-3P100W-TRI-BZ-SF-UNV	120-277V	100/80/60w	145 lm/w	30/40/50k	>80
LED-ARL2-3P100W-TRI-BZ-SA-UNV	120-277V	100/80/60w	145 lm/w	30/40/50k	>80
LED-ARL2-3P100W-TRI-BZ-TR-UNV	120-277V	100/80/60w	145 lm/w	30/40/50k	>80
LED-ARL2-3P100W-TRI-BZ-YK-UNV	120-277V	100/80/60w	145 lm/w	30/40/50k	>80
LED-ARL2-3P100W-TRI-BZ-SFA-UNV	120-277V	100/80/60w	145 lm/w	30/40/50k	>80
LED-ARL2-3P150W-TRI-BZ-SF-UNV	120-277V	150/135/120w	145 lm/w	30/40/50k	>80
LED-ARL2-3P150W-TRI-BZ-SA-UNV	120-277V	150/135/120w	145 lm/w	30/40/50k	>80
LED-ARL2-3P150W-TRI-BZ-TR-UNV	120-277V	150/135/120w	145 lm/w	30/40/50k	>80
LED-ARL2-3P150W-TRI-BZ-YK-UNV	120-277V	150/135/120w	145 lm/w	30/40/50k	>80
LED-ARL2-3P150W-TRI-BZ-SFA-UNV	120-277V	150/135/120w	145 lm/w	30/40/50k	>80
LED-ARL2-3P240W-TRI-BZ-SF-UNV	120-277V	240/210/180w	145 lm/w	30/40/50k	>80
LED-ARL2-3P240W-TRI-BZ-SA-UNV	120-277V	240/210/180w	145 lm/w	30/40/50k	>80
LED-ARL2-3P240W-TRI-BZ-TR-UNV	120-277V	240/210/180w	145 lm/w	30/40/50k	>80
LED-ARL2-3P240W-TRI-BZ-YK-UNV	120-277V	240/210/180w	145 lm/w	30/40/50k	>80
LED-ARL2-3P240W-TRI-BZ-SFA-UNV	120-277V	240/210/180w	145 lm/w	30/40/50k	>80
LED-ARL2-3P300W-TRI-BZ-SF-UNV	120-277V	300/280/260w	145 lm/w	30/40/50k	>80
LED-ARL2-3P300W-TRI-BZ-SA-UNV	120-277V	300/280/260w	145 lm/w	30/40/50k	>80
LED-ARL2-3P300W-TRI-BZ-TR-UNV	120-277V	300/280/260w	145 lm/w	30/40/50k	>80
LED-ARL2-3P300W-TRI-BZ-YK-UNV	120-277V	300/280/260w	145 lm/w	30/40/50k	>80
LED-ARL2-3P300W-TRI-BZ-SFA-UNV	120-277V	300/280/260w	145 lm/w	30/40/50k	>80

Large Area Light Gen 2 High Voltage

NEW

NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-ARL2-3P150W-TRI-BZ-SFA-HV	277-480V	150/135/120w	145 lm/w	30/40/50k	>80
LED-ARL2-3P300W-TRI-BZ-SFA-HV	277-480V	300/280/260w	145 lm/w	30/40/50k	>80

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

Accessory Model	Description
ARL2-TRI-OPTICS-T-II	Type II Optics Lens ARL2 TRI Series (25° Beam) Lens Req'd: (1 x 100w/150w) (2 x 240/300w)
ARL2-TRI-OPTICS-T-IV	Type V Optics Lens ARL2 TRI Series (90° Beam) Lens Req'd: (1 x 100w/150w) (2 x 240/300w)
ARL2-TRI-OPTICS-T-V	Type V Optics Lens ARL2 TRI Series (90° Beam) Lens Req'd: (1 x 100w/150w) (2 x 240/300w)

Accessory Model	Description
ARL2-SF	Slip Fitter Bracket
ARL2-SA	Straight Arm (Adjustable Up/Down) Bracket
ARL2-YK	Yoke Bracket
ARL2-TR	Trunnion Bracket
ARL2-SFA	Slip Fitter and Straight Arm Combo Arm
HB01DMS-A	Bi-Level Motion + Daylight Sensor
HB03R	Controller for HB03DMS-A (controls multiple)
ARL2-100/150W-SHIELD-BZ	House Side Shield for 100W and 150W ARL2
ARL2-240/300W-SHIELD-BZ	House Side Shield for 240W and 300W ARL2

Optics Lens

Slip Fitter

Straight Arm
Adjustable

Yoke

Trunnion

Slip Fitter
& Straight ArmHouse
Side Shield

Controller

Large Area Light Gen 2

- Five changable bracket options
- Type III optics standard, other optics available
- 0-10V Dimmable
- Twist-C technology
- 10Kv Surge Protector Built In

Single CCT



Box Qty: 1

Model	Voltage	Watts	Lumens	Color	CRI
LED-ARL2-150W-50K-BZ-SF-UNV	120-277V	150w	21,750	5000k	>80
LED-ARL2-150W-50K-BZ-SA-UNV	120-277V	150w	21,750	5000k	>80
LED-ARL2-150W-50K-BZ-TR-UNV	120-277V	150w	21,750	5000k	>80
LED-ARL2-150W-50K-BZ-YK-UNV	120-277V	150w	21,750	5000k	>80
LED-ARL2-150W-50K-BZ-SFA-UNV	120-277V	150w	21,750	5000k	>80
LED-ARL2-240W-50K-BZ-SF-UNV	120-277V	240w	33,790	5000k	>80
LED-ARL2-240W-50K-BZ-SA-UNV	120-277V	240w	33,790	5000k	>80
LED-ARL2-240W-50K-BZ-TR-UNV	120-277V	240w	33,790	5000k	>80
LED-ARL2-240W-50K-BZ-YK-UNV	120-277V	240w	33,790	5000k	>80
LED-ARL2-240W-50K-BZ-SFA-UNV	120-277V	240w	33,790	5000k	>80
LED-ARL2-300W-50K-BZ-SF-UNV	120-277V	300w	40,195	5000k	>80
LED-ARL2-300W-50K-BZ-SA-UNV	120-277V	300w	40,195	5000k	>80
LED-ARL2-300W-50K-BZ-TR-UNV	120-277V	300w	40,195	5000k	>80
LED-ARL2-300W-50K-BZ-YK-UNV	120-277V	300w	40,195	5000k	>80
LED-ARL2-300W-50K-BZ-SFA-UNV	120-277V	300w	40,195	5000k	>80

Large Area Light Gen 2 High Voltage

Model	Voltage	Watts	Lumens	Color	CRI
LED-ARL2-150W-50K-BZ-SFA-HV	277-480V	150w	21,750	5000k	>80
LED-ARL2-240W-50K-BZ-SFA-HV	277-480V	240w	34,800	5000k	>80
LED-ARL2-300W-50K-BZ-SFA-HV	277-480V	300w	43,500	5000k	>80

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Accessory Model	Description
ARL2-TRI-OPTICS-T-II	Type II Optics Lens ARL2 TRI Series (25° Beam) Lens Req'd: (1 x 100w/150w)(2 x 240/300w)
ARL2-TRI-OPTICS-T-IV	Type V Optics Lens ARL2 TRI Series (90°Beam) Lens Req'd: (1 x 100w/150w)(2 x 240/300w)
ARL2-TRI-OPTICS-T-V	Type V Optics Lens ARL2 TRI Series (90°Beam) Lens Req'd: (1 x 100w/150w)(2 x 240/300w)

Accessory Model	Description
ARL2-SF	Slip Fitter Bracket
ARL2-SA	Straight Arm (Adjustable Up/Down) Bracket
ARL2-YK	Yoke Bracket
ARL2-TR	Trunnion Bracket
ARL2-SFA	Slip Fitter and Straight Arm Combo Arm
HB01DMS-A	Bi-Level Motion + Daylight Sensor
HB03R	Controller for HB03DMS-A (controls multiple)
ARL2-100/150W-SHIELD-BZ	House Side Shield for 100W and 150W ARL2
ARL2-240/300W-SHIELD-BZ	House Side Shield for 240W and 300W ARL2

Pre-Instaled Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (Internal 20W)
Add '-PC' to model #	Photocell



Custom Gray Finish

-SA



-SF



-TR



Custom Green Finish

-YK



Optics Lens



Slip Fitter



Straight Arm Adjustable




Yoke



Trunnion



Slip Fitter & Straight Arm

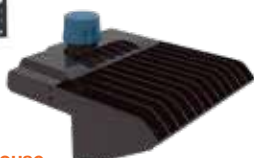

House Side Shield



Controller

Bullet Flood Knuckle Mount

- 40° Beam Spread
- All bracket options fully adjust up and down
- IP65 Wet Location Rated
- 1/2" Knuckle Mount Included
- Optics on lens allows for consistent beam angle
- Bracket allows for full adjustability

3CCT Selectable

ETA: 11/2022

NEW

NEW

NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-BLT-3P25W-TRI-BZ-KN-UNV	120-277V	15/20/25w	1875/2500/3125	30/40/50k	>80
LED-BLT-3P25W-TRI-WH-KN-UNV	120-277V	15/20/25w	1875/2500/3125	30/40/50k	>80
LED-BLT-3P25W-TRI-BZ-TR-UNV	120-277V	15/20/25w	1875/2500/3125	30/40/50k	>80



Box Qty: 12



Box Qty: 12

Model	Voltage	Watts	Lumens	Color	CRI
LED-BLT-15W-30K-BZ-KN-UNV	120-277V	15w	1,800	3000k	>80
LED-BLT-15W-50K-BZ-KN-UNV	120-277V	15w	1,800	5000k	>80
LED-BLT-28W-30K-BZ-KN-UNV	120-277V	28w	3,500	3000k	>80
LED-BLT-28W-50K-BZ-KN-UNV	120-277V	28w	3,500	5000k	>80
LED-BLT-42W-30K-BZ-KN-UNV	120-277V	42w	5,250	3000k	>80
LED-BLT-42W-50K-BZ-KN-UNV	120-277V	42w	5,250	5000k	>80

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.



Post Top Fixture

- Foldable design for easy stocking and transportation
- Dark sky compliant

3CCT Selectable



Box Qty: 1



Model	Voltage	Watts	Lumens	Color	CRI
LED-PST-35W-TRI-BZ	120-277V	35w	4,550	30/40/50k	>80
LED-PST-55W-TRI-BZ	120-277V	55w	7,150	30/40/50k	>80
LED-PST-75W-TRI-BZ	120-277V	75w	9,750	30/40/50k	>80

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (Internal 15W)
Add '-BMS' to model #	Bi-Level Motion + Daylight Sensor
Add '-PC' to model #	Photocell
Add '-HV' to model #	High Voltage (Internal 480V)



Area Barn Dusk to Dawn Flood Light

- Dusk to dawn photocell sensor included
- 3 Selectable color temps.: 30/40/50K
- High luminous efficacy: up to 155lm/W

3CCT Selectable



Box Qty: 2



Model	Voltage	Watts	Lumens	Color	CRI
LED-BDD-40W-TRI-SLV-PC	120-277V	40w	6,200	30/40/50k	>80
LED-BDD-40W-TRI-BZ-PC	120-277V	40w	6,200	30/40/50k	>80
LED-BDD-60W-TRI-SLV-PC	120-277V	60w	9,300	30/40/50k	>80
LED-BDD-60W-TRI-BZ-PC	120-277V	60w	9,300	30/40/50k	>80

Accessory Model	Description
BDD-JBX-SLV	Silver J-Box Installation Cover
BDD-JBX-BZ	Bronze J-Box Installation Cover
TN-L-POLE	Pole Installation Tenon Bracket

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.



-SLV




-BZ



J-Box Installation Cover

Available in Silver and Bronze

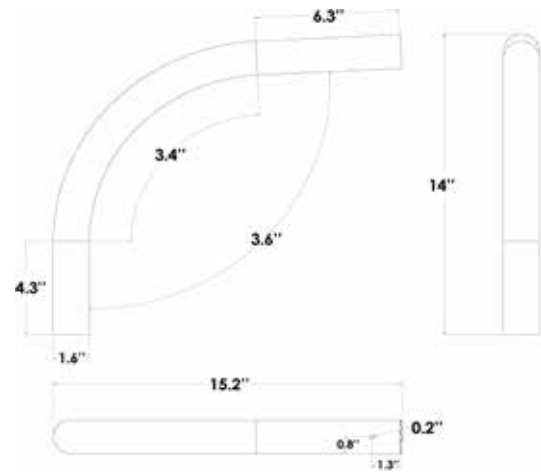

Tenon Bracket Dimensions





Sports Light Fixture

- LED driver can be remote mounted away from fixture for easy maintenance
- All fixtures includes a yoke mount. Slip fitter can be added to the fixture
- Shield is included with the fixture
- Fixture can be adjusted up or down
- Fixture is stocked in black finish
- Free lighting layouts are available
- Product can be customized but with a longer lead time
- Perfect for stadiums and outdoor fields

3 Power Selectable

5-10V DIMMABLE IP67 RATED DLC LISTED cUL US LISTED **Box Qty: 1**

Watts	Lumens
300W	39,000
450W	58,500
600W	78,000
800W	124,000
1000W	130,000
1200W	156,000

	Model	Voltage	Watts	Lumens	Color	CRI
NEW	LED-SPL-3P600W-50K-YK-UNV-	120-277V	600/450/300w	130lm/w	5000k	>80
NEW	LED-SPL-3P1200W-50K-YK-UNV-	120-277V	1200/1000/800w	130lm/w	5000k	>80

Accessory Model	Description
SPL-480V-DRIVER	347-480V Adder for Sports Light Fixture (600W: Qty 1 Required 1200W: Qty 1 Required)
SPL-SF	Slip Fitter for Sports Light Fixture
SPL-LSR	Laser Aiming Device



ROUND



Round Bollard Base

- 5 different head options
- Round Version: Base and head sold separately
- Square Version: Head and base sold as a set

3 Power Selectable/Order Your Base



Box Qty: 1

ETA: 7/2022

	Model	Voltage	Watts	Lumens	CRI
NEW	BLD-3P22-RD-UNV-BZ-22	120-277V	22/16/12w	2,860/2,080/1,560	>80
NEW	BLD-3P22-RD-UNV-BL-22	120-277V	22/16/12w	2,860/2,080/1,560	>80
NEW	BLD-3P22-RD-UNV-BZ-44	120-277V	22/16/12w	2,860/2,080/1,560	>80
NEW	BLD-3P22-RD-UNV-BL-44	120-277V	22/16/12w	2,860/2,080/1,560	>80

Round Bollard Head

5CCT Selectable/Order Your Head



Box Qty: 4

ETA: 7/2022

	Model	Voltage	Watts	Lumens	Color	CRI
NEW	LED-BLD-RD-5CCT-CN-DM-	120-277V	22/16/12W	2,860/2,080/1,563	27/30/35/40/50K	>80
NEW	LED-BLD-RD-5CCT-CN-DM-	120-277V	22/16/12W	2,860/2,080/1,566	27/30/35/40/50K	>80
NEW	LED-BLD-RD-5CCT-LV-DM-BZ	120-277V	22/16/12W	2,860/2,080/1,565	27/30/35/40/50K	>80
NEW	LED-BLD-RD-5CCT-LV-DM-BL	120-277V	22/16/12W	2,860/2,080/1,566	27/30/35/40/50K	>80
NEW	LED-BLD-RD-5CCT-CN-FL-BZ	120-277V	22/16/12W	2,860/2,080/1,564	27/30/35/40/50K	>80
NEW	LED-BLD-RD-5CCT-CN-FL-BL	120-277V	22/16/12W	2,860/2,080/1,566	27/30/35/40/50K	>80
NEW	LED-BLD-RD-5CCT-LV-FL-BZ	120-277V	22/16/12W	2,860/2,080/1,566	27/30/35/40/50K	>80
NEW	LED-BLD-RD-5CCT-LV-FL-BL	120-277V	22/16/12W	2,860/2,080/1,566	27/30/35/40/50K	>80

Factory Installed Frosted Lens Available: BLD-RD-FL

Square Bollard Base & Head Included



Box Qty: 1

ETA: 7/2022

	Model	Voltage	Watts	Lumens	Color	CRI
NEW	LED-BLD-3P22-SQ-5CCT-UNV-CN-FL-BZ-44	120-277V	22/16/12w	2,860/2,080/1,560	27/30/35/40/50K	>80
NEW	LED-BLD-3P22-SQ-5CCT-UNV-CN-FL-BL-44	120-277V	22/16/12w	2,860/2,080/1,560	27/30/35/40/50K	>80

SQUARE



SQUARE FLAT



CONE

ROUND DOME



LOUVER



CONE



FROSTED LENS



CONE LENS LED

ROUND FLAT



LOUVER



CONE



FROSTED LENS



LOUVER LENS LED



BL-BLACK

*Custom finishes include black, white and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Pre-Instaled Accessory	Description
Add '-BMS' to model #	Bi-Level Motion + Daylight Sensor
Add '-EMB' to model #	Emergency Backup (Internal 15W)
Add '-PC' to model #	Photocell






Qube Extendable LED Aquarium Light

- Extendable
- 3 Light Modes
- 5 Levels of Brightness
- 3 / 6 / 12 Hour Timer
- 20,000 Lifetime Hours
- Waterproof Sealant
- Acrylic Baffle

Suggest for Fish Tank
9W = 12" - 18"
14W = 18" - 24"
16W = 24" - 30"
20W = 30" - 36"
25W = 36" - 46"
32W = 46" - 52"

Box Qty: 1

	Model	Voltage	Watts	Lumens	Color	CRI
NEW	QB-AQUA-12I-9W-FS	100-240V	9w	650	Red, Blue, 6500K	>80
NEW	QB-AQUA-16I-14W-FS	100-240V	14w	850	Red, Blue, 6500K	>80
NEW	QB-AQUA-22I-16W-FS	100-240V	16w	920	Red, Blue, 6500K	>80
NEW	QB-AQUA-28I-20W-FS	100-240V	20w	1,250	Red, Blue, 6500K	>80
NEW	QB-AQUA-36I-25W-FS	100-240V	25w	1,600	Red, Blue, 6500K	>80
NEW	QB-AQUA-46I-32W-FS	100-240V	32w	1,800	Red, Blue, 6500K	>80

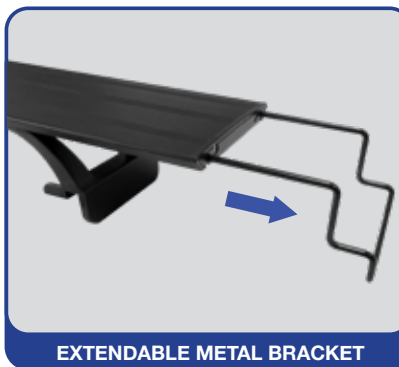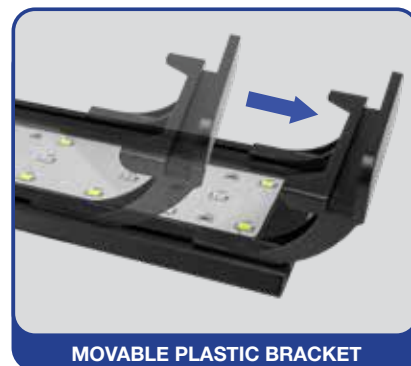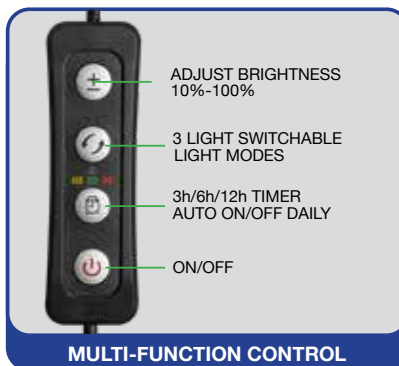

3 LIGHT MODES & 5 LEVELS OF BRIGHTNESS



Qube LED Commercial Growlight

FULL SPECTRUM


- Adjust power for any stage of plant life
- Linkable connector to daisy chain multiple lights included
- 10 foot power cord
- 6 foot suspension kit included
- Energy saving LED technology
- Features 8 LED bars compared to industry standard of 6
- Ideal for cannabis growing use
- 0-10V Dimmable to work with grow light control systems

0-10V DIMMABLE IP65 RATED DLC LISTED CULUS LISTED **Box Qty: 1**

	Model	Voltage	Watts	Lumens	Color	CRI
NEW	QB-FSG-8B-7T660W	120-277V	660w	1716 µMols / 2.6µMol/J	Full Spectrum	>80
NEW	QB-FSG-8B-7T960W	120-277V	960w	2496 µMols / 2.6µMol/J	Full Spectrum	>80

Growlight Control System ETA: 4Q 2022

- Control up to 100 fixtures in 10 unit series
- Controller reads temperature and humidity
- Short range bluetooth control via mobile app
- Multi-stage timing function which can simulate sunrise and sunset

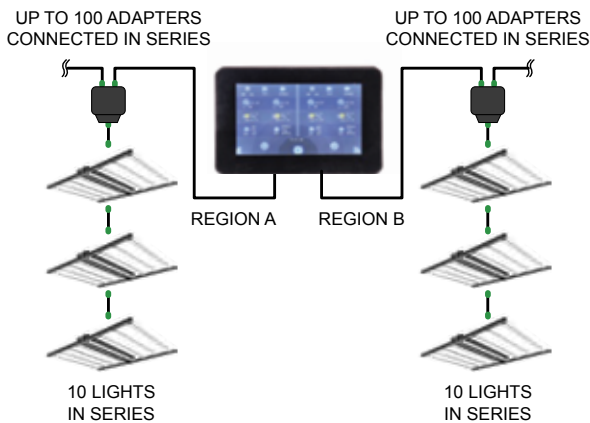

- ⚡ INPUT: AUTO 120-277V
- ☁ IP65 RATED
- 📷 FULL SPECTRUM LED
- 🔌 BUILT-IN POWER CONTROL KNOB
- 🔘 0-10V DIMMABLE FOR CONTROL COMPATIBILITY



Twist-C Technology Linear Highbay

- 0-10V dimmable integrated driver
- Optional internally-mounted motion sensor
- High voltage (300-480V) driver available

3 Power Selectable with Twist-C Technology

Box Qty:
2ft: 2
4ft: 1



Watts	Lumens
60W	8,700
80W	11,600
110W	15,950
125W	18,125
150W	21,750
165W	23,925
200W	29,000
220W	31,900
260W	37,700
290W	42,050
320W	46,400

IN STOCK

NEW

NEW

NEW

NEW

NEW

NEW

NEW

NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-LHB-2FT-3P110-F-40K-UNV	120-277V	110/80/60w	145lm/w	4000k	>80
LED-LHB-2FT-3P110-F-50K-UNV	120-277V	110/80/60w	145lm/w	5000k	>80
LED-LHB-2FT-3P165-F-40K-UNV	120-277V	165/150/125w	145lm/w	4000k	>80
LED-LHB-2FT-3P165-F-50K-UNV	120-277V	165/150/125w	145lm/w	5000k	>80
LED-LHB-4FT-3P220W-F-40K-UNV	120-277V	220/200/180w	145lm/w	4000k	>80
LED-LHB-4FT-3P220W-F-50K-UNV	120-277V	220/200/180w	145lm/w	5000k	>80
LED-LHB-4FT-3P320W-F-40K-UNV	120-277V	320/290/260w	145lm/w	4000k	>80
LED-LHB-4FT-3P320W-F-50K-UNV	120-277V	320/290/260w	145lm/w	5000k	>80



3 Power Selectable - 6' Whip Included Final Production



Box Qty: 2


Model	Voltage	Watts	Lumens	Color	CRI
LED-LHB-2FT-3M110-F-50K-6'	120-277V	110/80/60w	145lm/w	5000k	>80
LED-LHB-2FT-3M165-F-50K	120-277V	165/150/125w	145lm/w	5000k	>80
LED-LHB-2FT-3M165-F-50K-6'-BMS	120-277V	165/150/125w	145lm/w	4000k	>80

Single Power Final Production



Box Qty: 1

Model	Voltage	Watts	Lumens	Color	CRI
LED-LHB-4FT-220W-WH-F-40K	120-277V	220w	29,980	4000k	>80
LED-LHB-4FT-220W-WH-F--MS-40K	120-277V	220w	29,980	4000k	>80

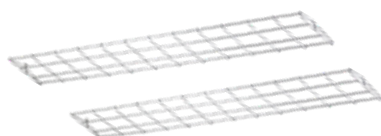

Wire Guards




Motion Sensor



HB03R Controller



Emergency Backup

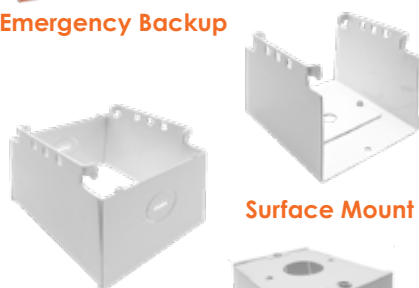

Surface Mount

Pendant Mount 2ft



Pendant Mount 4ft

Pre-installed Accessory Model	Description
Add '-BMS' to model #	Bi-Level Motion + Daylight Sensor
Add '-EMB' to model #	Emergency Backup (External 15W)
Add '-HV' to model #	347-480V Driver for Fixture
Add '-SBT' to model #	Bluetooth Control

Accessory Model	Description
3Whip-(#)ft - Specify ft in place of #	3 Wire Whip Hot, Neutral, Ground
5Whip-(#)ft - Specify ft in place of #	5 Wire Whip Hot, Neutral, Ground, Dim
Stem Pendant	Highbay Mount
HB01DMS-A	Bi-Level Motion + Daylight Sensor
HB03R	Controller for HD406VRH-D-WH (Controls Multiple)
LHB-2FT-WG	Linear Highbay Wire Guard 2ft
LHB-4FT-WG	Linear Highbay Wire Guard 4ft
LHB-2FT-CLENS	Linear Highbay Clear Lens 2ft
LHB-4FT-CLENS	Linear Highbay Clear Lens 4ft
LHB-2FT-SM	Linear Highbay Surface Mount
LHB-4FT-SM	Linear Highbay Surface Mount
LHB-2FT-PDM	Pendant Mount for 2' LHB
LHB-4FT-PDM	Pendant Mount for 4' LHB



Watts	Lumens
60W	7,800
180W	23,400
210W	27,300

Round UFO Highbay

- 0-10V dimmable integrated driver
- Durable die-cast aluminum housing
- IP-67 fully waterproof for hosing down
- Twist-C technology

3CCT & 3 Power Selectable w/ 6' Whip



Box Qty: 1

IN STOCK

NEW

NEW

NEW

NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-RHB3-3P150-CTRI-BL-6'	120-277V	150/100/60w	130lm/w	50/40/35k	>80
LED-RHB3-3P150-CTRI-WH-6'	120-277V	150/100/60w	130lm/w	50/40/35k	>80
LED-RHB3-3P240-CTRI-BL-6'	120-277V	240/210/180w	130lm/w	50/40/35k	>80
LED-RHB3-3P240-CTRI-WH-6'	120-277V	240/210/180w	130lm/w	50/40/35k	>80



Single CCT w/ 6' Whip

Model	Voltage	Watts	Lumens	Color	CRI
LED-RHB3-100W-40K-BL-6	120-277V	100w	14,000	4000k	>80
LED-RHB3-100W-50K-BL-6	120-277V	100w	14,000	5000k	>80
LED-RHB3-150W-40K-BL-6	120-277V	150w	21,000	4000k	>80
LED-RHB3-150W-50K-BL-6	120-277V	150w	21,000	5000k	>80
LED-RHB3-240W-40K-BL-6	120-277V	240w	33,600	4000k	>80
LED-RHB3-240W-50K-BL-6	120-277V	240w	33,600	5000k	>80
LED-RHB3-100W-40K-WH-6	120-277V	100w	14,000	4000k	>80
LED-RHB3-100W-50K-WH-6	120-277V	100w	14,000	5000k	>80
LED-RHB3-150W-40K-WH-6	120-277V	150w	21,000	4000k	>80
LED-RHB3-150W-50K-WH-6	120-277V	150w	21,000	5000k	>80
LED-RHB3-240W-40K-WH-6	120-277V	240w	33,600	4000k	>80
LED-RHB3-240W-50K-WH-6	120-277V	240w	33,600	5000k	>80



Aluminum Reflector (90°)



Surface Mount Yoke



Pendant Emergency Backup



UFO Emergency Test Controller

Pre-installed Accessory Model	Description
Add '-BMS' to model #	Bi-Level Motion Sensor
Add '-EMB' to model #	Emergency Backup
Add '-HV' to model #	347-480V Driver for Fixture
Add '-WHIP' to model #	Optional Longer Whips Are Available

Accessory Model	Description
RHB-PDM-HK	Pendant Mount Hook 1/2" Pipe
RHB3-100/150-WG	100/150w Wire Guard
RHB3-240-WG	240w Wire Guard
RHB-100/150-SM	100/150w Surface Mount
RHB-240-SM	240w Surface Mount
RHB3-100/150-ALM-RF-90	Aluminum Reflector 90°
RHB3-240-ALM-RF-90	Aluminum Reflector 90°
RHB-100/150-ACR-RF	Acrylic Reflector 90°
RHB-240-ACR-RF	Acrylic Reflector 90°
RHB-UNV-ACR-BC	Acrylic Bottom Cover 90°
LED-EMB-30W-HV-UFO	Emergency Back Up For Internal Drivers- High Voltage 170V Output Includes Round UFO HighBay EM Kit Uninstalled Price
UFO-TEST-CTR	Test button remote control for HV-UFO



Acrylic Reflector (90°)



Acrylic Reflector Bottom Cover



Pendant Mount



HB01DMS-A
Bi Level Motion Sensor
and Daylight Harvesting Sensor



HB03R
Controller for
HB01DMS-A



-BZ



-WH



HD03R
Controller

Square Slim Canopy Light

- Rugged powder-coated die-cast aluminum housing
- Integrated heatsink
- Silicone seals inhibit moisture ingress

3CCT & 3 Power Selectable



Box Qty: 2




Model	Voltage	Watts	Lumens	Color	CRI
LED-SCP-3P60-TRI-WH	120-277V	60/40/25w	145lm/w	30/40/50k	>80
LED-SCP-3P60-TRI-BZ	120-277V	60/40/25w	145lm/w	30/40/50k	>80
LED-SCP-3P60-TRI-WH-BMS	120-277V	60/40/25w	145lm/w	30/40/50k	>80
LED-SCP-3P60-TRI-BZ-BMS	120-277V	60/40/25w	145lm/w	30/40/50k	>80

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (Internal 20W)
Add '-SBT' to model #	Bluetooth Control
Add '-BMS' to model #	Bi-Level Motion + Daylight Sensor
Add '-HV' to model #	347-480V Driver for Fixture

Accessory Model	Description
HB02DMS	Bi Level Motion + Daylight Sensor Compatible with SCP (uninstalled)
HD03R	Remote for HD Sensors
HD05R	Remote for HD Sensors w/ Screen



Large Square Slim Gas Station Canopy Light

Single CCT



Box Qty: 2

Model	Voltage	Watts	Lumens	Color	CRI
LED-CP-PH-150W-DL	120-277V	150w	18,000lm	5000k	>80

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

Accessory Model	Description
24x24-GF-CP2	24x24 Goof Ring




-BZ

-WH

HB03R
Controller

HB01DMS-A
Sensor

Round Slim Canopy Light

- Wattage selectable and CCT switchable (30/40/50K color temps avail.)
- Rugged powder-coated die-cast aluminum housing
- Silicone seals inhibit moisture ingress
- Twist-C technology

3CCT & 5 Power Selectable


Box Qty: 2

Model	Voltage	Watts	Lumens	Color	CRI
LED-RCP-5P55W-TRI-WH	120-277V	55/47/38.5/30/22w	145lm/w	30/40/50k	>80
LED-RCP-5P55W-TRI-BZ	120-277V	55/47/38.5/30/22w	145lm/w	30/40/50k	>80
LED-RCP-5P100W-TRI-WH	120-277V	100/90/80/70/60w	145lm/w	30/40/50k	>80
LED-RCP-5P100W-TRI-BZ	120-277V	100/90/80/70/60w	145lm/w	30/40/50k	>80

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.



Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (Internal 20W)
Add '-BMS' to model #	Bi-Level Motion + Daylight Sensor
Add '-HV' to model #	347-480V Driver for Fixture

Accessory Model	Description
HB03R	Remote for HD Sensors
HB01DMS-A	Motion+Daylight Sensor (HB03R Remote Req)





1x4 Panel - Edge Lit

- LiFud-brand flicker-free integrated driver, 0-10V dimmable
- Edge-lit design provides diffuse, shadowless light
- No UV, no RF, non-yellowing PMMA lens
- Powder-coated white frame



Inner Box Qty: 2
Master Box: 4
Must Purchase in
Box Quantity
to Avoid Breakage

Model	Voltage	Watts	Lumens	Color	CRI
LED-PNL-1x4-40W-50K-LF	120/277V	40w	4,600	5000k	>80
LED-PNL-1x4-40W-40K-LF	120/277V	40w	4,600	4000k	>80
LED-PNL-1x4-40W-35K-LF	120/277V	40w	4,600	3500K	>80

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 15W)



2x2 Panel - Edge Lit



Inner Box Qty: 2
Master Box: 4
Must Purchase in
Box Quantity
to Avoid Breakage

Model	Voltage	Watts	Lumens	Color	CRI
LED-PNL-2x2-40W-50K-LF	120-277V	40w	4,600	5000k	>80
LED-PNL-2x2-40W-40K-LF	120-277V	40w	4,600	4000k	>80
LED-PNL-2x2-40W-35K-LF	120-277V	40w	4,600	3500K	>80
LED-PNL-2x2-40W-30K-LF	120-277V	40w	4,600	3000K	>80

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 15W)



2x4 Panel - Edge Lit



Inner Box Qty: 2
Master Box: 4
Must Purchase in
Box Quantity
to Avoid Breakage

Model	Voltage	Watts	Lumens	Color	CRI
LED-PNL-2x4-50W-50K-LF	120-277V	50w	5,750	5000k	>80
LED-PNL-2x4-50W-40K-LF	120-277V	50w	5,750	4000k	>80
LED-PNL-2x4-50W-35K-LF	120-277V	50w	5,750	3500k	>80
LED-PNL-2x4-50W-30K-LF	120-277V	50w	5,750	3000k	>80
LED-PNL-2x4-60W-50K-LF	120-277V	60w	6,900	5000k	>80
LED-PNL-2x4-60W-40K-LF	120-277V	60w	6,900	4000k	>80
LED-PNL-2x4-72W-50K-LF	120-277V	72w	8,280	5000k	>80
LED-PNL-2x4-72W-40K-LF	120-277V	72w	8,280	4000k	>80

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 15W)

1x4 Panel - BackLit

- Flicker-free integrated driver, 0-10V dimmable
- Backlit design provides diffuse, shadowless light
- No UV, no RF, non-yellowing PMMA lens
- Powder-coated white frame

4CCT Power Selectable



Box Quantity: 4
Must Purchase in
Box Quantity
to Avoid Breakage



NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-BPL-1x4-3M40-4CCT	120/277V	20/30/40w	4400/3300/2200	30/40/50k	>80

3CCT & 3 Power Selectable



Box Qty: 4



NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-BPL-1x4-3M40-TRI	120/277V	20/30/40w	4400/3300/2200	30/40/50k	>80



Box Qty: 4

Final Production

Model	Voltage	Watts	Lumens	Color	CRI
LED-BPL-1x4-20W-35K-HL	120/277V	20w	2,600	3500k	>80
LED-BPL-1x4-20W-40K-HL	120/277V	20w	2,600	4000k	>80
LED-BPL-1x4-30W-50K-HL	120/277V	30w	3,900	5000k	>80

Final Production

Final Production

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 15W)
Add '-BMS' to model #	Bi-Level Motion + Daylight Sensor
3Whip-(#)ft - Specify ft in place of #	3 Wire Whip Hot, Neutral, Ground
5Whip-(#)ft - Specify ft in place of #	5 Wire Whip Hot, Neutral, Ground, Dim

2x2 Panel - BackLit

4CCT Power Selectable



Box Quantity: 4
Must Purchase in
Box Quantity
to Avoid Breakage



NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-BPL-2x2-3M40-4CCT	120/277V	20/30/40w	4400/3300/2200	30/40/50k	>80

3CCT & 3 Power Selectable



Box Qty: 4



NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-BPL-2x2-3M40-TRI	120/277V	40/30/20w	4400/3300/2200	30/40/50k	>80



Box Qty: 4

Final Production

Model	Voltage	Watts	Lumens	Color	CRI
LED-BPL-2x2-20W-35K-HL	120/277V	20w	2,600	3500k	>80
LED-BPL-2x2-30W-50K-HL	120/277V	30w	3,900	5000k	>80

Final Production

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 15W)
Add '-BMS' to model #	Bi-Level Motion + Daylight Sensor
3Whip-(#)ft - Specify ft in place of #	3 Wire Whip Hot, Neutral, Ground
5Whip-(#)ft - Specify ft in place of #	5 Wire Whip Hot, Neutral, Ground, Dim

2x4 Panel - BackLit

4CCT Power Selectable



Box Quantity: 4
Must Purchase in
Box Quantity
to Avoid Breakage



NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-BPL-2x4-3M40-4CCT	120/277V	20/30/40w	4400/3300/2200	30/40/50k	>80

3CCT & 3 Power Selectable



Box Qty: 4



NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-BPL-2x4-3M50-4CCT	120/277V	50/40/30w	5500/4400/3300	30/40/50k	>80

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 15W)
Add '-BMS' to model #	Bi-Level Motion + Daylight Sensor
3Whip-(#)ft - Specify ft in place of #	3 Wire Whip Hot, Neutral, Ground
5Whip-(#)ft - Specify ft in place of #	5 Wire Whip Hot, Neutral, Ground, Dim




Lumen Selection



Watt Selection


Surface Mount Frame

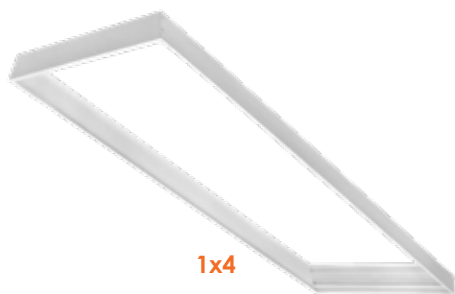

1x4




2x2

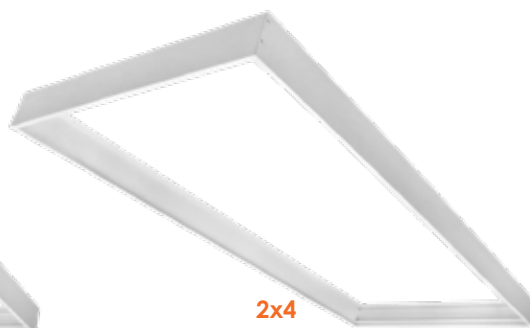


2x4


Flange (Drywall) Kit

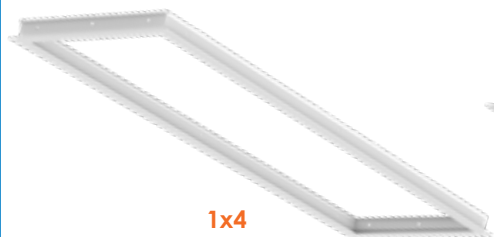

1x4

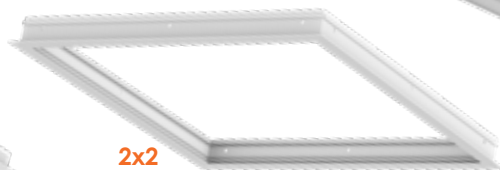

2x2

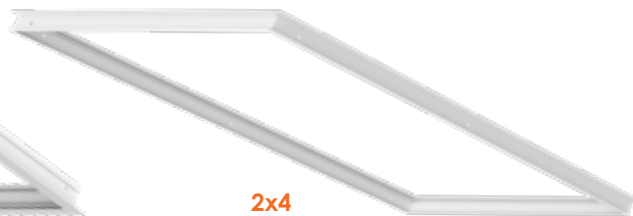

2x4



Emergency Backup



Earthquake Hook



Suspension Kit

1x4 / 2x2 / 2x4 Panel Accessories

Accessories also work with other 2x2 and 2x2 fixtures (SM only compatible with edge-lit panels)

Model	Description
LED-PNL-1X4-SM	Surface Mount Frame 1x4 (Edge-lit and BPL Panels only)
LED-PNL-2X2-SM	Surface Mount Frame 2x2 (Edge-lit and BPL Panels only)
LED-PNL-2X4-SM	Surface Mount Frame 2x4 (Edge-lit and BPL Panels only)
LED-PNL-1X4-FLNG	Flange (Drywall) Kit for Panels for all 1x4 fixtures
LED-PNL-2X2-FLNG	Flange (Drywall) Kit for Panels for all 2x2 fixtures
LED-PNL-2X4-FLNG	Flange (Drywall) Kit for Panels for all 2x4 fixtures
LED-PNL-1X4-SK	Suspension Kit for Panels 1x4
LED-PNL-2X2-SK	Suspension Kit for Panels 2x2
LED-PNL-2X4-SK	Suspension Kit for Panels 2x4
LED-PNL-HK	Earthquake Hook
2X2-SM-3.5"	2x2 Surface Mount Kit 3.5" Height for all panels and troffers
2X4-SM-3.5"	2x4 Surface Mount Kit 3.5" Height for all panels and troffers
3Whip-(#)ft - Specify ft in place of #	3 Wire Whip Hot, Neutral, Ground
5Whip-(#)ft - Specify ft in place of #	5 Wire Whip Hot, Neutral, Ground, Dim
480V-DRIVER	347-480V Driver for Fixture

1x1 / 1x2 LED Surface Mount Panels

- Internal flicker-free triac-dimmable driver
- Included surface mount bracket mounts directly to j-box
- Edge-lit design provides diffuse, shadowless light
- Only 1" Thick in Size

5CCT Selectable





Box Qty: 4

Model	Voltage	Watts	Lumens	Color	CRI
LED-PNL-SM-1X1-18W-5CCT	120V	18w	1,500	27/30/35/40/50K	>80
LED-PNL-SM-1X2-22W-5CCT	120V	22w	2,000	27/30/35/40/50K	>80



Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 25W)

*Custom finishes include bronze, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

1x4 / 2x2 / 2x4 LED Surface Mount Panels

- Internal flicker-free 0-10V dimmable driver
- Included surface mount bracket mounts directly to 30 or 40 j-box
- Edge-lit design provides diffuse, shadowless light
- Only 1" thick in size!

3CCT Selectable






Box Qty: 4

Model	Voltage	Watts	Lumens	Color	CRI
LED-PNL-SM-1X4-40W-TRI	120/277v	40w	4,000	30/40/50k	>80
LED-PNL-SM-2X2-40W-TRI	120/277v	40w	4,000	30/40/50k	>80
LED-PNL-SM-2X4-50W-TRI	120/277v	50w	5,000	30/40/50k	>80




Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 25W)


*Custom finishes include bronze, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

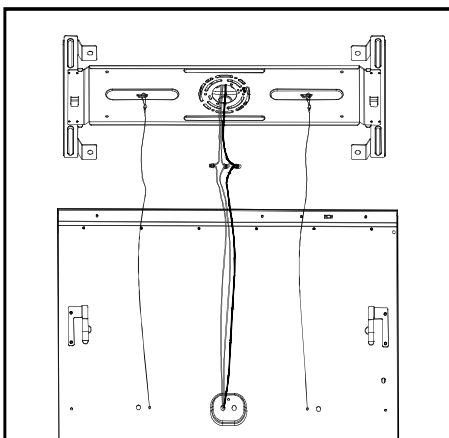

Once wiring has been installed into the fixture, identify and straighten out the 3 wires coming from the fixture to the junction box wires.

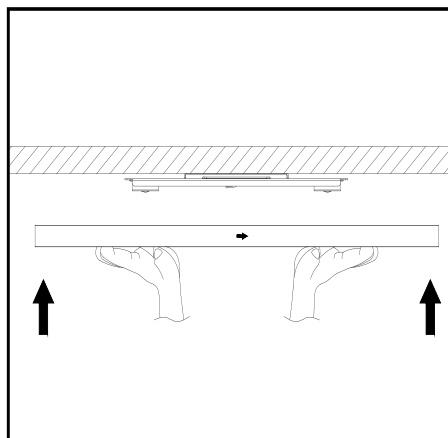

Put the mounting bracket into the panel light first, then aim the shrapnel on the back of the lamp, and put the panel light up.

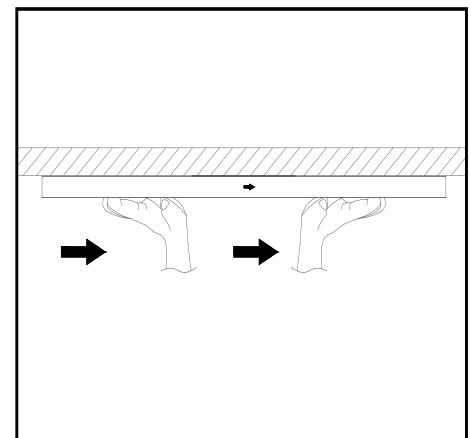

The mounting bracket is pre-mounted to the shrapnel side of the panel light, simply lift and push flush with the ceiling moving accordingly to the direction indicated by the panel light.

2x2 LED Center Basket Troffer

- Flicker-free 0-10V dimmable internal driver
- Up to 56% higher efficiency than fluorescent
- PC body reduces risk of damage in transit and on jobsite
- Variable color temp. & brightness model available

Box Quantity: 2
Must Purchase in
Box Quantity
to Avoid Breakage

4CCT & 4 Power Selectable



Model	Voltage	Watts	Lumens	Color	CRI
LED-CBT-2X2-PC-CCT-HL	120-277V	35/30/25/20w	130lm/w	50/40/35/30k	>80
LED-CBT-2X2-PC-CCT-HL-90CRI	120-277V	35/30/25/20w	130lm/w	50/40/35/30k	>90



Single CCT

Watts	Lumens
20W	2,600
25W	3,250
30W	3,900

Model	Voltage	Watts	Lumens	Color	CRI
LED-CBT-2X2-28W-50K-HL	120-277V	28w	3,640	5000k	>80
LED-CBT-2X2-28W-40K-HL	120-277V	28w	3,640	4000k	>80
LED-CBT-2X2-28W-35K-HL	120-277V	28w	3,640	3500k	>80
LED-CBT-2X2-35W-50K-HL	120-277V	35w	4,550	5000k	>80
LED-CBT-2X2-35W-40K-HL	120-277V	35w	4,550	4000k	>80
LED-CBT-2X2-35W-35K-HL	120-277V	35w	4,550	3500k	>80

2x4 LED Center Basket Troffer

4CCT & 4 Power Selectable



Box Quantity: 2
Must Purchase in
Box Quantity
to Avoid Breakage

Model	Voltage	Watts	Lumens	Color	CRI
LED-CBT-2X4-PC-CCT-HL	120-277V	50/45/40/35w	130lm/w	50/40/35/30k	>80
LED-CBT-2X4-PC-CCT-HL-90CRI	120-277V	50/45/40/35w	130lm/w	50/40/35/30k	>90



Single CCT

Watts	Lumens
40W	5,200
45W	5,850

Model	Voltage	Watts	Lumens	Color	CRI
LED-CBT-2X4-35W-50K-HL	120-277V	35w	4,550	5000k	>80
LED-CBT-2X4-35W-40K-HL	120-277V	35w	4,550	4000k	>80
LED-CBT-2X4-35W-35K-HL	120-277V	35w	4,550	3500k	>80
LED-CBT-2X4-50W-50K-HL	120-277V	50w	6,500	5000k	>80
LED-CBT-2X4-50W-40K-HL	120-277V	50w	6,500	4000k	>80
LED-CBT-2X4-50W-35K-HL	120-277V	50w	6,500	3500k	>80

2x2 LED Center Basket Troffer

- Flicker-free 0-10V dimmable internal driver
- Metal body reduces risk of damage in transit and on jobsite
- Up to 56% higher efficiency than fluorescent
- Variable color temp. & brightness model available

Box Quantity: 2
Must Purchase in
Box Quantity
to Avoid Breakage

4CCT & 3 Power Selectable



NEW

NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-CBT-2X2-3P35-4CCT	120-277V	35/28/20w	5,200/3,900/2,600	50/40/35/30k	>80
LED-CBT-2X2-3P35-4CCT-90CRI	120-277V	35/28/20w	5,200/3,900/2,600	50/40/35/30k	>90



2x4 LED Center Basket Troffer

4CCT & 3 Power Selectable

NEW

NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-CBT-2X4-3P50-4CCT	120-277V	50/40/30w	6,500/5,200/3,900	50/40/35/30k	>80
LED-CBT-2X4-3P50-4CCT-90CRI	120-277V	50/40/30w	6,500/5,200/3,900	50/40/35/30k	>90

Surface Mount Frame

2x2

2x4

Flange (Drywall) Kit

2x2

2x4

Model	Description
2X2-SM-3.5"	2x2 Surface Mount Kit 3.5" Height for all panels and troffers
2X4-SM-3.5"	2x4 Surface Mount Kit 3.5" Height for all panels and troffers
LED-PNL-2X2-FLNG	Flange (Drywall) Kit for Panels 2x2
LED-PNL-2X4-FLNG	Flange (Drywall) Kit for Panels 2x4
3Whip-(#)ft - Specify ft in place of #	3 Wire Whip Hot, Neutral, Ground
5Whip-(#)ft - Specify ft in place of #	5 Wire Whip Hot, Neutral, Ground, Dim



- 2' / 3' / 4' T8 Type A+B Tube**
- Install tubes with or without the existing ballast (single or double sided)
 - See ballast compatibility chart to ensure compatibility.
 - Light beam spread replicates the same look as a fluorescent, but with improved light output and efficiency
 - PC film protectant for shatter protection (Food Industry OK)
- 3CCT Selectable**

ETA: 6/2022

NEW

NEW

NEW

NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-T8-DF-GL-2FT-8W-CTRI	120-277V	8w	1,000	35/40/50k	>80
LED-T8-DF-GL-3FT-12W-CTRI	120-277V	12w	1,500	35/40/50k	>80
LED-T8-DF-GL-4FT-15W-CTRI	120-277V	15w	1,950	35/40/50k	>80
LED-T8-DF-GL-4FT-18W-CTRI	120-277V	18w	2,200	35/40/50k	>80



Box Qty: 30
Must Purchase in Box Quantity to Avoid Breakage



2' / 3' / 4' T8 Type A+B Tube

- Install tubes with or without the existing ballast (single or double sided)
- See ballast compatibility chart to ensure compatibility.
- Light beam spread replicates the same look as a fluorescent, but with improved light output and efficiency
- PC film protectant for shatter protection (Food Industry OK)



Box Qty: 30
Must Purchase in Box Quantity to Avoid Breakage

IN STOCK

NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-T8-DF-GL-2FT-8W-30K	120-277V	8w	1,000	3000k	>80
LED-T8-DF-GL-2FT-8W-35K	120-277V	8w	1,000	3500k	>80
LED-T8-DF-GL-2FT-8W-40K	120-277V	8w	1,000	4000k	>80
LED-T8-DF-GL-2FT-8W-50K	120-277V	8w	1,000	5000k	>80
LED-T8-DF-GL-3FT-12W-30K	120-277V	12w	1,500	3000k	>80
LED-T8-DF-GL-3FT-12W-35K	120-277V	12w	1,500	3500k	>80
LED-T8-DF-GL-3FT-12W-50K	120-277V	12w	1,500	5000k	>80
LED-T8-DF-GL-4FT-15W-35K	120-277V	15w	1,950	3500k	>80
LED-T8-DF-GL-4FT-15W-40K	120-277V	15w	1,950	4000k	>80
LED-T8-DF-GL-4FT-15W-50K	120-277V	15w	1,950	5000k	>80
LED-T8-DF-GL-4FT-18W-30K	120-277V	18w	2,200	3000k	>80
LED-T8-DF-GL-4FT-18W-35K	120-277V	18w	2,200	3500k	>80
LED-T8-DF-GL-4FT-18W-40K	120-277V	18w	2,200	4000k	>80
LED-T8-DF-GL-4FT-18W-50K	120-277V	18w	2,200	5000k	>80
LED-T8-DF-GL-4FT-18W-65K	120-277V	18w	2,200	6500k	>80
Final Production — LED-T8-DC-GL-4FT-18W-35K	120-277V	18w	2,550	3500k	>80
Final Production — LED-T8-DC-GL-4FT-18W-40K	120-277V	18w	2,550	4000k	>80
Final Production — LED-T8RW-GLF-4FT-15W-40K	120-277V	15w	1,800	4000k	>80
Final Production — LED-T8RW-GLF-4FT-15W-50K	120-277V	15w	1,800	5000k	>80

Model	Description
LED-EMB-25W-HV-T8	Emergency Backup (External 25W)
Accessory	Description
T8-8FT-4FT-KIT	T8 Conversion Kit. One 8ft bulb to two 4ft bulbs.

8' T8 Type A+B Tube

- Install tubes with or without the existing ballast (double sided connection only)
- See ballast compatibility chart to ensure compatibility.
- 2 Piece LED Design allows for shipping in 4ft box
- Pins are interchangeable: includes double pin and single pin, R17D optional
- Light beam spread replicates the same look as a fluorescent, but with improved light output and efficiency.



Box Qty: 15
Must Purchase in Box Quantity to Avoid Breakage

Model	Voltage	Watts	Lumens	Color	CRI
LED-T8-DF-GL-8FT-42W-40K	120-277V	42w	5,500	4000k	>80
LED-T8-DF-GL-8FT-42W-50K	120-277V	42w	5,500	5000k	>80

Accessory	Description
R17D-EC	R17(D) End Cap Converter (Switchable end cap for 8' tube)

Model	Description
LED-EMB-25W-HV-T8	Emergency Backup (External 25W)

Single Pin Included

R17D Pin Optional

2-Piece Design

4' T5 Type A+B LED Tube

- Install tubes with or without the existing ballast (single or double sided)
- See ballast compatibility chart to ensure compatibility.
- Light beam spread replicates the same look as a fluorescent, but with improved light output and efficiency
- PC film protectant for shatter protection (Food Industry OK)



Box Qty: 30
Must Purchase in
Box Quantity
to Avoid Breakage

Model	Voltage	Watts	Lumens	Color	CRI
LED-T5-DF-4FT-24W-40K	120-277V	24w	3,200	4000k	>80
LED-T5-DF-4FT-24W-50K	120-277V	24w	3,200	5000k	>80

Accessory	Description
T8-8FT-4FT-KIT	T8 Conversion Kit. One 8ft bulb to two 4ft bulbs.

T8 4ft Emergency LED Tube

- Equipped with a self-test function, tests itself monthly/yearly
- Built-in emergency system, easy installation and replacement
- 90 Minute emergency duration
- For use without existing ballast, AC Only (See Installation Guide)



Box Qty: 25
Must Purchase in
Box Quantity
to Avoid Breakage

Model	Voltage	Watts	Lumens	Color	CRI
LED-T8-EM-4FT-15W-30K	120-277V	15w	2,000	3000k	n/a
LED-T8-EM-4FT-15W-35K	120-277V	15w	2,000	3500k	>80
LED-T8-EM-4FT-15W-40K	120-277V	15w	2,000	4000k	>80
LED-T8-EM-4FT-15W-50K	120-277V	15w	2,000	5000k	n/a

Accessory	Description
T8-8FT-4FT-KIT	T8 Conversion Kit. One 8ft bulb to two 4ft bulbs.



T8 Type A + B U-Shaped LED Bulbs

- Install tubes with or without the existing ballast (single or double sided)
- See ballast compatibility chart to ensure compatibility.
- Light beam spread replicates the same look as a fluorescent, but with improved light output and efficiency
- PC film protectant for shatter protection (Food Industry OK)



Box Qty: 20
Must Purchase in
Box Quantity
to Avoid Breakage

3CCT Selectable

Model	Voltage	Watts	Lumens	Color	CRI
LED-T8U-DF-GL-22X6-15W-CTRI	120-277V	15w	1,950	35/40/50k	>80

Model	Voltage	Watts	Lumens	Color	CRI
LED-T8U-DF-GL-22X6-15W-40K	120-277V	15w	1,950	4000k	>80
LED-T8U-DF-GL-22X6-15W-50K	120-277V	15w	1,950	5000k	>80

Pre-installed Accessory Model	Description
LED-EMB-25W-HV-T8	Emergency Back Up Specifically made for T8 bulbs with resistors (New T8 bulbs UL requirement)

T8 4ft 2 Lamp Strip Fixture

- LED T8 ready single sided connection
- Aligner locks in place for easy continuous row mounting
- Suitable for use in damp locations
- Mount individually or in continuous rows to ceiling or wall

Box Qty: 10

Model	Description
T8-4FT-2LAMP-STRIP	4 foot- 2 Lamp LED T8 Strip Fixture



ETA:
6/2022



2' & 4' Prismatic LED Lens Wraps

- Lens is held by a spring making it easily removable for surface mount installation
- This fixture is non-dimmable
- Integrated LED provides a cleaner light than a 2 lamp fluorescent
- Fixture can be surface mounted, wall mounted, or suspended



Box Qty for 2FT: 12
Box Qty for 4FT: 6

Model	Voltage	Watts	Lumens	Color	CRI
LED-WRP-PRM-2FT-20W-35K	120-277V	20w	1,900	3500k	>80
LED-WRP-PRM-2FT-20W-40K	120-277V	20w	1,900	4000k	>80
LED-WRP-PRM-2FT-20W-50K	120-277V	20w	1,900	5000k	>80
LED-WRP-PRM-4FT-40W-35K	120-277V	40w	3,800	3500k	>80
LED-WRP-PRM-4FT-40W-40K	120-277V	40w	3,800	4000k	>80
LED-WRP-PRM-4FT-40W-50K	120-277V	40w	3,800	5000k	>80

Pre-installed Accessory Model	Description
Add '-MS-' to model #	On/Off Motion Sensor
Add '-EMB-' to model #	Emergency Backup (External 15W)
Add '-BMS-EMB' to model #	Motion Sensor + Emergency Backup

2' & 4' Frosted LED Lens Wraps

- Lens is removeable for easy surface mount installation
- Sturdy aluminum housing prevents bending
- 0-10V Dimming for controls
- Fixture can be surface mounted, wall mounted, or suspended



Box Qty for 2FT: 12
Box Qty for 4FT: 6

Model	Voltage	Watts	Lumens	Color	CRI
LED-WRP-FR-2FT-20W-35K	120-277V	20w	2,200	3500k	>80
LED-WRP-FR-2FT-20W-40K	120-277V	20w	2,200	4000k	>80
LED-WRP-FR-2FT-20W-50K	120-277V	20w	2,200	5000k	>80
LED-WRP-FR-4FT-48W-35K	120-277V	48w	5,040	3500k	>80
LED-WRP-FR-4FT-48W-40K	120-277V	48w	5,040	4000k	>80
LED-WRP-FR-4FT-48W-50K	120-277V	48w	5,040	5000k	>80

Pre-installed Accessory Model	Description
Add '-BMS-' to model #	Bi-Level Motion + Daylight Sensor
Add '-EMB-' to model #	Emergency Backup (External 15W)
Add '-BMS-EMB' to model #	Motion Sensor + Emergency Backup

Accessories for Wraps

Model	Description
SK-9FT-ADJ-2	9ft Suspension Kit Adjustable





2' Round Strip LED Fixture

- Environmental friendly polyester powder coated
- Anti-rust durable plastic housing
- 50,000-hour LED lifespan based on IES LM-90 results
- Fixture can be surface mounted, wall mounted, or suspended
- BMS: Bi-Level Motion + Daylight Sensor
- EMB: Emergency Back Up: 90 minutes

2FT 3CCT Selectable

Box Qty: 12

Model	Voltage	Watts	Lumens	Color	CRI
LED-RST-2FT-20W-TRI	120-277V	20w	2,600	30/40/50k	>80
LED-RST-2FT-20W-TRI-BMS	120-277V	20w	2,600	30/40/50k	>80
LED-RST-2FT-20W-TRI-EMB	120-277V	20w	2,600	30/40/50k	>80
LED-RST-2FT-20W-TRI-BMS-EMB	120-277V	20w	2,600	30/40/50k	>80



4' Round Strip LED Fixture

3CCT & 3 Power Selectable

Box Qty: 6

Model	Voltage	Watts	Lumens	Color	CRI
LED-RST-4FT-3M40W-TRI	120-277V	40/30/20w	5,200/3,900/2,600	30/40/50k	>80
LED-RST-4FT-3M40W-TRI-BMS	120-277V	40/30/20w	5,200/3,900/2,600	30/40/50k	>80
LED-RST-4FT-3M40W-TRI-EMB	120-277V	40/30/20w	5,200/3,900/2,600	30/40/50k	>80
LED-RST-4FT-3M40W-TRI-BMS-EMB	120-277V	40/30/20w	5,200/3,900/2,600	30/40/50k	>80



8' 3-Power + 3CCT Selectable

3CCT & 3 Power Selectable

Box Qty: 6

Model	Voltage	Watts	Lumens	Color	CRI
LED-RST-8FT-3M70W-TRI	120-277V	70/60/50w	9,100/7,800/6,500	30/40/50k	>80
LED-RST-8FT-3M70W-TRI-BMS	120-277V	70/60/50w	9,100/7,800/6,500	30/40/50k	>80
LED-RST-8FT-3M70W-TRI-EMB	120-277V	70/60/50w	9,100/7,800/6,500	30/40/50k	>80
LED-RST-8FT-3M70W-TRI-BMS-EMB	120-277V	70/60/50w	9,100/7,800/6,500	30/40/50k	>80



Suspension Kit

Accessories for RST Fixtures

Model	Description
NEW RST-SM-CN	Surface Mount Linkable Bracket
NEW RST-PDM-CN	Pendant Mount Linkable Bracket
NEW RST-2FT-WG	2ft Long Wire Guard for 2ft RST
NEW RST-4FT-WG	4ft Long Wire Guard, use 2 pieces for 8ft
SK-9FT-ADJ-2	9ft Suspension Kit Adjustable

2' / 4' / 8' Vapor Tight LED Fixture

- Environmental friendly polyester powder coated
- Anti-rust durable plastic housing
- 50,000-hour LED lifespan based on IES LM-90 results

Box Qty:
3M25 - 12
3M50 - 6
3M80 - 6
3M100 - 4

3CCT & 3 Power Selectable



	Model	Voltage	Watts	Lumens	Color	CRI
NEW	LED-VPT-2FT-3M25-CTRI	120-277V	25/20/15w	130lm/w	30/40/50k	>80
NEW	LED-VPT-4FT-3M50-4CCT	120-277V	50/40/30w	130lm/w	50/40/35/30k	>80
NEW	LED-VPT-4FT-3M80-CTRI	120-277V	80/70/60w	130lm/w	30/40/50k	>80
NEW	LED-VPT-8FT-3M100-CTRI	120-277V	100/90/80w	130lm/w	30/40/50k	>80

Watts	Lumens
15W	1,950
20W	2,600
25W	3,250
30W	3,900
40W	5,200
50W	7,500
60W	7,800
70W	9,100
80W	10,400
90W	11,700
100W	13,000

Pre-installed Accessory Model	Description
Add '-BMS-' to model #	Bi-Level Motion + Daylight Sensor
Add '-EMB-' to model #	Emergency Backup (External 15W)
Add '-BMS-EMB' to model #	Motion Sensor + Emergency Backup


FEATURES



Knock-Outs on both ends, connectable with waterproof connectors



Steel Lock Mounts



3 Color Selection



1" Mini Low Voltage Downlights

- Smaller lamp body for flexible application
- Low-Voltage Daisy-Chain Wiring
- 5-100% dimming compatible with Electronic Low Voltage drivers (see CV series)



Box Qty: 20

Model	Voltage	Watts	Lumens	Color	CRI
LED-MDL-1-6W-30K-RD-WH-12V	12V	6w	500	3000k	>90

Accessory Model	Description
MDL-TRIM-RD-BLK	1" Mini Downlight Round Black Trim
MDL-TRIM-RD-BZ	1" Mini Downlight Round Bronze Trim
MDL-TRIM-SQ-WH	1" Mini Downlight Square White Trim
MDL-TRIM-SQ-BLK	1" Mini Downlight Square Black Trim
MDL-TRIM-SQ-BZ	1" Mini Downlight Square Bronze Trim
MDL-24°-OPTIC	1" Mini Downlight Optic Lens 24°



-BZ



-BLK



-BLK



-WH



-BZ



1" Mini Low Voltage Downlight Adjustable

- Adjustable fixture allows 60° pitch angle
- Low-Voltage Daisy-Chain Wiring
- 5-100% dimming compatible with Electronic Low Voltage drivers (see CV series)



Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-MDL-1-ADJ-6W-30K-RD-WH-12V	12V	6w	500	3000k	>90
LED-MDL-1-ADJ-6W-30K-RD-BLK-12V	12V	6w	500	3000k	>90
LED-MDL-1-ADJ-6W-30K-RD-BZ-12V	12V	6w	500	3000k	>90
LED-MDL-1-ADJ-6W-30K-SQ-WH-12V	12V	6w	500	3000k	>90
LED-MDL-1-ADJ-6W-30K-SQ-BLK-12V	12V	6w	500	3000k	>90
LED-MDL-1-ADJ-6W-30K-SQ-BZ-12V	12V	6w	500	3000k	>90



2" LED Trimless Round Downlight

- External J-Box Eliminates Recessed Can
- New Construction Mounting Plate Available
- Suitable for Use in Wet Locations
- IC & Airtight-Rated Fixture

5CCT Selectable



Box Qty: 18



	Model	Voltage	Watts	Lumens	Color	CRI
NEW	LED-DLJBX-TML-2R-8W-5CCT-WH	120V	8w	600	27/30/35/40/50K	>90
NEW	LED-DLJBX-TML-2R-8W-5CCT-BLK	120V	8w	600	27/30/35/40/50K	>90
NEW	LED-DLJBX-TML-2R-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K	>90
NEW	LED-DLJBX-TML-2R-15W-5CCT-BLK	120V	15w	1000	27/30/35/40/50K	>90

2" LED Trimless Gimbal Downlight

5CCT Selectable



Box Qty: 18



	Model	Voltage	Watts	Lumens	Color	CRI
NEW	LED-DLJBX-TML-GMB-2R-8W-5CCT-WH	120V	8w	600	27/30/35/40/50K	>90
NEW	LED-DLJBX-TML-GMB-2R-8W-5CCT-BLK	120V	8w	600	27/30/35/40/50K	>90

4" LED Trimless Round Downlight

5CCT Selectable



Box Qty: 18



	Model	Voltage	Watts	Lumens	Color	CRI
NEW	LED-DLJBX-TML-4R-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K	>90
NEW	LED-DLJBX-TML-4R-15W-5CCT-BLK	120V	15w	1000	27/30/35/40/50K	>90



2" LED Trimless Square Downlight

5CCT Selectable



Box Qty: 18



	Model	Voltage	Watts	Lumens	Color	CRI
NEW	LED-DLJBX-TML-2SQ-8W-5CCT-WH	120V	8w	600	27/30/35/40/50K	>90
NEW	LED-DLJBX-TML-2SQ-8W-5CCT-BLK	120V	8w	600	27/30/35/40/50K	>90
NEW	LED-DLJBX-TML-2SQ-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K	>90
NEW	LED-DLJBX-TML-2SQ-15W-5CCT-BLK	120V	15w	1000	27/30/35/40/50K	>90





1" LED J-Box Canless Downlight

- External J-Box Eliminates Recessed Can
- New Construction Mounting Plate Available
- Suitable for Use in Wet Locations
- Mix or Match Inner & Outer Trim Styles
- IC & Airtight-Rated Fixture

5CCT Selectable



Box Qty: 24

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-1RG-7W-5CCT-WH-R	120V	7w	550	27/30/35/40/50K	>90



2" LED J-Box Canless Downlight

5CCT Selectable



Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-2-8W-5CCT-W/W-S	120V	8w	600	27/30/35/40/50K	>90



2" LED J-Box Canless Downlight

Warm Dimming



Box Qty: 18

NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-2-6W-3WD-W/W-S	120V	6w	450	30-->18k	>80
LED-DLJBX-2-12W-3WD-W/W-S	120V	12w	850	30-->18k	>80

NEW

2" LED J-Box Canless Downlight

5CCT Selectable



Box Qty: 18

NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-2-15W-5CCT-W/W-S	120V	15w	1000	27/30/35/40/50K	>90



Single CCT



Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-2-15W-27K-W/W-S	120V	15w	1000	2700k	>90
LED-DLJBX-2-15W-30K-W/W-S	120V	15w	1000	3000k	>90
LED-DLJBX-2-15W-40K-W/W-S	120V	15w	1000	4000k	>90
LED-DLJBX-2-15W-50K-W/W-S	120V	15w	1000	5000k	>90



White (-WH-S)
Included
(-WH-BFL)



Black (-BLK-S)
(BLK-BFL)



Bronze (-BZ-S)
(BZ-BFL)



Chrome (-CH-S)



Nickel (-BN-S)



White (-WH-S)
(WH-BFL)



Black (-BLK-S)
(BLK-BFL)




Bronze (-BZ-S)
(BZ-BFL)



Nickel (-BN-S)

1" LED J-Box Canless Trim

Accessory	Description
DLJBX-1-TRIM-WH-SQ	1" White Square Smooth Trim
DLJBX-1-TRIM-BL-R	1" Black Round Smooth Trim
DLJBX-1-TRIM-BL-SQ	1" Black Square Smooth Trim

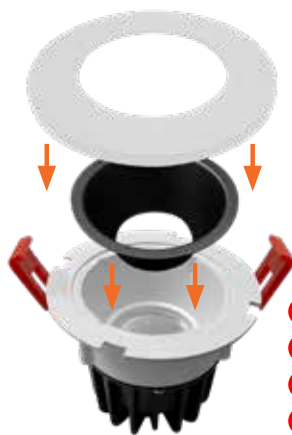

2" LED J-Box Canless Trim

Accessory	Description
DLJBX-2-TRIM-BLK-S	2" Black In and Out Smooth Trim
DLJBX-2-TRIM-BL-BFL	2" Black In and Out Baffle Trim
DLJBX-2-TRIM-BZ-S	2" Bronze In and Out Smooth Trim
DLJBX-2-TRIM-BZ-BFL	2" Bronze In and Out Baffle Trim
DLJBX-2-TRIM-BN-S	2" Brushed Nickel In and Out
DLJBX-2-TRIM-CH-S	2" Chrome In and Out Smooth Trim
DLJBX-2-TRIM-WH-BFL	2" White In and Out Baffle Trim
NEW DLJBX-2-TRIM-BN-S-SQ	2" Brushed Nickel Smooth Square
NEW DLJBX-2-TRIM-BL-S-SQ	2" Black Smooth Square Trim
NEW DLJBX-2-TRIM-BZ-SQ	2" Bronze Smooth Square Trim
NEW DLJBX-2-TRIM-WH-S-SQ	2" White Smooth Square Trim



2" LED Snaptrim Adjustable Downlight

- External J-Box Eliminates Recessed Can
- New Construction Mounting Plate Available
- 35° tilt and up to 360° rotation
- Suitable for Use in Wet Locations
- IC & Airtight-Rated Fixture

12V Version

Use Electronic Low Voltage drivers see CV series



Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-ADJ-2-5W-30K-WH-12V	12V	5w	350	3000k	>90
LED-DLJBX-ADJ-2-5W-30K-BLK-12V	12V	5w	350	3000k	>90

120V Version



Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-ADJ-2-5W-27K	120V	5w	350	2700k	>90
LED-DLJBX-ADJ-2-5W-30K	120V	5w	350	3000k	>90
LED-DLJBX-ADJ-2-5W-40K	120V	5w	350	4000k	>90
LED-DLJBX-ADJ-2-5W-50K	120V	5w	350	5000k	>90

Accessory	Description
JBX-EXT-6'-2PIN	6' Extension Cable for fixture to J-Box
JBX-EXT-10'-2PIN	10' Extension Cable for fixture to J-Box



3" LED Snaptrim Adjustable Downlight

5CCT Selectable



Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-ADJ-3-8W-5CCT-WH-R	120V	8w	600	27/30/35/40/50K	>90
LED-DLJBX-ADJ-3-8W-5CCT-BLK-R	120V	8w	600	27/30/35/40/50K	>90

Warm Dimming



Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-ADJ-3-6W-3WD-WH-R	120V	6w	450	30—>18k	>90
LED-DLJBX-ADJ-3-6W-3WD-BLK-R	120V	6w	450	30—>18k	>90



White (-WH-S) Included Black (-BLK-S) Nickel (-BN-S) White (-WH-SQ) Black (-BLK-SQ) Nickel (-BN-SQ)

Accessory	Description
DLJBX-ADJ-3-TRIM-WH-SQ	3" Gimbal Square Trim White Finish
DLJBX-ADJ-3-TRIM-BN-R	3" Gimbal Round Trim Brushed Nickel
DLJBX-ADJ-3-TRIM-BN-SQ	3" Gimbal Square Trim Brushed Nickel
DLJBX-ADJ-3-TRIM-BZ-R	3" Gimbal Round Trim Bronze Finish
DLJBX-ADJ-3-TRIM-BZ-SQ	3" Gimbal Square Trim Bronze Finish
DLJBX-ADJ-3-TRIM-BLK-SQ	3" Gimbal Square Trim Black Finish



3" Regressed Gimbal Adjustable Downlight

- External j-box & spring mount clips for easy installation
- Compatible with most dimmers (e.g. Lutron DVCL-153P)

5CCT Selectable



Box Qty: 18



Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-ADJ-3RG-8W-5CCT-WH-R	120V	8w	600	27/30/35/40/50K	>90
LED-DLJBX-ADJ-3RG-8W-5CCT-BLK-R	120V	8w	600	27/30/35/40/50K	>90

Accessory	Description
Add '-EMB-' to model	Emergency Backup (External 25W)
CUNV-NC-ICAT	2/3/4/6" Universal Pre-Mounting New Construction Plate
JBX-EXT-6'-2PIN	6" Extension Cable for fixture to J-Box Unit
JBX-EXT-10'-2PIN	10" Extension Cable for fixture to J-Box Unit

4" SnapTrim Floating Adjustable J-Box

- 360° Twist allows for an easy adjustment after installation
- Unique floating gimbal design adds an architectural touch
- Carless module does not require a housing making it perfect for new construction and remodeling.

5CCT Selectable



Box Qty: 18



Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-FLT-4R-9W-5CCT-WH	120V	9w	650	27/30/35/40/50K	>90

5CCT Selectable

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-SCP-4R-12W-5CCT-WH	120V	12w	900	27/30/35/40/50K	>90

Accessory	Description
Add '-EMB-' to model #	Emergency Backup (External 25W)

4" Regressed Gimbal Adjustable Sloped Ceiling J-Box

5CCT Selectable



Box Qty: 18



Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-SLP-ADJ-4R-8W-5CCT-WH	120V	8w	600	27/30/35/40/50K	>90
LED-SL-SLP-ADJ-4R-8W-5CCT-BLK	120V	8w	600	27/30/35/40/50K	>90

4" Regressed Downlight

- External j-box & spring mount clips for easy installation
- Compatible with most dimmers (e.g. Lutron DVCL-153P)

5CCT Selectable



Box Qty: 18



Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-4RG-15W-5CCT-WH-R	120V	15w	1000	27/30/35/40/50K	>90

Warm Dimming



Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-4RG-12W-3WD-WH-R	120V	12w	850	30—>18k	>90

Accessory	Description
Add '-EMB-' to model #	Emergency Backup (External 25W)
DLJBX-4RG-TRIM-WH-SQ	4" Regressed Gimbal White Square Trim
DLJBX-4RG-TRIM-BLK-R	4" Regressed Gimbal Black Round Trim
DLJBX-4RG-TRIM-BLK-SQ	4" Regressed Gimbal Black Square Trim
DLJBX-4RG-TRIM-BRZ-R	4" Regressed Gimbal Bronze Round Trim
DLJBX-4RG-TRIM-BRZ-SQ	4" Regressed Gimbal Bronze Square Trim



White (-WH)
Included

White (-WH-SQ)

Bronze (-BRZ-R)

Bronze (-BRZ-SQ)

Black (-BLK-R)

Black (-BLK-SQ)



4" SnapTrim Adjustable Downlight

- External j-box & spring mount clips for easy installation
- Compatible with most dimmers (e.g. Lutron DVCL-153P)
- Canless module does not require housing

5CCT Selectable

SELECT TO SWITCH DIMMABLE JA8 TITLE 24 COMPLIANT ETL LISTED Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-ADJ-4-12W-5CCT-WH-R	120V	12w	750	27/30/35/40/50K	>90
LED-DLJBX-ADJ-4-12W-5CCT-BLK-R	120V	12w	750	27/30/35/40/50K	>90
LED-DLJBX-ADJ-4-12W-5CCT-BN-R	120V	12w	750	27/30/35/40/50K	>90



Warm Dimming

WARM DIMMING SELECT TO SWITCH DIMMABLE JA8 TITLE 24 COMPLIANT ETL LISTED Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-ADJ-4-12W-3WD-WH-R	120V	12w	750	30-->18k	>90

Accessory	Description
JBX-EXT-6'-2PIN	6" Extension Cable for fixture to J-Box Unit
JBX-EXT-10'-2PIN	10" Extension Cable for fixture to J-Box Unit
Add '-EMB-' to model #	Emergency Backup (External 25W)



DISPLAY



Display featuring 10 of our canless downlights. Place a \$3,000+ stock orders of downlights and get a free counter display.

Canless LED Downlight Accessories


Accessory	Description
CUNV-NC-ICAT	2" / 3" / 4" / 6" Universal Pre-Mounting New Construction Plate
C4-JBX-RI	4" Rough In Plate
C6-JBX-RI	6" Rough In Plate
C8-JBX-RI	8" Rough In Plate
JBX-EXT-6'-2PIN	6' Extension Cable for fixture to J-Box
JBX-EXT-10'-2PIN	10' Extension Cable for fixture to J-Box
JBX-EXT-12'-2PIN	12' Extension Cable for fixture to J-Box
JBX-EXT-6'-TRI	6' Extension Cable for fixture to J-Box
JBX-EXT-10'-TRI	10' Extension Cable for fixture to J-Box
LED-EMB-25W-HV-0/10V	Emergency Back Up For Internal Drivers (Works with all 0-10V Dim or <25W fixtures) -Single Sided Flex-




LED-EMB-25W-HV-0/10V




6' / 10' Extension Cable

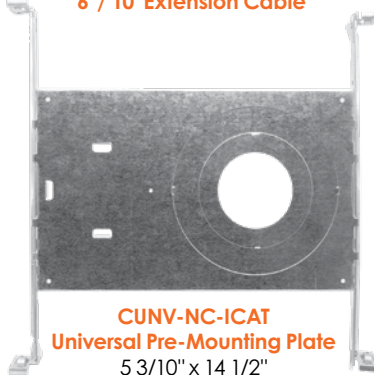

CUNV-NC-ICAT
Universal Pre-Mounting Plate
5 3/10" x 14 1/2"

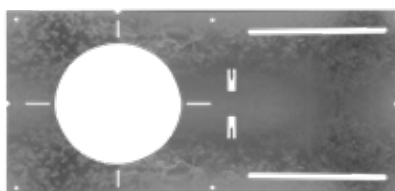

C4-JBX-RI
4" Rough In Plate
6 1/2" x 13 1/4"

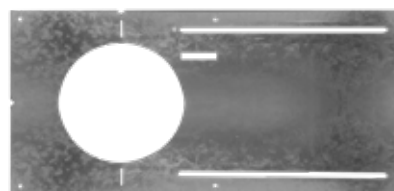

C6-JBX-RI
6" Rough In Plate
8 1/2" x 17 1/4"



C8-JBX-RI
8" Rough In Plate
10 1/2" x 26"



3" EXT SnapTrim Round Downlight

- Canless module does not require housing
- Check spec sheet for dimmer compatibility. Triac and 0-10V options are available.
- Accessories including color trims (see page 36)

5CCT Selectable

Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-PNL-3R-8W-5CCT-WH	120V	8w	500	27/30/35/40/50K	>90
LED-SL-PNL-3SQ-8W-5CCT-WH	120V	8w	500	27/30/35/40/50K	>90



4" EXT SnapTrim Round Downlight

5CCT Selectable

Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-PNL-4R-12W-5CCT-WH	120V	12w	840	27/30/35/40/50K	>90



3 Power & 5CCT Selectable

Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-PNL-4R-3P12W-5CCT-WH	120V	12/10/8w	840/700/500	27/30/35/40/50K	>90



3CCT Selectable

Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-PNL-4R-11W-TRI	120V	11w	750	30/40/50k	>90
LED-SL-PNL-4R-11W-TRI-0/10V	120/277V	11w	750	30/40/50k	>90



Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 25W)

4" EXT SnapTrim Square Downlight

5CCT Selectable

Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-PNL-4SQ-12W-5CCT-WH	120V	12w	840	27/30/35/40/50K	>90



3 Power & 5CCT Selectable

Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-PNL-4SQ-3P12W-5CCT-WH	120V	12/10/8w	840/700/500	27/30/35/40/50K	>90



3CCT Selectable

Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-PNL-4SQ-11W-TRI	120V	11w	750	30/40/50k	>90
LED-SL-PNL-4SQ-11W-TRI-0/10V	120/277V	11w	750	30/40/50k	>90



Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 25W)

6" EXT SnapTrim Round Downlight

5CCT Selectable

Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-PNL-6R-15W-5CCT-WH	120V	15w	1050	27/30/35/40/50K	>90



3 Power & 5CCT Selectable

Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-PNL-6R-3P15W-5CCT-WH	120V	15/12/9w	1150/950/750	27/30/35/40/50K	>90



3CCT Selectable

Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-PNL-6R-14W-TRI	120V	14w	1000	30/40/50k	>90
LED-SL-PNL-6R-14W-TRI-0/10V	120/277V	14w	1000	30/40/50k	>90



Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 25W)





6" EXT SnapTrim Square Downlight

5CCT Selectable



Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-PNL-6SQ-15W-5CCT-WH	120V	15w	1050	27/30/35/40/50K	>90



3 Power & 5CCT Selectable



Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-PNL-6SQ-3P15W-5CCT-WH	120V	15/12/9w	1150/950/750	27/30/35/40/50K	>90



3CCT Selectable



Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SLPNL-6SQ-14W-TRI	120V	14w	1000	30/40/50k	>90
LED-SLPNL-6SQ-14W-TRI-0/10V	120/277V	14w	1000	30/40/50k	>90



Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 25W)



8" EXT SnapTrim Square Downlight

3 Power & 5CCT Selectable



Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-PNL-8SQ-3P22W-5CCT-WH	120V	22/19/16w	1600/1400/1200	27/30/35/40/50K	>90



3 Power & 5CCT Selectable



Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-PNL-8R-3P22W-5CCT-WH	120V	22/19/16w	1600/1400/1200	27/30/35/40/50K	>90



Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 25W)



8" EXT SnapTrim Round Downlight

3CCT Selectable



Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-PNL-8R-18W-TRI	120V	18w	1200	30/40/50k	>90
LED-SL-PNL-8R-18W-TRI-0/10v	120/277V	18w	1200	30/40/50k	>90



10" EXT SnapTrim Round Downlight

3CCT Selectable



Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-PNL-10R-22W-TRI-0/10v	120/277V	22w	1600	30/40/50k	>90



Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 25W)





4" EXT SnapTrim Tilting Downlight

- Canless module does not require housing
- Fixture is adjustable up to 45°
- Accessories including color trims

5CCT Selectable

Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-TLT-4R-9W-5CCT-WH	120V	9w	600	27/30/35/40/50K	>90

3CCT Selectable

Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-TLT-4R-9W-TRI	120V	9w	600	30/40/50k	>90

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 25W)



6" EXT SnapTrim Tilting Downlight

5CCT Selectable

Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-TLT-6R-12W-5CCT-WH	120V	12w	800	27/30/35/40/50K	>90

3CCT Selectable

Box Qty: 18

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-TLT-6R-12W-TRI	120V	12w	800	30/40/50k	>90




Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 25W)



SnapTrim LED Downlight Accessories


J-Box

LED-EMB-25W-HV-0/10V

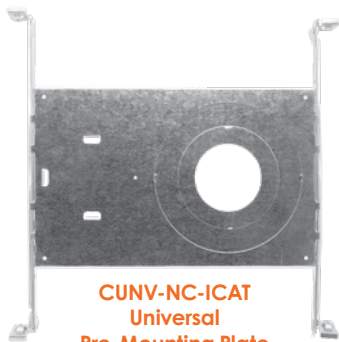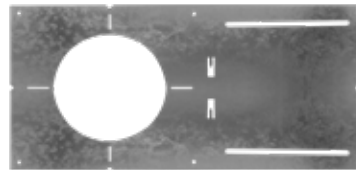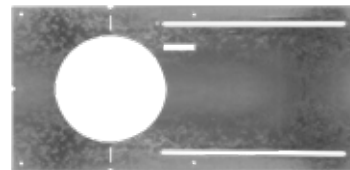6' / 10' Extension Cable

**CUNV-NC-ICAT
Universal
Pre-Mounting Plate
5 3/10" x 14 1/2"**

**C4-JBX-RI
4" Rough In Plate
6 1/2" x 13 1/4"**

**C6-JBX-RI
6" Rough In Plate
8 1/2" x 17 1/4"**

**C8-JBX-RI
8" Rough In Plate
10 1/2" x 26"**

Accessory	Description
JBX-11W-HV-0/10V	SL-PNL-4SQ 120/277V 0-10V Driver
JBX-11W-277-347V	SL-PNL-4SQ 277-347V Driver
JBX-14W-HV-0/10V	SL-PNL-6SQ 120/277V 0-10V Driver
JBX-14W-277-347V	SL-PNL-6SQ 277-347V Driver
JBX-18W-277-347V	SL-PNL-8R 277-347V Driver
CUNV-NC-ICAT	2" 3" 4" 6" Universal Pre-Mounting New Construction Plate
C4-JBX-RI	4" Rough In Plate
C6-JBX-RI	6" Rough In Plate
C8-JBX-RI	8" Rough In Plate
JBX-EXT-6'-TRI	6' Extension Cable for fixture to J-Box
JBX-EXT-10'-TRI	10' Extension Cable for fixture to J-Box
LED-EMB-25W-HV-0/10V	Emergency Back Up For Internal Drivers (Works with all 0-10V Dim or <25W fixtures) -Single Sided Flex-

SLPNL Trims for TRI & 3 Power + 5CCT Models


BLK

BZ

BN

BLK

BZ

BN

Accessory	Description
SLPNL-TRIM-3R-BLK	3" Round Black Trim
SLPNL-TRIM-3R-BRZ	3" Round Bronze Trim
SLPNL-TRIM-3R-BNI	3" Round Brushed Nickel Trim
SLPNL-TRIM-4R-BLK	4" Round Black Trim
SLPNL-TRIM-4R-BRZ	4" Round Bronze Trim
SLPNL-TRIM-4R-BNI	4" Round Brushed Nickel Trim
SLPNL-TRIM-4SQ-BLK	4" Square Black Trim
SLPNL-TRIM-4SQ-BRZ	4" Square Bronze Trim
SLPNL-TRIM-4SQ-BNI	4" Square Brushed Nickel Trim
SLPNL-TRIM-6R-BLK	6" Round Black Trim
SLPNL-TRIM-6R-BRZ	6" Round Bronze Trim
SLPNL-TRIM-6R-BNI	6" Round Brushed Nickel Trim
SLPNL-TRIM-6SQ-BLK	6" Square Black Trim
SLPNL-TRIM-6SQ-BRZ	6" Square Bronze Trim
SLPNL-TRIM-6SQ-BNI	6" Square Brushed Nickel Trim

SLPNL Trims for 5CCT

Accessory	Description
SL-PNL-4R-TRIM-5CT-BLK	4" Round Black Trim
SL-PNL-4R-TRIM-5CT-BZ	4" Round Bronze Trim
SL-PNL-4R-TRIM-5CT-BN	4" Round Brushed Nickel Trim
SL-PNL-6R-TRIM-5CT-BLK	6" Round Black Trim
SL-PNL-6R-TRIM-5CT-BZ	6" Round Bronze Trim
SL-PNL-6R-TRIM-5CT-BN	6" Round Brushed Nickel Trim

4" / 6" / 8" / 10" Commercial Downlight

- Change wattage output with the flick of a switch
- CCT Color changing technology (30/40/50K variable)
- 4" & 6" TRI: 0-10V, ELV, Triac
- 8" & 10" 0-10V

New-
Model
ETA:
7/2022

3 Power Selectable



Box Qty: 6



Model	Voltage	Watts	Lumens	Color	CRI
NEW LED-CMD-4-3M19-5CCT-UNV	120-277V	9/14/19w	750/1000/1500lm	27/30/35/40/50k	>90
NEW LED-CMD-6-3M19-5CCT-UNV	120-277V	9/13/19w	800/1200/1600lm	27/30/35/40/50k	>90
NEW LED-CMD-4-3M19-TRI-UNV	120-277V	10/15/19w	750/1000/1400lm	30/40/50k	>90
LED-CMD-6-3M19-TRI-UNV	120-277V	9/13/18w	800/1200/1600lm	30/40/50k	>90
LED-CMD-8-3M29-TRI-UNV	120-277V	16.5/23/29w	1500/2000/2500lm	30/40/50k	>90
LED-CMD-10-3M38-TRI-UNV	120-277V	21/30/38w	1250/2000/3000lm	30/40/50k	>90




4" Model
ETA: 6/2022

BLK



HZ



GR

Trim Accessories for CMD-3M Series

Accessory	Description
CMD-TRIM-4-HZ-SM	4" Clear-Specular Haze Reflector
CMD-TRIM-4-BLK-SM	4" Black Reflector
CMD-TRIM-6-HZ-SM	6" Clear-Specular Haze Reflector
CMD-TRIM-6-BLK-SM	6" Black Reflector
CMD-TRIM-8-HZ-SM	8" Clear-Specular Haze Reflector
CMD-TRIM-8-BLK-SM	8" Black Reflector
CMD-TRIM-10-HZ-SM	10" Clear-Specular Haze Reflector
CMD-TRIM-10-BLK-SM	10" Black Reflector

Accessories for CMD-3M Series

Accessory Model	Description
NEW GR-4-WH	4" Goof Ring, Inner Dim: 4" Outer Dim: 8"
NEW GR-6-WH	6" Goof Ring, Inner Dim: 6.3" Outer Dim: 10.5"
NEW GR-8-WH	8" Goof Ring, Inner Dim: 8" Outer Dim: 12.5"
NEW GR-10-WH	10" Goof Ring, Inner Dim: 9" Outer Dim: 14.1"
NEW JBOX-ALM	Junction Box (6 Knock-Outs)
NEW C4-NC-RI-J-JBX	4" Commercial New Construction Plate with Joist Bar + J-Box
NEW C6-NC-RI-J-JBX	6" Commercial New Construction Plate with Joist Bar + J-Box
C8/10-NC-RI-J-JBX	8/10" Commercial New Construction Plate with Joist Bar + J-Box
C6-JBX-RI	6" Rough-In Plate (J-Box is not included)
C8-JBX-RI	8" Rough-In Plate (J-Box is not included)
CUNV-NC-ICAT	Universal Pre-Mounting Plate
LED-EMB-25W-HV-0/10V	Emergency Back Up For Internal Drivers (Works with all 0-10V Dim or <25W fixtures) -Single Sided Flex-

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 25W)



4" / 6" / 8" / 10" Commercial Downlight Module

- Choose between 3 wattages
- ETL listed for USA and CA, Energy Star Certified
- 120-277V, 50-60Hz driver
- 24°-45° field adjustable beam angle, in 5° increments
- Must purchase trim for each module
- 4" trim is only compatible with 3M20 and 3M35

5CCT & 3 Power Selectable


Box Qty: 6


ETA 08/22

NEW

ETA 08/22

NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-CADM-3M20-5CCT-UNV	120-277V	10/12/20w	1500/1000/750lm	27/30/35/40/50K	>90
LED-CADM-3M30-5CCT-UNV	120-277V	35/20/13w	3000/2000/1250lm	27/30/35/40/50K	>90
LED-CADM-3M35-35K-UNV	120-277V	35/20/13w	3000/2000/1250lm	3500k	>90
LED-CADM-3M35-40K-UNV	120-277V	35/20/13w	3000/2000/1250lm	4000k	>90
LED-CADM-3M55-30K-UNV	120-277V	55/40/32w	5000/4000/3200lm	3000k	>90
LED-CADM-3M55-35K-UNV	120-277V	55/40/32w	5000/4000/3200lm	3500k	>90
LED-CADM-3M55-40K-UNV	120-277V	55/40/32w	5000/4000/3200lm	4000k	>90

4" / 6" / 8" / 10" Commercial Downlight Trims


Box Qty: 6

Model	Description
CADM-4-CSH	4" Clear-Specular Haze Reflector/White Trim (3M20 & 3M35 only)
CADM-4-WH	4" White Reflector + Trim (3M20 & 3M35 only)
CADM-6-CSH	6" Clear-Specular Haze Reflector/White Trim
CADM-6-WH	6" White Reflector + Trim
CADM-8-CSH	8" Clear-Specular Haze Reflector/White Trim
CADM-8-WH	8" White Reflector + Trim
CADM-10-CSH	10" Clear-Specular Haze Reflector/White Trim
CADM-10-WH	10" White Reflector + Trim

* Custom color trims are available

Accessories for CADM Series

Accessory Model	Description
GR-4-WH	4" Goof Ring, Inner Dim: 6.3" Outer Dim: 10.5"
GR-6-WH	6" Goof Ring, Inner Dim: 6.3" Outer Dim: 10.5"
GR-8-WH	8" Goof Ring, Inner Dim: 8" Outer Dim: 12.5"
GR-10-WH	10" Goof Ring, Inner Dim: 9" Outer Dim: 14.1"
JBOX-ALM	Junction Box (6 Knock-Outs)
C4-NC-RI-J-JBX	4" Commercial New Construction Plate with Joist Bar + J-Box
C6-NC-RI-J-JBX	6" Commercial New Construction Plate with Joist Bar + J-Box
C8/10-NC-RI-J-JBX	8/10" Commercial New Construction Plate with Joist Bar + J-Box
LED-EMB-25W-HV-0/10V	Emergency Back Up For Internal Drivers (Works with all 0-10V Dim or <25W fixtures -Single Sided Flex-


Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 25W)



CSH



WH



GR



LED-EMB-25W-HV-0/10V


J-BOX ALM

4.46" W x 3.04" D x 1.37" H



C4-NC-RI-J-JBX

17" W x 6.5" D x 3.5" H
5" Hole

14" Min. Extend
25" Max. Extend
(Assembly Required)

C6-NC-RI-J-JBX

18.5" W x 9" D x 4" H
6.25" Hole

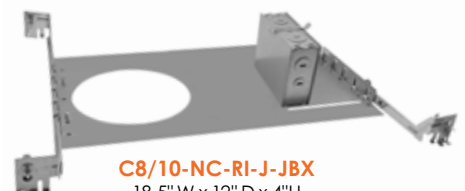14.25" Min. Extend
25" Max. Extend
(Assembly Required)

C8/10-NC-RI-J-JBX

18.5" W x 12" D x 4" H
8" Hole

14" Min. Extend
25" Max. Extend
(Assembly Required)



4" SnapTrim Baffle Downlight

- Baffled trim design
- Integrated j-box & spring mount clips for easy installation
- Compatible with most dimmers (e.g. Lutron DVCL-153P)
- Canless module does not require housing

5CCT Selectable



Box Qty: 12

IN STOCK

NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-4B-11W-5CCT-WH	120V	11w	750	27/30/35/40/50K	>90



6" SnapTrim Baffle Downlight

5CCT Selectable



Box Qty: 12

NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-6B-15W-5CCT-WH	120V	14w	1000	27/30/35/40/50K	>90



4" SnapTrim Downlight

Single CCT



Box Qty: 12

Final Production

Final Production

Final Production

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-4B-7W-27K	120V	7w	550	2700k	>90
LED-DLJBX-4B-7W-30K	120V	7w	550	3000k	>90
LED-DLJBX-4B-7W-50K	120V	7w	550	5000k	>90

6" SnapTrim Downlight

Single CCT



Box Qty: 12

Final Production

Final Production

Final Production


Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-6B-9W-27K	120V	9w	650	2700k	>90
LED-DLJBX-6B-9W-30K	120V	9w	650	3000k	>90
LED-DLJBX-6B-9W-50K	120V	9w	650	5000k	>90

DLJBX Accessories




LED-EMB-25W-HV-0/10V


Accessory Model	Description
CUNV-NC-ICAT	2"3" 4" 6" Universal Pre-Mounting New Construction Plate
C4-JBX-RI	4" Rough-In Plate
C6-JBX-RI	6" Rough-In Plate
LED-EMB-25W-HV-0/10V	Emergency Back Up For Interl Drivers (Works with all 0-10V Dim or <25W fixtures)



CUNV-NC-ICAT
Universal
Pre-Mounting Plate
5 3/10" x 14 1/2"

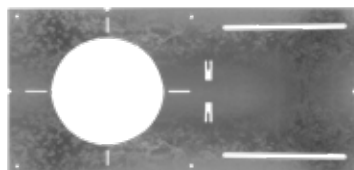

C4-JBX-RI
4" Rough In Plate
6 1/2" x 13 1/4"

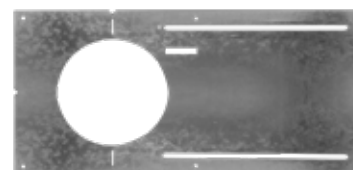

C6-JBX-RI
6" Rough In Plate
8 1/2" x 17 1/4"

Smart Downlight RGB+W

- RGB+W Technology: Tunable from 27K-50K + RGB colors
- Dimmable and controllable via Bluetooth from your smartphone
- Music Mode: RGB Colors dance to music
- Suitable for retrofit or new construction
- Set timing schedule and group fixtures together
- Connect to multiple phones
- Control your lights with WIFI

4" Smart Downlight RGB+W



Box Qty: 12

Model	Voltage	Watts	Lumens	Color	CRI
LED-ECODL-4-10.5W-RGB+W	120V	10.5w	800	RGB+W	>90

5/6" Smart Downlight RGB+W



Box Qty: 12

Model	Voltage	Watts	Lumens	Color	CRI
LED-ECODL-5/6-12W-RGB+W	120V	12w	1000	RGB+W	>90

Pre-installed Accessory Model	Description
Add '-EMB-' to model #	Emergency Backup (External 25W)



4"



5/6"



PHONE APP
APPLE



PHONE APP
ANDROID



COLOR



WHITE



SCENE



MUSIC RHYTHM





RDL-6CLIP



BLK-SM

BZ-SM

BN-SM



BLK-BFL

BZ-BFL

BN-BFL



4" Round Retrofit Downlight

- Selectable 5CCT (27/30/35/40/50K) and 3-Power wattages (8/10/12W)
- Instant On, no waiting time to heat up
- Compatible with most dimmers down to 5%
- Wet location rated

5CCT & 3 Power Selectable



Box Qty: 60



Model	Voltage	Watts	Lumens	Color	CRI
LED-RDL-4-PC-CCT-WH-SM	120V	12/10/8w	800/680/560lm	27/30/35/40/50K	>90

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 25W)

5/6" Round Retrofit Downlight

5CCT & 3 Power Selectable



Box Qty: 36



Model	Voltage	Watts	Lumens	Color	CRI
LED-RDL-5/6-PC-CCT-WH-SM	120V	18/15/12w	1300/1100/900lm	27/30/35/40/50K	>90

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency Backup (External 25W)
RDL-6CLIP	Tension clip for 5/6" Downlight. For use in old housings

Round Retrofit Downlight Accessories

Accessory Model	Description
RDL-TRIM-4-BLK-SM	4" Black Trim Smooth
RDL-TRIM-4-BZ-SM	4" Bronze Trim Smooth
RDL-TRIM-4-BN-SM	4" Brushed Nickel Trim Smooth
RDL-TRIM-4-WH-BFL	4" White Trim Baffle
RDL-TRIM-4-BLK-BFL	4" Black Trim Baffle
RDL-TRIM-4-BZ-BFL	4" Bronze Trim Baffle
RDL-TRIM-4-BN-BFL	4" Brushed Nickel Trim Baffle
RDL-TRIM-4-CUSTOM	4" Custom Trim
RDL-TRIM-5/6-BLK-SM	5/6" Black Trim Smooth
RDL-TRIM-5/6-BZ-SM	5/6" Bronze Trim Smooth
RDL-TRIM-5/6-BN-SM	5/6" Brushed Nickel Trim Smooth
RDL-TRIM-5/6-WH-BFL	5/6" White Trim Baffle
RDL-TRIM-5/6-BLK-BFL	5/6" Black Trim Baffle
RDL-TRIM-5/6-BRZ-BFL	5/6" Bronze Trim Baffle
RDL-TRIM-5/6-BN-BFL	5/6" Brushed Nickel Trim Baffle
RDL-TRIM-5/6-CUSTOM	5/6" Custom Trim

Accessory Model	Description
LED-EMB-25W-HV-0/10V	Emergency Back Up For Internal Drivers (Works with all 0-10V Dim or <25W fixtures) -Single Sided Flex-

Fire Rated LED Cans (IC-Rated)

- Fire Rated: Chicago Plenum
- IC-Rated
- Features Title 24 quick connect for LED trims



Box Qty: 4

ETA:

7/2022

NEW

NEW

Model	Voltage	Description
C4-NC-ICAT-LED-FR	120-277V	4" Fire Rated IC Can (New Construction)
C6-NC-ICAT-LED-FR	120-277V	6" Fire Rated IC Can (New Construction)


LED Cans (IC-Rated)

- IC-Rated
- Features Title 24 quick connect for LED trims



Box Qty: 6

Model	Voltage	Description
C4-NC-ICAT-LED	120-277V	4" IC Rated Can (New Construction)
C4-RM-ICAT-LED	120-277V	4" IC Rated Can (Remodel)
C6-NC-ICAT-LED	120-277V	6" IC Rated Can (New Construction)
C6-RM-ICAT-LED	120-277V	6" IC Rated Can (Remodel)

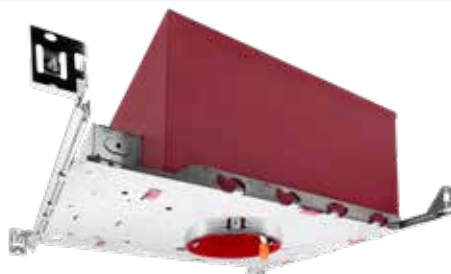

4" ADL Downlight

- Fits into standard 4" recessed can
- Instant On
- Compatible with most dimmers down to 5%

Single CCT



Box Qty: 20

Final Production



-BLK



-BZ



-BN



-WH



Model	Voltage	Watts	Lumens	Color	CRI
LED-ADL-4-10W-40K-BLK-SM	120V	10w	665	3000k	>90
LED-ADL-4-10W-50K-BLK-SM	120V	10w	665	4000k	>90
LED-ADL-4-10W-40K-BZ-SM	120V	10w	665	5000k	>90
LED-ADL-4-10W-50K-BZ-SM	120V	10w	665	3000k	>90
LED-ADL-4-10W-40K-BN-SM	120V	10w	665	4000k	>90
LED-ADL-4-10W-50K-BN-SM	120V	10w	665	5000k	>90
LED-ADL-4-10W-40K-BL/WH-SM	120V	10w	665	3000k	>90
LED-ADL-4-10W-50K-BL/WH-SM	120V	10w	665	4000k	>90
LED-ADL-4-10W-40K-BLK-BFL	120V	10w	665	5000k	>90
LED-ADL-4-10W-50K-BLK-BFL	120V	10w	665	3000k	>90
LED-ADL-4-10W-40K-BZ-BFL	120V	10w	665	4000k	>90
LED-ADL-4-10W-50K-BZ-BFL	120V	10w	665	5000k	>90
LED-ADL-4-10W-40K-BN-BFL	120V	10w	665	3000k	>90
LED-ADL-4-10W-50K-BN-BFL	120V	10w	665	4000k	>90
LED-ADL-4-10W-30K-BL/WH-BFL	120V	10w	665	5000k	>90
LED-ADL-4-10W-40K-BL/WH-BFL	120V	10w	665	3000k	>90
LED-ADL-4-10W-50K-BL/WH-BFL	120V	10w	665	4000k	>90
LED-ADL-4-10W-40K-WH-BFL	120V	10w	665	5000k	>90
LED-ADL-4-10W-50K-WH-BFL	120V	10w	665	3000k	>90



DISPLAY



BACK

Display featuring
10 of our canless
downlights.
Place a \$3,000+ stock
orders of downlights
and get a free
counter display.



5/8" ADL Downlight

- Fits into standard 5" or 6" recessed can
- Instant On
- Compatible with most dimmers down to 5%

Single CCT



Box Qty: 20

Model	Voltage	Watts	Lumens	Color	CRI
LED-ADL-5/6-15W-30K-BZ-SM	120V	15w	1100	3000k	>90
LED-ADL-5/6-15W-40K-BZ-SM	120V	15w	1100	4000k	>90
LED-ADL-5/6-15W-50K-BZ-SM	120V	15w	1100	5000k	>90
LED-ADL-5/6-15W-30K-BN-SM	120V	15w	1100	3000k	>90
LED-ADL-5/6-15W-40K-BN-SM	120V	15w	1100	4000k	>90
LED-ADL-5/6-15W-50K-BN-SM	120V	15w	1100	5000k	>90
LED-ADL-5/6-15W-30K-BL/WH-SM	120V	15w	1100	3000k	>90
LED-ADL-5/6-15W-40K-BL/WH-SM	120V	15w	1100	4000k	>90
LED-ADL-5/6-15W-50K-BL/WH-SM	120V	15w	1100	5000k	>90
LED-ADL-5/6-15W-30K-BLK-BFL	120V	15w	1100	3000k	>90
LED-ADL-5/6-15W-40K-BLK-BFL	120V	15w	1100	4000k	>90
LED-ADL-5/6-15W-50K-BLK-BFL	120V	15w	1100	5000k	>90
LED-ADL-5/6-15W-30K-BZ-BFL	120V	15w	1100	3000k	>90
LED-ADL-5/6-15W-40K-BZ-BFL	120V	15w	1100	4000k	>90
LED-ADL-5/6-15W-50K-BZ-BFL	120V	15w	1100	5000k	>90
LED-ADL-5/6-15W-30K-BN-BFL	120V	15w	1100	3000k	>90
LED-ADL-5/6-15W-40K-BN-BFL	120V	15w	1100	4000k	>90
LED-ADL-5/6-15W-50K-BN-BFL	120V	15w	1100	5000k	>90
LED-ADL-5/6-15W-30K-BL/WH-BFL	120V	15w	1100	3000k	>90
LED-ADL-5/6-15W-40K-BL/WH-BFL	120V	15w	1100	4000k	>90
LED-ADL-5/6-15W-50K-BL/WH-BFL	120V	15w	1100	5000k	>90
LED-ADL-5/6-15W-30K-WH-BFL	120V	15w	1100	3000k	>90
LED-ADL-5/6-15W-40K-WH-BFL	120V	15w	1100	4000k	>90
LED-ADL-5/6-15W-50K-WH-BFL	120V	15w	1100	5000k	>90

Final Production

-BLK

-BZ

-BN

-WH



DISPLAY



BACK

Display featuring 10 of our canless downlights. Place a \$3,000+ stock orders of downlights and get a free counter display.



4" Square ADL Downlight

- Selectable 5CCT (27/30/35/40/50K)
- Instant On
- Compatible with most dimmers down to 5%

5CCT Selectable



Box Qty: 12



Model	Voltage	Watts	Lumens	Color	CRI
LED-DL-SQ-4-11W-5CCT	120V	11w	750	27/30/35/40/50K	>90

4" Square ADL Downlight Trims

Accessory Model	Description
DL-SQ-4-TRIM-BLK-SM	DL-SQ-4 Black Smooth Trim
DL-SQ-4-TRIM-BZ-SM	DL-SQ-4 Bronze Smooth Trim



BLK



BZ

6" Square ADL Downlight

5CCT Selectable



Box Qty: 12



Model	Voltage	Watts	Lumens	Color	CRI
LED-DL-SQ-6-14W-5CCT	120V	14w	1100	27/30/35/40/50K	>90

6" Square ADL Downlight Trims

Accessory Model	Description
DL-SQ-6-TRIM-BLK-SM	DL-SQ-6 Black Smooth Trim
DL-SQ-6-TRIM-BZ-SM	DL-SQ-6 Bronze Smooth Trim



BLK



BZ



Accessory Model	Description
LED-EMB-25W-HV-0/10V	Emergency Back Up For Internal Drivers (Works with all 0-10V Dim or <25W fixtures -Single Sided Flex-



5CCT Selectable Switch

Switch between 27, 30, 35, 40, and 50K color temperatures with the flip of a switch, located on the back of the fixture.





Final Production

6" Innovate Downlight

Box Qty: 6

Model	Voltage	Watts	Lumens	Color	CRI
LED-FL-RES-6-18W-CW	120V	18w	1500	4000k	>80
LED-FL-RES-6-18W-CWUNV	120-277V	18w	1500	4000k	>80

Accessory Model	Description
LED-EMB-25W-HV-0/10V	Emergency Back Up For Internal Drivers (Works with all 0-10V Dim or <25W fixtures) -Single Sided Flex-



4" 12V Innovate Downlight

- Easy-mount spring clips allow tool-less retrofit installation
- Heavy-duty die-cast aluminum heatsink
- Only ideal with magnetic transformers
- Dimmable with low voltage dimmers
- Uses standard MR16 connector

Box Qty: 24

Model	Voltage	Watts	Lumens	Color	CRI
LED-EDL-4-10W-5CCT-WH-12V	12V	10w	600	27/30/35/40/50K	>80



Downlight Accessories

- Compatible with 4" ADL and FL downlights

Final Production

Accessory Model	Description
ADL-4-TRIM-BLK-SM	4" Black Snap-On Trim Smooth
ADL-4-TRIM-BZ-SM	4" Bronze Snap-On Trim Smooth
ADL-4-TRIM-BN-SM	4" Brushed Nickel Snap-On Trim Smooth
ADL-4-TRIM-BL/WH-SM	4" White In/Black Out Snap-On Trim Smooth
ADL-4-TRIM-BLK-BFL	4" Black Snap-On Trim Baffle
ADL-4-TRIM-BZ-BFL	4" Bronze Snap-On Trim Baffle
ADL-4-TRIM-BN-BFL	4" Brushed Nickel Snap-On Trim Baffle
ADL-4-TRIM-WH-BFL	4" White Snap-On Trim Baffle
ADL-TRIM-CUSTOM	4" Custom Color Snap-On Trim



4" Adjustable Downlight

- Adjustable fixture allows 360° free rotation, and 60° pitch angle
- 5CCT Color Selectable (27/30/35/40/50K)
- Title 24 connector (E26 adapter included)

5CCT Selectable


Box Qty: 24


Model	Voltage	Watts	Lumens	Color	CRI
LED-DL-ADJ-4-10W-5CCT-WH	120V	10w	750	27/30/35/40/50K	>90
LED-DL-ADJ-4-10W-5CCT-BLK	120V	10w	750	27/30/35/40/50K	>90

Accessory Model	Description
LED-EMB-25W-HV-0/10V	Emergency Back Up For Internal Drivers (Works with all 0-10V Dim or <25W fixtures) -Single Sided Flex-

5/6" Adjustable Downlight

5CCT Selectable


Box Qty: 16


Model	Voltage	Watts	Lumens	Color	CRI
LED-DL-ADJ-5/6-16.5W-5CCT-WH	120V	16.5w	1200	27/30/35/40/50K	>90
LED-DL-ADJ-5/6-16.5W-5CCT-BLK	120V	16.5w	1200	27/30/35/40/50K	>90

Accessory Model	Description
LED-EMB-25W-HV-0/10V	Emergency Back Up For Internal Drivers (Works with all 0-10V Dim or <25W fixtures) -Single Sided Flex-

5/6" Adjustable Downlight

Single CCT


Box Qty: 16

Model	Voltage	Watts	Lumens	Color	CRI
LED-DL-ADJ-5/6-16.5W-WW	120V	16.5w	1200	3000k	>90

Accessory Model	Description
LED-EMB-25W-HV-0/10V	Emergency Back Up For Internal Drivers (Works with all 0-10V Dim or <25W fixtures) -Single Sided Flex-

5" Trimless Surface Mounts

- Ultra thin, easy to install, and perfect for any kitchens, corridors
- Compatible with 30/40 junction box or recessed can installation
- Super thin modern frame


Box Qty: 20

	Model	Voltage	Watts	Lumens	Color	CRI
NEW	LED-TSM-5R-12W-30K-WH	120V	12w	850	3000k	>90
NEW	LED-TSM-5R-12W-30K-BLK	120V	12w	850	3000k	>90
NEW	LED-TSM-5R-12W-30K-BN	120V	12w	850	3000k	>90

	Accessory Model	Description
NEW	TSM-4CLIP	4" Recessed Can Conv (for 5" only)



7" Trimless Surface Mounts


Box Qty: 12

	Model	Voltage	Watts	Lumens	Color	CRI
NEW	LED-TSM-7R-15W-30K-WH	120V	15w	1100	3000k	>90
NEW	LED-TSM-7R-15W-30K-BLK	120V	15w	1100	3000k	>90
NEW	LED-TSM-7R-15W-30K-BN	120V	15w	1100	3000k	>90

	Accessory Model	Description
NEW	TSM-6CLIP	6" Recessed Can Conv (for 7,9,11" only)



9" Trimless Surface Mounts


Box Qty: 12

	Model	Voltage	Watts	Lumens	Color	CRI
NEW	LED-TSM-9R-18W-30K-WH	120V	18w	1300	3000k	>90
NEW	LED-TSM-9R-18W-30K-BLK	120V	18w	1300	3000k	>90
NEW	LED-TSM-9R-18W-30K-BN	120V	18w	1300	3000k	>90

	Accessory Model	Description
NEW	TSM-6CLIP	6" Recessed Can Conv (for 7,9,11" only)



11" Trimless Surface Mounts


Box Qty: 8

	Model	Voltage	Watts	Lumens	Color	CRI
NEW	LED-TSM-11R-20W-30K-WH	120V	20w	1500	3000k	>90
NEW	LED-TSM-11R-20W-30K-BLK	120V	20w	1500	3000k	>90
NEW	LED-TSM-11R-20W-30K-BN	120V	20w	1500	3000k	>90

	Accessory Model	Description
NEW	TSM-6CLIP	6" Recessed Can Conv (for 7,9,11" only)

	Accessory Model	Description
	LED-EMB-25W-HV-0/10V	Emergency Back Up For Internal Drivers (Works with all 0-10V Dim or <25W fixtures) -Single Sided Flex-



5" Round Slimline Disk

- Edge-lit design provides even light distribution
- Check spec sheet for dimmer compatibility. Triac and 0-10V options are available.
- Work in 30/40 J-Box (0/10V Version only 40)
- Fixture is wet location rated
- Newly updated CCT switch, allows for installation into pancake J-box

Triac Dimmable


Box Qty: 20
NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-SLDSKR-5-10W-5CCT-WH	120V	10w	650	27/30/35/40/50K	>90
LED-SLDSKR-5-10W-30K	120V	10w	650	3000k	>90



0-10V 120-277V


Box Qty: 20
NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-SLDSKR-5-10W-TRI-0/10V	120-277V	10w	650	30/40/50k	>90



7" Round Slimline Disk

Triac Dimmable


Box Qty: 20
NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-SLDSKR-7-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K	>90
LED-SLDSKR-7-15W-30K	120V	15w	1000	3000k	>90



0-10V 120-277V


Box Qty: 20
NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-SLDSKR-7-15W-TRI-0/10V	120-277V	15w	1000	30/40/50k	>90



12" Round Slimline Disk

Triac Dimmable


Box Qty: 6
NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-SLDSKR-12-22W-5CCT-WH	120V	22w	1450	27/30/35/40/50K	>90
LED-SLDSKR-12-22W-TRI	120V	22w	1450	30/40/50k	>90
LED-SLDSKR-12-22W-30K	120V	22w	1450	3000k	>90
LED-SLDSKR-12-22W-40K	120V	22w	1450	4000k	>90



0-10V 120-277V


Box Qty: 6
NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-SLDSKR-12-22W-TRI-0/10V	120-277V	22w	1450	30/40/50k	>90



Slimline Disk Trims




BN

BLK

BZ

Model	Description
SLDSK-5R-TRIM-BLK	5" Round Snap on Trim Black
SLDSK-5R-TRIM-BRZ	5" Round Snap on Trim Bronze
SLDSK-5R-TRIM-BNI	5" Round Snap on Trim Brushed Nickel
SLDSK-7R-TRIM-BLK	7" Round Snap on Trim Black
SLDSK-7R-TRIM-BRZ	7" Round Snap on Trim Bronze
SLDSK-7R-TRIM-BNI	7" Round Snap on Trim Brushed Nickel
SLDSK-12R-TRIM-BLK	12" Round Snap on Trim Black
SLDSK-12R-TRIM-BRZ	12" Round Snap on Trim Bronze
SLDSK-12R-TRIM-BNI	12" Round Snap on Trim Brushed Nickel

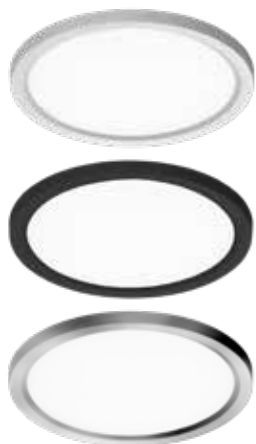

15" Round Slimline Disk


5CCT Selectable



Box Qty: 20



	Model	Voltage	Watts	Lumens	Color	CRI
NEW	LED-SLDSKR-15-30W-5CCT-WH	120V	30w	2000	27/30/35/40/50K	>90
NEW	LED-SLDSKR-15-30W-5CCT-BLK	120V	30w	2000	27/30/35/40/50K	>90
NEW	LED-SLDSKR-15-30W-5CCT-BN	120V	30w	2000	27/30/35/40/50K	>90

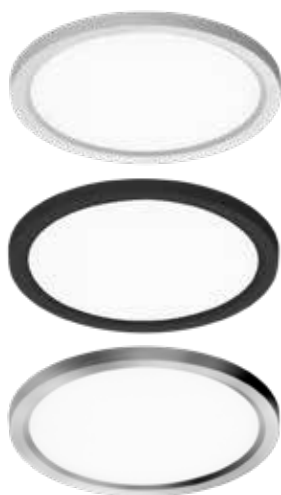

19" Round Slimline Disk

5CCT Selectable



Box Qty: 20



	Model	Voltage	Watts	Lumens	Color	CRI
NEW	LED-SLDSK-19R-35W-5CCT-WH	120V	35w	2200	27/30/35/40/50K	>90
	LED-SLDSK-19R-35W-5CCT-BLK	120V	35w	2200	27/30/35/40/50K	>90
	LED-SLDSK-19R-35W-5CCT-BN	120V	35w	2200	27/30/35/40/50K	>90

3CCT Selectable




Box Qty: 20



	Model	Voltage	Watts	Lumens	Color	CRI
	LED-SLDSK-19R-35W-TRI-WH	120V	35w	2200	30/40/50k	>90

*Custom finishes include bronze, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

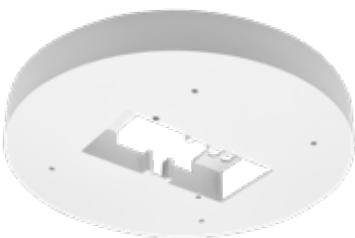

Accessory Model	Description
SLDSKR-15-TRIM-CUS	15" Custom Paint (contact us for qty quote)
SLDSKR-19-TRIM-CUS	19" Custom Paint (contact us for qty quote)
SLDSKR-7-EMB	7" Round EM BACKUP
SLDSKR-7-EMB-EMPTY	7" Round EM BACKUP Empty Body
SLDSKR-7-EMB-UNV	7" Round EM BACKUP for ALL Models
SLDSKR-7-EMB-EMPTY-UNV	7" Round BACKUP Empty Body for ALL Models
SLDSKR-12-EMB-UNV	12" Round EM BACKUP for ALL Models
SLDSKR-12-EMB-EMPTY-UNV	12" Round BACKUP Empty Body for ALL Models
SLDSK-4CLIP	Add the can converter on the fixture to install into a standard 4" recessed can.
SLDSK-12-6CLIP	Add the can converter on the fixture to install into a standard 6" recessed can.
SLDSK-7-6CLIP	Add the can converter on the fixture to install into a standard 6" recessed can.
LED-EMB-25W-HV-T8	Emergency Back Up For AC driverless Internal Drivers (Works with all fixtures <25W fixtures) -Single Sided Flex-



5" Square Slimline Disk

- Edge-lit design provides even light distribution
- Check spec sheet for dimmer compatibility. Triac and 0-10V options are available.
- Work in 30/40 J-Box (0/10V Version only 40)
- Fixture is wet location rated
- Newly updated CCT switch, allows for installation into pancake J-box

Triac Dimmable


Box Qty: 20
NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-SLDSKSQ-5-10W-5CCT-WH	120V	10w	650	27/30/35/40/50K	>90
LED-SLDSKSQ-5-10W-TRI	120V	10w	650	30/40/50k	>90
LED-SLDSKSQ-5-10W-TRI-0/10V	120V	10w	650	30/40/50k	>90



Single CCT


Box Qty: 20

Model	Voltage	Watts	Lumens	Color	CRI
LED-SLDSKSQ-5-10W-30K-0/10V	120-277V	10w	650	3000k	>90



7" Square Slimline Disk

Triac Dimmable


Box Qty: 20
NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-SLDSKSQ-7-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K	>90
LED-SLDSKSQ-7-15W-TRI	120V	15w	1000	30/40/50k	>90
LED-SLDSKSQ-7-15W-TRI-0/10V	120V	15w	1000	30/40/50k	>90



Single CCT


Box Qty: 20

Model	Voltage	Watts	Lumens	Color	CRI
LED-SLDSKSQ-7-15W-30K-0/10V	120-277V	15w	1000	3000k	>90



12" Square Slimline Disk

5CCT Selectable


Box Qty: 20
NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-SLDSKSQ-12-22W-5CCT-WH	120V	22w	1450	27/30/35/40/50K	>90



3CCT Selectable


Box Qty: 20

Model	Voltage	Watts	Lumens	Color	CRI
LED-SLDSKSQ-12-22W-TRI	120V	22w	1450	30/40/50k	>90



Slimline Disk Trims

Model	Description
SLDSKSQ-5-TRIM-BLK	5" Square Snap on Trim Black
SLDSKSQ-5-TRIM-BRZ	5" Square Snap on Trim Bronze
SLDSKSQ-5-TRIM-BNI	5" Square Snap on Trim Brushed Nickel
SLDSKSQ-7-TRIM-BLK	7" Square Snap on Trim Black
SLDSKSQ-7-TRIM-BRZ	7" Square Snap on Trim Bronze
SLDSKSQ-7-TRIM-BNI	7" Square Snap on Trim Brushed Nickel
SLDSKSQ-12-TRIM-BLK	12" Square Snap on Trim Black
SLDSKSQ-12-TRIM-BRZ	12" Square Snap on Trim Bronze
SLDSKSQ-12-TRIM-BNI	12" Square Snap on Trim Brushed Nickel


-BLK

-BNI

-BRZ

Accessory Model	Description
SLDSK-4CLIP	Add the can converter on the fixture to install into a standard 4" recessed can.
SLDSK-7-6CLIP	Add the can converter on the fixture to install into a standard 6" recessed can.
SLDSK-12-6CLIP	Add the can converter on the fixture to install into a standard 6" recessed can.
LED-EMB-25W-HV-0/10V	Emergency Back Up For Internal Drivers (Works with all 0-10V Dim or <25W fixtures) -Single Sided Flex-



4" Cusp Disk

- '-TRI' model switches between 3000k, 4000k, & 5000k
- Mount to existing 30 or 40 j-box or ceiling
- Fixture is damp rated. Silicone sealant required for wet location
- Newly updated CCT switch, allows for installation into pancake J-box

5CCT Selectable


Box Qty: 20


Model	Voltage	Watts	Lumens	Color	CRI
LED-CDSK-4-10W-5CCT-WH	120V	10w	650	27/30/35/40/50K	>90
LED-CDSK-4-10W-5CCT-BZ	120V	10w	650	27/30/35/40/50K	>90

3CCT Selectable


Box Qty: 20


Model	Voltage	Watts	Lumens	Color	CRI
LED-CDSK-4-10W-TRI-WH	120V	10w	650	30/40/50k	>90
LED-CDSK-4-10W-TRI-BN	120V	10w	650	30/40/50k	>90

Accessory Model	Description
CDSK-4-CLIP	4" Recessed Can Converteror <25W fixtures -Single Sided Flex-
Add '-EMB-' to model #	Emergency Backup (External 25W)

6" Cusp Disk

5CCT Selectable


Box Qty: 20


Model	Voltage	Watts	Lumens	Color	CRI
LED-CDSK-6-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K	>90
LED-CDSK-6-15W-5CCT-BZ	120V	15w	1000	27/30/35/40/50K	>90
LED-CDSK-6-15W-5CCT-BN	120V	15w	1000	27/30/35/40/50K	>90
LED-CDSK-6-15W-5CCT-BLK	120V	15w	1000	27/30/35/40/50K	>90

3CCT Selectable


Box Qty: 20


Model	Voltage	Watts	Lumens	Color	CRI
LED-CDSK-6-15W-TRI-WH	120V	15w	1000	30/40/50k	>90
LED-CDSK-6-15W-TRI-BLK	120V	15w	1000	30/40/50k	>90
LED-CDSK-6-15W-TRI-BZ	120V	15w	1000	30/40/50k	>90
LED-CDSK-6-15W-TRI-BN	120V	15w	1000	30/40/50k	>90

Accessory Model	Description
CDSK-6-CLIP	6" Recessed Can Converteror <25W fixtures -Single Sided Flex-
Add '-EMB-' to model #	Emergency Backup (External 25W)

6" Cusp Disk

Single CCT


Box Qty: 20

Model	Voltage	Watts	Lumens	Color	CRI
LED-CDSK-6-15W-27K	120V	15w	1000	2700k	>90
LED-CDSK-6-15W-30K	120V	15w	1000	3000k	>90
LED-CDSK-6-15W-35K	120V	15w	1000	3500k	>90
LED-CDSK-6-15W-40K	120V	15w	1000	4000k	>90
LED-CDSK-6-15W-50K	120V	15w	1000	5000k	>90

Accessory Model	Description
CDSK-6-CLIP	6" Recessed Can Converteror <25W fixtures -Single Sided Flex-
Add '-EMB-' to model	Emergency Backup (External 25W)

8" Cusp Disk

CCT Selectable


Box Qty: 20


Model	Voltage	Watts	Lumens	Color	CRI
LED-CDSK-8-27W-5CCT-WH	120V	27w	2100	27/30/35/40/50K	>90
LED-CDSK-8-18W-TRI	120V	18w	1400	30/40/50k	>90



Accessory Model	Description
Add '-EMB-' to model #	Emergency Backup (External 25W)


-BN

-BLK

-BZ

-BN

NEW

ETA: 7/2022
NEW

4" Cusp Disk w/ PIR Sensor

- Motion sensor turns OFF after one minute
- Mount to existing 30 or 40 j-box or ceiling
- Fixture is damp rated. Silicone sealant required for wet location
- This item is not dimmable
- Newly updated CCT switch, allows for installation into pancake J-box
- Closet rated

5CCT Selectable

SELECT SWITCH DIMMABLE JA8 TITLE 24 COMPLIANT Box Qty: 20

Model	Voltage	Watts	Lumens	Color	CRI
LED-CDSK-4-10W-5CCT-WH-PIR	120V	10w	650	27/30/35/40/50K	>90



3CCT Selectable

SELECT SWITCH DIMMABLE JA8 TITLE 24 COMPLIANT Box Qty: 20

Model	Voltage	Watts	Lumens	Color	CRI
LED-CDSK-4-10W-TRI-WH-PIR	120V	10w	650	30/40/50k	>90



Accessory Model	Description
CDSK-4-CLIP	4" Recessed Can Convertor
Add '-EMB-' to model #	Emergency Backup (External 25W)

6" Cusp Disk w/ PIR Sensor

5CCT Selectable

SELECT SWITCH DIMMABLE JA8 TITLE 24 COMPLIANT Box Qty: 20

Model	Voltage	Watts	Lumens	Color	CRI
LED-CDSK-6-15W-5CCT-WH-PIR	120V	15w	1000	27/30/35/40/50K	>90



3CCT Selectable


SELECT SWITCH DIMMABLE JA8 TITLE 24 COMPLIANT Box Qty: 20

Model	Voltage	Watts	Lumens	Color	CRI
LED-CDSK-6-15W-TRI-WH-PIR	120V	15w	1000	30/40/50k	>90



Accessory Model	Description
CDSK-6-CLIP	6" Recessed Can Convertor
Add '-EMB-' to model #	Emergency Backup (External 25W)



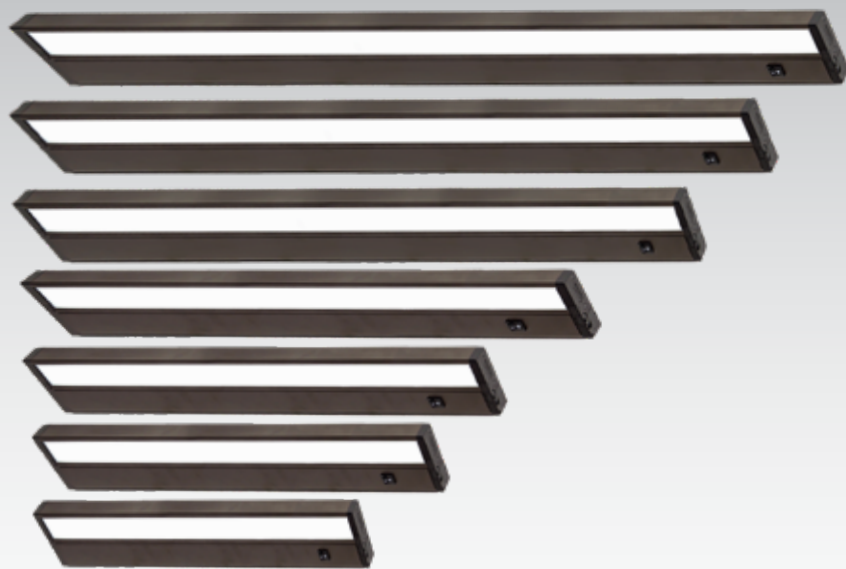

3000+

\$250.00

DISPLAY

End Connectors

Daisy chain multiple fixtures


Edge-Lit Technology

Produces uniform, diffuse light

Hardware Knockouts

No external wiring necessary

- Toggles between selectable colors, as well as high & low light intensity modes
- Frosted lens will not yellow or deform over time
- Use jumper connectors to daisy-chain multiple fixtures
- Compatible with most dimmers (e.g. Lutron DVCL-153P)
- Install as a hardwire or use included power cord
- Built-in screws in the front make installation easy

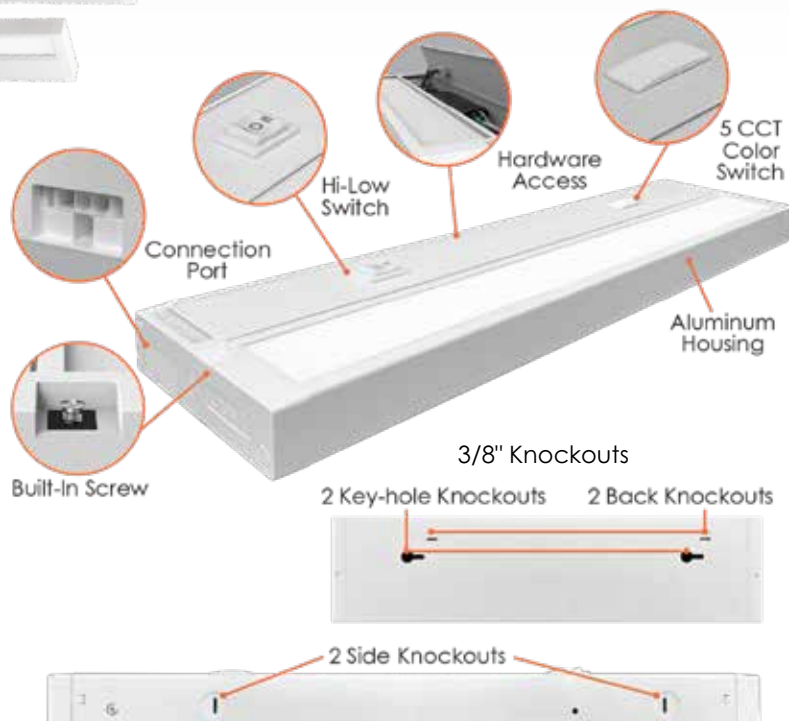

Undercabinet Bar Light 5CCT Selectable



Box Qty: 8, 11, 14 - 12
22, 28, 33, 42 - 6



	Model	Voltage	Watts	Lumens	Color	CRI
NEW	LED-UC-8I-4W-5CCT-WH	120V	4w	180	27/30/35/40/50K	>90
NEW	LED-UC-11I-6W-5CCT-WH	120V	6w	350	27/30/35/40/50K	>90
NEW	LED-UC-14I-8W-5CCT-WH	120V	8w	570	27/30/35/40/50K	>90
NEW	LED-UC-22I-10W-5CCT-WH	120V	10w	750	27/30/35/40/50K	>90
NEW	LED-UC-28I-12W-5CCT-WH	120V	12w	900	27/30/35/40/50K	>90
NEW	LED-UC-33I-15W-5CCT-WH	120V	15w	1,050	27/30/35/40/50K	>90
NEW	LED-UC-42I-18W-5CCT-WH	120V	18w	1,250	27/30/35/40/50K	>90
NEW	LED-UC-8I-4W-5CCT-BZ	120V	4w	180	27/30/35/40/50K	>90
NEW	LED-UC-11I-6W-5CCT-BZ	120V	6w	350	27/30/35/40/50K	>90
NEW	LED-UC-14I-8W-5CCT-BZ	120V	8w	570	27/30/35/40/50K	>90
NEW	LED-UC-22I-10W-5CCT-BZ	120V	10w	750	27/30/35/40/50K	>90
NEW	LED-UC-28I-12W-5CCT-BZ	120V	12w	900	27/30/35/40/50K	>90
NEW	LED-UC-33I-15W-5CCT-BZ	120V	15w	1,050	27/30/35/40/50K	>90
NEW	LED-UC-42I-18W-5CCT-BZ	120V	18w	1,250	27/30/35/40/50K	>90

3CCT Selectable



Box Qty: 8, 11, 14 - 12
22, 28, 42 - 6



	Model	Voltage	Watts	Lumens	Color	CRI
	LED-UC-8I-4W-TRI-W	120V	4w	180	30/40/50k	>90
	LED-UC-11I-6W-TRI-W	120V	6w	350	30/40/50k	>90
	LED-UC-14I-8W-TRI-W	120V	8w	570	30/40/50k	>90
	LED-UC-22I-10W-TRI-W	120V	10w	750	30/40/50k	>90
	LED-UC-28I-12W-TRI-W	120V	12w	900	30/40/50k	>90
	LED-UC-42I-18W-TRI-W	120V	18w	1,250	30/40/50k	>90
	LED-UC-11I-6W-TRI-B	120V	6w	350	30/40/50k	>90
	LED-UC-14I-8W-TRI-B	120V	8w	570	30/40/50k	>90
	LED-UC-22I-10W-TRI-B	120V	10w	750	30/40/50k	>90
	LED-UC-28I-12W-TRI-B	120V	12w	900	30/40/50k	>90
	LED-UC-42I-18W-TRI-B	120V	18w	1,250	30/40/50k	>90

Single CCT



Box Qty: 11, 14 - 12
22, 28, 42 - 6

	Model	Voltage	Watts	Lumens	Color	CRI
	LED-UC-11I-6W-30K-W	120V	6w	350	3000k	>90
	LED-UC-42I-18W-30K-W	120V	18w	1,250	3000k	>90
	LED-UC-14I-8W-30K-B	120V	8w	570	3000k	>90
	LED-UC-22I-10W-30K-B	120V	10w	750	3000k	>90
	LED-UC-28I-12W-30K-B	120V	12w	900	3000k	>90
	LED-UC-42I-18W-30K-B	120V	18w	1,250	3000k	>90

Included in the box



Accessory Model	Description
UC-JUMPER-6"-WH	6" UC Jumper
UC-JUMPER-12"-WH	12" UC Jumper
UC-JUMPER-24"-WH	24" UC Jumper
UC-JUMPER-6"-BZ	6" UC Jumper
UC-JUMPER-12"-BZ	12" UC Jumper
UC-PC-5'-WH	5' Power Cable
UC-PC-5'-BZ	5' Power Cable
UC-JBOX	Undercabinet Junction Box



Undercabinet Puck Light

- Mounting options include either recessed or surface mounted
- Embedded magnets allow for easily interchangeable face plate
- Split-wire connectors allow easy daisy-chaining of fixtures
- Dimmable with electronic constant voltage transformer.
Do not use magnetic system.
- 5-100% dimming with compatible electronic dimming drivers
(See CV Drivers)

Single CCT



Box Qty: 50

Model	Voltage	Watts	Lumens	Color	CRI
LED-PCK-3W-27K-12V	12V	3w	300	2700k	>90
LED-PCK-3W-30K-12V	12V	3w	300	3000k	>90
LED-PCK-3W-40K-12V	12V	3w	300	4000k	>90
LED-PCK-3W-50K-12V	12V	3w	300	5000k	>90
LED-PCK-3W-27K-24V	24V	3w	300	2700k	>90
LED-PCK-3W-30K-24V	24V	3w	300	3000k	>90


Undercabinet Puck Light Accessories

Box Qty: 10



Model	Description
LED-PCK-TRM-BLK	Puck Light Trim, Black
LED-PCK-TRM-BRZ	Puck Light Trim, Bronze
LED-PCK-TRM-CP	Puck Light Trim, Copper
LED-PCK-TRM-NCK	Puck Light Trim, Brushed Nickel
LED-PCK-TRM-SLVR	Puck Light Trim, Silver
ET-12V-12W	12W Undercabinet Transformer




-WH

-BLK


-BZ

LED Step Lights

- Available in white, bronze, or black finish
- 3 faceplates included in the box: horizontal angled louvre, vertical angled louvre, and flat frosted lens
- Rated for indoor and outdoor use (IP67)
- Non-dimmable


Box Qty: 24

Model	Voltage	Watts	Lumens	Color	CRI
LED-STEP-AGL-2W-27K-120V-WH	120V	2w	150	2700k	>90
LED-STEP-AGL-2W-27K-120V-BLK	120V	2w	150	2700k	>90
LED-STEP-AGL-2W-27K-120V-BZ	120V	2w	150	2700k	>90
LED-STEP-AGL-2W-30K-120V-WH	120V	2w	150	3000k	>90
LED-STEP-AGL-2W-30K-120V-BLK	120V	2w	150	3000k	>90
LED-STEP-AGL-2W-30K-120V-BZ	120V	2w	150	3000k	>90
LED-STEP-AGL-2W-40K-120V-WH	120V	2w	150	4000k	>90
LED-STEP-AGL-2W-40K-120V-BLK	120V	2w	150	4000k	>90
LED-STEP-AGL-2W-40K-120V-BZ	120V	2w	150	4000k	>90


-WH

-BLK

-BZ

-WH

-BLK

-BN

LED ARCY Step Lights

- Available in white, brushed nickel and black
- Vertical (VT) or Horizontal (HZ) versions available
- Rated for indoor and outdoor use (IP67)
- Non-dimmable


Box Qty: 18

ETA: 7/2022

NEW
NEW
NEW
NEW
NEW
NEW

Model	Voltage	Watts	Lumens	Color	CRI
LED-STEP-ARC-3W-5CCT-HZ-WH	120V	3w	150	27/30/35/40/50K	>90
LED-STEP-ARC-3W-5CCT-VT-WH	120V	3w	150	27/30/35/40/50K	>90
LED-STEP-ARC-3W-5CCT-HZ-BLK	120V	3w	150	27/30/35/40/50K	>90
LED-STEP-ARC-3W-5CCT-VT-BLK	120V	3w	150	27/30/35/40/50K	>90
LED-STEP-ARC-3W-5CCT-HZ-BN	120V	3w	150	27/30/35/40/50K	>90
LED-STEP-ARC-3W-5CCT-VT-BN	120V	3w	150	27/30/35/40/50K	>90


-WH

-BLK

-BN




Emergency Exit Sign (Single/Double Sided)

- Super bright SMD LED
- Film protectant for extra shatter protection (food industry OK)
- Non-Dimmable
- For indoor use only



Box Qty: 12

Model	Voltage	Watts	Color
LED-EM-EXT-R-WH	120-277V	3w	Red
LED-EM-EXT-G-WH	120-277V	3w	Green



Emergency Exit Sign Combo (Single/Double Sided)

- Test switch and charge indicator
- Non-Dimmable
- Film protectant for extra shatter protection (food industry OK)
- For indoor use only



Box Qty: 10

Model	Voltage	Watts	Color
LED-EM-EXT-R-WH-CMB	120-277V	3.5w	Red
LED-EM-EXT-G-WH-CMB	120-277V	3.5w	Green



Edge-Lit Emergency Exit Sign (Single/Double Sided)

- Can be illuminated single or double sided (Removeable plate in middle)
- Test switch and charge indicator
- Film protectant for extra shatter protection (food industry OK)
- For indoor use only



Box Qty: 10

Model	Voltage	Watts	Color
LED-EM-EXT-EL-R (S)	120-277V	3w	Red
LED-EM-EXT-EL-G (S)	120-277V	3w	Green
LED-EM-EXT-EL-R (D)	120-277V	3w	Red
LED-EM-EXT-EL-G (D)	120-277V	3w	Green





Emergency Exit Sign (Single/Double Sided)

- Super bright SMD LED
- Film protectant for extra shatter protection (food industry OK)
- Non-Dimmable
- For indoor use only
- Remote capable


Box Qty: 8

ETA: 8/2022

NEW
NEW

Model	Voltage	Watts	Color
LED-EM-EXT-R-WH-CMB-RC	120-277V	3.5w	Red
LED-EM-EXT-G-WH-CMB-RC	120-277V	3.5w	Green



Single Remote Head

- Super bright SMD LED
- Film protectant for extra shatter protection (food industry OK)
- Non-Dimmable
- For indoor and outdoor use
- Only compatible with RC-EMB


Box Qty: 24

ETA: 8/2022

NEW

Model	Voltage	Watts	Color
LED-EM-RC-1	120-277V	1.5w	5000K



Double Remote Head

- Super bright SMD LED
- Film protectant for extra shatter protection (food industry OK)
- Non-Dimmable
- For indoor and outdoor use
- Only compatible with RC-EMB


Box Qty: 15

ETA: 8/2022

NEW

Model	Voltage	Watts	Color
LED-EM-RC-2	120-277V	3w	5000K



Emergency LED Light

- Super bright SMD LED
- Film protectant for extra shatter protection (food industry OK)
- Non-Dimmable
- For indoor use only


Box Qty: 10

Model	Voltage	Watts	Lumens	Color	CRI
LED-EM-DH	120-277V	3w	N/A	5000k	N/A



Outdoor Emergency Wallpack w/ Photocell

- Super bright SMD LED
- Overcharge & Over-discharge protection
- Non-Dimmable
- IP65 Rated


Box Qty: 6

Model	Voltage	Watts	Lumens	Color	CRI
LED-EM-WP-12W-PC-BZ	120-277V	12w	1,000	5000k	N/A



Corn Bulbs - 3 Color and 3 Power Selectable

- Select between 3 different wattages and 3 different colors
- Includes 4K surge protection
- Multiple base types available
- Twist-C technology

Box Qty:
3M36: 12
3M54: 12
3M80: 6
3M120: 6

3CCT & 3 Power Selectable



Model	Voltage	Watts	Lumens	Color	CRI
LED-CRN-3M36-TRI-E26	120-277V	36/27/18w	145lm/w	30/40/50k	>80
LED-CRN-3M36-TRI-EX39	120-277V	36/27/18w	145lm/w	30/40/50k	>80
LED-CRN-3M54-TRI-E26	120-277V	54/45/36w	145lm/w	30/40/50k	>80
LED-CRN-3M54-TRI-EX39	120-277V	54/45/36w	145lm/w	30/40/50k	>80
LED-CRN-3M80-TRI-EX39	120-277V	80/63/54w	145lm/w	30/40/50k	>80
LED-CRN-3M120-TRI-EX39	120-277V	120/100/80w	145lm/w	30/40/50k	>80

Accessory Model	Description
HB01DMS-A	Bi-Level Motion + Daylight Sensor
HB03R	Controller for HB01DMS-A (Controls Multiple)

HB01DMS-A

Bi Level Motion Sensor and
Daylight Harvesting Sensor

Watts	Lumens
18W	2,610
27W	3,915
36W	5,220
45W	6,525
54W	7,830
63W	9,135
80W	11,600
100W	14,500
120W	17,400

3CCT Selectable



3 Power Selectable



E26 Base



EX39 Base



Optional Motion
+ Daylight Sensor

(Only available for 3M80 and 3M120 bulbs)



HB03R
Controller for
HB01DMS-A





GX23 PL Lamp Type A+B

- Compatible with existing ballast or direct AC wiring
- Easily upgrade fluorescent fixtures, no rewiring required
- Not dimmable


Box Qty: 50

Model	Voltage	Watts	Lumens	Color	CRI
LED-PL-GX23-6W-40K	120-277V	6w	600	4000k	>80
LED-PL-GX23-6W-50K	120-277V	6w	600	5000k	>80



G24 PL Lamp Type A+B

- Easily upgrade fluorescent fixtures, no rewiring required
- Not dimmable
- Compatible with existing ballast or direct AC wiring


Box Qty: 50

Model	Voltage	Watts	Lumens	Color	CRI
LED-PL-G24-7W-40K 13W Equivalent	120-277V	7w	650	4000k	>80
LED-PL-G24-7W-50K 13W Equivalent	120-277V	7w	650	5000k	>80
LED-PL-G24-11W-30K 13W Equivalent	120-277V	11w	1,300	3000k	>80
LED-PL-G24-11W-40K 13W Equivalent	120-277V	11w	1,300	4000k	>80
LED-PL-G24-11W-50K 13W Equivalent	120-277V	11w	1,300	5000k	>80

2G11 PL Lamp

- Compatible with existing ballast
- Easily upgrade fluorescent fixtures, no rewiring required
- Not dimmable


Box Qty: 50

Model	Voltage	Watts	Lumens	Color	CRI
LED-PL-2G111-15W-30K	120V	15w	1,600lm	3000k	>80

*Final
Production*



A19 Filament Bulb

- Compatible with most dimmers
- Available in tungsten-mimicking color temperature
- Attractive retro style adds visual interest



Box Qty: 40

Model	Voltage	Watts	Lumens	Color	CRI
LED-FLM-A19-8.5W-30K-D	120V	8.5w	550	3000k	>90
LED-FLM-A19-4W-30K-12V	12v	4w	550	3000k	>90
LED-FLM-A19-10W-27K	120V	10w	1,000	2700k	>90
LED-FLM-A19HM-4W-18K	120V	4w	400	1800k	>90



E12 Filament Bulb

- Compatible with most dimmers



Box Qty: 100

Model	Voltage	Watts	Lumens	Color	CRI
LED-FLM-E12T-4W-30K-12V*	12v	4w	400	3000k	>90
LED-FLM-E12T-4W-27K*	120V	4w	400	2700k	>90
LED-FLM-E12T-4W-30K*	120V	4w	400	3000k	>90
LED-FLM-E12T-4W-60K	120V	4w	400	6000k	>90
LED-FLM-E12FL-4W-27K*	120V	4w	400	2700k	>90
LED-FLM-E12T-6W-27K*	120V	6w	600	2700k	>90
LED-FLM-E12T-6W-30K*	120V	6w	600	3000k	>90
LED-FLM-E12T-6W-40K	120V	6w	600	4000k	>90



ST64 Filament Bulb

- Available in tungsten-mimicking color temperature
- Compatible with most dimmers
- Attractive retro style adds visual interest



Box Qty: 40

Model	Voltage	Watts	Lumens	Color	CRI
LED-FLM-ST64-4W-18K	120V	4w	400	1800k	>90
LED-FLM-ST64-4W-30K	120V	4w	400	3000k	>90



G16.5 Globe Filament Bulb

- Compatible with most dimmers
- Attractive retro style adds visual interest


Box Qty: 100

Model	Voltage	Watts	Lumens	Color	CRI
LED-FLM-G16.5C-4W-27K	120V	4w	400	2700k	>90
LED-FLM-G16.5M-4W-27K	120V	4w	400	2700k	>90



G25 Globe Filament Bulb

- Available in tungsten-mimicking color temperature
- Compatible with most dimmers
- Attractive retro style adds visual interest


Box Qty: 40

Model	Voltage	Watts	Lumens	Color	CRI
LED-FLM-G25-5W-30K	120V	4w	400	3000k	>90



T30 Tube Filament Bulb

- Compatible with most dimmers
- Available in tungsten-mimicking color temperature
- Attractive retro style adds visual interest


Box Qty: 40

Model	Voltage	Watts	Lumens	Color	CRI
LED-FLM-T30-4W-18K	120V	4w	400	1800k	>90
LED-FLM-T30-4W-30K	120V	4w	400	3000k	>90
LED-FLM-T30-4W-50K	120V	4w	400	5000k	>90



A19 GU24 Bulb

- High intensity: ready to replace existing 65W halogen
- Suitable for use in existing fixtures
- Compatible with most dimmers



Box Qty: 50

Model	Voltage	Watts	Lumens	Color	CRI
LED-A19GU24-9W-WW	120V	9w	800	3000k	>90



A19 6-Pack Screw-Base LED Non-Dimmable Bulb

- High intensity: ready to replace existing 60W halogen
- Suitable for use in existing fixtures
- Sold in a 6-pack



Box Qty: 16

Model	Voltage	Watts	Lumens	Color	CRI
LED-A19-9W-30K-ND6	120V	9w	800	3000k	>90



A19 Screw-Base LED Bulb

- High intensity: ready to replace existing 60W halogen
- Suitable for use in existing fixtures



Box Qty: 100

Model	Voltage	Watts	Lumens	Color	CRI
LED-A19-9W-30K-HD	120V	9w	800	3000k	>90
LED-A19-9W-40K-HD	120V	9w	800	4000k	>90
LED-A19-9W-50K-HD	120V	9w	800	5000k	>90



A21 Screw-Base LED Bulb

- High intensity: ready to replace existing 100W halogen
- Suitable for use in existing fixtures
- Compatible with most dimmers



Box Qty: 100

Model	Voltage	Watts	Lumens	Color	CRI
LED-A21-16W-30K-HD	120V	16w	1,600	3000k	>90
LED-A21-16W-40K-HD	120V	16w	1,600	4000k	>90
LED-A21-16W-50K-HD	120V	16w	1,600	5000k	>90



Candelabra Bulbs

- E12 'candelabra' base
- '-ND' models are non-dimmable
- '-D' models are dimmable

Box Qty: 100

Model	Voltage	Watts	Lumens	Color	CRI
LED-E12-5W-30K-D	120V	5w	280	3000k	>80
LED-E12-3W-27K-ND	120V	3w	280	2700k	>80
LED-E12-5W-27K-ND	120V	5w	280	2700k	>80



MR16



MR11

MR Series Bulbs

- Ideal replacements for MR-base halogens
- Integrated aluminum heatsink



Box Qty:
MR11 - 50
MR16 - 100

Model	Voltage	Watts	Lumens	Color	CRI
LED-MR11-3W-30K-2PK	12V	3w	280	3000k	>80
LED-MR11-3W-50K-2PK	12V	3w	280	5000k	>80
LED-MR16-5W-27K-HD	12V	5w	350	2700k	>90
LED-MR16-5W-30K-HD	12V	5w	350	3000k	>90
LED-MR16-7W-27K-HD	12V	7w	500	2700k	>90
LED-MR16-7W-30K-HD	12V	7w	500	3000k	>90
LED-MR16-7W-40K-HD	12V	7w	500	4000k	>90
LED-MR16-7W-50K-HD	12V	7w	500	5000k	>90
LED-MR16-9W-D-DIM	12V	9w	500	6500k	>90



GU10 Bulbs

- Drop-in GU10 halogen replacement
- Compatible with most dimmers



Box Qty: 100

Model	Voltage	Watts	Lumens	Color	CRI
LED-GU10-5.5W-30K-HD	120V	5.5w	450	3000k	>90
LED-GU10-5.5W-50K-HD	120V	5.5w	450	5000k	>90



G9 Bulbs

- Drop-in G9 halogen replacement
- Compatible with most dimmers



Box Qty: 100

Model	Voltage	Watts	Lumens	Color	CRI
LED-G9-5W-HL-30K	120V	5w	500	3000k	>80
LED-G9-5W-HL-40K	120V	5w	500	4000k	>80



Bayonet Base Bulbs

- Available in single and double contact (-SC & -DC)
- Drop-in 12V halogen replacement



Box Qty:
BN - 40
BNWP - 100

*Final
Production*

Model	Voltage	Watts	Lumens	Color	CRI
LED-BN-2W-HL-WW-DC	12V	2w	180	3000k	>80
LED-BNWP-3W-WW-SC	12V	3w	280	3000k	>80
LED-BNWP-3W-CW-SC	12V	3w	280	4000k	>80
LED-BNWP-3W-WW-DC	12V	3w	280	3000k	>80



Wedge-Base Bulbs

- Available in single and double contact (-SC & -DC)
- Drop-in 12V halogen replacement
- Compatible with most dimmers

Box Qty:
WG - 40
WGWP - 100

*Final
Production*

Model	Voltage	Watts	Lumens	Color	CRI
LED-WG-2W-HL-WW	12V AC/DC	2w	180	3000k	>80
LED-WGWP-3W-WW	12V AC/DC	3w	280	3000k	>80



Bi-Pin 12V Bulbs

- Pin-compatible drop-in replacement for 12V halogens
- Compatible with most dimmer modules
- Fully waterproof silicone enclosure

Box Qty
T3: 20
G4WP: 100

*Final
Production
Final
Production*

Model	Voltage	Watts	Lumens	Color	CRI
LED-T3-2W-WW (Non-Waterproof)	12V AC/DC	2w	150	3000k	>80
LED-T3-2W-CW (Non-Waterproof)	12V AC/DC	2w	150	4000k	>80
LED-G4WP-1.5W-SW	12V AC/DC	1.5w	110	2700k	>80
LED-G4WP-1.5W-WW	12V AC/DC	1.5w	110	3000k	>80
LED-G4WP-1.5W-CW	12V AC/DC	1.5w	110	4000k	>80
LED-G4WP-2.5W-SW	12V AC/DC	2.5w	210	2700k	>80
LED-G4WP-2.5W-WW	12V AC/DC	2.5w	210	3000k	>80
LED-G4WP-2.5W-CW	12V AC/DC	2.5w	210	4000k	>80
LED-G4WP-3.5W-SW	12V AC/DC	3.5w	280	2700k	>80
LED-G4WP-3.5W-WW	12V AC/DC	3.5w	280	3000k	>80
LED-G4WP-3.5W-CW	12V AC/DC	3.5w	280	4000k	>80
LED-GY6.35-4W-SW	12V AC/DC	4w	350	2700k	>80
LED-GY6.35-4W-WW	12V AC/DC	4w	350	3000k	>80



PAR LITE Series Bulbs (40°)

- Highly directional light like traditional PAR lamps
- Ideal for track lighting and showcase lighting
- Compatible with most dimmers



Box Qty
P30: 40
P38: 24

Model	Voltage	Watts	Lumens	Color	CRI
LED-P30-10W-30K	120V	10w	800	3000k	>90
LED-P30-10W-50K	120V	10w	800	5000k	>90
LED-P38-15W-30K	120V	15w	1,200	3000k	>90
LED-P38-15W-50K	120V	15w	1,200	5000k	>90



PAR38 12K Jewelry Bulb

- Shine our new 12,000K bulb on diamonds to add an extra sparkle
- Very powerful COB Chip provides 3,000 lumens
- Universal voltage 120-277v for commercial applications



Box Qty: 10

Model	Voltage	Watts	Lumens	Color	CRI
LED-PAR38-32W-12K-UNV	120/277V	32w	3,000	12,000k	>80



PAR LUX Series Bulb (40°)

- Ideal for landscape lighting (IP67)
- Compatible with most dimmers
- Integrated aluminum heatsink



Box Qty: 20

Model	Voltage	Watts	Lumens	Color	CRI
LED-PAR36-13W-WW	12V	13w	780	3000k	>80





120V Architectural Striplights

- Lumen & watt ratings are per-foot
- Compatible with most dimmer modules
- Cutable every 18"
- Available in 100ft rolls



Box Qty: 2

Model	Voltage	Watts	Lumens	Color	CRI
ST-2835-120V-4W-30K	120V	4w/ft	320/ft	3000k	>90
ST-2835-120V-4W-40K	120V	4w/ft	320/ft	4000k	>90
ST-2835-120V-4W-50K	120V	4w/ft	320/ft	5000k	>90

120V Architectural Striplight Accessories

Model	Voltage	Watts	Lumens	Color	CRI
ST-POWSET-18	120V	N/A	N/A	White	N/A
ST-POWSET-36	120V	N/A	N/A	White	N/A
ST-POWSET-72	120V	N/A	N/A	White	N/A
ST-JBX-POW-1200W-36"	120V	N/A	N/A	White	N/A
ST-POW-UNV-400W-36"	120V	N/A	N/A	White	N/A
ST-JUMPER-6	120V	N/A	N/A	White	N/A
ST-JUMPER-12	120V	N/A	N/A	White	N/A
ST-120-WP-COUP	120V	N/A	N/A	Clear	N/A
120V-STRAP-100PK	120V	N/A	N/A	N/A	N/A
ST-COUP-PIN	120V	N/A	N/A	N/A	N/A
ST-END-CAP	120V	N/A	N/A	N/A	N/A





120V Colored Striplights

- Lumen & watt ratings are per-foot
- Compatible with most dimmer modules
- Cutable every 19"
- Available in 100ft rolls




Box Qty: 2



Model	Voltage	Watts	Lumens	Color	CRI
RML-SMD5050-120-R	120V	4w/ft	285/ft	Red	>80
RML-SMD5050-120-B	120V	4w/ft	285/ft	Blue	>80
RML-SMD5050-120-G	120V	4w/ft	285/ft	Green	>80



120V Striplight Accessories

Model	Voltage	Watts	Lumens	Color	CRI
RML-POWSET-18	120V	N/A	N/A	White	N/A
RML-POWSET-36	120V	N/A	N/A	White	N/A
RML-POWSET-72	120V	N/A	N/A	White	N/A
RML-JUMPER-6	120V	N/A	N/A	White	N/A
RML-JUMPER-12	120V	N/A	N/A	White	N/A
RML-120-WP-COUP	120V	N/A	N/A	Clear	N/A
120V-STRAP	120V	N/A	N/A	Clear	N/A
RML-COUP	120V	N/A	N/A	N/A	N/A
RML-END-CAP	120V	N/A	N/A	N/A	N/A

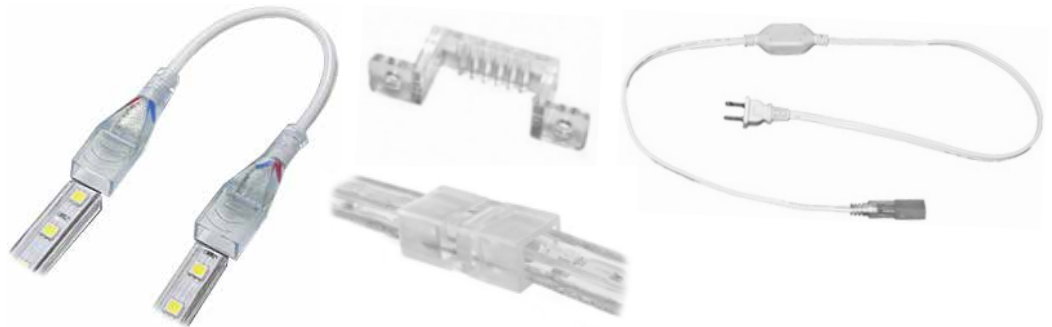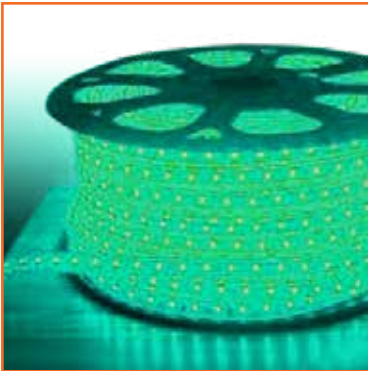

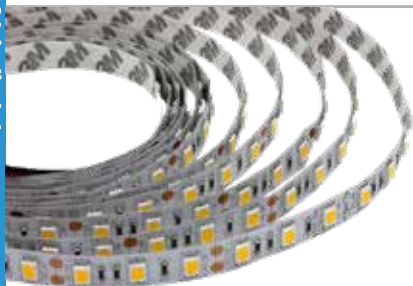

Low Voltage Striplights (12V)

- Lumen & watt ratings are per-foot
- Mains-dimmable with magnetic transformer
- Available in 100ft rolls



Box Qty: 20

Model	Voltage	Watts	Lumens	Color	CRI
LED-TP-3528-12V-DL	12V DC	1.5w/ft	120/ft	5000k	>80
LED-TP-3528-12V-R	12V DC	1.5w/ft	120/ft	Red	>80
LED-TP-3528-12V-B	12V DC	1.5w/ft	120/ft	Blue	>80
LED-TP-3528-12V-G	12V DC	1.5w/ft	120/ft	Green	>80
LED-TP-2835-12V-DL	12V DC	2.2w/ft	180/ft	5000k	>80
LED-TP-5050-12V-DL	12V DC	4w/ft	285/ft	5000k	>80

Low Voltage Striplights (24V)



Box Qty: 20

Model	Voltage	Watts	Lumens	Color	CRI
LED-TP-2216-2W-24V95-WW	24V DC	2w/ft	150/ft	3000k	>95
LED-TP-2216-2W-24V95-DL	24V DC	2w/ft	150/ft	5000k	>95
LED-TP-2216-3W-24V95-DL	24V DC	3w/ft	225/ft	5000k	>95
LED-TP-2216-4W-24V95-DL	24V DC	4w/ft	300/ft	5000k	>95

Low Voltage Striplight Accessories (12/24V)



Box Qty: 100

Model	Voltage	Watts	Lumens	Color	CRI
LV-8MM-JUMPER	12V	N/A	N/A	N/A	N/A
LV-10MM-JUMPER	12V	N/A	N/A	N/A	N/A
LV-8MM-LIVEEND	12V	N/A	N/A	N/A	N/A
LV-10MM-LIVEEND	12V	N/A	N/A	N/A	N/A
LV-8MM-COUP	12V	N/A	N/A	N/A	N/A
LV-10MM-COUP	12V	N/A	N/A	N/A	N/A
LV-Male-Con	12V	N/A	N/A	N/A	N/A
LV-Female-Con	12V	N/A	N/A	N/A	N/A
ET-60W-PS-12V	12V	60w	N/A	N/A	N/A
LPV-60W-24V	12V	60w	N/A	N/A	N/A

Box Qty:
20W: 12
12V 60: 12
12V 150: 6
24V 60: 6

Constant Voltage Triac Dimmable Transformers

	Model	Voltage	Watts
NEW	CV-12V-DC-20W-DIM	Input: 120-277V Output: 12V DC	20w
NEW	CV-12V-DC-60W-DIM	Input: 120-277V Output: 12V DC	60w
NEW	CV-12V-DC-150W-DIM	Input: 120-277V Output: 12V DC	150w
NEW	CV-24V-DC-60W-DIM	Input: 120-277V Output: 24V DC	60w





Magnetic Transformers

- Suitable for use with EnVision 12V strip lights, puck lights, etc.
- Allows mains dimming for compatible 12V fixtures
- Rated for 120VAC input only


Box Qty: 10

Model	Input Voltage	Output Voltage	Watts
MT-12V-DC-20W-DIM	120VAC	12V	20W
MT-12V-DC-40W-DIM	120VAC	12V	40W
MT-12V-DC-60W-DIM	120VAC	12V	60w
MT-12V-DC-100W-DIM	120VAC	12V	100w
MT-12V-DC-150W-DIM	120VAC	12V	150w
MT-12V-DC-200W-DIM	120VAC	12V	200w
MT-12V-DC-300W-DIM	120VAC	12V	300w
MT-24V-DC-20W-DIM	120VAC	24V	20W
MT-24V-DC-40W-DIM	120VAC	24V	40W
MT-24V-DC-60W-DIM	120VAC	24V	60w
MT-24V-DC-100W-DIM	120VAC	24V	100w
MT-24V-DC-150W-DIM	120VAC	24V	150w
MT-24V-DC-200W-DIM	120VAC	24V	200w
MT-24V-DC-300W-DIM	120VAC	24V	300w



Electronic Magnetic Transformers

- Suitable for use with EnVision 24V strip lights, puck lights, etc.
- Allows mains dimming for compatible 24V fixtures
- Rated for 120VAC input only


Box Qty: 12V 30-80W: 12
Box Qty: 12V 120-300W: 6
Box Qty: 24V 30-80W: 12
Box Qty: 24V 120-300W: 6

Model	Input Voltage	Output Voltage	Watts
MLE-12V-DC-30W-DIM	120VAC	12V	30w
MLE-12V-DC-60W-DIM	120VAC	12V	60w
MLE-12V-DC-80W-DIM	120VAC	12V	80w
MLE-12V-DC-120W-DIM	120VAC	12V	120w
MLE-12V-DC-150W-DIM	120VAC	12V	150w
MLE-12V-DC-200W-DIM	120VAC	12V	200w
MLE-12V-DC-300W-DIM	120VAC	12V	300w
MLE-24V-DC-30W-DIM	120VAC	24V	30w
MLE-24V-DC-60W-DIM	120VAC	24V	60w
MLE-24V-DC-80W-DIM	120VAC	24V	80w
MLE-24V-DC-120W-DIM	120VAC	24V	120w
MLE-24V-DC-150W-DIM	120VAC	24V	150w
MLE-24V-DC-200W-DIM	120VAC	24V	200w
MLE-24V-DC-300W-DIM	120VAC	24V	300w



Sensors

- Universal input voltage (100-277v AC, 50/60Hz)
- Selectable emergency power (3/5/8W)
- Constant output power (auto-sensing output)
- UL Listed for field installation

Box Qty: 1

Model	Item Description	Voltage	
HB01DMS-A	Bi Level Motion Sensor w/ Daylight Harvesting, Works with ARL2, RHB, CRN Twist into female 12V sensor auxiliary, remote required	12V	<1w
HB01DMS-C	Bi Level Motion Sensor w/ Daylight Harvesting 1/2" Knockout - Includes Auxiliary	12V	<1w
HB03R	Remote for HB01 Series	12V	<1w
HD406VRH-D-WH	Bi Level Motion Sensor w/ Daylight Harvesting White Finish with Side 1/2" Knock Out -Remote Control Compatible-	120-277V	<1w
HD406VRH-A-WH	Bi Level Motion Sensor w/ Daylight Harvesting UFO High Bay Side Mount -Remote Control Compatible-	120-277V	<1w
HD406VRH-A-BL	Bi Level Motion Sensor w/ Daylight Harvesting UFO High Bay Side Mount -Remote Control Compatible-	120-277V	<1w
HD407V-CR	Bi Level Motion Sensor w/ Daylight Harvesting Detachable Version w/ external sensor -Remote Control Compatible	120-277V	<1w
HD03R	Remote for HD Sensors	120-277V	<1w
HD05R	Remote for HD Sensors w/ S creen	120-277V	<1w
MC605V/D	Bi Level Motion Sensor w/ Daylight Harvesting Detachable Version W/ external sensor	120-277V	<1w
MC061V	Bi Level Motion Sensor w/ Daylight Harvesting LHB 220w Internal Sensor	120-277V	<1w

Smart Sensors

- Universal input voltage (100-277v AC, 50/60Hz)
- Selectable emergency power (3/5/8W)
- Constant output power (auto-sensing output)
- UL Listed for field installation

Box Qty: 10



Model	Item Description	Voltage	Watts
SMART-MOD-BT	Smart Bluetooth Module - Dim, Group, Controls, via Bluetooth(Connect to any 0-10V Dim Fixture)	120-277V	<1w
SMART-MOD-WF	Smart Wifi Module - Dim, Group, Controls, via Wifi (Connect to any Triac Dimmable Fixture)	120-277V	<1w
SMART-MOD-BT-GTW	Gateway: Add time control, smart home capability	120-277V	<1w

Suspension Kits



Model	Item Description
LED-PNL-2x2/1x4-SK	Suspension Kit for Panels 2x2 and 1x4
LED-PNL-2X4-SK	Suspension Kit for Panels 2x4
SK-9FT-ADJ-2	9ft Suspension Kit for Strips and Vapors

Button Photocell Universal

Box Qty: 10



Model	Input	Output
PC-BTN-UNV-1/2"	120/277V	25-48v DC
PC-BTN-UNV-3/8"	120/277V	25-48v DC
PC-TWL-RC	120/277V	25-48v DC
PC-TWL-UNV	120/277V	25-48v DC
PC-TWL-HV	120/277V	25-48v DC



Battery Backup (8W High Voltage Double Flex)

- Selectable emergency power (3/5/8W)
- For use with external driver fixtures


Box Qty: 6

Model	Input	Watt	Output
LED-EMB-8W-HV-EXT-D	120/277V	8W	95V DC

Battery Backup (25W High Voltage Single Flex)

- Selectable emergency power (15/20/25W)
- 0/10V: Recommended for use with 0-10V dim fixtures with internal drivers including downlights, surface mounts, etc.
- If the fixtures does not have 0-10V purple gray wires, max load is 25W
- T8: Compatible with T8 bulbs that have been updated to the latest UL requirement that requires shock resistors that will not allow standard EM backups to sense the current


Box Qty: 6

Model	Input	Watt	Output
LED-EMB-25W-HV-0/10V	120/347V	25W	120V DC
LED-EMB-25W-HV-T8	120/277V	25W	120V DC

Battery Backup (30W High Voltage)

- Universal input voltage (100-347v AC, 50/60Hz)
- Constant output power (auto-sensing output)
- UL Listed for field installation
- Battery protection: over/under voltage, over-temp., short circuit
- Backup runtime: 90 minutes
- For use with internal driver - Includes Round UFO Highbay EM Kit


Box Qty: 4

Model	Input	Watt	Output
LED-EMB-30W-HV-UFO	120/347V	30W	175V DC
UFO-TEST-CTR	N/A	N/A	N/A

Battery Backup (15W Low Voltage Double Flex)

- For use with external driver fixtures including: flat panels, troffers, high bays, wraps, etc.


Box Qty: 4

Model	Input	Watt	Output
LED-EMB-15W-LV-EXT-D	120/277V	15W	25-48V DC

Battery Backup (15W Low Voltage Single Flex)

- For use with external driver fixtures including: flat panels, troffers, high bays, wraps, etc.


Box Qty: 4

Model	Input	Watt	Output
LED-EMB-15W-LV-EXT-S	120/277V	15W	25-48V DC

Battery Backup (Split Design)

- Universal input voltage (100-277v AC, 50/60Hz)
- Constant output power (auto-sensing output)
- UL Listed for field installation
- Battery protection: over/under voltage, over-temp., short circuit
- Backup runtime: 90 minutes
- For use with external driver w/ internal housing space: wall packs, canopy, etc.


Box Qty: 4

Model	Input	Watt	Output
LED-EMB-4W-LV-INT	120/277V	4W	25-48V DC
LED-EMB-8W-LV-INT	120/277V	8W	25-48V DC
LED-EMB-20W-LV-INT	120/277V	20W	25-48V DC


8W

20W

EnVisionLED™



EnVision LED Lighting, Inc.

Los Angeles, CA

Phone: 323.604.0066

www.envisionledlighting.com