

2X4



2X2



1X4



BackLit LED Panel 4CCT & 3 Power Selectable

The EnVision LED Back-lit Panel has a unique modern design configured to combine high performance LED chips and our leading technology diffuser, which makes the ideal solution for any commercial lighting need. Now, with power changing and selectable color temperatures, these panels will suit all of your needs! This high efficient luminaire provides long-life and uniform illumination, in addition to being equipped with a 0-10V dimmable driver.

Applications:

- Suspended Installation
- Commercial Lighting
- Recessed Lighting
- General Indoor Lighting

Product Information:

- Even Light Distribution
- 110° Beam Angle
- Dimmable: Compatible with 0-10V Dimmers Down to 5%
- No Yellowing of the Lens
- 120/277V
- 80 CRI (Color Rendering Index)
- Even Light Distribution
- Damp Location Rated
- 110° Beam Angle
- No Yellowing of the Lens

LED - BPL - **Size/Wattage** **- 4 CCT -** **Accessories** **- BMS** **- EMB** **- Warranty**

1 **2** **3** **4** **5** **6** **7**


1 Product	2 Size/Wattage	3 Color	4 Accessories	5 BMS	6 EMB	7 Warranty
LED-BPL Back-lit Panel	1X4-3M40 20/30/40W (2200, 3300, 4400lm) 2X2-3M40 20/30/40W (2200, 3300, 4400lm) 2X4-3M50 (30/40/50W (3300, 4400, 5500lm)	4CCT 30/35 40/50K	(Blank) None SM Surface Mount Frame Kit (3.5" Height) FLNG Flange (Drywall) Kit SK Suspension Kit	(Blank) None BMS Bi-Level Motion Sensor	(Blank) None EMB Emergency Backup (External 15W)	(Blank) 5 Year 10YR (incl.) 10 Year

Specs and model numbers are subject to change with or without notice. Customization of product is available.

FEATURES

Powder-Coated White Frame

Frosted Lens
No UV, no yellowing no LGP



Sticky Slim Test Button
Test button will be pre-installed to the flange of the fixture. No need for external junction box for test switch




Works for Drop Ceiling Flange, Surface Mount Application

Unique Back-Lit Design
The unique back-lit design provides a diffuse, shadow-less light

Emergency Backup
Optional 90 minute emergency backup


Integrated Driver
Flicker-free integrated driver, 0-10V dimmable

DIMENSIONS

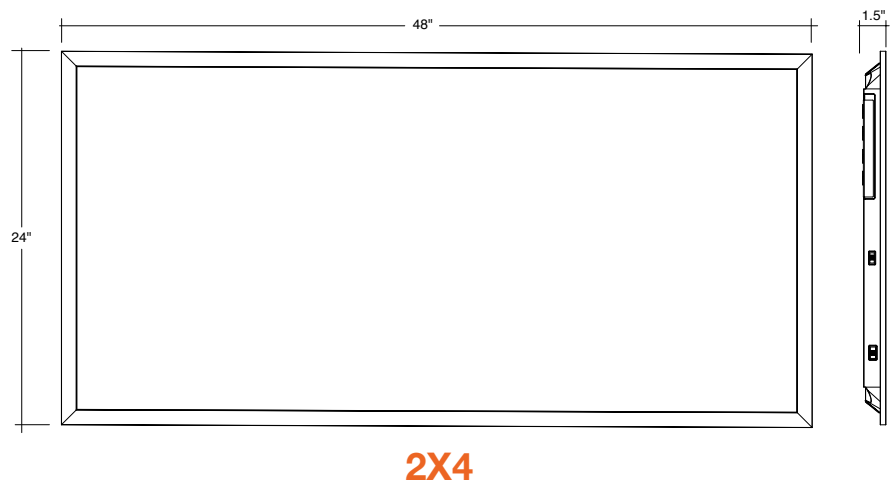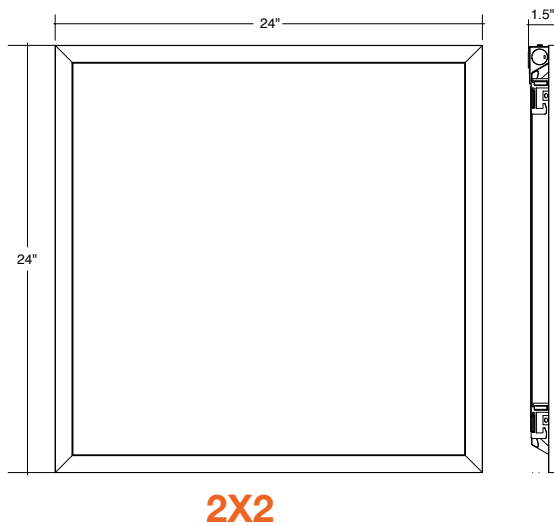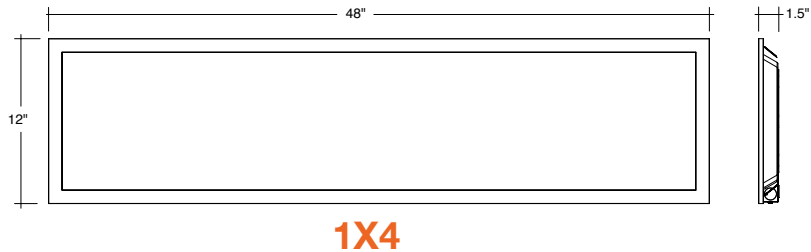

Optional Accessories


Surface Mount Frame

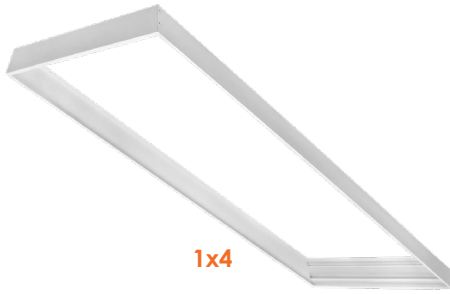

1x4



2x2

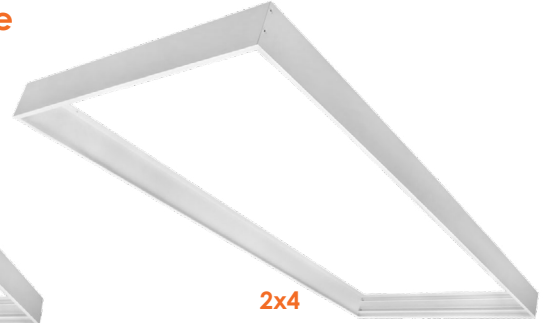


2x4


Flange (Drywall) Kit



1x4

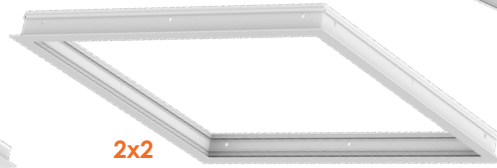


2x2

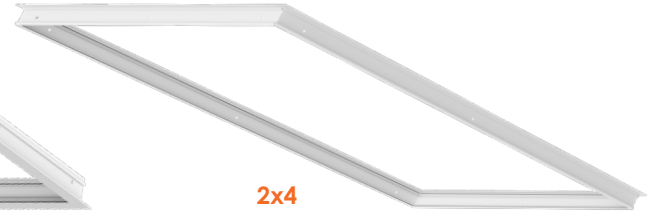

2x4



Emergency Backup



Earthquake Hook



Suspension Kit

1x4 / 2x2 / 2x4 Panel Accessories

Accessories also work with other 2x2 and 2x2 fixtures (SM only compatible with edge-lit panels)

Model	Description
LED-PNL-1X4-SM	Surface Mount Frame 1x4 (Edge-lit and BPL Panels only)
LED-PNL-2X2-SM	Surface Mount Frame 2x2 (Edge-lit and BPL Panels only)
LED-PNL-2X4-SM	Surface Mount Frame 2x4 (Edge-lit and BPL Panels only)
LED-PNL-1X4-FLNG	Flange (Drywall) Kit for Panels for all 1x4 fixtures
LED-PNL-2X2-FLNG	Flange (Drywall) Kit for Panels for all 2x2 fixtures
LED-PNL-2X4-FLNG	Flange (Drywall) Kit for Panels for all 2x4 fixtures
LED-PNL-1X4-SK	Suspension Kit for Panels 1x4
LED-PNL-2X2-SK	Suspension Kit for Panels 2x2
LED-PNL-2X4-SK	Suspension Kit for Panels 2x4
LED-PNL-HK	Earthquake Hook
2X2-SM-3"	2x2 Surface Mount Kit 3" Height for all panels and troffers
2X4-SM-3"	2x4 Surface Mount Kit 3" Height for all panels and troffers
2X2-SM-3.5"	2x2 Surface Mount Kit 3.5" Height for all panels and troffers
2X4-SM-3.5"	2x4 Surface Mount Kit 3.5" Height for all panels and troffers
3Whip-(#)ft - Specify ft in place of #	3 Wire Whip Hot, Neutral, Ground
5Whip-(#)ft - Specify ft in place of #	5 Wire Whip Hot, Neutral, Ground, Dim