

# T8 6" U-Shaped LED Bulb

## Type A+B

Tubes



WATT	LUMENS
15	1,950

### Common Applications: Panel Fixture Bulb Replacement



### Detail Specifications:

- IP Rating: Damp Location
- Beam Angle: 300°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 130° F
- Lens: Frosted lens with film protectant for extra shatter protection (food industry OK)
- Average life (L70) of 70,000 hours

### Applications:

- 2x2 Panel Fixture Retrofit
- 2x4 Panel Fixture Retrofit
- General indoor Lighting
- Fluorescent Retrofitting
- Walkways & Pathways
- Commercial and Industrial

### Product Information:

- Standard size of fluorescent versions
- Suitable for use in existing fixtures
- Approved for use in enclosed fixtures
- Instant-On to full brightness
- U-shape end lights up!

### Driver Options:

- NV: 120-277V Non-Dimmable
- Built in 2.5Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

### Mounting & Installation:

- Rewire (single or double ended connection)
- Use with existing ballast (see ballast compatibility chart)

### Certifications:


- UL Listed for USA and CA
- DLC Listed
- NSF Rated
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series


**LED-T8U-DF-GL-22X6-15W-40K**  
**LED-T8U-DF-GL-22X6-15W-50K**

*Specs and model numbers are subject to change with or without notice. Customization of product is available.*

## FEATURES

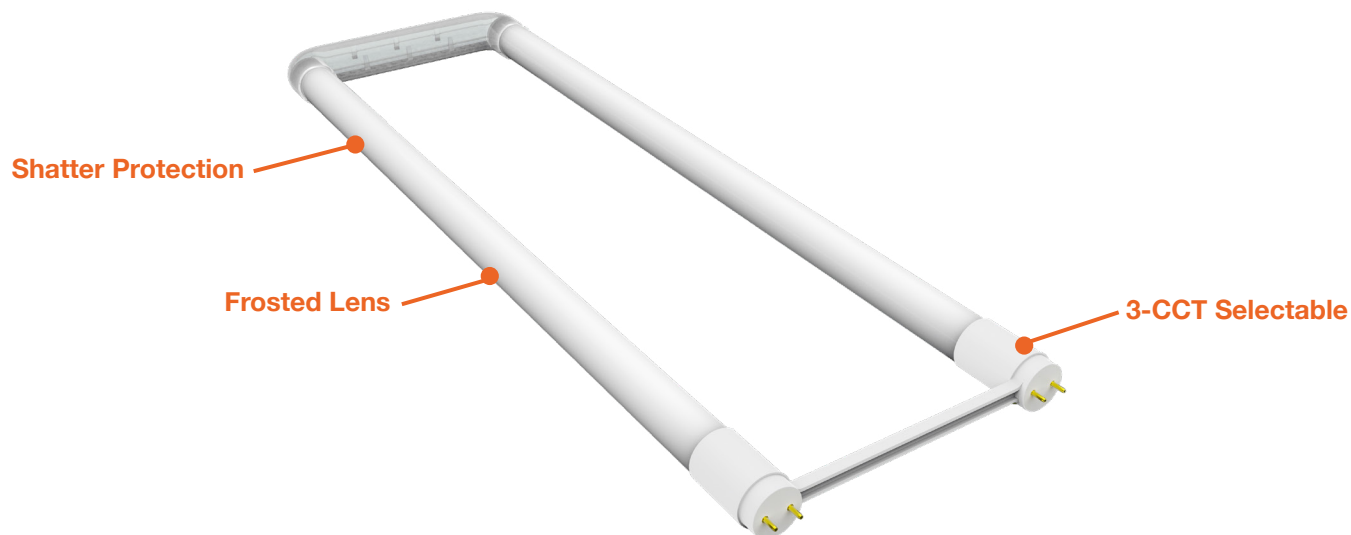

## DIMENSIONS

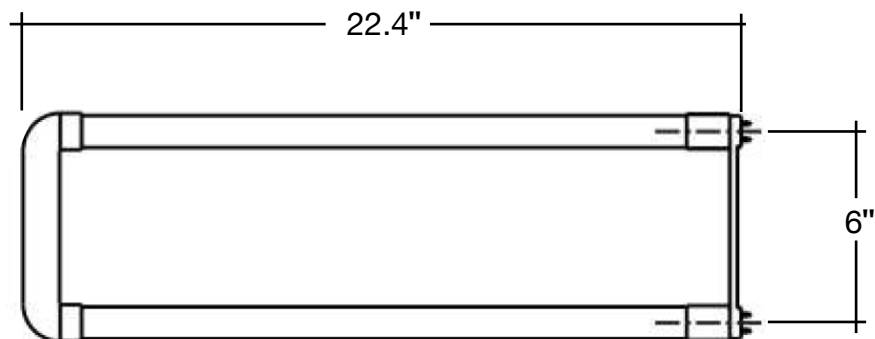

*Specs and model numbers are subject to change with or without notice. Customization of product is available.*