

RHB3 UFO High Bays

3-CCT + 3-Power Selectable



WATT	LUMENS
60	8,400
100	14,000
150	21,000
180	25,200
210	29,400
240	33,600

Project: _____ Part #: _____
Type: _____

UFO highbay



Detail Specifications:

- Finish: Black or White
- IP Rating: IP67 Wet Location
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >80
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 113° F
- With Sensor: -22° - 113° F
- Lens: Clear Acrylic
- Average life (L70) of 70,000 hours

Applications:

- Warehouse/Distribution Facility
- Utility & Storage
- Garage Structures
- Commercial and Industrial

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Replace existing fixtures or use in new construction
- Instant-On to full brightness
- Select-n-Switch Technology: 3-CCT + 3-Power Selectable
- Twist-C Control: Control ready receptacle built into each fixture

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- HV: 277-480V 0-10V Dimmable
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Flicker Free

Mounting & Installations:

- 6' whip included
- Optional pendant mount for 1" pipe available
- Optional surface mount kits available

Certifications:

- UL Listed for USA and CA
- DLC Listed
- ROHS Compliant
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	Finish	Whip	Voltage 1	EMB	Surge Protector
LED-RHB3-3P150W-CTRI	BL Black	6 6' Whip (Incl.)	(Blank) 120-277V	(Blank) No Emergency Backup	(Blank) 6KV Built In
60/100/150W	WH White	CS Extend to Custom Length	HV 1 347-480V	EMB 90 Minute Emergency Backup	20KV Surge Protector
35/40/50K				SEMB Surface Mount 90 min Emergency Backup	
120-277V					
LED-RHB3-3P240W-CTRI					
180/210/240W					
35/40/50K					
120-277V					

1. HV requires assembly.

Optional Accessories (Order Separately)

Sensors	Remote for Sensors	Reflector	Reflector Bottom Wire Guards	Mounting Kits	Emergency Backup
HB01DMS-A Bi-Level Motion + Daylight Sensor	HB01DMS Remote	RHB3-100/150-ALM-RF-90 Aluminum Reflector Only Works with for 100 & 150W RHB3-240-ALM-RF-90 Aluminum Reflector for 240W RHB3-100/150-ACR-RF 90° Acrylic Reflector for 100 & 150W RHB3-240-ACR-RF 90° Acrylic Reflector for 240W	RHB3-UNV-ACR -BC Acrylic Lens -WG Wire Guard for 100 & 150W RHB3-240-WG Wire Guard for 240W	RHB-100/150-SM Surface Mount Kit for 100 & 150W RHB-240-SM Surface Mount Kit for 240W RHB-PDM-HK 1" Pip Pendant Mount	LED-EMB-30W-HV-UFO Surface Mount Kit Emergency Backup UFO-TEST -CTR Test Button Controller

1. Reflectors and wire guards can't be mixed together. i.e. if fixture uses a reflector, it won't work with a wire guard.

2. Custom emergency backup option available in surface mount applications. Contact us for more information.

Specs and model numbers are subject to change with or without notice.

RHB3 UFO High Bays


3-CCT + 3-Power Selectable

FEATURES




DIMENSIONS


Pendant Mount





Surface Mount





Pendant Mount

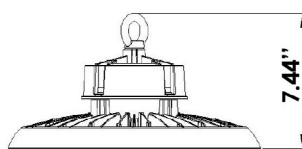



Surface Mount

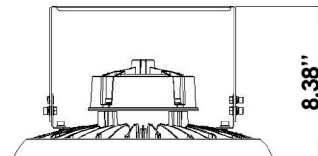

3P150W




3P240W

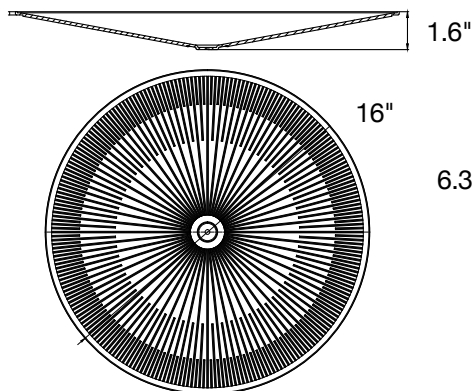

Acrylic Bottom Cover (90°)


RHB3-UNV-ACR-BC

Only Compatible with ACR Reflectors

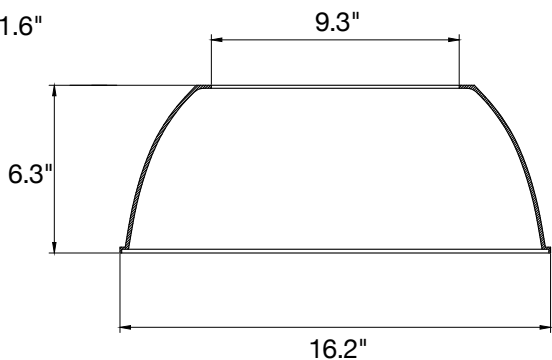



Acrylic Reflector (90°)

RHB3-100/150-ACR-RF

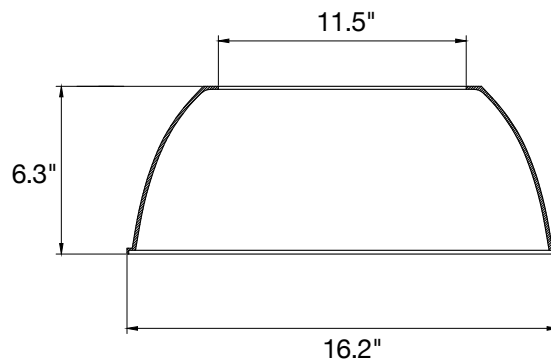



Acrylic Reflector (90°)

RHB3-240-ACR-RF




Wire Guard

RHB3-100/150-WG




Wire Guard

RHB3-240-WG

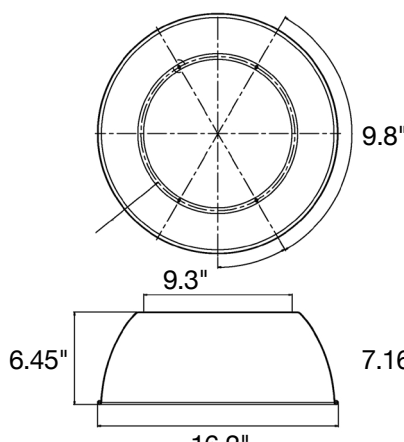

Aluminum Reflector

RHB3-100/150-ALM-RF-90

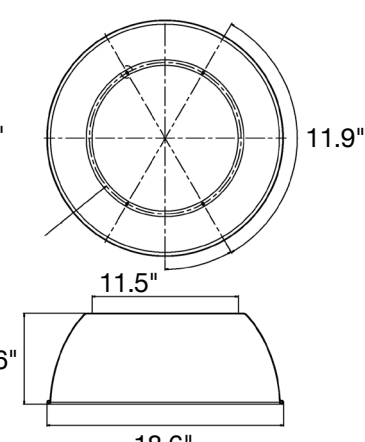

Aluminum Reflector

RHB3-240-ALM-RF-90

RHB3 UFO High Bays

3-CCT + 3-Power Selectable

Model	Voltage	Watts	Lumens	Color	CRI
LED-RHB3-3P150-CTRI-BL-6'	120-277V	60/100/150w	130lm/w	35/40/35k	>80
LED-RHB3-3P150-CTRI-WH-6'	120-277V	60/100/150w	130lm/w	35/40/35k	>80
LED-RHB3-3P240-CTRI-BL-6'	120-277V	180/210/240w	130lm/w	35/40/35k	>80
LED-RHB3-3P240-CTRI-WH-6'	120-277V	180/210/240w	130lm/w	35/40/35k	>80

REFLECTORS

Accessory Model	Description
RHB3-100/150-ALM-RF-90	90° Aluminum reflector for 100 & 150W
RHB3-240-ALM-RF-90	90° Aluminum reflector for 240W
RHB3-100/150-ACR-RF	90° Acrylic reflector for 100 & 150W
RHB3-240-ACR-RF	90° Acrylic reflector for 240W

REFLECTOR BOTTOM COVERS

Accessory Model	Description
RHB3-UNV-ACR-BC	Acrylic Bottom Cover 90°

WIRE GUARDS

Accessory Model	Description
RHB3-100/150-WG	Wire guard for 100 & 150W
RHB3-240-WG	Wire guard for 240W

MOUNTING KITS

Accessory Model	Description
RHB-PDM-HK	Pendant Mount Hook 1" Pipe
RHB-100/150-SM	100/150w Surface Mount
RHB-240-SM	240w Surface Mount

EMERGENCY BACKUP

Accessory Model	Description
LED-EMB-30W-HV-UFO	30W Pendant Emergency Backup
UFO-TEST-CTR	Test Button Controller

REMOTE CONTROL

Accessory Model	Description
HB03R	Remote for HB-Line Series

SENSOR

Accessory Model	Description
HB01DMS-A	A Default Setting • Brightness: 100% Hold Time: 1Min. • Stand-By Dimming Level: 20% • Stand-By Time: 1 Min. Sensitivity: 100% • Daylight: Disable



RHB30100/150-ALM-RF-90
RHB3-240-ALM-RF-90



RHB3-100/150-ACR-RF
RHB3-1240-ACR-RF



RHB3-UNV-ACR-BC



Acrylic Reflector
Bottom Cover & Sensor



RHB3-100/150-WG
RHB3-240-WG



RHB-PDM-HK



RHB-100/150-SM
RHB-240-SM



LED-EMB-30W-HV-UFO



UFO-TEST-CTR




HB03R



HB01DMS-A

SURFACE EMERGENCY BACK-UP (SEMB)

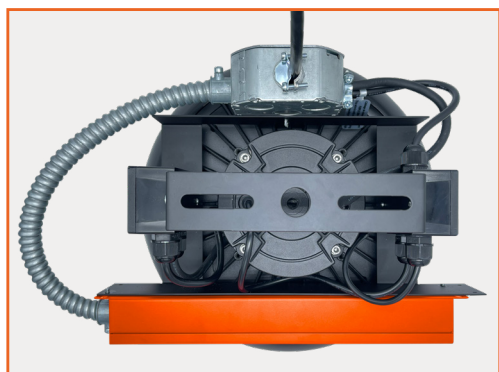

EMERGENCY BACK UP (EMB)

