

T8 6" U-Shaped LED Bulb

Type A+B

Tubes



Common Applications: Panel Fixture Bulb Replacement



Detail Specifications:

- IP Rating: Damp Location
- Beam Angle: 300°
- CCT: 35/40/50K Selectable
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 130° F
- Lens: Frosted lens with film protectant for extra shatter protection (food industry OK)
- Average life (L70) of 70,000 hours

Applications:

- 2x2 Panel Fixture Retrofit
- 2x4 Panel Fixture Retrofit
- General indoor Lighting
- Fluorescent Retrofitting
- Walkways & Pathways
- Commercial and Industrial

Product Information:

- Standard size of fluorescent versions
- Suitable for use in existing fixtures
- Approved for use in enclosed fixtures
- Instant-On to full brightness
- U-shape end lights up!

Driver Options:

- UNV: 120-277V Non-Dimmable
- Built in 2.5Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Rewire (single or double ended connection)
- Use with existing ballast (see ballast compatibility chart)

Certifications:


- UL Listed for USA and CA
- DLC Listed
- NSF Rated
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series


LED-T8U-DF-GL-22X6-15W-CTRI

Specs and model numbers are subject to change with or without notice. Customization of product is available.

FEATURES

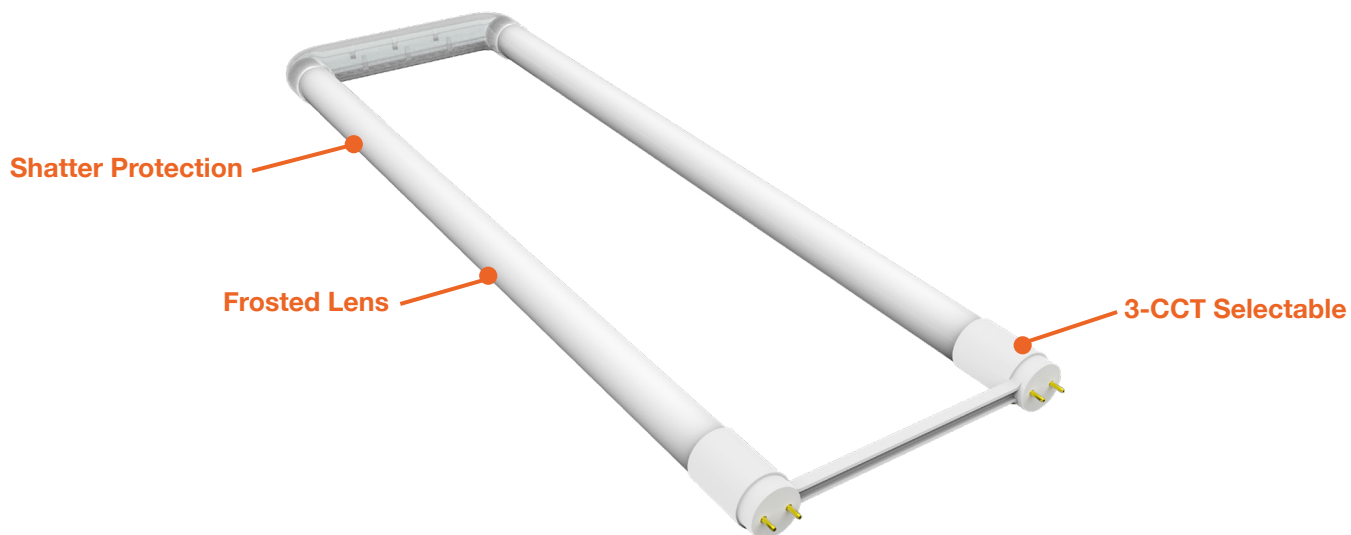

DIMENSIONS

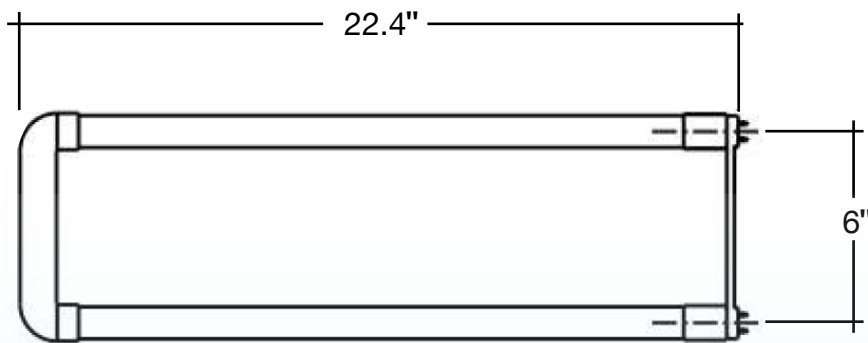

Specs and model numbers are subject to change with or without notice. Customization of product is available.