


# T-30 Tubular Bulb Filament Series

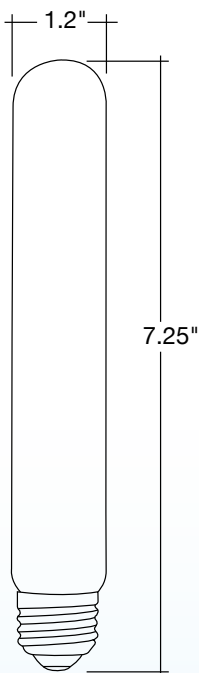

### Detail Specifications

- IP Rating: Damp Location
- Beam Angle: Omni-Directional 360°
- Chip: Filament, R9- 78, CRI >90
- Operating Temperature: -4° - 114° F
- Average life (L70) of 25,000 hours

### Applications:

- Decorative Lighting
- Interior Lighting
- Table & Floor Lamps
- Showcases
- Residential, Multi-Family, Commercial

### Product Information:

- Suitable for use in existing fixtures
- Instant-On to full brightness

### Driver Options:

- 120V
- Triac Dimmable
- PF >0.9, 50/60Hz

### Mounting & Installation:

- E26 Socket
- Direct E26 Lamp Replacement

### Certifications:

- UL Listed for USA and CA
- Title 20 and JA8-2022 Approved (30K Only)
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

### Dimmer List:

|         |           |
|---------|-----------|
| Leviton | 6674      |
| Lutron  | LGCL-153P |
| Lutron  | DVCL-153P |
| Lutron  | CTCL-153P |
| Lutron  | MAELV-300 |

### Series

**LED-FLM-T30-4W-18K**

400 Lumens 40W Equivalent

**LED-FLM-T30-5W-30K**

400 Lumens 40W Equivalent

**LED-FLM-T30-5W-50K**

400 Lumens 40W Equivalent

*Specs and model numbers are subject to change with or without notice.*