

4" 12V MR-16 Retrofit Installation Instructions



IMPORTANT Read all instructions before installing fixtures. Keep for future reference.

SAFETY For your safety, this fixture must be wired in accordance to local electrical codes and ordinances. All work should be done by a qualified electrician.

WARNING Make certain power is OFF from the electrical panel before starting installation or attempting any maintenance. Indoor installation only.

4" LED Retrofit Trim Series

Recessed housing and dimmer compatibility

- The LED downlight is designed to install in standard 4, recessed downlight housings.
- Compatible with most dimmers when used with multiple LED downlight fixtures.
- Compatibility of housing not on this list may be determined by measurement of the housing as detailed in the attached drawing (Fig 1)


IMPORTANT SAFETY INFORMATION

Read Instructions Before Installation


WARNING - Risk of electric shock. Disconnect power at fuse or circuit breaker before installing or servicing.

NOTE:

- (1) It may be necessary to remove a socket mounting plate for adequate clearance.
 - (2) Each lampholder shall be installed only in its intended manner and orientation.
 - (3) Not all existing recessed housings that meet these requirements will be compatible with the LED Downlight.
- To ensure compatibility, a test installation should be conducted.
- (4) Suitable for wet locations.
 - (5) **WARNING** - Risk of fire or electric shock. LED Retrofit Kit installation requires knowledge of luminaire electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.
 - (6) **WARNING** - Risk of fire or electric shock. Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings.
 - (7) Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
 - (8) **WARNING** - To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
 - (9) **THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED**

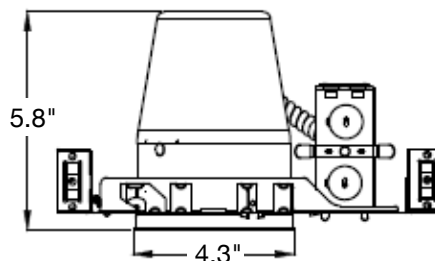

Minimum distance between edge of fixture and top of housing or other obstruction

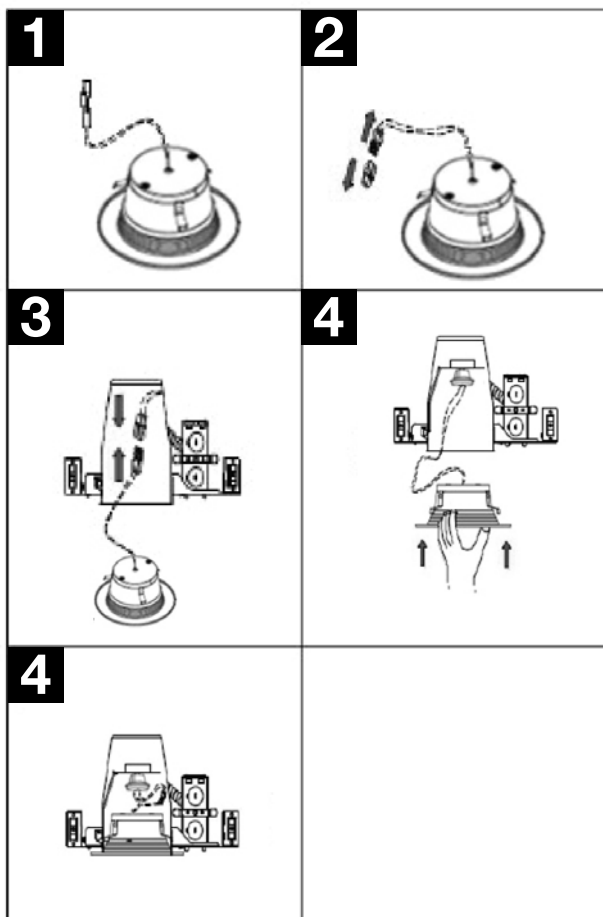

STEP 1:

Remove LED Downlight fixture from the packaging

STEP 2:

Make sure the POWER IS TURNED OFF at the source to the recessed housing(s) that you are installing the fixture(s) in. Once power has been turned off, remove existing trim and lampholder, revealing the existing socket and split up the terminals.

STEP 3:

Pull LED downlight assembly, connect the terminals between the lampholder and the Trim. Care should be taken not to damage wiring during this process.

STEP 4:

Slide LED Downlight with torsion spring in fully-deployed position,

STEP 5:

Up into the recessed housing firmly until trim ring is flush with ceiling.