

Project:	Part #:
Type:	

S	Or	10	$\mathbf{a}$	re
	CI.	ı	U	





### **Detachable Motion Sensor**



#### Features:

- 5.8GHz microwave motion sensor with dimmable function
- Suitable for tri-proof light
- Tri-level control by 1-10V output
- · Detachable version flexible installation
- Remote control
- 5 year warranty



CONTROL







**HOLD** TIME

**DAYLIGHT THRESHOLD** 







**AREA** 

STAND-BY **REMOTE DIMMING** CONTROL **SETTINGS** 

TECHNICAL DATA				
Operating voltage	120~277 VAC 50/60Hz			
Switching capacity	Max.3.0A@120Vac,Max.2.0A@277Vac			
Stand-by power	<1W			
Detection area	50%/100%			
Hold time	5s/30s/1min/10min			
Daylight threshold	2Lux/10Lux/50Lux/Disable			
Stand-by period	0s/30s/20min/+∞			
Stand-by dimming level	10%/20%/30%/50%			
Microwave frequency	5.8GHz ± 75MHz			
Microwave power	<0.3mW			
Interfaces	6-pole pluggable clamp terminal (L,N,N,L',1-10v+,1-10v-) for 0.75- 1.5mm <sup>2</sup> cal			
Mounting height	Max.6m(ceiling mounted);Max.3m(wall mounted)			
Detection range	Max.ø14m(ceiling mounted);Max.10m(wall mounted)			
Detection angle	30°-150°			
Operating temperature	-20°C~+60°C			
IP rating	IP20			

Series HD407V-CR 1W • 120-277V

**Optional Accessories** (Order Separately)

Remote Options


HD03R HD05R

Specs and model numbers are subject to change with or without notice.




## **Detachable Motion Sensor**

#### **FEATURES**

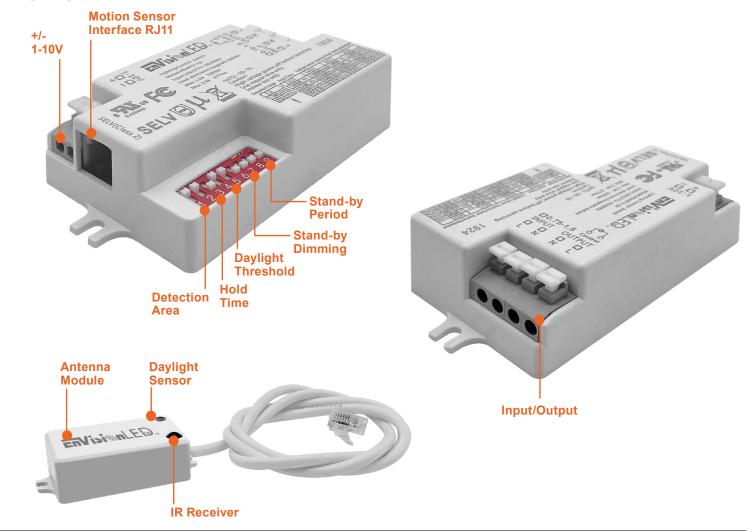

### **DIMENSIONS**

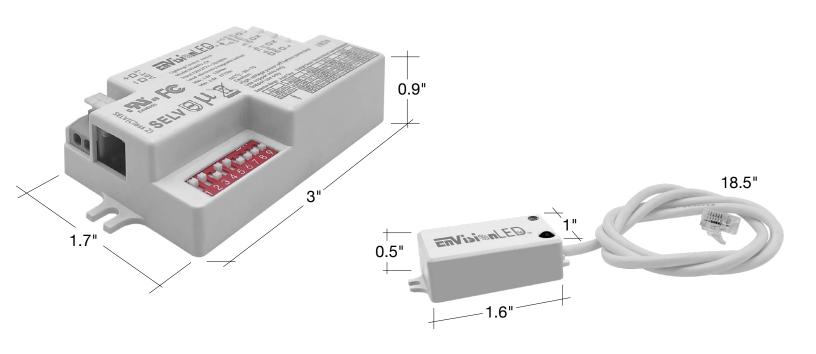



# **Detachable Motion Sensor**

#### **ACCESSORIES**



HD03R



**H-Line Sensors** 

Model	Item Description	Voltage	Watts
HD03R	Remote for HD Sensors	120-277V	<1w
HD05R	Remote for HD Sensors w/ S creen	120-277V	<1w

Specs and model numbers are subject to change with or without notice.