




## Backlite-Line: LED Panels

### 3-CCT & 3-Power Selectable

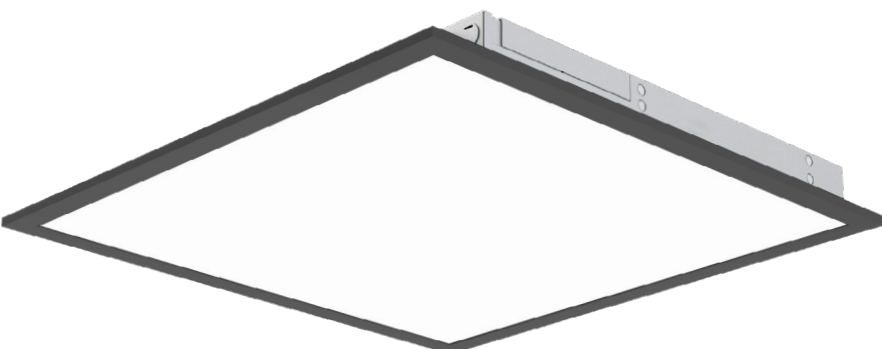

#### Detail Specifications:

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >80
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Frosted, non-yellowing
- Average life (L70) of 50,000 hours

#### Applications:

- General Indoor Lighting
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality
- Commercial and Industrial

#### Product Information:

- Aluminum housing finished with corrosion free power coat
- Even light distribution
- Lightweight for easier installation
- 3-CCT & 3-Power Selectable

#### Driver Options:

- UNV: 120-277V 0-10V Dimmable
- Optional 347-480V step down transformer available
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- Isolated Driver
- Flicker Free

#### Mounting & Installations:

- Lay-in ceilings for 5/8" and 3/8" ceiling widths
- Built-in earthquake clips
- Optional 9' suspension kit available
- Optional surface mount, drywall kit available
- Use surface mount and suspension kit for an aesthetically pleasing design

#### Certifications:

- UL Listed for USA Only
- DLC Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

#### Series

#### LED-BPL-2X2-3M40-TRI-BLK -

20/30/40W • 2,200/3,300/4,400lm  
120-277V

#### Emergency

(blank)

No Emergency  
**EMB**  
Emergency  
Backup

#### Optional Accessories (Order Separately)

##### Suspension Kits

#### SK-9FT-ADJ-2

9' Suspension Kit  
**CK-6FT-V**

6' Chain

Hanging Kit

#### LED-PNL-2X4-SK

3.5' Suspension Kit,  
Works for All Sizes

##### Surface Mount Kits<sup>1</sup> Drywall Kits

#### 2X2-SM-3"

3" Height

#### LED-PNL-2X2



-FLNG

Drywall Kit

1. Custom height options  
available. Contact us.

Specs and model numbers are subject to change with or without notice. Customization of product is available.


## FEATURES

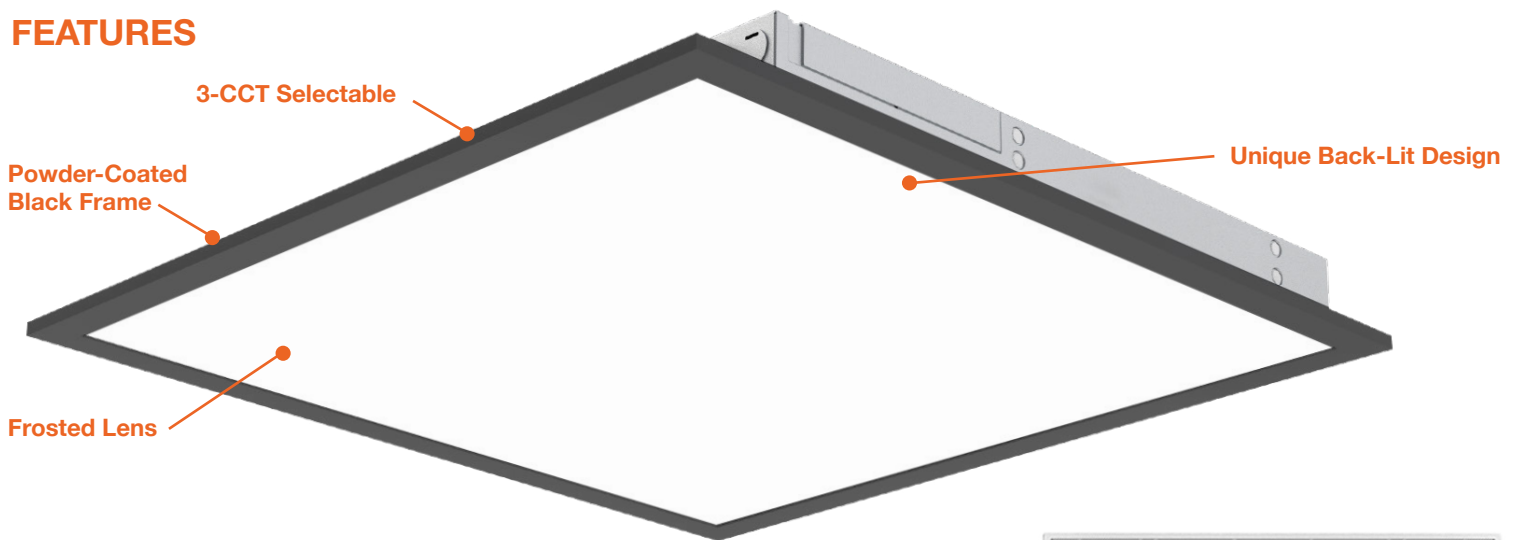


### Sticky Slim Test Button

Test button will be pre-installed to the flange of the fixture. No need for external junction box for test switch


**Works for Drop Ceiling  
Flange, Surface Mount Application**

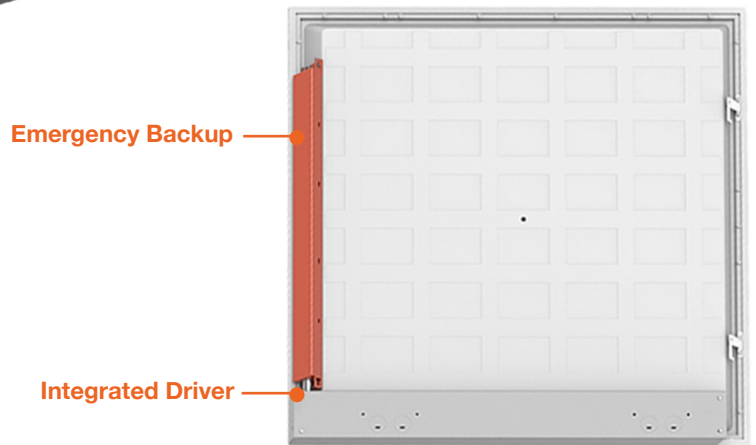

## DIMENSIONS

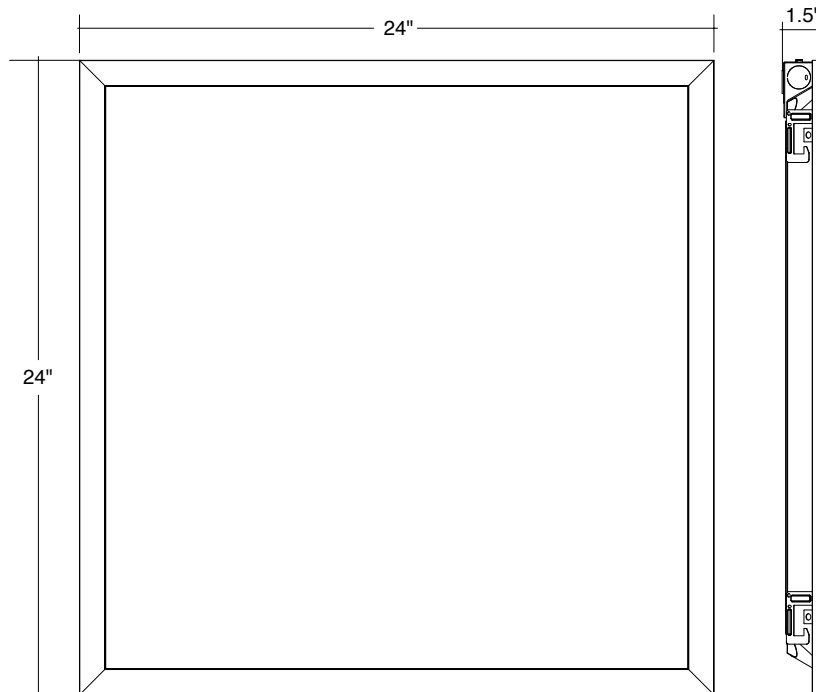

## ACCESSORIES

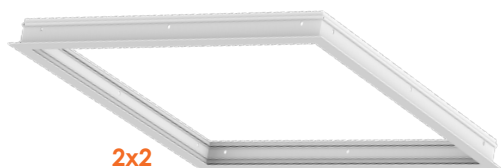

Model	Voltage	Watts	Lumens	Color	CRI
LED-BPL-2x2-3M40-TRI-BLK	120/277V	20/30/40w	2200/3300/4400	30/40/50k	>80

## SUSPENSION KITS

Accessory	Description
SK-9FT-ADJ-2	9' Suspension Kit
CK-6FT-V	6' Chain Hanging Kit
LED-PNL-2X4-SK	3.5' Suspension Kit, works for all sizes

## SURFACE MOUNT KITS

Accessory	Description
2X2-SM-3"	2X2 Surface Mount Kit 3" Height for all Panels and Troffers

## DRYWALL KITS

Accessory	Description
LED-PNL-2X2-FLNG	Flange (Drywall) Kit for Panels for all 2X2 Fixtures