



EnVisionLED™

2024 Catalog V2

Warehouse Locations

- Bell, CA (HQ)
- Midland, NC
- Dallas, TX
- Freehold, NJ
- S. Windsor, CT
- Cincinnati, OH

About Envision LED Lighting

Established in 2010, Envision LED Lighting, Inc. is a Los Angeles based LED lighting leader that provides the market with an array of LED lighting products. Our series of high efficiency, low energy consuming LED products have been skillfully developed by our engineers to suit a range of clients both in the residential and commercial application.

EnVision LED's objective is very simple; to provide superior LED lighting products and service at the highest level of quality and performance in the industry. Our USA team of lighting professionals that strive to develop innovative techniques to manufacture the most efficient LED lighting products. This allows users to save money and create a brighter future for the environment.

What's New?

Customization: EnVision has always been a believer in adding controls to our fixtures. Now we have added the cost on our price sheet for easier quoting.

10 Year Warranty: EnVision is now offering a 10 year optional warranty on most of our products.

Freight Allowed: EnVision has updated their Free Freight Allowed policy.

Best of all, our new catalog features hundreds of new SKUs that are now available. Check out **"NEW"** throughout the catalog!

Please contact EnVision LED or your local rep for more information on what's new!

Our new facility allows us to ship all in stock orders within 24-48 hours. Reach out to us with special ship requests or hard deadlines and we will do our best to make it happen.

Envision LED Affiliated Organizations



American Lighting Association

Envision LED Lighting Inc is a proud member of ALA.



Safety Certification Listings

All EnvisionLED products carry either a UL or ETL nationally recognized safety certification listing to ensure the highest level of safety.



Performance Certification Listing

Products which carry DLC qualified listings are shown in each product specification table.



Energy Star

Products which carry Energy Star qualified listings are shown in each product specification table.



JA8 Title 24 Compliance

Look for the JA8 icon for products that have been qualified and listed in California's JA8 MAEDBS database provided to help comply with California Title 24 requirements.

Envision LED Product Features



Selected Color Temperature

A specification for white light sources used to describe the dominant color tone along the dimension from warm (yellows and reds) to cool (blue).



Select-N-Switch Technology

EnVisions technology which allows you to choose your desired lumen and CCT. Just Select-N-Switch!"



Twist-C Control

EnVision's new Twist-C technology allows for an easy sensor installation without any wiring necessary! Purchase any Twist-C control ready fixture and simply twist the sensor into the fixture to activate. (Remote model#: HB03R is required for set-up).



Envision
CONNECT

EnVision Connect App

Download our new smart home app on your favorite Android or Apple devices to connect our Bluetooth enabled fixtures and sensors!

Table of Contents

NEW Wall Packs	1-5
NEW Area Lights	6-11
Cylinders & Wall Sconces	12
Tenon Mounts for Poles	13
NEW Area Lights	14-16
Sports Lights	17
Bollard Lights	18
Aquarium Lights / Grow Lights	19
Linear Highbay	20-21
UFO Highbay	22
NEW Canopy Lights	23-24
Panels	25-28
NEW Troffers	29
NEW Tubes	30-32
Linear Fixtures	33-34
NEW Linear	35
Strips	36
NEW Wraps	37
NEW Vapor Tights	38
1" Mini Downlights	39
Trimless Downlights	40
NEW Canless Downlights	41-51
EXT Snaptrim Downlight Accessories	52
NEW Commercial Downlights	53-55
J-Box Downlights	56
Smart Downlights	57
Retrofit Downlights	58-60
LED Cans	61
NEW Surface Mounts	62-68
Track Lights	69
Puck Lights	70
NEW Undercabinet Fixtures	71-72
Step Lights	73
NEW Emergency Exit Signs	74-75
Corn bulbs	76
PL Lamps	77
Filament Bulbs	78
NEW LED Bulbs	79-81
LED Lightstrips	82
LED Striplights	83
Magnetic & Electronic Transformers	84-85
Sensors	86
Emergency Battery Backups	87
Displays	88



Mini Wall Pack: M-Line - w/ Photocell

- Frosted polycarbonate lens will not yellow over time
- Built-in photocell with EZ-disconnect

3-CCT Select



Model	Voltage	Watts	Lumens	Color
LED-WPM-20W-TRI-F-BZ-PC	120-277V	20w	2,860	50/40/30k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

Small Body Wall Pack: S-Line - w/ Photocell

- Frosted polycarbonate lens will not yellow over time
- Built-in photocell with EZ-disconnect

3-CCT Select



Model	Voltage	Watts	Lumens	Color
LED-WPS-29W-TRI-BZ-PC	120-277V	29w	3,799	50/40/30k

Single CCT

Model	Voltage	Watts	Lumens	Color
LED-WPS-60W-50K-BZ-PC	120-277V	60w	7,860	5000k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

Regular Wall Pack: Full-Line

- Thick glass lens wall pack will not yellow over time
- Built-in photocell with EZ-disconnect

3-CCT & 5-Power Select w/ Photocell



Model	Voltage	Watts	Lumens	Color
LED-WPF-5P60-TRI-BZ-PC	120/277V	60/50/40/30/20w	140 lm/w	50/40/30k
LED-WPF-5P60-TRI-BL-PC	120/277V	60/50/40/30/20w	140 lm/w	50/40/30k
LED-WPF-5P60-TRI-WH-PC	120/277V	60/50/40/30/20w	140 lm/w	50/40/30k
LED-WPF-5P120-TRI-BZ-PC	120/277V	120/100/80/60/40w	140 lm/w	50/40/30k
LED-WPF-5P120-TRI-BL-PC	120/277V	120/100/80/60/40w	140 lm/w	50/40/30k
LED-WPF-5P120-TRI-WH-PC	120/277V	120/100/80/60/40w	140 lm/w	50/40/30k

Single CCT

Model	Voltage	Watts	Lumens	Color
LED-WPF-40W-40K-BZ	120/277V	40w	5,600	4000k

Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (Internal 8W)
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS1BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (Envision Connect App)
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
Add: -HV to model#	347-480V step down transformer

Slim Wall Pack: SL-Line

- Thick glass lens wall pack will not yellow over time
- Selectable photocell

3-CCT & 5-Power Select w/ Photocell



Model	Voltage	Watts	Lumens	Color
LED-WPF-SL-3P60-TRI-BZ-UNV-PC	120-277V	60/40/30w	130 lm/w	50/40/30k
LED-WPF-SL-3P120-TRI-BZ-UNV-PC	120-277V	120/100/80w	130 lm/w	50/40/30k
LED-WPF-SL-3P60-TRI-BZ-HV-PC	277-480V	60/40/30w	130 lm/w	50/40/30k
LED-WPF-SL-3P120-TRI-BZ-HV-PC	277-480V	120/100/80w	130 lm/w	50/40/30k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

Accessory Model	Description
WPF-SHIELD	Cut off shield for WPF wall packs
WPF-WG	Wire guard for WPF wall packs
WPF-SL-SHIELD	Cut off sShield for WPF-SL wall packs

Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (Internal 8W)
Add: -CEMB to model #	90 minute emergency backup cold weather -4-120F
Add '-BMS' to model #	Bi-level motion + daylight sensor
Add '-BMS1' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS1BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (Envision Connect App)
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
Add: -HV to model#	347-480V step down transformer



5P60

5P120


WATT	LUMENS	WATT	LUMENS
20	2,300	40	5,600
30	4,200	60	8,400
40	5,600	80	11,200
50	7,000	100	14,000
60	8,400	120	16,800



WATT	LUMENS	WATT	LUMENS
30	3,900	80	10,400
40	5,200	100	13,000
60	7,800	120	15,600



Shield




Wire Guard



Emergency Back-Up



Bi-Level Motion

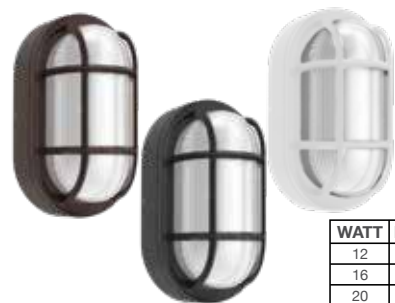

E.T.A. 08/2024

NEW

WATT	LUMENS
12	1,020
16	1,360
20	1,700

Bulk Head Wall Pack

- Frosted glass lens will not yellow over time
- Selectable photocell

3-CCT Select

3CCT 3000K 4000K 5000K 80 HIGH CRI 6 Box Qty.

Model	Voltage	Watts	Lumens	Color
LED-WPBH-3P20-TRI-BZ-PC	120-277V	20/16/12	85 lm/w	50/40/30k
LED-WPBH-3P20-TRI-BL-PC	120-277V	20/16/12	85 lm/w	50/40/30k
LED-WPBH-3P20-TRI-WH-PC	120-277V	20/16/12	85 lm/w	50/40/30k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Rotating Wall Pack: R-Line

- Optical lens on individual LED chips, full forward throw light
- Upgraded housing design includes back cover for more installation applications
- Dark sky compliant
- Full 360° rotating in any angle
- Toolless rotation and locking system

Single Module

3CCT 3000K 4000K 5000K 80 HIGH CRI 4 Box Qty.

Model	Voltage	Watts	Lumens	Color
LED-WPROT2-25WS-TRI-BZ	120-277V	25w	3,600	50/40/30k
LED-WPROT2-40WS-30K-BZ	120-277V	40w	4,890	3000k
LED-WPROT2-40WS-40K-BZ	120-277V	40w	4,890	4000k
LED-WPROT2-40WS-50K-BZ	120-277V	40w	4,890	5000k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Double Module

Model	Voltage	Watts	Lumens	Color
LED-WPROT2-3P80WD-TRI-BZ	120-277V	80/60/40w	130 lm/w	50/40/30k
LED-WPROT2-60WD-TRI-BZ	120-277V	60w	8,280	50/40/30k
LED-WPROT2-80WD-30K-BZ	120-277V	80w	10,875	3000k
LED-WPROT2-80WD-40K-BZ	120-277V	80w	10,875	4000k
LED-WPROT2-80WD-50K-BZ	120-277V	80w	10,875	5000k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Accessory Model	Description
WPROT-SHIELD	Wall pack: R-line shield
Pre-Installed Accessory Model Description	
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-PC' to model #	Button photocell
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS1' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS1BT' to model #	S-BMS-EXT-1-BT: Bi level motion+daylight sensor bluetooth control (Envision Connect App)
Add '20KV' to model #	SG-20KV-UNV: 20KV surge protector



Full Cut Off Wall Packs Adjustable: AFC-Line

- Optical lens on individual LED chips, full forward throw light
- Dark sky compliant
- Adjustable up to 90° easy

3-CCT & 3-Power Select


3CCT 3000K 4000K 5000K 80 HIGH CRI 2 Box Qty.

Model	Voltage	Watts	Lumens	Color
LED-WPFC-ADJ-30W-TRI-BZ	120-277V	30W	4,050	50/40/30k
LED-WPFC-ADJ-3P50W-TRI-BZ	120-277V	50/40/30W	145 lm/w	50/40/30k
LED-WPFC-ADJ-3P50W-TRI-BL	120-277V	50/40/30W	145 lm/w	50/40/30k
LED-WPFC-ADJ-3P50W-TRI-WH	120-277V	50/40/30W	145 lm/w	50/40/30k
LED-WPFC-ADJ-3P80W-TRI-BZ	120-277V	80/70/60W	145 lm/w	50/40/30k
LED-WPFC-ADJ-3P80W-TRI-BL	120-277V	80/70/60W	145 lm/w	50/40/30k
LED-WPFC-ADJ-3P80W-TRI-WH	120-277V	80/70/60W	145 lm/w	50/40/30k

Single CCT

Model	Voltage	Watts	Lumens	Color
LED-WPFC-ADJ-55W-50K-BZ	120-277V	55w	6,150	5000k

Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-CEMB' to model #	90 Minute emergency backup cold weather -4-120F
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS1BT' to model #	S-BMS-EXT-1-BT: Bi level motion+daylight sensor bluetooth control (Envision Connect App)

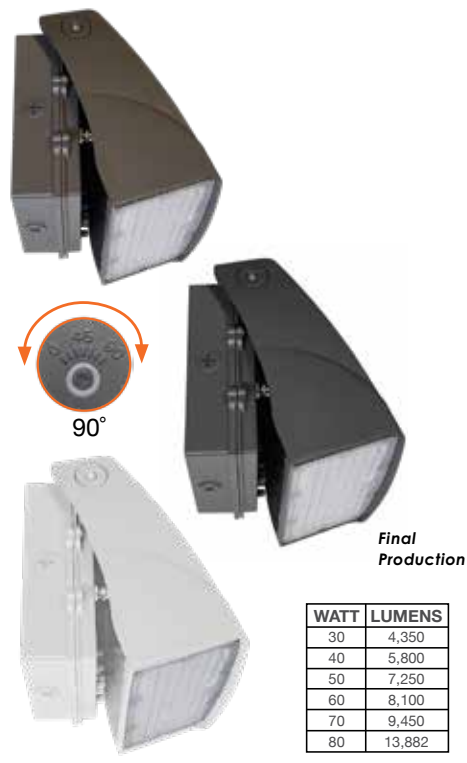

Full-Cutoff Wall Pack: Flat-FC Line

- Optical lens on individual LED chips for full forward throw light
- Dark sky compliant
- Built-in photocell with EZ-disconnect

3-CCT & 5-Power Select w/ Photocell








Model	Voltage	Watts	Lumens	Color
LED-WPFC-FL-5P60W-TRI-BZ-PC	120-277V	60/50/40/30/20W	145 lm/w	50/40/30k
LED-WPFC-FL-5P60W-TRI-BL-PC	120-277V	60/50/40/30/20W	145 lm/w	50/40/30k
LED-WPFC-FL-5P60W-TRI-WH-PC	120-277V	60/50/40/30/20W	145 lm/w	50/40/30k
LED-WPFC-FL-5P120W-TRI-BZ-PC	120-277V	120/110/100/90/80W	145 lm/w	50/40/30k
LED-WPFC-FL-5P120W-TRI-BL-PC	120-277V	120/110/100/90/80W	145 lm/w	50/40/30k
LED-WPFC-FL-5P120W-TRI-WH-PC	120-277V	120/110/100/90/80W	145 lm/w	50/40/30k

Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 20W)
Add '-PC' to model #	Button photocell
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS1BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor w/ bluetooth control (Envision connect App)

WATT	LUMENS	WATT	LUMENS
20	2,900	80	11,600
30	4,350	90	13,050
40	5,800	100	14,500
50	7,250	110	15,950
60	8,700	120	17,400



Full-Cutoff Wall Pack: FC-Line

- Optical lens on individual LED chips for full forward throw light
- Dark sky compliant
- Built-in photocell with EZ-disconnect

3-CCT & 5-Power Select w/ Photocell








Model	Voltage	Watts	Lumens	Color
LED-WPFC-5P80-TRI-BZ-PC	120-277V	80/64/48/32/16w	145 lm/w	50/40/30k
LED-WPFC-5P80-TRI-BL-PC	120-277V	80/64/48/32/16w	145 lm/w	50/40/30k
LED-WPFC-5P80-TRI-WH-PC	120-277V	80/64/48/32/16w	145 lm/w	50/40/30k
LED-WPFC-5P80-TRI-BZ-HV-PC	277-480V	80/64/48/32/16w	145 lm/w	50/40/30k
LED-WPFC-5P150-TRI-BZ-PC	120-277V	150/120/90/60/30w	145 lm/w	50/40/30k
LED-WPFC-5P150-TRI-BL-PC	120-277V	150/120/90/60/30w	145 lm/w	50/40/30k
LED-WPFC-5P150-TRI-WH-PC	120-277V	150/120/90/60/30w	145 lm/w	50/40/30k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

Pre-Installed Accessory Model	Description
Add: -T2 to Model #	Factory installed type II optic (80W: 1 PC) (150W: 2 Pcs)
Add: -T4 to Model #	Factory installed type IV optic (80W: 1 PC) (150W: 2 Pcs)
WPFC-T-II	Wall pack: FC-line: type II optics lens req'd: (80W: 1 PC) (150W: 2 PCs)
WPFC-T-IV	Wall pack: FC-line: type IV optics lens req'd: (80W: 1 PC) 150W: 2 PCs)
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS1BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor w/ bluetooth control (Envision Connect App)

WATT	LUMENS	WATT	LUMENS
16	2,320	64	9,280
30	4,350	80	11,600
32	4,640	90	13,050
48	6,960	120	17,400
60	8,700	150	21,750





Slim Wall Pack: EGG-Line

- Backup time up to 90 min.
- EMB- Emergency Back-up
- Emergency mode 690 Lumens
- Built-in photocell with EZ-disconnect



Model	Voltage	Watts	Lumens	Color
LED-WPE-15W-TRI-PC-BZ	120-277V	15w	1950	50/40/30k
LED-WPE-15W-TRI-PC-BZ-EMB	120-277V	15w	1950	50/40/30k
LED-WPE-15W-TRI-PC-BL	120-277V	15w	1950	50/40/30k
LED-WPE-15W-TRI-PC-BL-EMB	120-277V	15w	1950	50/40/30k

**Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.*

E.T.A. 07/2024

NEW

NEW

Semi-Circle Full Cut Off Wall Pack: CIRCLE-Line

- Type III standard,
- Slim and architectural IP67-rated housing
- Dark sky compliant
- Selectable photocell

3-CCT & 3-Power Select



Model	Voltage	Watts	Lumens	Color
LED-WPFC-SC-3P80-TRI-BZ-PC	120-347V	80/64/48w	135 lm/w	50/40/30k
LED-WPFC-SC-3P80-TRI-BL-PC	120-347V	80/64/48w	135 lm/w	50/40/30k
LED-WPFC-SC-3P80-TRI-WH-PC	120-347V	80/64/48w	135 lm/w	50/40/30k

Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS1BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (Envision connect app)
Add: -T4 to Model #	Factory installed type IV
Add: -T5 to Model #	Factory installed type V
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
SC-T-IV	Wall pack: FC-line: Type IV optic lens
SC-T-V	Wall pack: FC-Line: Typel V optics Lens

WATT	LUMENS
48	6,480
64	8,640
80	10,800

ET A. 08/2024

NEW

NEW

ETA: 08/2024

NEW

NEW



Emergency Back-Up

Optic Lens

Bi-Level Motion

Half Cylinder Up/Down Wall Pack: CIRCLE-Line

- Type III standard
- Downlight only or 20% up & 80% down selectable
- Selectable photocell

3-CCT & 3-Power Select



Model	Voltage	Watts	Lumens	Color
LED-WPUD-SC-3P80-TRI-BZ-PC	120-347V	80/64/48w	130 lm/w	50/40/30k
LED-WPUD-SC-3P80-TRI-BL-PC	120-347V	80/64/48w	130 lm/w	50/40/30k
LED-WPUD-SC-3P80-TRI-WH-PC	120-347V	80/64/48w	130 lm/w	50/40/30k

Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS1BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (Envision connect app)
Add: -T4 to Model #	Factory installed type IV
Add: -T5 to Model #	Factory installed type V
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
SC-T-IV	Wall pack: FC-line: Type IV optic lens
SC-T-V	Wall pack: FC-line: Type V optic lens

WATT	LUMENS
48	6,960
64	9,280
80	11,600

ETA 08/2024

NEW

NEW

ETA: 08/2024

NEW

NEW



Optic Lens

Bi-Level Motion

Emergency Back-Up

Full Cut Off Wall Packs: Full-FC-Line

- Optical lens on individual LED chips, full forward throw light
- Slim and architectural IP67-rated housing
- Dark sky compliant
- Selectable photocell

3-CCT & 3-Power Select










E.T.A. 07/2024

NEW

Model	Voltage	Watts	Lumens	Color
LED-WPF-FC-21-3P100-TRI-BZ-PC	120-277V	100/80/60W	130 lm/w	50/40/30k
LED-WPF-FC-21-3P100-TRI-BL-PC	120-277V	100/80/60W	130 lm/w	50/40/30k

Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (Internal 8W)
Add: '-CEMB' to model #	90 minute emergency backup cold weather -4-120F
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS1BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector

WATT	LUMENS
60	8,100
80	10,800
100	13,500



Full Cut Off Wall Packs: ARCY-Line

- Optical lens on individual LED chips, full forward throw light
- Slim and architectural IP67-rated housing
- Dark sky compliant
- Fixture tilts up and down
- Selectable photocell

3-CCT & 3-Power Select









NEW

NEW

NEW

NEW

Model	Voltage	Watts	Lumens	Color
LED-WPFC-ARC-3P65-TRI-BZ-PC	120-347V	65/50/30W	130 lm/w	50/40/30k
LED-WPFC-ARC-3P65-TRI-BL-PC	120-347V	65/50/30W	130 lm/w	50/40/30k
LED-WPFC-ARC-3P65-TRI-WH-PC	120-347V	65/50/30W	130 lm/w	50/40/30k
LED-WPFC-ARC-3P100-TRI-BZ-PC	120-347V	100/80/60W	130 lm/w	50/40/30k
LED-WPFC-ARC-3P100-TRI-BL-PC	120-347V	100/80/60W	130 lm/w	50/40/30k
LED-WPFC-ARC-3P100-TRI-WH-PC	120-347V	100/80/60W	130 lm/w	50/40/30k

Accessory Model	Description
WPFC-ARC-S-T-IV	Wall pack: ARCY-line optic for 3P65
WPFC-ARC-M-T-IV	Wall pack: ARCY-line optic for 3P100
WPFC-ARC-S-T-V	Wall pack: ARCY-line optic for 3P65
WPFC-ARC-M-T-V	Wall pack: ARCY-line optic for 3P100


Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-PC' to model #	Button photocell
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS1BT' to model #	S-BMS-EXT-1-BT: Bi level motion+daylight sensor bluetooth control (Envision Connect App)
Add '20KV' to model #	SG-20KV-UNV: 20KV surge protector

WATT	LUMENS
30	3,900
50	6,500
60	7,800
65	8,450
80	10,400
100	13,000




Bi-Level Motion

Adjustable Angle
20° Tilt

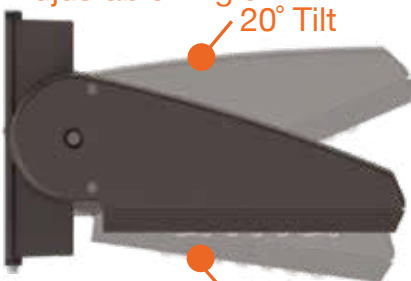

10° Tilt

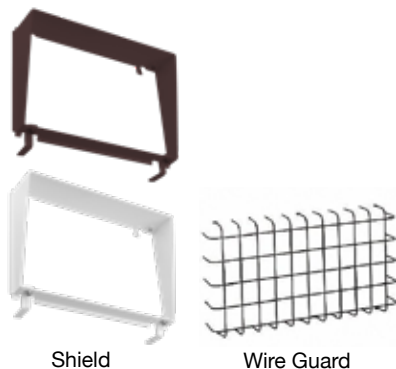

Mini Area Flood Lights: M-Line

- Knuckle option is 1/2"
- All bracket options fully adjust up and down
- Corrosion-resistant bronze powder coat
- Full weatherproof IP67 rating housing
- Built-in photocell with EZ-disconnect

3-CCT & Power Select w/ Photocell

Box Qty.
2P30- 8
2P50- 6
3P80- 5



Model	Voltage	Watts	Lumens	Color
LED-ARL-2P30-TRI-BZ-TR-PC	120-277V	30/15w	3,819	50/40/30k
LED-ARL-2P30-TRI-BZ-KN-PC	120-277V	30/15w	3,819	50/40/30k
LED-ARL-2P30-TRI-WH-KN-PC	120-277V	30/15w	3,819	50/40/30k
LED-ARL-2P50-TRI-BZ-TR-PC	120-277V	50/35w	7,000	50/40/30k
LED-ARL-2P50-TRI-BZ-KN-PC	120-277V	50/35w	7,000	50/40/30k
LED-ARL-2P50-TRI-WH-KN-PC	120-277V	50/35w	7,000	50/40/30k
LED-ARL-2P50-TRI-WH-TR-PC	120-277V	50/35w	7,000	50/40/30k
LED-ARL-3P80-TRI-BZ-KN-PC	120-277V	80/70/60w	11,200	50/40/30k
LED-ARL-3P80-TRI-WH-KN-PC	120-277V	80/70/60w	11,200	50/40/30k
LED-ARL-3P80-TRI-BZ-TR-PC	120-277V	80/70/60w	11,200	50/40/30k

15W 3-CCT Select

Box Qty.
8



Final Production

Model	Voltage	Watts	Lumens	Color
LED-ARL-15W-TRI-BZ-TR	120-277V	15w	2,100	50/40/30k
LED-ARL-15W-TRI-BZ-KN	120-277V	15w	2,100	50/40/30k
LED-ARL-15W-TRI-WH-KN	120-277V	15w	2,100	50/40/30k

30W 3-CCT Select

Box Qty.
8

Final Production

Model	Voltage	Watts	Lumens	Color
LED-ARL-30W-TRI-BZ-TR	120-277V	30w	3,819	50/40/30k

80W 3-CCT Select

Box Qty. KN- 5
Box Qty. SFA- 1

Final Production

Model	Voltage	Watts	Lumens	Color
LED-ARL-80W-TRI-WH-KN	120-277V	80w	11,200	50/40/30k
LED-ARL-80W-TRI-BZ-SFA	120-277V	80w	11,200	50/40/30k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Single CCT

Box Qty.
8



Model	Voltage	Watts	Lumens	Color
LED-ARL-15W-30K-BZ-TR	120-277V	15W	2,100	3000k
LED-ARL-15W-50K-WH-KN	120-277V	15W	2,100	5000k
LED-ARL-30W-30K-BZ-TR	120-277V	30W	3,800	3000k
LED-ARL-30W-30K-BZ-KN	120-277V	30W	3,800	3000k
LED-ARL-30W-30K-WH-KN	120-277V	30W	3,800	3000k
LED-ARL-50W-30K-BZ-TR	120-277V	50W	6,800	3000k

Accessory Model	Accessory Description
ARL-15/30W-SHIELD-BZ	Area light 15W shield
ARL-15/30W-SHIELD-WH	Area light 15W shield
ARL-15/30W-WG	Area light 15W wire guard
ARL-50W-SHIELD-BZ	Area light 50W shield
ARL-50W-SHIELD-WH	Area light 50W shield
ARL-50W-WG	Area light 50W wire guard
ARL-80W-SHIELD-BZ	Area light 80W shield
ARL-80W-SHIELD-WH	Area light 80W shield
ARL-80W-WG	Area light 80W wire guard



3P60

3P100

WATT	LUMENS	WATT	LUMENS
40	5,200	60	8,100
50	6,500	80	10,800
60	7,800	100	13,500

3P150

WATT	LUMENS
100	13,500
120	16,200
150	20,250



Trunion



Mini Area Floodlights: XS-Line

- Includes 1/2" knuckle (installed on to the fixture)
- Yoke mount included separate in the box
- All bracket options fully adjust up and down
- Selectable photocell

3-CCT & Power Select w/ Photocell

IP67 RATED 80 HIGH CRI DLC LISTED Box Qty. 8



E.T.A. 08/2024

NEW

Model	Voltage	Watts	Lumens	Color
LED-FL-15W-TRI-BZ-KNYK-PC	120-277V	15w	1,950	50/40/30k
LED-FL-15W-TRI-BL-KNYK-PC	120-277V	15w	1,950	50/40/30k
LED-FL-15W-TRI-WH-KNYK-PC	120-277V	15w	3,900	50/40/30k
LED-FL-30W-TRI-BZ-KNYK-PC	120-277V	30w	3,900	50/40/30k
LED-FL-30W-TRI-BL-KNYK-PC	120-277V	30w	6,800	50/40/30k
LED-FL-30W-TRI-WH-KNYK-PC	120-277V	30w	6,800	50/40/30k
LED-FL-3P60-TRI-BZ-KNYK-PC	120-277V	60/50/40w	130lm/w	50/40/30k
LED-FL-3P60-TRI-BL-KNYK-PC	120-277V	60/50/40w	130lm/w	50/40/30k
LED-FL-3P60-TRI-WH-KNYK-PC	120-277V	60/50/40w	130lm/w	50/40/30k
LED-FL-3P100-TRI-BZ-KNYK-PC	120-277V	100/80/60	135lm/w	50/40/30k
LED-FL-3P100-TRI-BL-KNYK-PC	120-277V	100/80/60	135lm/w	50/40/30k
LED-FL-3P100-TRI-WH-KNYK-PC	120-277V	100/80/60	135lm/w	50/40/30k
LED-FL-3P150-TRI-BZ-KNYK-PC	120-277V	150/120/100w	135lm/w	50/40/30k
LED-FL-3P150-TRI-BL-KNYK-PC	120-277V	150/120/100w	135lm/w	50/40/30k
LED-FL-3P150-TRI-WH-KNYK-PC	120-277V	150/120/100w	135lm/w	50/40/30k

08/2024

E.T.A.

NEW

NEW

NEW

NEW

NEW

NEW

NEW

NEW

NEW

NEW

Mini Flood Light: ARCY-Line

- Includes 1/2" knuckle (installed on to the fixture)
- Trunion mount included separate in the box
- All bracket options fully adjust up and down
- Selectable photocell

3-CCT & Power Select w/ Photocell

IP67 RATED 80 HIGH CRI DLC LISTED Box Qty. 2



Model	Voltage	Watts	Lumens	Color
LED-ARL3-ARC-3P30-TRI-BZ-UNV-KNT-PC	120-277V	30/25/15w	150lm/w	50/40/30k
LED-ARL3-ARC-3P60-TRI-BZ-UNV-KNT-PC	120-277V	60/50/40w	150lm/w	50/40/30k
LED-ARL3-ARC-3P100-TRI-BZ-UNV-KNT-PC	120-277V	100/80/60w	150lm/w	50/40/30k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	2,250	40	6,000	60	9,000
25	3,750	50	7,500	80	12,000
30	4,500	60	9,000	100	15,000

Large Flood Lights: ARCY-Line

- Bracket options shown on page 10 (brackets sold separately)
- NEMA 7Hx6V optic
- Selectable photocell
- Twist-C technology: Sensor ready socket

3-CCT & Power Select w/ Photocell

IP67 RATED 80 HIGH CRI DLC LISTED Box Qty. 2



E.T.A. 07/2024

NEW

NEW

NEW

Model	Voltage	Watts	Lumens	Color
LED-ARL3-ARC-3P150-TRI-BZ-UNV-PC	120-277V	150/120/80w	150lm/w	50/40/30k
LED-ARL3-ARC-3P150-TRI-BL-UNV-PC	120-277V	150/120/80w	150lm/w	50/40/30k
LED-ARL3-ARC-3P150-TRI-WH-UNV-PC	120-277V	150/120/80w	150lm/w	50/40/30k
LED-ARL3-ARC-3P150-TRI-BZ-HV-PC	277-480V	150/120/80w	150lm/w	50/40/30k
LED-ARL3-ARC-3P300-TRI-BZ-UNV-PC	120-277V	300/240/180w	150lm/w	50/40/30k
LED-ARL3-ARC-3P300-TRI-BL-UNV-PC	120-277V	300/240/180w	150lm/w	50/40/30k
LED-ARL3-ARC-3P300-TRI-WH-UNV-PC	120-277V	300/240/180w	150lm/w	50/40/30k
LED-ARL3-ARC-3P300-TRI-BZ-HV-PC	277-480V	300/240/180w	150lm/w	50/40/30k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

WATT	LUMENS	WATT	LUMENS
80	12,000	180	27,000
120	18,000	240	36,000
150	22,500	300	45,000

Large Area Light: Optic-Line

- Bracket options shown on page 10 (brackets sold separately)
- Easy optic swap: Type III optics installed, Type II, IV, V included
- 0-10V Dimmable
- Twist-C technology: Sensor ready socket

3-CCT & 5-Power Select



Box Qty.
5P150- 4
5P300- 2



Model	Voltage	Watts	Lumens	Color
LED-ARL3-OPT-5P150-TRI-BZ-UNV	120-277V	150/125/100/75/50w	150lm/w	50/40/30k
LED-ARL3-OPT-5P150-TRI-BZ-HV	277-480V	150/125/100/75/50w	150lm/w	50/40/30k
LED-ARL3-OPT-5P150-TRI-BL-UNV	120-277V	150/125/100/75/50w	150lm/w	50/40/30k
LED-ARL3-OPT-5P150-TRI-BL-HV	277-480V	150/125/100/75/50w	150lm/w	50/40/30k
LED-ARL3-OPT-5P150-TRI-WH-UNV	120-277V	150/125/100/75/50w	150lm/w	50/40/30k
LED-ARL3-OPT-5P150-TRI-WH-HV	277-480V	150/125/100/75/50w	150lm/w	50/40/30k
LED-ARL3-OPT-5P300-TRI-BZ-UNV	120-277V	300/270/240/210/180w	150lm/w	50/40/30k
LED-ARL3-OPT-5P300-TRI-BZ-HV	277-480V	300/270/240/210/180w	150lm/w	50/40/30k
LED-ARL3-OPT-5P300-TRI-BL-UNV	120-277V	300/270/240/210/180w	150lm/w	50/40/30k
LED-ARL3-OPT-5P300-TRI-BL-HV	277-480V	300/270/240/210/180w	150lm/w	50/40/30k
LED-ARL3-OPT-5P300-TRI-WH-UNV	120-277V	300/270/240/210/180w	150lm/w	50/40/30k
LED-ARL3-OPT-5P300-TRI-WH-HV	277-480V	300/270/240/210/180w	150lm/w	50/40/30k
NEW LED-ARL3-OPT-5P450-TRI-BZ-UNV	120-277V	450/420/390/360/330w	150lm/w	50/40/30k
NEW LED-ARL3-OPT-5P450-TRI-BL-UNV	120-277V	450/420/390/360/330w	150lm/w	50/40/30k
NEW LED-ARL3-OPT-5P450-TRI-WH-UNV	120-277V	450/420/390/360/330w	150lm/w	50/40/30k

E.T.A. 07/2024

Shields

Accessory Model	Description
ARL3-OPT-L-HSS-BZ	ARL3: Optic-line: House side shield for 5P150
ARL3-OPT-L-HSS-BL	ARL3: Optic-line: House side shield for 5P150
ARL3-OPT-L-HSS-WH	ARL3: Optic-line: House side shield for 5P150
ARL3-OPT-XL-HSS-BZ	ARL3: Optic-line: House side shield for 5P300
ARL3-OPT-XL-HSS-BL	ARL3: Optic-line: House side shield for 5P300
ARL3-OPT-XL-HSS-WH	ARL3: Optic-line: House side shield for 5P300
ARL3-OPT-XXL-HSS-BZ	ARL3: Optic-line: House side shield for 5P450
ARL3-OPT-XXL-HSS-BL	ARL3: Optic-line: House side shield for 5P450
ARL3-OPT-XXL-HSS-WH	ARL3: Optic-line: House side shield for 5P450

Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 40W/field install)
Add '-PC' to model #	Photocell
Add: 20KV to model#	Add: 20KV to model#

5P150		5P300	
WATT	LUMENS	WATT	LUMENS
50	7,500	180	27,000
75	11,250	210	31,500
100	15,000	240	36,000
125	18,750	270	40,500
150	22,500	300	45,000

5P450	
WATT	LUMENS
330	49,500
360	54,000
390	58,500
420	63,000
450	67,500



Toolless Access to Optic Lens




Toolless Access to Driver



Rotatable Optic Lens

Field rotation eases lighting design implementation. Rotate lens and receive different light distribution in different directions. No change to fixture installation and EPA.

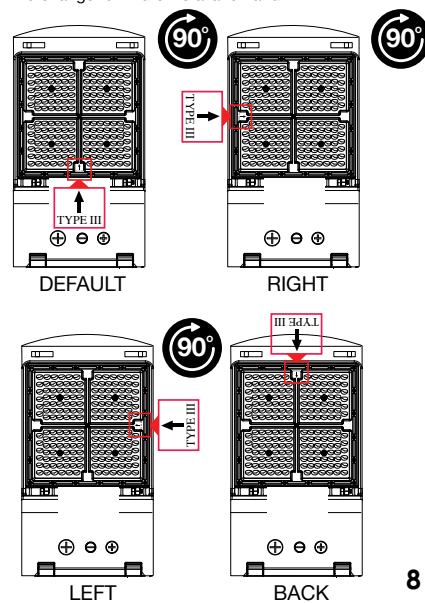



WATT	LUMENS	WATT	LUMENS
20	2,800	200	28,000
40	5,600	215	30,100
60	8,400	225	31,500
70	10,150	240	33,600
90	12,600	250	35,000
100	14,000	275	38,500
110	15,400	300	42,000
130	18,200	330	46,200
140	19,600	360	50,400
150	21,000	390	54,600
165	23,100	420	58,800
190	26,600	450	63,000

House
Side Shield

Optics Lens

S-TWC-MW-1
S-TWC-MW-BT
TWC-DLS-TWC-PIR-1
S-TWC-PIR-BT

S-LINE-R

Large Area Light: Bolt-Line

- Bracket options shown on page 10 (brackets sold separately)
- Type III optics standard, other optics available
- 0-10V dimmable
- Twist-C technology: Sensor ready socket
- 10Kv surge protector built in

3-CCT & 5-Power Select



Model	Voltage	Watts	Lumens	Color
LED-ARL3-5P100-TRI-BZ-UNV	120-277V	100/80/60/40/20w	140 lm/w	50/40/30k
LED-ARL3-5P150-TRI-BZ-UNV	120-277V	150/130/110/90/80w	140 lm/w	50/40/30k
LED-ARL3-5P240-TRI-BZ-UNV	120-277V	150/130/110/90/80w	140 lm/w	50/40/30k
LED-ARL3-5P300-TRI-BZ-UNV	120-277V	300/275/250/225/200w	140 lm/w	50/40/30k
LED-ARL3-5P450-TRI-BZ-UNV	120-277V	450/420/390/360/330w	140 lm/w	50/40/30k

Large Area Light High Voltage: Bolt-Line

3-CCT & 5-Power Select



Model	Voltage	Watts	Lumens	Color
LED-ARL3-5P150-TRI-BZ-HV	277-480V	150/130/110/90/80w	140 lm/w	50/40/30k
LED-ARL3-5P300-TRI-BZ-HV	277-480V	300/275/250/225/200w	140 lm/w	50/40/30k
LED-ARL3-5P450-TRI-BZ-HV	277-480V	450/420/390/360/330w	140 lm/w	50/40/30k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

Accessory Model	Description
ARL3-100-150W-HSS-BZ	ARL3: House side shield for 100W and 150W
ARL3-240-300W-HSS-BZ	ARL3: House side shield for 240W and 300W
ARL3-450W-HSS-BZ	ARL3: House side shield for 450W

Accessory Model	Description
ARL3-T-II-100-150	ARL: Type II optics lens (25° beam) lens
ARL3-T-IV-100-150	ARL2: Type IV optics lens (60/90° beam) lens
ARL3-T-V-100-150	ARL2: Type V optics lens (360° beam) lens
ARL3-T-II-240-300	ARL: Type II optics lens (25° beam) lens
ARL3-T-IV-240-300	ARL2: Type IV optics lens (60/90° beam) lens
ARL3-T-V-240-300	ARL2: Type V optics lens (360° beam) lens
ARL3-T-II-450	ARL: Type II optics lens (25° beam) lens
ARL3-T-IV-450	ARL2: Type IV optics lens (60/90° beam) lens
ARL3-T-V-450	ARL2: Type V optics lens (360° beam) lens

Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 40W/field install)
Add '-PC' to model #	Photocell
Add: 20KV to model#	Add: 20KV to model#



Brackets for ARL3 Fixtures

Accessory Model	Description
ARL3-SF	ARL3: Slip fitter
ARL3-SF-BL	ARL3: Slip fitter (black)
ARL3-SF-WH	ARL3: Slip fitter (white)
ARL3-SA	ARL3: Straight arm
ARL3-SA-BL	ARL3: Straight arm (black)
ARL3-SA-WH	ARL3: Straight arm (white)
ARL3-WM	ARL3: Wall mount bracket (requires ARL3-SA for mounting)
ARL3-WM-BL	ARL3: Wall mount bracket (requires ARL3-SA for mounting) (black)
ARL3-WM-WH	ARL3: Wall mount bracket (requires ARL3-SA for mounting) (white)
ARL3-SFA	ARL3: Slip fitter/straight arm combo
ARL3-SFA-BL	ARL3: Slip fitter/straight arm combo (black)
ARL3-SFA-WH	ARL3: Slip fitter/straight arm combo (white)
ARL3-ARC-TR	ARL3 Arc: Trunnion (only works with arc)
ARL3-TR	ARL3: Trunnion (only works with bolt & optic-line)
ARL3-TR-BL	ARL3: Trunnion (only works with bolt & optic-line) (black)
ARL3-TR-WH	ARL3: Trunnion (only works with bolt & optic-line) (white)
ARL3-YK-100-150	ARL3: Yoke
ARL3-YK-240-450	ARL3: Yoke

Sensors for ARL3 Fixtures



Accessory Model	Description
S-TWC-MW-1	"Twist-C microwave sensor Brightness: 100%/ hold time: 10 min. Bi-level dim: 50% stand by time: 10 min. Sensitivity: 100% daylight: Enabled"
S-TWC-PIR-1	"Twist-C PIR sensor Brightness: 100%/ hold time: 10 min. Bi-level dim: 50% stand by time: 10 min. Sensitivity: 100% daylight: Enabled"
S-TWC-MW-BT	"Twist-C microwave sensor w/ bluetooth app control and group: Brightness, hold time, B- level dim, stand by time, Sensitivity, daylight: Disabled"
S-TWC-PIR-BT	"Twist-C microwave sensor Brightness: 100%/ hold time: 10 min. Bi-level dim: 50% stand by time: 10 min. Sensitivity: 100% daylight: Enabled"
TWC-DL	Twist-C daylight sensor: Dusk to dawn, works like a photocell
S-LINE-R	Remote for S-LINE series sensors



Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 20W)
Add '-PC' to model #	Photocell
Add: 20KV to model#	Add: 20KV to model#

Large Area Light Gen 2

- Five bracket options
- Type III optics standard, other optics available
- 0-10V dimmable
- Twist-C technology: Sensor ready socket
- 10Kv surge protector built in

3-CCT & 3-Power Select

Model	Voltage	Watts	Lumens	Color
LED-ARL2-3P100W-TRI-BZ-TR-UNV	120-277V	100/80/60w	140 lm/w	50/40/30k
LED-ARL2-3P100W-TRI-BZ-YK-UNV	120-277V	100/80/60w	140 lm/w	50/40/30k
LED-ARL2-3P150W-TRI-BZ-SF-UNV	120-277V	150/135/120w	140 lm/w	50/40/30k
LED-ARL2-3P240W-TRI-BZ-SF-UNV	120-277V	240/210/180w	140 lm/w	50/40/30k
LED-ARL2-3P240W-TRI-BZ-YK-UNV	120-277V	240/210/180w	140 lm/w	50/40/30k
LED-ARL2-3P300W-TRI-BZ-SF-UNV	120-277V	300/280/260w	140 lm/w	50/40/30k
LED-ARL2-3P300W-TRI-BZ-TR-UNV	120-277V	300/280/260w	140 lm/w	50/40/30k
LED-ARL2-3P300W-TRI-BZ-YK-UNV	120-277V	300/280/260w	140 lm/w	50/40/30k

Model	Voltage	Watts	Lumens	Color
LED-ARL2-3P150W-TRI-BZ-SFA-HV	277-480V	120/135/150w	145 lm/w	50/40/30k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Model	Voltage	Watts	Lumens	Color
LED-ARL2-150W-50K-BZ-SF-UNV	120-277V	150w	21,750	5000k
LED-ARL2-150W-50K-BZ-TR-UNV	120-277V	150w	21,750	5000k
LED-ARL2-240W-50K-BZ-SFA-UNV	120-277V	240w	33,790	5000k
LED-ARL2-300W-50K-BZ-SF-UNV	120-277V	300w	40,195	5000k
LED-ARL2-300W-50K-BZ-TR-UNV	120-277V	300w	40,195	5000k
LED-ARL2-300W-50K-BZ-SFA-UNV	120-277V	300w	40,195	5000k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

WATT	LUMENS	WATT	LUMENS
60	8,700	180	26,100
80	11,600	210	30,450
100	14,500	240	34,800
120	17,400	260	37,700
135	19,575	280	40,600
150	21,750	300	43,500



Accessory Model	Description
ARL2-OPTICS-T-V	ARL2: Type V optics lens (90° beam) lens req'd: (1 x 100w/150w) (2 x 240/300w)
ARL2-TRI-OPTICS-T-II	Type II optics lens ARL2 TRI series (25° beam) lens req'd: (1 x 100w/150w) (2 x 240/300w)
ARL2-TRI-OPTICS-T-IV	Type V optics lens ARL2 TRI series (90° beam) lens req'd: (1 x 100w/150w) (2 x 240/300w)
ARL2-TRI-OPTICS-T-V	Type V optics lens ARL2 TRI series (90° beam) lens req'd: (1 x 100w/150w) (2 x 240/300w)

Accessory Model	Description
ARL2-YK	Yoke bracket
ARL2-TR	Trunnion bracket
ARL2-SFA	Slip fitter and straight arm combo arm
HB01DMS-A	Bi-level motion + daylight sensor
ARL2-100/150W-SHIELD-BZ	House side shield for 100W and 150W ARL2
ARL2-240/300W-SHIELD-BZ	House side shield for 240W and 300W ARL2



3" Edge-Lit Cylinder Up/Down Light: M-Line

- Lumen output 50% up/50% down
- Dark sky compliant
- Beam Angle 60°
- Selectable photocell

3-CCT w/ Photocell



Model	Voltage	Watts	Lumens	Color
LED-CYE-UD-3-3P30-TRI-BZ-PC	120-277V	30/20/10W	120 lm/w	50/40/30k
LED-CYE-UD-3-3P30-TRI-BL-PC	120-277V	30/20/10W	120 lm/w	50/40/30k
LED-CYE-UD-3-3P30-TRI-WH-PC	120-277V	30/20/10W	120 lm/w	50/40/30k



WATT	LUMENS
10	1,200
20	2,400
30	3,600

4" & 6" Cylinder Up and/or Down Light: ARCY-Line

- Lumen output 50% up/50% down
- Selectable up/down light
- Selectable photocell

3-CCT & 3-Power Select w/ Photocell




Model	Voltage	Watts	Lumens	Color
LED-CYA-UD-4-3P20-TRI-BZ-PC	120-277V	20/16/12W	See Chart	50/40/30k
LED-CYA-UD-4-3P20-TRI-BL-PC	120-277V	20/16/12W	See Chart	50/40/30k
LED-CYA-UD-4-3P20-TRI-WH-PC	120-277V	20/16/12W	See Chart	50/40/30k
LED-CYA-UD-6-3P35-TRI-BZ-PC	120-277V	35/29/22W	See Chart	50/40/30k
LED-CYA-UD-6-3P35-TRI-BL-PC	120-277V	35/29/22W	See Chart	50/40/30k
LED-CYA-UD-6-3P35-TRI-WH-PC	120-277V	35/29/22W	See Chart	50/40/30k



Accessory Model	Description
Add: -15D to Model #	Factory installed 15D Optic
CYA-UD-4-OPTIC-15	Cylinder: ARCY-Line optic (field install)
CYA-UD-6-OPTIC-15	Cylinder: ARCY-Line optic (field install)

WATT	LUMENS
12	1,250
16	1,600
20	2,000
22	2,200
29	2,750
35	3,100



Beam



Modern Square Sconce Light: M-Line

- Frosted glass lens

5-CCT Selectable w/ Up & Down Light




Model	Voltage	Watts	Lumens	Color
LED-WSC-UD-15W-5CCT-WH	120-277V	15W	1,000	50/40/35/30/27k
LED-WSC-UD-15W-5CCT-BL	120-277V	15W	1,000	50/40/35/30/27k





Indoor Use



Outdoor Use

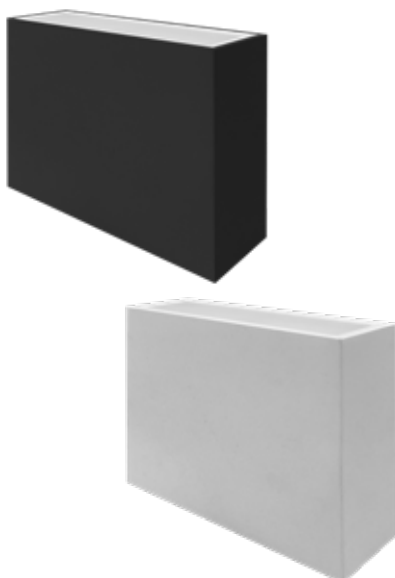





Tenon Mount For Poles

- Compatible with 2 3/8" slip fitter brackets



Box Qty: 4

Accessory Model	Description
TN-WM-90-7	Tenon: Wall mount 90 degree arm 7" mounting bracket bronze finish




Box Qty: 4

Accessory Model	Description
TN-WM-7	Tenon: Wall mount straight 4" mounting bracket bronze finish




Box Qty: 10

Accessory Model	Description
TN-RD-3	Tenon: Round 3" pole reducer to 2.36"





Box Qty: 10

Accessory Model	Description
TN-RD-4	Tenon: Round 4" pole reducer to 2.36"





Box Qty: 6

Accessory Model	Description
TN-RD-5	Tenon: Round 5" pole reducer to 2.36"





Box Qty: 10

Accessory Model	Description
TN-SQ-3	Tenon: Square 3" pole reducer to 2.36"





Box Qty: 10

Accessory Model	Description
TN-SQ-4	Tenon: Square 4" pole reducer to 2.36"




Box Qty: 10

Accessory Model	Description
TN-SQ-5	Tenon: Square 5" pole reducer to 2.36"





Box Qty: 1

Accessory Model	Description
TN-BH-SQ-180-2S	Tenon: Square bullhorn 2-head adapter





Box Qty: 1

Accessory Model	Description
TN-BH-SQ-180-3S	Tenon: Square bullhorn 3-head adapter



Box Qty: 1

Accessory Model	Description
TN-BH-SQ-180-3Y	Tenon: Square bullhorn 3-head Y-adapter



Box Qty: 1

Accessory Model	Description
TN-BH-SQ-90-4X	Tenon: Square bullhorn 4-head X-adapter



Post Top Fixture: Bolt-Line

- Foldable design for easy stocking and transportation
- Dark sky compliant
- Fits 2 3/4" pole

3-CCT & 3-Power Select



E.T.A. 07/2024
NEW
NEW

Model	Voltage	Watts	Lumens	Color
LED-PST-3P75-TRI-BZ-UNV	120-277V	75/50/35w	135lm/w	50/40/30k
LED-PST-3P75-TRI-BL-UNV	120-277V	75/50/35w	135lm/w	50/40/30k
LED-PST-3P150-TRI-BZ-UNV	120-277V	150/125/100w	135lm/w	50/40/30k
LED-PST-3P150-TRI-BL-UNV	120-277V	150/125/100w	135lm/w	50/40/30k

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 15W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
Add '-PC' to model #	Photocell
Add '-HV' to model #	High voltage (internal 480V)
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector

WATT	LUMENS
35	4,700
50	7,400
75	10,200
100	13,900
125	17,400
150	20,400






Bullet Flood Lights: S-Line

- 40° beam spread
- IP65 wet location rated
- Bracket allows for full adjustability
- KN (1/2" knuckle)
- TR (Trunnion)

3-CCT Select

Model	Voltage	Watts	Lumens	Color
LED-BLT-25W-TRI-BZ-KN-UNV	120-277V	25w	3,500	50/40/30k
LED-BLT-25W-TRI-WH-KN-UNV	120-277V	25w	3,500	50/40/30k

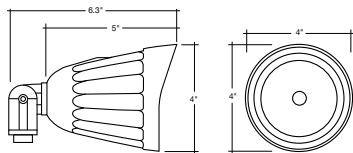

1/2" Knuckle Mount


Bullet Flood Lights: Magna-Line

3-CCT & 3-Power Select with Photocell

Model	Voltage	Watts	Lumens	Color
LED-BLT-3P25W-TRI-BZ-KN-UNV	120-277V	25/20/15w	125lm/w	50/40/30k
LED-BLT-3P25W-TRI-WH-KN-UNV	120-277V	25/20/15w	125lm/w	50/40/30k
LED-BLT-3P25W-TRI-BZ-TR-UNV	120-277V	25/20/15w	125lm/w	50/40/30k



WATT	LUMENS
15	1,875
20	2,500
25	3,125



1/2" Knuckle Mount




Final
Production

Bullet Flood Lights: M-Line

Model	Voltage	Watts	Lumens	Color
LED-BLT-28W-30K-BZ-KN-UNV	120-277V	28w	3,500	3000k
LED-BLT-42W-30K-BZ-KN-UNV	120-277V	42w	5,250	3000k
LED-BLT-42W-50K-BZ-KN-UNV	120-277V	42w	5,250	5000k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.



1/2" Knuckle Mount



Area Barn Dusk to Dawn Flood Light: Bolt-Line


- Dusk to dawn photocell sensor included
- 3 Selectable color temps.: 30/40/50K
- High luminous efficacy: up to 155lm/W

3-CCT Select

Model	Voltage	Watts	Lumens	Color
LED-BDD-40W-TRI-BZ-PC	120-277V	40w	6,200	50/40/30k
LED-BDD-60W-TRI-SL-PC	120-277V	60w	9,300	50/40/30k
LED-BDD-60W-TRI-BZ-PC	120-277V	60w	9,300	50/40/30k




-SLV

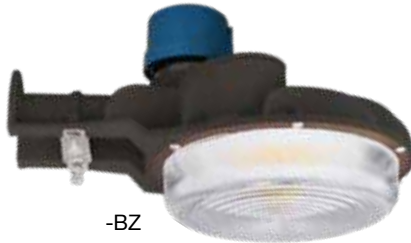

-BZ



J-Box Installation Cover
Available in Silver and Bronze

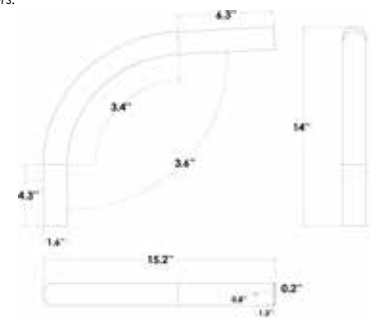

Tenon Bracket Dimensions

Accessory Model	Description
BDD-JBX-SLV	Silver J-box installation cover
BDD-JBX-BZ	Bronze J-box installation cover
TN-L-POLE	Pole installation tenon bracket

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Gooseneck Area Light: Bolt-Line

- Selectable photocell
- Adjustable rotation

3-CCT Select

Model	Voltage	Watts	Lumens	Color
LED-GNB-3P50-TRI-BZ-PC	120-277V	50/40/30w	130 lm/w	50/40/30k
LED-GNB-3P50-TRI-BL-PC	120-277V	50/40/30w	130 lm/w	50/40/30k
LED-GNB-3P50-TRI-WH-PC	120-277V	50/40/30w	130 lm/w	50/40/30k



-BZ



-BL



-WH

WATT	LUMENS
30	3,900
40	5,200
50	6,500





WATT	LUMENS	WATT	LUMENS
300	39,000	800	124,000
450	58,500	1000	130,000
600	78,000	1200	156,000


RGB	WATTS	LUMENS
Red/Green/Blue	500	26,600
R	175	3,400
G	175	22,400
B	175	1,866



Remote Mountable
Driver up to 70ft.



WATT	LUMENS
400	60,000
600	90,000
800	120,000



Anti-Glare Shield



SPL-SF



Laser



Slip Fitter

Sports Light Fixture: Magna-Line

- All fixtures includes a yoke mount
- Slip fitter can be added to the fixture (20-30 min. field install)
- Shield is included with the fixture
- Fixture can be adjusted up or down
- Fixture is stocked in black finish
- Free lighting layouts are available
- Product can be customized but with a longer lead time
- Perfect for stadiums and outdoor fields

Round

- LED driver can be remote mounted away from fixture for easy maintenance
- 0-10V dimmable



Model	Voltage	Watts	Lumens	Color
LED-SPL-3P600W-50K-YK-UNV-BLK	120-277V	600/450/300w	130 lm/w	5000k
LED-SPL-3P1200W-50K-YK-UNV-BLK	120-277V	1200/1000/800w	130 lm/w	5000k

Round RGB

- Compatible with DMX controller (required)

Model	Voltage	Watts	Lumens	Color
LED-SPL-500W-RGB-YK-BLK	120-277V	500w	See Chart	RGB

*RGB model custom order only

Accessory Model	Description
SPL-3P600-30D	SPL 3P600: 30D optic lens
SPL-3P600-60D	SPL 3P600: 30D optic lens
SPL-480V-DRIVER	480V added for SPL fixture (600w requires 1. 1200w requires 2)
SPL-EC-35FT	35FT Extension cord for remote mount driver

Square Sports Light: Arcy-Line



Model	Voltage	Watts	Lumens	Color
LED-SQSPL-3P800W-50K-YK-UNV-BLK	120-277V	800/600/400w	130lm/w	5000k

Accessory Model	Description
SQSPL-AG	SQSPL: Anti-glare louver shield
SQSPL-20D	SQSPL: 20D optic lens
SQSPL-55D	SQSPL: 55D optic lens

Accessory Model	Description
SPL-SF	Slip fitter for sports light fixture
SPL-LSR	Laser aiming device

Accessory Model	Description
Add: -PC to Model #	On/off photocell
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
Add: -HV to model#	480V added for SPL fixture (600w/800w requires 1. 1200w requires 2)

ROUND


WATT	LUMENS
12	1,560
16	2,080
22	2,860

Round Bollard Base: Bolt-Line

- 5 different head options
- Round version: Base and head sold separately
- Square version: Base and head sold as a set

3-Power Select / Order Your Base

 Box Qty.
1

Model	Height	Finish
BLD-3P22-RD-UNV-BZ-22	22"	Bronze
BLD-3P22-RD-UNV-BL-22	22"	Black
BLD-3P22-RD-UNV-BZ-44	44"	Bronze
BLD-3P22-RD-UNV-BL-44	44"	Black

Round Bollard Head: Bolt-Line

5-CCT Select / Order Your Head

Model	Voltage	Watts	Lumens	Color
LED-BLD-RD-5CCT-CN-DM-BZ	120-277V	22/16/12W	130lm/w	50/40/35/30/27K
LED-BLD-RD-5CCT-CN-DM-BL	120-277V	22/16/12W	130lm/w	50/40/35/30/27K
LED-BLD-RD-5CCT-LV-DM-BZ	120-277V	22/16/12W	130lm/w	50/40/35/30/27K
LED-BLD-RD-5CCT-LV-DM-BL	120-277V	22/16/12W	130lm/w	50/40/35/30/27K
LED-BLD-RD-5CCT-CN-FL-BZ	120-277V	22/16/12W	130lm/w	50/40/35/30/27K
LED-BLD-RD-5CCT-CN-FL-BL	120-277V	22/16/12W	130lm/w	50/40/35/30/27K
LED-BLD-RD-5CCT-LV-FL-BZ	120-277V	22/16/12W	130lm/w	50/40/35/30/27K
LED-BLD-RD-5CCT-LV-FL-BL	120-277V	22/16/12W	130lm/w	50/40/35/30/27K

Factory Installed Frosted Lens Available: BLD-RD-FRL

Factory Installed Frosted Lens Available: BLD-RD-SHIELD

Square Bollard (Base & Head Included)

WATT	LUMENS
12	1,560
16	2,080
22	2,860

Model	Voltage	Watts	Lumens	Color
LED-BLD-3P22-SQ-5CCT-UNV-CN-FL-BZ-44	120-277V	22/16/12W	130lm/w	50/40/35/30/27K
LED-BLD-3P22-SQ-5CCT-UNV-CN-FL-BL-44	120-277V	22/16/12W	130lm/w	50/40/35/30/27K

DOVE


WATT	LUMENS
12	1,560
16	2,080
22	2,860

SQUARE


WATT	LUMENS
12	1,560
16	2,080
22	2,860

BL-BLACK
SQUARE FLAT

CONE
ROUND DOVE


LOUVER

CONE

FROSTED LENS
ROUND FLAT

LOUVER

CONE

FROSTED LENS

CONE LENS LED

LOUVER LENS LED

*Custom finishes include black, white and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Round Bollard Accessories	Description
BLD-RD-FRL	Frosted lens for round heads. Must be factory installed.
BLD-RD-SHIELD	Field installed round 180° shield

Pre-Installed Accessory	Description
Add: -EMB to Model #	90 minute emergency backup
Add: -PC to Model #	On/Off photocell
Add: -BMS to Model #	HD407VC-R: Bi level motion + daylight sensor
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
Add: -HV to model#	347-480V Step down transformer



Qube Extendable LED Aquarium Light


- Extendable
- 3 light modes
- 5 levels of brightness
- 3 / 6 / 12 hour timer
- 20,000 lifetime hours
- Waterproof sealant
- Acrylic baffle



3 LIGHT MODES & 5 LEVELS OF BRIGHTNESS




Box Qty.
1



MULTI-FUNCTION CONTROL



MOVABLE PLASTIC BRACKET



EXTENDABLE METAL BRACKET



INCLUDED

Model	Voltage	Watts	Lumens	Color	CRI
QB-AQUA-12I-9W-FS	100-240V	9w	650	Red, Blue, 6500K	>80
QB-AQUA-16I-14W-FS	100-240V	14w	850	Red, Blue, 6500K	>80
QB-AQUA-22I-16W-FS	100-240V	16w	920	Red, Blue, 6500K	>80
QB-AQUA-28I-20W-FS	100-240V	20w	1,250	Red, Blue, 6500K	>80
QB-AQUA-36I-25W-FS	100-240V	25w	1,600	Red, Blue, 6500K	>80
QB-AQUA-46I-32W-FS	100-240V	32w	1,800	Red, Blue, 6500K	>80

Qube LED Commercial Growlight

FULL SPECTRUM

- Adjust power for any stage of plant life
- Linkable connector to daisy chain multiple lights included
- 10 foot power cord
- 6 foot suspension kit included
- Energy saving LED technology
- Features 8 LED bars compared to industry standard of 6
- Ideal for cannabis growing use
- 0-10V dimmable to work with grow light control systems

8 HIGH CRI
Box Qty.
1

Model	Voltage	Watts	Lumens	Color
QB-FSG-8B-7T660W	120-277V	660w	1716 µMols / 2.6µMol/J	Full Spectrum
QB-FSG-8B-7T960W	120-277V	960w	2496 µMols / 2.6µMol/J	Full Spectrum


- ⚡ INPUT: AUTO 120-277V
- ☔ IP65 RATED
- 🔍 FULL SPECTRUM LED
- 🔌 BUILT-IN POWER CONTROL KNOB
- 🔊 0-10V DIMMABLE FOR CONTROL COMPATIBILITY



Linear Highbay: Bolt-Line

- 0-10V dimmable integrated driver
- Optional internally-mounted motion sensor
- Twist-C technology: Sensor ready socket

3-Power Select

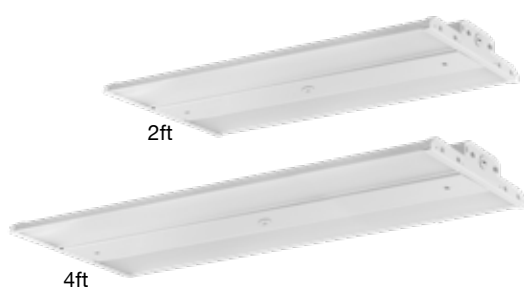

WATT	LUMENS	WATT	LUMENS
60	8,700	200	29,000
80	11,600	220	31,900
110	15,950	240	34,800
125	18,125	260	37,700
150	21,750	280	40,600
160	23,200	290	42,050
165	23,925	320	46,400
180	26,100		

Model	Voltage	Watts	Lumens	Color
LED-LHB-2FT-3P110-F-40K-UNV	120-277V	110/80/60w	145lm/w	4000k
LED-LHB-2FT-3P110-F-50K-UNV	120-277V	110/80/60w	145lm/w	5000k
LED-LHB-2FT-3P165-F-40K-UNV	120-277V	165/150/125w	145lm/w	4000k
LED-LHB-2FT-3P165-F-50K-UNV	120-277V	165/150/125w	145lm/w	5000k
LED-LHB-4FT-3P220-F-40K-UNV	120-277V	220/200/180w	145lm/w	4000k
LED-LHB-4FT-3P220-F-50K-UNV	120-277V	220/200/180w	145lm/w	5000k
LED-LHB-4FT-3P320-F-40K-UNV	120-277V	320/290/260w	145lm/w	4000k
LED-LHB-4FT-3P320-F-50K-UNV	120-277V	320/290/260w	145lm/w	5000k
LED-LHB-4FT-5P320-CTRI-UNV	120-277V	320/280/240/200/160w	145lm/w	5000k


Accessory Model	Description
LHB-3P-4FT-OPTIC-30D	Linear highbay: Slim-line G2 30DG lens for 4ft model
Add: -30D to Model #	Factory installed 30D optic (4ft only)

Linear Highbay: C-Line



WATT	LUMENS	WATT	LUMENS
60	9,000	260	39,000
110	16,500	290	43,500
165	24,750	320	48,000
180	27,000	380	57,000
200	30,000	410	61,500
220	31,900	440	66,000

4-CCT & 3-Power Select

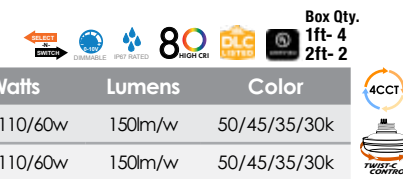


Model	Voltage	Watts	Lumens	Color
LED-LHB-1FT-3P165-4CCT-UNV	120-277V	165/110/60w	150lm/w	50/45/35/30k
LED-LHB-1FT-3P165-4CCT-HV	277-480V	165/110/60w	150lm/w	50/45/35/30k
LED-LHB-2FT-3P220-4CCT-UNV	120-277V	220/200/180w	150lm/w	50/45/35/30k
LED-LHB-2FT-3P220-4CCT-HV	277-480V	220/200/180w	150lm/w	50/45/35/30k
LED-LHB-2FT-3P320-4CCT-UNV	120-277V	320/290/260w	150lm/w	50/45/35/30k
LED-LHB-2FT-3P320-4CCT-HV	277-480V	320/290/260w	150lm/w	50/45/35/30k
LED-LHB-2FT-3P440-4CCT-UNV	120-277V	440/410/380w	150lm/w	50/45/35/30k
LED-LHB-2FT-3P440-4CCT-HV	277-480V	440/410/380w	150lm/w	50/45/35/30k



3P440 lens is not adjustable



6'/10'/20' Whip

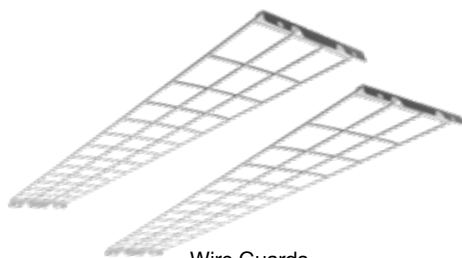

Wire Guards



Emergency Backup

S-TWC-MW-1
S-TWC-MW-BT
TWC-DLS-TWC-PIR-1
S-TWC-PIR-BT


S-LINE-R




3ft Chain-Link



Pendant Mount 2ft



Surface Mount



Pendant Mount 4ft

Accessory Model	Description
6'-WHIP-1/2KO	6' Whip
10'-WHIP-1/2KO	10' Whip
20'-WHIP-1/2KO	20' Whip
LHB-3P165-1FT-WG	LHB: Wire guard 1ft 3P165
LHB-3P165-2FT-WG	LHB: Wire guard 2ft 3P165
LHB-3P220-2FT-WG	LHB: Wire guard 2ft 3P220
LHB-3P320-2FT-WG	LHB: Wire guard 2ft 3P320
LHB-3P420-2FT-WG	LHB: Wire guard 2ft 3P420
LHB-3P-4FT-WG	LHB: Wire guard 4ft 3P220 & 320
LHB-3P-PDM	LHB: Pendant mount bracket up to 320W
LHB-3P440-PDM	LHB: Pendant mount bracket for 440W
LHB-3P-SM	LHB: Surface mount bracket up to 320W
LHB-3P440-SM	LHB: Surface mount bracket for 440W

Pre-installed Accessory Model	Description
Add: -EMB to Model #	90 minute emergency backup
Add: -EMBV to Model #	90 minute emergency backup for 480V
Add: -20KV to model#	SG-20KV-UNV: 20KV surge protector

Sensors for LED-LHB Fixtures

Accessory Model	Description
S-TWC-MW-1	"Twist-C microwave sensor Brightness: 100%/ Hold time: 10 Min Bi-level Dim: 50% Stand by time: 10 Min Sensitivity: 100% Daylight: Enabled"
S-TWC-PIR-1	"Twist-C PIR sensor Brightness: 100% hold time: 10 Min. Bi-level dim: 50% stand by time: 10 Min. Sensitivity: 100% daylight: Enabled"
S-TWC-PIR-BT	"Twist-C PIR sensor w/ bluetooth app control and group: Brightness, hold time, bi-level dim, stand by time, sensitivity, daylight: Disabled"
S-TWC-MW-BT	"Twist-C microwave sensor w/ bluetooth app control and group: Brightness, hold time, bi-level dim, stand by time, sensitivity, daylight: Disabled"
TWC-DL	Twist-C daylight sensor: Dusk to dawn, works like a photocell
S-LINE-R	Remote for S-Line series sensors



Final Production

WATT	LUMENS
60	7,800
100	13,000
150	19,500
180	23,400
210	27,300
240	31,200

Final Production



Aluminum Reflector (90°)



Surface Mount Yoke



Pendant Emergency Backup



UFO Emergency Test Controller



Acrylic Reflector (90°)



Acrylic Reflector Bottom Cover



Pendant Mount

S-TWC-MW-1
S-TWC-MW-BT
TWC-DLS-TWC-PIR-1
S-TWC-PIR-BT

S-LINE-R

Round UFO High Bay

- 0-10V dimmable integrated driver
- Durable die-cast aluminum housing
- IP67 fully waterproof for hosing down
- Twist-C technology: Sensor ready socket

3-CCT & 3 Power Select w/ 6' Whip

Box Qty. 1

Model	Voltage	Watts	Lumens	Color
LED-RHB3-3P240-CTRI-WH-6'	120-277V	240/210/180w	130lm/w	50/40/35k

Single CCT w/ 6' Whip

Box Qty. 1

Model	Voltage	Watts	Lumens	Color
LED-RHB3-100W-40K-BL-6	120-277V	100w	14,000	4000k
LED-RHB3-100W-50K-BL-6	120-277V	100w	14,000	5000k
LED-RHB3-240W-40K-BL-6	120-277V	240w	33,600	4000k
LED-RHB3-100W-40K-WH-6	120-277V	100w	14,000	4000k
LED-RHB3-100W-50K-WH-6	120-277V	100w	14,000	5000k
LED-RHB3-240W-40K-WH-6	120-277V	240w	33,600	4000k

RHB3 UFO High Bay: C-Line

- 0-10V dimmable integrated driver
- Durable die-cast aluminum housing
- IP67 fully waterproof for hosing down
- Twist-C technology: Sensor ready socket

Box Qty. 1

Model	Voltage	Watts	Lumens	Color
LED-RHB3C-3P150-CTRI-BL-10-UNV	120-277V	150/100/60w	150lm/w	50/40/35k
LED-RHB3C-3P150-CTRI-WH-10-UNV	120-277V	150/100/60w	150lm/w	50/40/35k
LED-RHB3C-3P240-CTRI-BL-10-UNV	120-277V	240/210/180w	150lm/w	50/40/35k
LED-RHB3C-3P240-CTRI-WH-10-UNV	120-277V	240/210/180w	150lm/w	50/40/35k
LED-RHB3C-3P150-CTRI-BL-10-HV	277-480V	150/100/60w	150lm/w	50/40/35k
LED-RHB3C-3P150-CTRI-WH-10-HV	277-480V	150/100/60w	150lm/w	50/40/35k
LED-RHB3C-3P240-CTRI-BL-10-HV	277-480V	240/210/180w	150lm/w	50/40/35k
LED-RHB3C-3P240-CTRI-WH-10-HV	277-480V	240/210/180w	150lm/w	50/40/35k

Pre-installed Accessory Model	Description
3Whip-(3)ft -specify ft in place of #	3 Wire whip hot, neutral, ground (\$15 min)
5Whip-(5)ft - specify ft in place of #	5 Wire whip hot, neutral, ground, dim (\$21min)
Add: -EMB to model #	90 Minute emergency backup
Add: -EMBV to model #	90 Minute emergency backup for 480V
Add: -20KV to model#	SG-20KV-UNV: 20KV surge protector

Accessory Model	Description
RHB-100/150-SM-BLK	RHB3: 100/150w surface mount
RHB-240-SM-BLK	RHB3: 240w surface mount
RHB-PDM-HK	RHB3: Pendant mount hook 1/2" Pipe
RHB3-100/150-WG	RHB3: 100/150w wire guard
RHB3-240-WG	RHB3: 240w wire guard
RHB3-100/150-ALM-RF	RHB3: 100/150w aluminum reflector 90°
RHB3-240-ALM-RF	RHB3: Aluminum reflector 90°
RHB3-100/150-ACR-RF	RHB3: 100/150w acrylic reflector 90°
RHB3-240-ACR-RF	RHB3: 240w acrylic reflector 90°
RHB3-UNV-ACR-BC	RHB3: Acrylic bottom cover universal fit
LED-EMB-30W-HV-UFO	RHB3: Emergency back up (uninstalled)
LED-EMB-30W-HV-UFO-BL	RHB3: Emergency back up (black) (uninstalled)
LED-EMB-30W-HV-UFO-WH	RHB3: Emergency back Up (white) (uninstalled)
UFO-TEST-CTR	RHB3: Emergency back up test button remote control



-BZ



-WH

HD03R
Controller

WATT	LUMENS
25	3,625
40	5,800
60	8,700

Square Canopy Light: Slim-Line

- Rugged powder-coated die-cast aluminum housing
- Integrated heatsink
- Silicone seals inhibit moisture ingress

3-CCT & 3-Power Select



Model	Voltage	Watts	Lumens	Color
LED-SCP-3P60W-TRI-WH	120-277V	60/40/25W	145lm/w	50/40/30k
LED-SCP-3P60W-TRI-BZ	120-277V	60/40/25W	145lm/w	50/40/30k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
Add '-HV' to model #	347-480V driver for fixture

Remote for Sensor	Description
HD03R	Remote for HD sensors
HD05R	Remote for HD sensors w/ screen

Square Canopy Light: Arcy-Line

- Rugged powder-coated die-cast aluminum housing
- 10% uplight standard
- Integrated heatsink
- Silicone seals inhibit moisture ingress
- Twist-C technology: Sensor ready socket

3-CCT & 3-Power Select



Model	Voltage	Watts	Lumens	Color
LED-SQUC-3P60-TRI-WH	120-277V	60/45/30W	145lm/w	50/40/30k
LED-SQUC-3P60-TRI-BZ	120-277V	60/45/30W	145lm/w	50/40/30k
LED-SQUC-3P90-TRI-WH	120-277V	90/80/70W	145lm/w	50/40/30k
LED-SQUC-3P90-TRI-BZ	120-277V	90/80/70W	145lm/w	50/40/30k



-BZ



-WH

WATT	LUMENS	WATT	LUMENS
30	4,200	70	10,150
45	6,300	80	11,600
60	8,400	90	13,050

S-TWC-MW-1
S-TWC-MW-BT
TWC-DLS-TWC-PIR-1
S-TWC-PIR-BT

S-LINE-R

Large Square Canopy Light: Slim-Line

2-CCT Selectable



Model	Voltage	Watts	Lumens	Color
LED-CP2-WH-150W-40/50K	120-277V	150w	18,000lm	40/50k


Single CCT

Model	Voltage	Watts	Lumens	Color
LED-CP2-WH-150W-50K	120-277V	150w	18,000lm	5000k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

Accessory Model	Description
24x24-GF-CP2	24x24 goof ring

Made to Order 10-15 Days



Goof Ring

E.T.A. 07/2024

NEW



-BZ



-WH

WATT	LUMENS
22	3,190
30	4,350
38.5	5,582
47	6,815
55	7,975

WATT	LUMENS
60	8,700
70	10,150
80	11,600
90	13,050
100	14,500



S-TWC-MW-1
S-TWC-MW-BT
TWC-DL



S-TWC-PIR-1
S-TWC-PIR-BT



S-LINE-R

Round Canopy Light: Slim-Line

- Wattage selectable and CCT switchable (30/40/50K color temps avail.)
- Rugged powder-coated die-cast aluminum housing
- Silicone seals inhibit moisture ingress
- Twist-C technology: Sensor ready socket

3-CCT & 5-Power Select




Model	Voltage	Watts	Lumens	Color
LED-RCP-5P55W-TRI-WH	120-277V	55/47/38.5/30/22W	145lm/w	50/40/30k
LED-RCP-5P55W-TRI-BZ	120-277V	55/47/38.5/30/22W	145lm/w	50/40/30k
LED-RCP-5P100W-TRI-WH	120-277V	100/90/80/70/60w	145lm/w	50/40/30k
LED-RCP-5P100W-TRI-BZ	120-277V	100/90/80/70/60w	145lm/w	50/40/30k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Pre-installed Accessory Model	Description
Add: -EMB to Model #	90 minute emergency backup
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
View spec sheet for ordering guide	Paint: Black, white, gray standard. custom RAL available

Model	Item Description	Output Volts	Watts
S-TWC-MW-1	Twist-C microwave sensor Brightness: 100% / hold time: 10 Min. Bi-level dim: 50% stand by time: 10 Min. Sensitivity: 100% daylight enabled"	12V	<1W
S-TWC-PIR-1	"Twist-C Microwave Sensor Brightness: 100% / hold time: 10 Min. Bi-level dim: 50% stand by time: 10 Min. Sensitivity: 100% daylight enabled"	12V	<1W
S-TWC-MW-BT	"Twist-C microwave sensor w/ bluetooth app Control and group: Brightness, hold time, bi-level dim, stand by time, sensitivity, Daylight: Disabled"	12V	<1W
S-TWC-PIR-BT	"Twist-C PIR sensor w/ bluetooth app control and group: Brightness, hold time, bi level dim, Stand by time sensitivity, Daylight: Disabled"	12V	<1W
TWC-DL	Twist-C daylight sensor: Dusk to dawn, works like a photocell	12V	<1W
S-LINE-R	Remote for S-LINE series sensors	12V	<1w



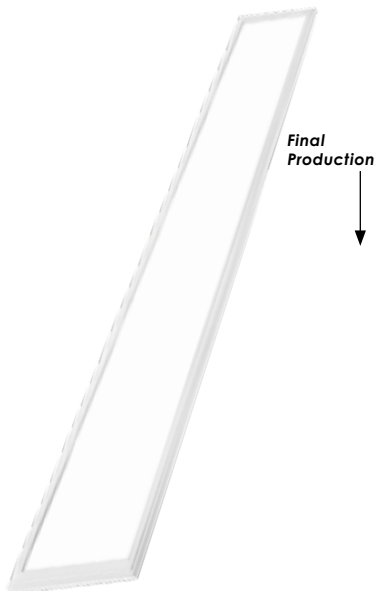

1x4 Panel - EdgeLit


- LiFud-brand flicker-free integrated driver, 0-10V dimmable
- Edge-lit design provides diffuse, shadowless light
- No UV, no RF, non-yellowing PMMA lens
- Powder-coated white frame



Inner Box Qty. 2
Master Box Qty. 4
Must Purchase in
Box Quantity to
Avoid Breakage

Model	Voltage	Watts	Lumens	Color
LED-PNL-1x4-40W-40K-LF	120/277V	40w	4,600	4000k
LED-PNL-1x4-40W-35K-LF	120/277V	40w	4,600	3500K

Pre-installed Accessory Model	Description
Add: 3Whip-(3)ft - specify ft in place of #	3 wire flex whip hot, neutral, ground (\$15 min)
Add: 5Whip-(5)ft - specify ft in place of #	5 wire flex whip hot, neutral, ground, dim (\$21min)
Add '-EMB' to model #	Emergency backup (external 15W)

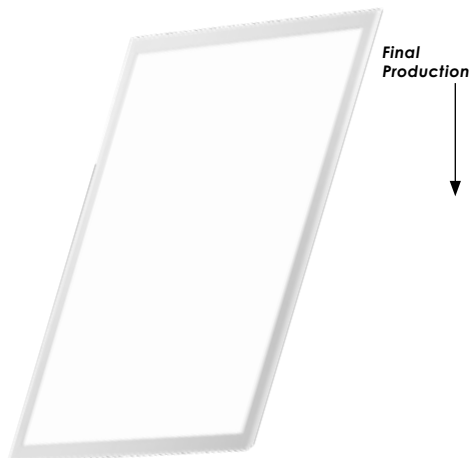


2x2 Panel - EdgeLit



Inner Box Qty. 2
Master Box Qty. 4
Must Purchase in
Box Quantity to
Avoid Breakage

Model	Voltage	Watts	Lumens	Color
LED-PNL-2x2-40W-50K-LF	120-277V	40w	4,600	5000k
LED-PNL-2x2-40W-40K-LF	120-277V	40w	4,600	4000k
LED-PNL-2x2-40W-35K-LF	120-277V	40w	4,600	3500K

Pre-installed Accessory Model	Description
Add: 3 whip-3ft -specify ft in place of #	3 wire flex whip hot, neutral, ground (\$15 min)
Add: 5 whip-5ft - specify ft in place of #	5 wire flex whip hot, neutral, ground, dim (\$21min)
Add '-EMB' to model #	Emergency backup (external 15W)

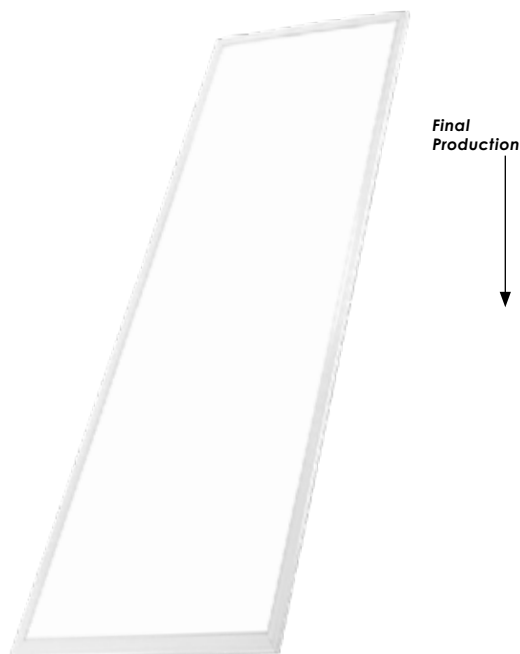

2x4 Panel - EdgeLit



Inner Box Qty. 2
Master Box Qty. 4
Must Purchase in
Box Quantity to
Avoid Breakage

Model	Voltage	Watts	Lumens	Color
LED-PNL-2x4-50W-30K-LF	120-277V	50w	5,750	3000k
LED-PNL-2x4-60W-50K-LF	120-277V	60w	6,900	5000k
LED-PNL-2x4-72W-50K-LF	120-277V	72w	8,280	5000k
LED-PNL-2x4-72W-40K-LF	120-277V	72w	8,280	4000k

Pre-installed Accessory Model	Description
Add: 3 whip-3ft -specify ft in place of #	3 wire flex whip hot, neutral, ground (\$15 min)
Add: 5 whip-5ft - specify ft in place of #	5 wire flex whip hot, neutral, ground, dim (\$21min)
Add '-EMB' to model #	Emergency backup (external 15W)

1x4 Panel - BackLit

- Flicker-free integrated driver, 0-10V dimmable
- No UV, no RF, non-yellowing PMMA lens
- Backlit design provides diffuse, shadowless light
- Powder-coated white frame

Box Qty. 4

Must Purchase in
Box Quantity to
Avoid Breakage

WATT	LUMENS
20	2,200
30	3,300
40	4,400

Final
Production

5-CCT & 3-Power Select



Model	Voltage	Watts	Lumens	Color
LED-BPL-1x4-3M40-5CCT	120/277V	40/30/20w	110lm/w	65/50/40/35/30k



Single CCT

Model	Voltage	Watts	Lumens	Color
LED-BPL-1x4-20W-35K-HL	120/277V	20w	2,600	3500k
LED-BPL-1x4-20W-40K-HL	120/277V	20w	2,600	4000k
LED-BPL-1x4-30W-50K-HL	120/277V	30w	3,900	5000k

Optional Trim

Accessory	Description
BPL-1X4-TRIM-BL	1x4 LED panel: Backlit-line black trim

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 15W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
3Whip-(3)ft - Specify ft in place of #	3 wire whip hot, neutral, ground
5Whip-(5)ft - Specify ft in place of #	5 wire whip hot, neutral, ground, dim

2x2 Panel - BackLit

5-CCT & 3-Power Select



Box Qty. 4

Must Purchase in
Box Quantity to
Avoid Breakage

3M40	
WATT	LUMENS
20	2,200
30	3,300
40	4,400

3M50	
WATT	LUMENS
30	3,750
40	5,000
50	6,250

Final
Production

Model	Voltage	Watts	Lumens	Color
LED-BPL-2x2-3M40-5CCT	120/277V	40/30/20w	110lm/w	65/50/40/35/30k
LED-BPL-2x2-3M50-5CCT-HL	120/277V	50/40/30w	125lm/w	65/50/40/35/30k



Black Finish

Model	Voltage	Watts	Lumens	Color
LED-BPL-2x2-3M40-TRI-BLK	120/277V	40/30/20w	110lm/w	50/40/30k



Single CCT

Model	Voltage	Watts	Lumens	Color
LED-BPL-2x2-20W-35K-HL	120/277V	20w	2,600	3500k
LED-BPL-2x2-30W-50K-HL	120/277V	30w	3,900	5000k

Optional Trim

Accessory	Description
BPL-2X2-TRIM-BL	2X2 LED panel: Backlit-line black trim

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 15W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
3Whip-(3)ft - Specify ft in place of #	3 wire whip hot, neutral, ground
5Whip-(5)ft - Specify ft in place of #	5 wire whip hot, neutral, ground, dim

2x4 Panel - BackLit

5-CCT & 3-Power Select



Box Qty. 4

Must Purchase in
Box Quantity to
Avoid Breakage

3M50	
WATT	LUMENS
20	2,200
30	3,300
40	4,400

3M65	
WATT	LUMENS
45	6,250
55	6,875
65	8,125

Final
Production

Model	Voltage	Watts	Lumens	Color
LED-BPL-2x4-3M50-5CCT	120/277V	40/30/20w	110lm/w	65/50/40/35/30k
LED-BPL-2x4-3M65-5CCT-HL	120/277V	65/55/45w	125lm/w	65/50/40/35/30k



Optional Trim

Accessory	Description
BPL-2X4-TRIM-BL	2X4 LED panel: Backlit-line black trim

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (External 15W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
3Whip-(3)ft - Specify ft in place of #	3 wire whip hot, neutral, ground
5Whip-(5)ft - Specify ft in place of #	5 wire whip hot, neutral, ground, dim




Lumen Selection




Watt Selection


Surface Mount Frame

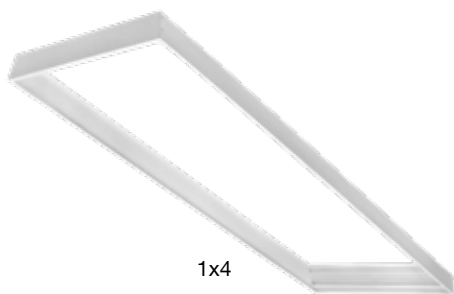

1x4

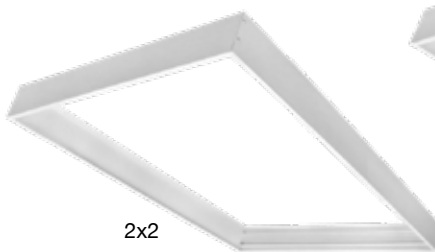


2x2

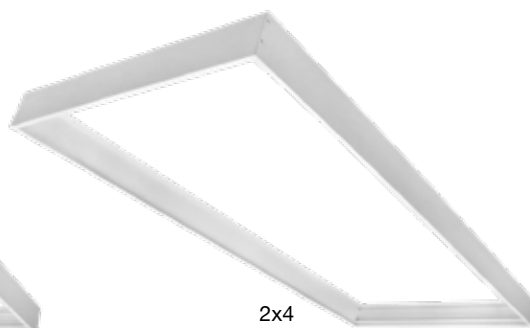


2x4


Flange (Drywall) Kit

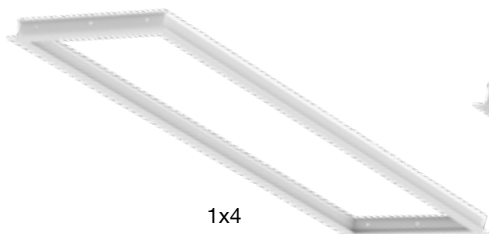

1x4

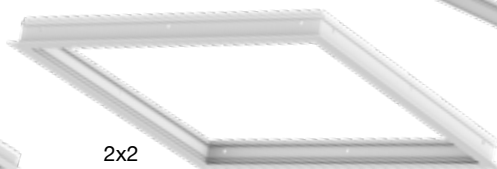

2x2

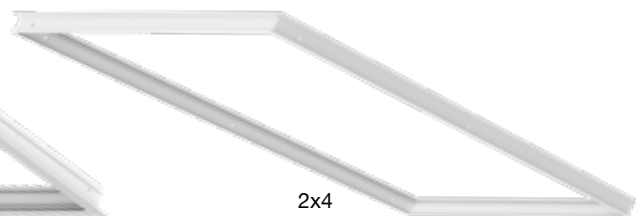

2x4



Emergency Backup



Suspension Kit

1x4 / 2x2 / 2x4 Panel Accessories

Accessories also work with other 2x2 and 2x2 fixtures (SM only compatible with edge-lit panels)

Final
Production

Model	Description
LED-PNL-2X2-SM	2x2 surface mount kit 2.5" height (for edge lit series only)
LED-PNL-2X4-SM	2x4 surface mount kit 2.5" height (for edge lit series only)
LED-PNL-1X4-SM	1X4 surface mount kit 2.5" height (for edge lit series only)
2X2-SM-3	2x2 surface mount kit 3" height for all panels and troffers
2X4-SM-3	2x4 surface mount kit 3" height for all panels and troffers
1X4-SM-3	1x4 surface mount kit 3" height for all panels and troffers
LED-PNL-2X2-FLNG	2x2 flange (drywall) kit
LED-PNL-2X4-FLNG	2x4 flange (drywall) kit
LED-PNL-1X4-FLNG	1x4 flange (drywall) kit
LED-PNL-2X4-SK	Suspension kit for panels



1x1 / 1x2 LED Surface Mount Panels: Slim-Line

- Internal flicker-free triac-dimmable driver
- Included surface mount bracket mounts directly to j-box
- Edge-lit design provides diffuse, shadowless light
- Only 1" thick in size


5-CCT Select

Model	Voltage	Watts	Lumens	Color
LED-PNL-SM-1X1-18W-5CCT	120V	18w	1,500	50/40/35/30/27K
LED-PNL-SM-1X2-22W-5CCT	120V	22w	2,000	50/40/35/30/27K



Accessory Model	Description
LED-EMB-25W-HV-0/10V-2P	Emergency backup (external 25W) field install

*Custom finishes include bronze, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

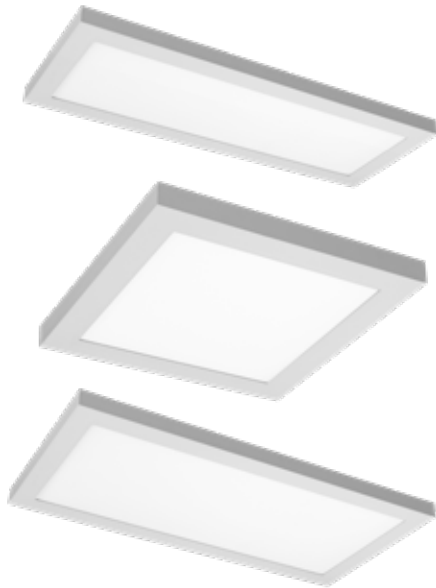

1x4 / 2x2 / 2x4 LED Surface Mount Panels: Slim-Line

- Internal flicker-free 0-10V dimmable driver
- Included surface mount bracket mounts directly to 30 or 40 j-box
- Edge-lit design provides diffuse, shadowless light
- Only 1.34" thick in size!

5-CCT Select

Model	Voltage	Watts	Lumens	Color
LED-BPL-SM-1X4-3M40-5CCT	120/277v	40/30/20w	110lm/w	50/40/35/30/27k
LED-BPL-SM-2X2-3M40-5CCT	120/277v	40/30/20w	110lm/w	50/40/35/30/27k
LED-BPL-SM-2X4-3M50-5CCT	120/277v	50/40/30w	110lm/w	50/40/35/30/27k



3-CCT Select


Model	Voltage	Watts	Lumens	Color
LED-PNL-SM-1X4-40W-TRI	120/277v	40w	4,000	50/40/30k
LED-PNL-SM-2X2-40W-TRI	120/277v	40w	4,000	50/40/30k
LED-PNL-SM-2X4-50W-TRI	120/277v	50w	5,000	50/40/30k




Accessory Model	Description
LED-EMB-25W-HV-0/10V-2P	Emergency backup (external 25W) field install

*Custom finishes include bronze, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.


3M40		3M50	
WATT	LUMENS	WATT	LUMENS
20	2,200	30	3,300
30	3,300	40	4,400
40	4,400	50	5,500

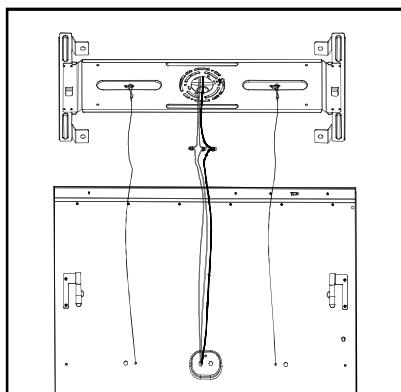

Once wiring has been installed into the fixture, identify and straighten out the 3 wires coming from the fixture to the junction box wires.

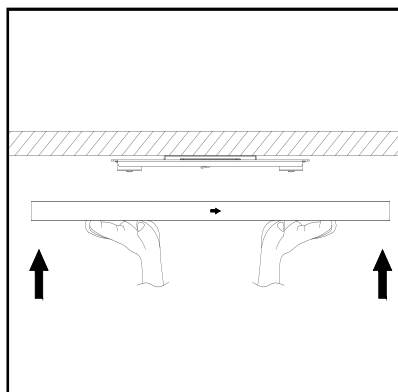

Put the mounting bracket into the panel light first, then aim the shrapnel on the back of the lamp, and put the panel light up.

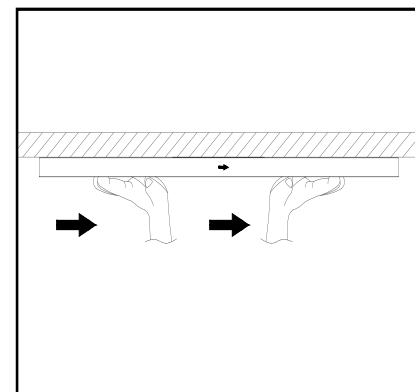

The mounting bracket is pre-mounted to the shrapnel side of the panel light, simply lift and push flush with the ceiling moving accordingly to the direction indicated by the panel light.

2x2 & 2x4 LED Center Basket Troffer: Arcy-Line

- Flicker-free 0-10V dimmable internal driver
- PC body fixture

4-CCT & 4-Power Select



Box Qty. 2
Must Purchase in
Box Quantity to
Avoid Breakage

Model	Voltage	Watts	Lumens	Color
LED-CBT-2X2-PC-CCT-HL	120-277V	35/30/25/20w	See Chart	50/40/35/30k
LED-CBT-2X4-PC-CCT-HL	120-277V	50/45/40/35w	See Chart	50/40/35/30k



2X2

WATT	LUMENS
20	2,600
25	3,250
30	3,900
35	4,550

2X4

WATT	LUMENS
35	4,550
40	5,200
45	5,850
50	6,500

2x2 & 2x4 LED Center Basket Troffer: C-Line

- Flicker-free 0-10V dimmable internal driver
- Metal body fixture

5-CCT & 5-Power Select



Box Qty. 2
Must Purchase in
Box Quantity to
Avoid Breakage

Model	Voltage	Watts	Lumens	Color
LED-CBT-2X2-5P40-5CCT	120-277V	40/35/30/25/20w	See Chart	50/40/35/30/27k
LED-CBT-2X4-5P50-5CCT	120-277V	50/40/30/25/20W	See Chart	50/40/35/30/27k



2x2 & 2x4 LED Center Basket Troffer - Retrofit Kit

5-CCT & 5-Power Select

Model	Voltage	Watts	Lumens	Color
LED-CBT-RK-2X2-5P40-5CCT	120-277V	40/35/30/25/20w	See Chart	50/40/35/30/27k
LED-CBT-RK-2X4-5P50-5CCT	120-277V	50/40/30/25/20W	See Chart	50/40/35/30/27k



5P40

WATT	LUMENS
20	2,500
25	3,125
30	3,750
35	4,375
40	5,000

5P50

WATT	LUMENS
20	3,750
25	4,375
30	5,000
40	5,625
50	6,250

2x2 & 2x4 LED Center Basket Thin LuxLume Troffer

- Flicker-free 0-10V dimmable internal driver
- Metal body fixture

4-CCT & 3-Power Select



Box Qty. 2
Must Purchase in
Box Quantity to
Avoid Breakage

Model	Voltage	Watts	Lumens	Color
LED-CBT-TL-2X2-3P40-4CCT	120-277V	40/35/24w	See Chart	50/40/35/30k
LED-CBT-TL-2X4-3P50-4CCT	120-277V	50/40/30w	See Chart	50/40/35/30k



2X2

WATT	LUMENS
20	2,400
30	3,600
40	4,800

2X4

WATT	LUMENS
30	3,600
40	4,800
50	6,000

Pre-installed Accessory Model	Description
Add: -EMB to Model #	90 minute emergency backup
Add: -BMS to Model #	S-BMS-INT-1: Bi level motion + daylight sensor
Add: -BMS-BT to Model #	S-BMS-INT-1-BT: Bi level motion + daylight sensor w/ bluetooth control (Envision Smart App)
Add: -HV to model#	347-480V step down transformer
3Whip-(3)ft - Specify ft in place of #	3 wire whip hot, neutral, ground
5Whip-(5)ft - Specify ft in place of #	5 wire whip hot, neutral, ground, dim
Add: -90CRI to model#	CRI90 LED fixture



E.T.A. 07/2024

NEW

NEW



WATT	LUMENS
12	1,560
15	1,950
18	2,300



Single Pin Included



R17D Pin Optional



2-Piece Design

4' T8 Dimmable Bypass Tubes

- Install tubes without the ballast (single or double sided) any two pins
- Light beam spread replicates the same look as a fluorescent, but with improved light output and efficiency
- PC film protectant for shatter protection (food industry OK)

Box Qty. 30
Must Purchase in
Box Quantity to
Avoid Breakage

5-CCT & 3-Power Select



Model	Voltage	Watts	Lumens	Color
LED-T8-RFD-GL-4FT-3P18-5CCT	120-277V	12/15/18w	145lm/w	65/50/40/35/30k



2' / 3' / 4' T8 Type A+B Tube

- Install tubes with or without the existing ballast (single or double sided)
- See ballast compatibility chart to ensure compatibility.
- Light beam spread replicates the same look as a fluorescent, but with improved light output and efficiency
- PC film protectant for shatter protection (food industry OK)

Box Qty. 30
Must Purchase in
Box Quantity to
Avoid Breakage

5-CCT Select



Model	Voltage	Watts	Lumens	Color
LED-T8-DF-GL-2FT-8W-5CCT	120-277V	8w	1,000	65/50/40/35/30k
LED-T8-DF-GL-3FT-12W-5CCT	120-277V	12w	1,500	65/50/40/35/30k
LED-T8-DF-GL-4FT-15W-5CCT	120-277V	15w	1,950	65/50/40/35/30k
LED-T8-DF-GL-4FT-18W-5CCT	120-277V	18w	2,200	65/50/40/35/30k



E.T.A. 07/2024
NEW
NEW
NEW
NEW

3-CCT Select

Model	Voltage	Watts	Lumens	Color
LED-T8-DF-GL-2FT-8W-CTRI	120-277V	8w	1,000	50/40/35k
LED-T8-DF-GL-3FT-12W-CTRI	120-277V	12w	1,500	50/40/35k
LED-T8-DF-GL-4FT-15W-CTRI	120-277V	15w	1,950	50/40/35k
LED-T8-DF-GL-4FT-18W-CTRI	120-277V	18w	2,200	50/40/35k



Single CCT

Model	Voltage	Watts	Lumens	Color
LED-T8-DF-GL-2FT-8W-30K	120-277V	8w	1,000	3000k
LED-T8-DF-GL-2FT-8W-35K	120-277V	8w	1,000	3500k
LED-T8-DF-GL-3FT-12W-30K	120-277V	12w	1,500	3000k
LED-T8-DF-GL-3FT-12W-35K	120-277V	12w	1,500	3500k
LED-T8-DF-GL-4FT-15W-35K	120-277V	15w	1,950	3500k
LED-T8-DF-GL-4FT-15W-40K	120-277V	15w	1,950	4000k
LED-T8-DF-GL-4FT-15W-50K	120-277V	15w	1,950	5000k
LED-T8-DF-GL-4FT-18W-30K	120-277V	18w	2,200	3000k
LED-T8-DF-GL-4FT-18W-35K	120-277V	18w	2,200	3500k
LED-T8-DF-GL-4FT-18W-40K	120-277V	18w	2,200	4000k
LED-T8-DF-GL-4FT-18W-50K	120-277V	18w	2,200	5000k
LED-T8-DF-GL-4FT-18W-65K	120-277V	18w	2,200	6500k

Accessory	Description
T8-8FT-4FT-KIT	T8 conversion kit. One 8ft bulb to two 4ft bulbs.

8' T8 Type A+B Tube

- Install tubes with or without the existing ballast (double sided connection only)
- See ballast compatibility chart to ensure compatibility.
- 2 Piece LED Design allows for shipping in 4ft box
- Pins are interchangeable: includes double pin and single pin, R17D optional
- Light beam spread replicates the same look as a fluorescent, but with improved light output and efficiency.

Box Qty. 15
Must Purchase in
Box Quantity to
Avoid Breakage



Model	Voltage	Watts	Lumens	Color
LED-T8-DF-GL-8FT-42W-40K	120-277V	42w	5,500	4000k
LED-T8-DF-GL-8FT-42W-50K	120-277V	42w	5,500	5000k

Accessory	Description
R17D-EC	R17(D) end cap converter (switchable end cap for 8' tube)



4' T5 Type A+B LED Tube

- Install tubes with or without the existing ballast (single or double sided)
- See ballast compatibility chart to ensure compatibility.
- Light beam spread replicates the same look as a fluorescent, but with improved light output and efficiency
- PC film protectant for shatter protection (food industry OK)

80 HIGH CRI

DLC

E17

Box Qty. 30
Must Purchase in
Box Quantity to
Avoid Breakage

Model	Voltage	Watts	Lumens	Color
LED-T5-DF-4FT-24W-40K	120-277V	24w	3,200	4000k
LED-T5-DF-4FT-24W-50K	120-277V	24w	3,200	5000k



T8 4ft Emergency LED Tube

- Equipped with a self-test function, tests itself monthly/yearly
- Built-in emergency system, easy installation and replacement
- 90 minute emergency duration
- For use without existing ballast, AC only (see installation guide)

80 HIGH CRI

DLC

E17

Box Qty. 30
Must Purchase in
Box Quantity to
Avoid Breakage

Model	Voltage	Watts	Lumens	Color
LED-T8-EM-4FT-15W-CTRI	120-277V	15w	2,000	35/40/50k
LED-T8-EM-4FT-15W-30K	120-277V	15w	2,000	3500k

3CCT



T8 Type A + B U-Shaped LED Bulbs

- Install tubes with or without the existing ballast (single or double sided)
- See ballast compatibility chart to ensure compatibility.
- Light beam spread replicates the same look as a fluorescent, but with improved light output and efficiency
- PC film protectant for shatter protection (food industry OK)

80 HIGH CRI

DLC

E17

Box Qty. 20
Must Purchase in
Box Quantity to
Avoid Breakage

3-CCT Select

Model	Voltage	Watts	Lumens	Color
LED-T8U-DF-GL-22X6-15W-CTRI	120-277V	15w	1,950	50/40/35k

3CCT

Common Applications: Panel Fixture Bulb Replacement



T8 Strip Fixtures (Tubes Not Included)

- LED T8 ready fixtures
- Aligner locks in place for easy continuous row mounting
- Suitable for use in damp locations
- Mount individually or in continuous rows to ceiling or wall

Box Qty. 10

Model	Description
T8-4FT-2LAMP-STRIP	4 ft T8 2 lamp strip fixture (single sided connection)
NEW T8-4FT-2/1L-STRIP	4 ft T8 1 or 2 lamp strip fixture (double sided connection)
NEW T8-8FT-4/2L-STRIP	8 ft T8 2 or 4 lamp strip fixture (double sided connection)
NEW T8-4FT-RF	4 ft symmetric white reflector

T8 Conversion Kit

Box Qty. 25

Model	Description
T8-8FT-4FT-KIT	T8 conversion kit. One 8ft bulb to two 4ft bulbs.

Dimmable Driver


- Connect the driver to any EnVision tube to dim via 0-10V control

Box Qty. 10


Model	Description
DIM-MOD-0/10V-TUBE	0-10V dimmable driver for EnVision LED tubes

ALIN & TBL Linear Custom Finish Options *Made to Order, 18-21 days*

GLOSS OPTIONS

								
Statuary Bronze 60 Gloss T026-BR340 Order Code: GL-BZ-1	RAL 7042 Grey 80 Gloss T009-GR230 Order Code: GL-GY-1	Silver Metallic 30 Gloss T353-GR06 Order Code: GL-SL-1	Chrome Metallic 80 Gloss T358-GR539 Order Code: GL-CH-1	Brass Metallic 30 Gloss T353-YL02 Order Code: GL-BM-1	Dark Red 90 Gloss P009-RD02 Order Code: GL-RD-1	Red 90 Gloss T009-RD01 Order Code: GL-RD-2	Dark Yellow 90 Gloss T009-YL71 Order Code: GL-YL-1	Designer Beige 90 Gloss T009-BG16 Order Code: GL-BG-1
								
Yellow 90 Gloss T009-YL01 Order Code: GL-YL-2	Terra Brown 90 Gloss (RAL8028) • C209-BR358 Order Code: GL-BR-1	Traffic Green 70 Gloss T007-GN16 Order Code: GL-GR-1	DOT Green 70 Gloss FS14066 • T007-GN13 Order Code: GL-GR-2	Green 60 Gloss C006-GN03 Order Code: GL-GR-3	Blue 90 Gloss T009-BL01 Order Code: GL-BU-1	Light Blue 90 Gloss T009-BL05 Order Code: GL-BU-2	Dark Blue 80 Gloss T008-BL20 Order Code: GL-BU-3	Black 10 Semi-Gloss T001-BK120 Order Code: SGL-BL-1

HAMMER OPTIONS

			
Black Hammer T013-BK62 Order Code: HM-BL-1	Black Hammer Low Gloss E311-BK04 Order Code: HM-BL-2	White Hammer T013-WH09 Order Code: HM-WH-1	Red Hammer T013-RD15 Order Code: HM-RD-1

HAMMERTONE OPTIONS

			
Bronze Hammertone T064-BR24 Order Code: HT-BZ-1	Silver Hammertone T064-GR05 Order Code: HT-SL-1	Blue Hammertone T064-BL95 Order Code: HT-BU-1	Green Hammertone T064-GN81 Order Code: HT-GY-1

VEIN OPTIONS




Copper Vein
T375-BK07
Order Code: VN-CP-1



Gold Vein
T375-BK10
Order Code: VN-GD-1



FS 25109 Blue Texture
T032-BL04
Order Code: TX-BU-1



White Texture
T032-WH15
Order Code: TX-WH-1




Oil Rubbed Bronze Texture
T291-BR251
Order Code: TX-BZ-1



Mock Rock Texture
T091-GR309
Order Code: TX-GY-1

TEXTURE OPTIONS

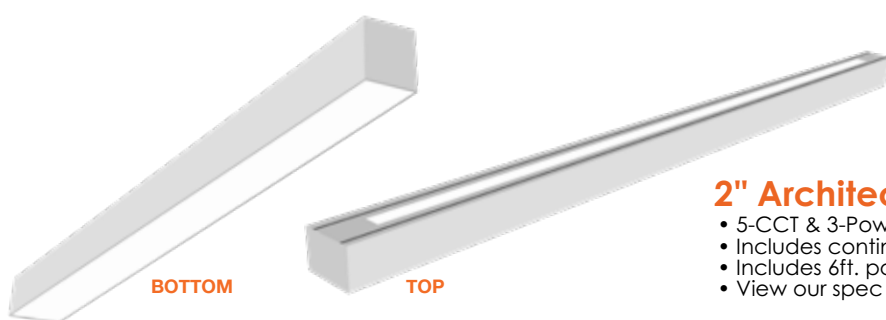


2" Architectural Linear Fixture: ARCY-Line

- 5-CCT & 3-Power selectable
- Includes continuous row brackets & jumper cables
- Includes 6ft. power cord & canopy suspension kits
- View our spec sheet for powder coated color options

Suspended or Surface Mounted Linear Models: Downlight Only



Box Qty.
3P12- 9 3P25- 9
3P50- 6 3P75- 4
3P100- 4



Model	Voltage	Watts	Lumens	Color
LED-ALIN2-1FT-3P12-D-5CCT-WH	120-277V	12/9/6w	1,500/1,080/750	50/40/35/30/27k
LED-ALIN2-2FT-3P25-D-5CCT-WH	120-277V	25/19/13w	3,000/2,280/1,560	50/40/35/30/27k
LED-ALIN2-4FT-3P50-D-5CCT-WH	120-277V	50/38/25w	6,000/4,560/3,000	50/40/35/30/27k
LED-ALIN2-6FT-3P75-D-5CCT-WH	120-277V	75/56/38w	9,000/6,720/4,560	50/40/35/30/27k
LED-ALIN2-8FT-3P100-D-5CCT-WH	120-277V	100/75/50w	12,000/9,000/6,000	50/40/35/30/27k



Suspended Linear Models: 80% Downlight & 20% Uplight

Made to order, 5-7 days



Model	Voltage	Watts	Lumens	Color
LED-ALIN2-2FT-3P25-UD-5CCT-WH	120-277V	25/19/13w	3,000/2,280/1,560	50/40/35/30/27k
LED-ALIN2-4FT-3P50-UD-5CCT-WH	120-277V	50/38/25w	6,000/4,560/3,000	50/40/35/30/27k
LED-ALIN2-6FT-3P75-UD-5CCT-WH	120-277V	75/56/38w	9,000/6,720/4,560	50/40/35/30/27k
LED-ALIN2-8FT-3P100-UD-5CCT-WH	120-277V	100/75/50w	12,000/9,000/6,000	50/40/35/30/27k



Recessed Linear Models

Made to order, 5-7 days



Model	Voltage	Watts	Lumens	Color
LED-ALIN2-1FT-3P12-D-5CCT-WH-RTK	120-277V	12/9/6w	1,500/1,080/750	50/40/35/30/27k
LED-ALIN2-2FT-3P25-D-5CCT-WH-RTK	120-277V	25/19/13w	3,000/2,280/1,560	50/40/35/30/27k
LED-ALIN2-4FT-3P50-D-5CCT-WH-RTK	120-277V	50/38/25w	6,000/4,560/3,000	50/40/35/30/27k
LED-ALIN2-6FT-3P75-D-5CCT-WH-RTK	120-277V	75/56/38w	9,000/6,720/4,560	50/40/35/30/27k
LED-ALIN2-8FT-3P100-D-5CCT-WH-RTK	120-277V	100/75/50w	12,000/9,000/6,000	50/40/35/30/27k



Trimless Linear Models

Made to order, 5-7 days



Model	Voltage	Watts	Lumens	Color
LED-ALIN2-1FT-3P12-D-5CCT-WH-TML	120-277V	12/9/6w	1,500/1,080/750	50/40/35/30/27k
LED-ALIN2-2FT-3P25-D-5CCT-WH-TML	120-277V	25/19/13w	3,000/2,280/1,560	50/40/35/30/27k
LED-ALIN2-4FT-3P50-D-5CCT-WH-TML	120-277V	50/38/25w	6,000/4,560/3,000	50/40/35/30/27k
LED-ALIN2-6FT-3P75-D-5CCT-WH-TML	120-277V	75/56/38w	9,000/6,720/4,560	50/40/35/30/27k
LED-ALIN2-8FT-3P100-D-5CCT-WH-TML	120-277V	100/75/50w	12,000/9,000/6,000	50/40/35/30/27k



Wall Mounted Linear Models: Downlight Only

Made to order, 5-7 days



Model	Voltage	Watts	Lumens	Color
LED-ALIN2-1FT-3P12-D-5CCT-WH-WM	120-277V	12/9/6w	1,500/1,080/750	50/40/35/30/27k
LED-ALIN2-2FT-3P25-D-5CCT-WH-WM	120-277V	25/19/13w	3,000/2,280/1,560	50/40/35/30/27k
LED-ALIN2-4FT-3P50-D-5CCT-WH-WM	120-277V	50/38/25w	6,000/4,560/3,000	50/40/35/30/27k
LED-ALIN2-6FT-3P75-D-5CCT-WH-WM	120-277V	75/56/38w	9,000/6,720/4,560	50/40/35/30/27k
LED-ALIN2-8FT-3P100-D-5CCT-WH-WM	120-277V	100/75/50w	12,000/9,000/6,000	50/40/35/30/27k




Wall Mounted Linear Models: 80% Downlight & 20% Uplight

Made to order, 5-7 days




Model	Voltage	Watts	Lumens	Color
LED-ALIN2-2FT-3P25-UD-5CCT-WH-WM	120-277V	25/19/13w	3,000/2,280/1,560	50/40/35/30/27k
LED-ALIN2-4FT-3P50-UD-5CCT-WH-WM	120-277V	50/38/25w	6,000/4,560/3,000	50/40/35/30/27k
LED-ALIN2-6FT-3P75-UD-5CCT-WH-WM	120-277V	75/56/38w	9,000/6,720/4,560	50/40/35/30/27k
LED-ALIN2-8FT-3P100-UD-5CCT-WH-WM	120-277V	100/75/50w	12,000/9,000/6,000	50/40/35/30/27k






LED-ALIN2-12X12-L-3P25



LED-ALIN2-24X24-L-3P50




LED-ALIN2-12X12-120L-3P25



LED-ALIN2-22X10-T-3P36



LED-ALIN2-22X22-X-3P50



LED-ALIN2-120L-D-5CCT-WH



LED-ALIN2-120L-D-5CCT-WH



LED-ALIN2-X-D-5CCT-WH



LED-ALIN2-Y-D-5CCT-WH

ALIN2-2/4FT-SRK-WH
ALIN2-2/4FT-SRK-BLSK-12FT-CPR-1WR-WH
SK-12FT-CPR-1WR-BL

Suspended or Surface Mounted Special Shape Models: Downlight Only

Box Qty: 4

Model	Voltage	Watts	Lumens	Color
LED-ALIN2-12X12-L-3P25-D-5CCT-WH	120-277V	25/19/13w	3000/2280/1560	50/40/35/30/27k
LED-ALIN2-12X12-120L-3P25-D-5CCT-WH	120-277V	25/19/13w	3000/2280/1560	50/40/35/30/27k
LED-ALIN2-24X24-L-3P50-D-5CCT-WH	120-277V	50/38/25w	6000/4560/3000	50/40/35/30/27k
LED-ALIN2-22X10-T-3P36-D-5CCT-WH	120-277V	36/25/17w	4320/3000/2040	50/40/35/30/27k
LED-ALIN2-22X22-X-3P50-D-5CCT-WH	120-277V	50/38/25w	6000/4560/3000	50/40/35/30/27k

Suspended Special Shape Models: 80% Downlight & 20% Uplight

Made to order, 5-7 days

Box Qty: 4

Model	Voltage	Watts	Lumens	Color
LED-ALIN2-12X12-L-3P25-UD-5CCT-WH	120-277V	25/19/13w	3000/2280/1560	50/40/35/30/27k
LED-ALIN2-12X12-120L-3P25-UD-5CCT-WH	120-277V	25/19/13w	3000/2280/1560	50/40/35/30/27k
LED-ALIN2-24X24-L-3P50-UD-5CCT-WH	120-277V	50/38/25w	6000/4560/3000	50/40/35/30/27k
LED-ALIN2-22X10-T-3P36-UD-5CCT-WH	120-277V	36/25/17w	4320/3000/2040	50/40/35/30/27k
LED-ALIN2-22X22-X-3P50-UD-5CCT-WH	120-277V	50/38/25w	6000/4560/3000	50/40/35/30/27k

Recessed Special Shape Models

Made to order, 5-7 days

Box Qty: 4

Model	Voltage	Watts	Lumens	Color
LED-ALIN2-12X12-L-3P25-D-5CCT-WH-RTK	120-277V	25/19/13w	3000/2280/1560	50/40/35/30/27k
LED-ALIN2-12X12-120L-3P25-D-5CCT-WH-RTK	120-277V	25/19/13w	3000/2280/1560	50/40/35/30/27k
LED-ALIN2-24X24-L-3P50-D-5CCT-WH-RTK	120-277V	50/38/25w	6000/4560/3000	50/40/35/30/27k
LED-ALIN2-22X10-T-3P36-D-5CCT-WH-RTK	120-277V	36/25/17w	4320/3000/2040	50/40/35/30/27k
LED-ALIN2-22X22-X-3P50-D-5CCT-WH-RTK	120-277V	50/38/25w	6000/4560/3000	50/40/35/30/27k

Trimless Special Shape Models

Made to order, 5-7 days

Box Qty: 4

Model	Voltage	Watts	Lumens	Color
LED-ALIN2-12X12-L-3P25-D-5CCT-WH-TML	120-277V	25/19/13w	3000/2280/1560	50/40/35/30/27k
LED-ALIN2-12X12-120L-3P25-D-5CCT-WH-TML	120-277V	25/19/13w	3000/2280/1560	50/40/35/30/27k
LED-ALIN2-24X24-L-3P50-D-5CCT-WH-TML	120-277V	50/38/25w	6000/4560/3000	50/40/35/30/27k
LED-ALIN2-22X10-T-3P36-D-5CCT-WH-TML	120-277V	36/25/17w	4320/3000/2040	50/40/35/30/27k
LED-ALIN2-22X22-X-3P50-D-5CCT-WH-TML	120-277V	50/38/25w	6000/4560/3000	50/40/35/30/27k

Suspended or Surface Mounted Connector Models: Downlight Only

Box Qty: 10

Model	Voltage	Watts	Lumens	Color
LED-ALIN2-L-D-5CCT-WH	120-277V	7/5/3.5w	840/600/420	50/40/35/30/27k
LED-ALIN2-X-D-5CCT-WH	120-277V	10/7.5/5w	1200/900/600	50/40/35/30/27k
LED-ALIN2-Y-D-5CCT-WH	120-277V	7/5/3.5w	840/600/420	50/40/35/30/27k
LED-ALIN2-120L-D-5CCT-WH	120-277V	7/5/3.5w	840/600/420	50/40/35/30/27k

Recessed Connector Models

Made to order, 5-7 days Box Qty: 10

Model	Voltage	Watts	Lumens	Color
LED-ALIN2-L-D-5CCT-WH-RTK	120-277V	7/5/3.5w	840/600/420	50/40/35/30/27k
LED-ALIN2-X-D-5CCT-WH-RTK	120-277V	10/7.5/5w	1200/900/600	50/40/35/30/27k
LED-ALIN2-Y-D-5CCT-WH-RTK	120-277V	7/5/3.5w	840/600/420	50/40/35/30/27k
LED-ALIN2-120L-D-5CCT-WH-RTK	120-277V	7/5/3.5w	840/600/420	50/40/35/30/27k

Trimless Connector Models

Made to order, 5-7 days Box Qty: 10

Model	Voltage	Watts	Lumens	Color
LED-ALIN2-L-D-5CCT-WH-TML	120-277V	7/5/3.5w	840/600/420	50/40/35/30/27k
LED-ALIN2-X-D-5CCT-WH-TML	120-277V	10/7.5/5w	1200/900/600	50/40/35/30/27k
LED-ALIN2-Y-D-5CCT-WH-TML	120-277V	7/5/3.5w	840/600/420	50/40/35/30/27k
LED-ALIN2-120L-D-5CCT-WH-TML	120-277V	7/5/3.5w	840/600/420	50/40/35/30/27k

Field Install Uplight

Box Qty: 2ft-1 4ft-2

Model	Voltage	Watts	Lumens	Color
ALIN2-2FT-UL-5CCT	120-277V	5/4/2.5w	600/480/300	50/40/35/30/27k
ALIN2-4FT-UL-5CCT	120-277V	10/7.5/5w	1,200/900/600	50/40/35/30/27k

Suspension Rods

Model	Description
ALIN2-2/4FT-SRK-WH	Suspension rod kit 2'4' length
ALIN2-2/4FT-SRK-BL	Suspension rod kit 2'4' length

Suspension Kit

Model	Description
SK-12FT-CPR-1WR-WH	Suspension kit: 12' canopy top 1 wire (2 pcs)
SK-12FT-CPR-1WR-BL	Suspension kit: 12' canopy top 1 wire (2 pcs)

Pre-installed	Description
Add 'EMB' to model #	Emergency backup (external 15W)
Add 'BMS' to model #	Bi-level motion + daylight sensor
Add: 20KV to model #	SG-20KV-UNV: 20KV surge protector

2' / 4' / 8' LED Suspended Tubular Linear: Arcy-Line

- Seamless linkable connection
 - 0-10V dimming for controls
 - Fixture can be surface mounted, wall mounted, or suspended
- Suspended or Surface Mounted Linear
Models: Downlight Only



Box Qty for 2FT: 12
Box Qty for 4FT: 6 Box Qty
for 8FT: 6

Model	Voltage	Watts	Lumens	Color
LED-TBL-2FT-20W-D-4CCT-WH	120-277V	20w	2,300	50/40/35/30k
LED-TBL-4FT-40W-D-4CCT-WH	120-277V	40w	4,600	50/40/35/30k
LED-TBL-8FT-80W-D-4CCT-WH	120-277V	80w	9,200	50/40/35/30k



WATT	LUMENS
20	2,300
40	4,600
80	9,200



Suspended Linear Models: 80% Downlight & 20% Uplight

Model	Voltage	Watts	Lumens	Color
LED-TBL-2FT-20W-UD-4CCT-WH	120-277V	20w	2,300	50/40/35/30k
LED-TBL-4FT-40W-UD-4CCT-WH	120-277V	40w	4,600	50/40/35/30k
LED-TBL-8FT-80W-UD-4CCT-WH	120-277V	80w	9,200	50/40/35/30k



Accessories

Model	Description
SK-6FT-I-CP-TH	6" Suspension kit for ATL
TBL-L	L-shape connector

Pre-installed Accessory Model	Description
Add: -EMB to model #	90 minute emergency backup
Add: -BMS to model #	Bi level motion + daylight sensor
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector

4' Drop Lens Suspended Linear: C-Line

- Includes 6' power cord and canopy suspension kit
- 50,000-hour LED lifespan based on IES LM-90 results

Suspended Linear Models: Downlight Only



Box Qty.
6

Model	Voltage	Watts	Lumens	Color
LED-ELIN-4FT-3P50-5CCT-WH	120-277V	50/40/30w	130lm/w	50/40/35/30/27k
LED-ELIN-4FT-3P50-5CCT-BL	120-277V	50/40/30w	130lm/w	50/40/35/30/27k



WATT	LUMENS
30	3,900
40	5,200
50	6,500

2' / 4' / 8' Suspended Linear Up & Downlight: C-Line

- Includes 6' power cord and canopy suspension kit
- 50,000-hour LED lifespan based on IES LM-90 results
- Up and downlight selectable

Suspended Linear Models: Down or Uplight



Box Qty.
6

Model	Voltage	Watts	Lumens	Color
NEW LED-UDL2-2FT-3P25-5CCT-WH	120-277V	25/20/15w	125lm/w	50/40/35/30/27k
NEW LED-UDL2-2FT-3P25-5CCT-BL	120-277V	25/20/15w	125lm/w	50/40/35/30/27k
NEW LED-UDL2-4FT-3P50-5CCT-WH	120-277V	50/40/30w	125lm/w	50/40/35/30/27k
NEW LED-UDL2-4FT-3P50-5CCT-BL	120-277V	50/40/30w	125lm/w	50/40/35/30/27k
NEW LED-UDL2-8FT-3P100-5CCT-WH	120-277V	100/80/60w	125lm/w	50/40/35/30/27k
NEW LED-UDL2-8FT-3P100-5CCT-BL	120-277V	100/80/60w	125lm/w	50/40/35/30/27k




Accessory	Description
NEW UDL-4XJ	4-way joiner

WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	1,875	30	3,750	60	7,500
20	2,500	40	5,000	80	10,000
25	3,125	50	6,250	100	12,500



Wattage Select 4-CCT Select Uplight Select



E.T.A. 07/2024



23" Suspended Cylinder: Arcy-Line

- 50% up & down light LGP diffuser
- Includes 6' power cord and canopy suspension kit

3-CCT Select

3-CCT Select 80+ HIGH CRI 5000K 2 Box Qty.

Model	Voltage	Watts	Lumens	Color
LED-SRD-23-50W-UD-RTRI-WH	120-277V	50w	5,000	35/40/50k
LED-SRD-23-50W-UD-RTRI-BL	120-277V	50w	5,000	35/40/50k

Pre-installed Accessory Model	Description
Add: -EMB to Model #	90 minute emergency backup



Round Strip LED Fixture

- 4' & 8' models are wattage selectable
- Includes 40 J-box cover
- Fixture can be surface mounted, wall mounted, or suspended
- BMS: Bi-level motion + daylight sensor
- EMB: Emergency back up: 90 minutes

2' Models

2' Models 80+ HIGH CRI 5000K 12 Box Qty.

Model	Voltage	Watts	Lumens	Color
LED-RST-2FT-20W-4CCT	120-277V	20w	2,600	50/40/35/30k
LED-RST-2FT-20W-4CCT-BL	120-277V	20w	2,600	50/40/35/30k

4' Models

4' Models 6 Box Qty.

Model	Voltage	Watts	Lumens	Color
LED-RST-4FT-3M40W-4CCT	120-277V	40/30/20w	145lm/w	50/40/35/30k
LED-RST-4FT-3M40W-4CCT-BL	120-277V	40/30/20w	145lm/w	50/40/35/30k
LED-RST-4FT-3M80W-4CCT	120-277V	80/65/50w	145lm/w	50/40/35/30k

8' Models

8' Models 6 Box Qty.

Model	Voltage	Watts	Lumens	Color
LED-RST-8FT-3M60W-4CCT	120-277V	60/50/40w	145lm/w	50/40/35/30k
LED-RST-8FT-3M60W-4CCT-BL	120-277V	60/50/40w	145lm/w	50/40/35/30k
LED-RST-8FT-3M100W-4CCT	120-277V	100/85/70w	145lm/w	50/40/35/30k
LED-RST-8FT-3M100W-4CCT-BL	120-277V	100/85/70w	145lm/w	50/40/35/30k

WATT	LUMENS	WATT	LUMENS
20	2,600	50	6,500
30	3,900	65	8,450
40	5,200	80	10,400

WATT	LUMENS	WATT	LUMENS
40	5,200	70	9,100
50	6,500	85	11,050
60	7,800	100	13,000



RST-2FT-WG
RST-4FT-WG



RST-SM-CN



RST-PDM-CN



SK-10FT-Y-LC-PD
SK-20FT-Y-LC-PD

Pre-installed Accessory Model	Description
Add: -EMB to Model #	90 minute emergency backup
Add: -BMS to Model #	Microwave bi level motion + daylight sensor
Add: -BMSPIR to Model #	PIR bi level motion + daylight sensor
Add: -HV to Model#	347-480V step down transformer

Accessories for RST Fixtures

Model	Description
RST-SM-CN	Surface mount linkable bracket
RST-PDM-CN	Pendant mount linkable bracket
RST-2FT-WG	2ft long wire guard for 2ft RST
RST-4FT-WG	4ft long wire guard, use 2 pieces for 8ft
SK-10FT-Y-LC-PD	Suspension kit: 10' Y-shape, loop top, paddle bottom (adjustable length)
SK-20FT-Y-LC-PD	Suspension Kit: 20' Y-Shape, loop top, paddle bottom (adjustable length)

2' & 4' Prismatic LED Lens Wraps

- Lens is held by a spring making it easily removable for surface mount installation
- Single CCT is non-dimmable
- 6-CCT is 0-10V dimmable
- Fixture can be surface mounted, wall mounted, or suspended



Box Qty for 2ft: 12
Box Qty for 4ft: 6



NEW

Model	Voltage	Watts	Lumens	Color
LED-WRP-PRM-2FT-20W-6CCT-UNV	120-277V	20w	2,300	65/50/40/35/30/27k
LED-WRP-PRM-4FT-40W-6CCT-UNV	120-277V	40w	4,600	65/50/40/35/30/27k

Model	Voltage	Watts	Lumens	Color
LED-WRP-PRM-2FT-40W-35K	120-277V	40w	1,900	3500k
LED-WRP-PRM-2FT-20W-40K	120-277V	20w	1,900	4000k
LED-WRP-PRM-2FT-20W-50K	120-277V	20w	1,900	5000k
LED-WRP-PRM-4FT-40W-35K	120-277V	40w	3,800	3500k
LED-WRP-PRM-4FT-40W-40K	120-277V	40w	3,800	4000k
LED-WRP-PRM-4FT-40W-50K	120-277V	40w	3,800	5000k

Pre-installed Accessory Model	Description
Add '-MS' to model #	On/Off motion sensor
Add '-EMB' to model #	Emergency backup (external 15W)

2' & 4' Frosted LED Lens Wraps

- Lens is removeable for easy surface mount installation
- Sturdy aluminum housing prevents bending
- 0-10V dimming for controls
- Fixture can be surface & wall mounted or suspended



Box Qty for 2ft: 12
Box Qty for 4ft: 6



Model	Voltage	Watts	Lumens	Color
LED-WRP-FR-2FT-3P24-6CCT-UNV	120-277V	24/20/16w	115lm/w	65/50/40/35/30/27k
LED-WRP-FR-4FT-3P48-6CCT-UNV	120-277V	48/40/32w	115lm/w	65/50/40/35/30/27k

Model	Voltage	Watts	Lumens	Color
LED-WRP-FR-2FT-20W-40K	120-277V	20w	2,200	4000k
LED-WRP-FR-2FT-20W-50K	120-277V	20w	2,200	5000k

Pre-installed Accessory Model	Description
Add '-BMS' to model #	On/Off motion sensor
Add '-EMB' to model #	Emergency backup (external 15W)
Add '-BMS-EMB' to model #	Motion sensor + emergency backup

Accessories for Wraps


Model	Description
SK-10FT-Y-LC-CB	10ft suspension kit adjustable
SK-20FT-Y-LC-CB	20ft suspension kit adjustable



Features a spring design allowing easy removal of lens for installation



WATT	LUMENS
16	1,840
20	2,300
24	2,760
32	3,680
40	4,600
48	5,520



1/2" Knockout



2' / 4' / 8' Vapor Tight LED Fixture: Bolt-Line

- Environmental friendly polyester powder coated
- Anti-rust durable plastic housing
- 50,000-hour LED lifespan based on IES LM-90 results

Box Qty:
3M25 - 12
3M50 - 6
3M80 - 6
3M100 - 4



5-CCT & 3 Power Select

Model	Voltage	Watts	Lumens	Color
LED-VPT-2FT-3P25-5CCT-UNV	120-277V	25/20/15w	150lm/w	65/50/40/35/30k
LED-VPT-4FT-3P50-5CCT-UNV	120-277V	50/40/30w	150lm/w	65/50/40/35/30k
LED-VPT-4FT-3580-5CCT-UNV	120-277V	80/70/60w	150lm/w	65/50/40/35/30k
LED-VPT-8FT-3P100-5CCT-UNV	120-277V	100/80/60w	150lm/w	65/50/40/35/30k

5CCT

E.T.A. 07/2024

NEW
NEW
NEW
NEW

5-CCT

WATT	LUMENS	WATT	LUMENS
15	2,250	60	9,000
20	3,000	70	10,500
25	3,750	80	12,000
30	4,500	100	15,000
40	6,000		
50	7,500		

4-CCT

WATT	LUMENS	WATT	LUMENS
15	1,950	60	7,800
20	2,600	70	9,100
25	3,250	80	10,400
30	3,900	90	11,700
40	5,200	100	13,000
50	6,500		

4-CCT & 3 Power Select

Model	Voltage	Watts	Lumens	Color
LED-VPT-2FT-3M25-4CCT	120-277V	25/20/15w	130lm/w	50/40/35/30k
LED-VPT-4FT-3M50-4CCT	120-277V	50/40/30w	130lm/w	50/40/35/30k
LED-VPT-4FT-3M80-4CCT	120-277V	80/70/60w	130lm/w	50/40/35/30k
LED-VPT-8FT-3M100-4CCT	120-277V	100/90/80w	130lm/w	50/40/35/30k

4CCT



4' Green Vapor Tight LED Fixture: Bolt-Line

- Ideal for use in horticultural neutral light applications

Model	Voltage	Watts	Lumens	Color
LED-VPT-4FT-80W-GREEN	120-277V	80w	4200	Green

Pre-installed Accessory Model	Description
Add: -EMB to Model #	90 minute emergency backup
Add: -BMS to Model #	HD407VC-R Bi level motion + daylight sensor
Add: 20KV to Model #	SG-20KV-UNV: 20KV surge protector
Add: -HV to Model #	347-480V step down transformer

Model	Description
SK-10FT-Y-LC-CB	10ft suspension kit adjustable
SK-20FT-Y-LC-CB	20ft suspension kit adjustable



Vertical



Horizontal

Jelly Jar Vapor Tight / Vertical & Horizontal: Bolt-Line

- All in one: Works for vertical or horizontal installation
- 0-10V dimming standard

3-CCT Select



Box Qty.
12

Model	Voltage	Watts	Lumens	Color	CRI
LED-JJ-21W-TRI	120-277V	21w	2700	50/40/30k	>80

3CCT



1" Low Voltage Downlights: Mini-Line

- Smaller lamp body for flexible application
- Low-voltage daisy-chain wiring
- 5-100% dimming compatible with electronic low voltage drivers (see CV series)



Model	Voltage	Watts	Lumens	Color
LED-MDL-1-6W-30K-RD-WH-12V	12V	6w	500	3000k

Accessory Model	Description
MDL-TRIM-RD-BLK	1" mini downlight round black trim
MDL-TRIM-RD-BZ	1" mini downlight round bronze trim
MDL-TRIM-SQ-WH	1" mini downlight square white trim
MDL-TRIM-SQ-BLK	1" mini downlight square black trim
MDL-TRIM-SQ-BZ	1" mini downlight square bronze trim
MDL-24°-OPTIC	1" mini downlight optic lens 24°



-BZ




-BLK



-BZ



-BLK



-WH



-WH



-BLK



-BZ

1" Low Voltage Downlight Adjustable: Mini-Line

- Adjustable fixture allows 60° pitch angle
- Low-voltage daisy-chain wiring
- 5-100% dimming compatible with electronic low voltage drivers (see CV series)



Model	Voltage	Watts	Lumens	Color
LED-MDL-1-ADJ-6W-30K-RD-WH-12V	12V	6w	500	3000k
LED-MDL-1-ADJ-6W-30K-RD-BLK-12V	12V	6w	500	3000k
LED-MDL-1-ADJ-6W-30K-RD-BZ-12V	12V	6w	500	3000k
LED-MDL-1-ADJ-6W-30K-SQ-WH-12V	12V	6w	500	3000k
LED-MDL-1-ADJ-6W-30K-SQ-BLK-12V	12V	6w	500	3000k
LED-MDL-1-ADJ-6W-30K-SQ-BZ-12V	12V	6w	500	3000k



-WH



-BLK



-BZ

2" LED Downlights: Trimless-Line

- External J-box eliminates recessed can
- New construction mounting plate available
- Suitable for use in wet locations
- IC & airtight-rated fixture
- EMB: Emergency back up: 90 minutes
- Beam angle: 38° standard, 24° & 60° available

Round






 Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-TML-2R-8W-5CCT-WH	120V	8w	600	50/40/35/30/27K
LED-DLJBX-TML-2R-8W-5CCT-BLK	120V	8w	600	50/40/35/30/27K
LED-DLJBX-TML-2R-15W-5CCT-WH	120V	15w	1000	50/40/35/30/27K
LED-DLJBX-TML-2R-15W-5CCT-BLK	120V	15w	1000	50/40/35/30/27K

Round Gimbal

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-TML-GMB-2R-8W-5CCT-WH	120V	8w	600	50/40/35/30/27K
LED-DLJBX-TML-GMB-2R-8W-5CCT-BLK	120V	8w	600	50/40/35/30/27K

Square

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-TML-2SQ-8W-5CCT-WH	120V	8w	600	50/40/35/30/27K
LED-DLJBX-TML-2SQ-8W-5CCT-BLK	120V	8w	600	50/40/35/30/27K
LED-DLJBX-TML-2SQ-15W-5CCT-WH	120V	15w	1000	50/40/35/30/27K
LED-DLJBX-TML-2SQ-15W-5CCT-BLK	120V	15w	1000	50/40/35/30/27K



4" LED Downlight: Trimless-Line

Round

Box Qty: 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-TML-4R-15W-5CCT-WH	120V	15w	1000	50/40/35/30/27K
LED-DLJBX-TML-4R-15W-5CCT-BLK	120V	15w	1000	50/40/35/30/27K

Square

Box Qty: 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-TML-4SQ-15W-5CCT-WH	120V	15w	1000	50/40/35/30/27K
LED-DLJBX-TML-4SQ-15W-5CCT-BLK	120V	15w	1000	50/40/35/30/27K

Pre-installed Accessory Model	Description
Add '-EMB-' to model #	Emergency backup (external 15W)





3" LED J-Box Canless Downlight: M-Line

- External J-box eliminates recessed can
- New construction mounting plate available
- Suitable for use in wet locations
- IC & airtight-rated fixture
- EMB: Emergency back up: 90 minutes

5-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-MDJBX-3-10W-5CCT-WH-R	120V	10w	800	50/40/35/30/27K



Accessory	Description
MDJBX-3-TRIM-WH-SQ	MDJBX-3: White square smooth trim
MDJBX-3-TRIM-BLK-R	MDJBX-3: Black round smooth trim
MDJBX-3-TRIM-BLK-SQ	MDJBX-3: Black square smooth trim

Pre-installed Accessory Model	Description
Add '-EMB-' to model #	Emergency backup (external 15W)



White (-WH-SQ)



Black (-BLK-R)



Black (-BLK-SQ)



4" LED J-Box Canless Downlight: M-Line

5-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-MDJBX-4-15W-5CCT-WH-R	120V	15w	1300	50/40/35/30/27K



Accessory	Description
MDJBX-4-TRIM-WH-SQ	MDJBX-3: White square smooth trim
MDJBX-4-TRIM-BLK-R	MDJBX-3: Black round smooth trim
MDJBX-4-TRIM-BLK-SQ	MDJBX-3: Black square smooth trim

Pre-installed Accessory Model	Description
Add '-EMB-' to model #	Emergency backup (external 15W)



White (-WH-SQ)



Black (-BLK-R)



Black (-BLK-SQ)



1" LED Canless Downlight: SnapTrim-Line

- External J-box eliminates recessed can
- New construction mounting plate available
- Suitable for use in wet locations
- IC & airtight-rated fixture
- EMB: Emergency back up: 90 minutes

5-CCT Select

Box Qty. 24

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-1RG-7W-5CCT-WH-R	120V	7w	550	50/40/35/30/27K

Trim Options

Accessory	Description
DLJBX-1-TRIM-WH-SQ	1" White square smooth trim
DLJBX-1-TRIM-BLK-R	1" Black round smooth trim
DLJBX-1-TRIM-BLK-SQ	1" Black square smooth trim



2" LED Canless Downlight: SnapTrim-Line

- Beam angle: 38° standard, 24° & 60° available

5-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-2-8W-5CCT-W/W-SM	120V	8w	600	50/40/35/30/27K
LED-DLJBX-2-15W-5CCT-W/W-S	120V	15w	1000	50/40/35/30/27K



Single CCT

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-2-15W-30K-W/W-S	120V	15w	1000	3000k
LED-DLJBX-2-15W-50K-W/W-S	120V	15w	1000	5000k

Warm Dimming



Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-2-6W-3WD-W/W-S	120V	6w	450	30—>18k
LED-DLJBX-2-12W-3WD-W/W-S	120V	12w	850	30—>18k



5-CCT Select-Fire Rated

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-2-8W-5CCT-FR-WW-SM	120V	8w	600	50/40/35/30/27K



White (-WH-S)
Included
(-WH-BFL)



Black (-BLK-S)
(BLK-BFL)



Bronze (-BZ-S)
(BZ-BFL)



Chrome (-CH-S)



Nickel (-BN-S)



White (-WH-S)
(WH-BFL)




Black (-BLK-S)
(BLK-BFL)



Bronze (-BZ-S)
(BZ-BFL)



Nickel (-BN-S)

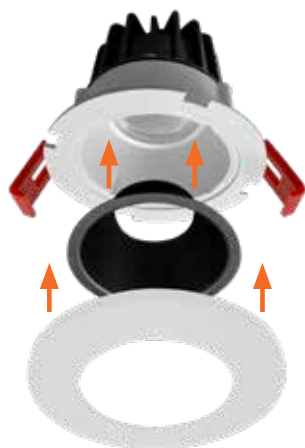

Trim Options

Accessory	Description
DLJBX-2-TRIM-BLK-S	2" Black in and out smooth trim
DLJBX-2-TRIM-BL-BFL	2" Black in and out baffle trim
DLJBX-2-TRIM-BZ-S	2" Bronze in and out smooth trim
DLJBX-2-TRIM-BZ-BFL	2" Bronze in and out baffle trim
DLJBX-2-TRIM-BN-S	2" Brushed nickel in and out smooth trim
DLJBX-2-TRIM-CH-S	2" Chrome in and out smooth trim
DLJBX-2-TRIM-WH-BFL	2" White in and out baffle trim
DLJBX-2-TRIM-BN-S-SQ	2" Brushed nickel smooth square trim
DLJBX-2-TRIM-BL-S-SQ	2" Black smooth square trim
DLJBX-2-TRIM-BZ-S-SQ	2" Bronze smooth square trim
DLJBX-2-TRIM-WH-S-SQ	2" White smooth square trim

2" LED Adjustable Downlight: SnapTrim-Line

- External J-box eliminates recessed can
- New construction mounting plate available
- 35° tilt and up to 360° rotation
- Suitable for use in wet locations
- IC & airtight-rated fixture

5-CCT Select

SELECT A SWITCH DIMMABLE 90+ HIGH CRI JA8 TITLE 24 COMPLIANT ENERGY STAR Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-ADJ-2-5W-5CCT-WH	120V	5w	350	50/40/35/30/27K

12V Version

Use Electronic Low Voltage drivers see CV series

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-ADJ-2-5W-30K-WH-12V	12V	5w	350	3000k
LED-DLJBX-ADJ-2-5W-30K-BLK-12V	12V	5w	350	3000k

120V Version

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-ADJ-2-5W-27K	120V	5w	350	2700k
LED-DLJBX-ADJ-2-5W-40K	120V	5w	350	4000k
LED-DLJBX-ADJ-2-5W-50K	120V	5w	350	5000k

Accessory	Description
JBX-EXT-6'-2PIN	6' extension cable for fixture to J-box
JBX-EXT-10'-2PIN	10' extension cable for fixture to J-box

3" LED Adjustable Downlight: SnapTrim-Line

- External J-box eliminates recessed can
- New construction mounting plate available
- 35° tilt and up to 360° rotation
- Suitable for use in wet locations
- IC & airtight-rated fixture
- EMB: Emergency back up: 90 minutes
- Beam angle: 38° standard, 24° & 60° available

5-CCT Select

SELECT A SWITCH DIMMABLE 90+ HIGH CRI JA8 TITLE 24 COMPLIANT ENERGY STAR Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-ADJ-3-8W-5CCT-WH-R	120V	8w	600	50/40/35/30/27K
LED-DLJBX-ADJ-3-8W-5CCT-BLK-R	120V	8w	600	50/40/35/30/27K
LED-DLJBX-ADJ-3-12W-5CCT-	120V	12w	1000	50/40/35/30/27K
LED-DLJBX-ADJ-3-12W-5CCT-	120V	12w	1000	50/40/35/30/27K

Warm Dimming

WARM DIMMING 2000K 1500K Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-ADJ-3-6W-3WD-WH-R	120V	6w	450	30-->18k
LED-DLJBX-ADJ-3-6W-3WD-BLK-R	120V	6w	450	30-->18k



Trim Options

Accessory	Description
DLJBX-ADJ-3-TRIM-WH-SQ	3" Gimbal square trim white finish
DLJBX-ADJ-3-TRIM-BN-R	3" Gimbal round trim brushed nickel
DLJBX-ADJ-3-TRIM-BN-SQ	3" Gimbal square trim brushed nickel
DLJBX-ADJ-3-TRIM-BLK-SQ	3" Gimbal square trim black finish





3" Regressed Gimbal Downlight: SnapTrim-Line

- External j-box & spring mount clips for easy installation
- Beam angle: 38° standard, 24° & 60° available

5-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-ADJ-3RG-8W-5CCT-WH-R	120V	8w	600	50/40/35/30/27K
LED-DLJBX-ADJ-3RG-8W-5CCT-BLK-R	120V	8w	600	50/40/35/30/27K
LED-DLJBX-ADJ-3RG-8W-5CCT-WH-SQ	120V	8w	600	50/40/35/30/27K
LED-DLJBX-ADJ-3RG-8W-5CCT-BLK-SQ	120V	8w	600	50/40/35/30/27K

Factory Add-Ons	Description
Add '-EMB-' to model #	Emergency backup (external 25W)



Floating Adjustable: SnapTrim-Line

- 360° twist allows for an easy adjustment after installation
- Unique floating gimbal design adds an architectural touch
- Canless module does not require a housing making it perfect for new construction and remodeling.

2"

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-FLT-2-5W-5CCT-WH	120V	5w	400	50/40/35/30/27K
LED-SL-FLT-2-5W-5CCT-BLK	120V	5w	400	50/40/35/30/27K

4"

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-FLT-4R-9W-5CCT-WH	120V	9w	700	50/40/35/30/27K

4"- Fire-Rated

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-FLT-4R-9W-5CCT-FR-WH	120V	9w	700	50/40/35/30/27K

Factory Add-Ons	Description
Add '-EMB-' to model #	Emergency backup (external 25W)



4" Round Scoop Downlight: SnapTrim-Line

5-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-SCP-4R-12W-5CCT-WH	120V	12w	900	50/40/35/30/27K

Factory Add-Ons	Description
Add '-EMB-' to model #	Emergency backup (external 25W)



4" Adjustable Sloped Ceiling: SnapTrim-Line

- Beam angle: 38° standard, 24° & 60° available

5-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-SLP-ADJ-4R-8W-5CCT-WH	120V	8w	600	50/40/35/30/27K
LED-SL-SLP-ADJ-4R-8W-5CCT-BLK	120V	8w	600	50/40/35/30/27K

Factory Add-Ons	Description
Add '-EMB-' to model #	Emergency backup (external 25W)



3" Regressed Downlight: SnapTrim-Line

- External j-box & spring mount clips for easy installation
- Beam angle: 38° standard, 24° & 60° available

5-CCT Select

SELECT DIMMABLE 90+ HIGH CRI JAB TITLE 24 Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-3RG-15W-5CCT-WH-R	120V	15w	1100	50/40/35/30/27K

Accessory	Description
DLJBX-3RG-TRIM-WH-SQ	3" Regressed white square trim
DLJBX-3RG-TRIM-BLK-R	3" Regressed black round trim
DLJBX-3RG-TRIM-BLK-SQ	3" Regressed black square trim
Add '-EMB-' to model #	Emergency backup (external 25W)

4" Regressed Downlight: SnapTrim-Line

5-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-4RG-18W-5CCT-WH-R	120V	18w	1500	50/40/35/30/27K
LED-DLJBX-4RG-15W-5CCT-WH-R	120V	15w	1000	50/40/35/30/27K
LED-DLJBX-4RG-15W-5CCT-WH-R-0/10V	120-277V	15w	1100	50/40/35/30/27K

5-CCT Select - Fire Rated

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-4RG-15W-5CCT-FR-WH-R	120V	18w	1500	50/40/35/30/27K


Warm Dimming



Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-4RG-12W-3WD-WH-R	120V	12w	850	30--->18k

Accessory	Description
Add '-EMB-' to model #	Emergency backup (external 25W)
DLJBX-4RG-TRIM-WH-SQ	4" Regressed gimbal white square trim
DLJBX-4RG-TRIM-BLK-R	4" Regressed gimbal black round trim
DLJBX-4RG-TRIM-BLK-SQ	4" Regressed gimbal black square trim
DLJBX-4RG-TRIM-BRZ-R	4" Regressed gimbal bronze round trim
DLJBX-4RG-TRIM-BRZ-SQ	4" Regressed gimbal bronze square trim

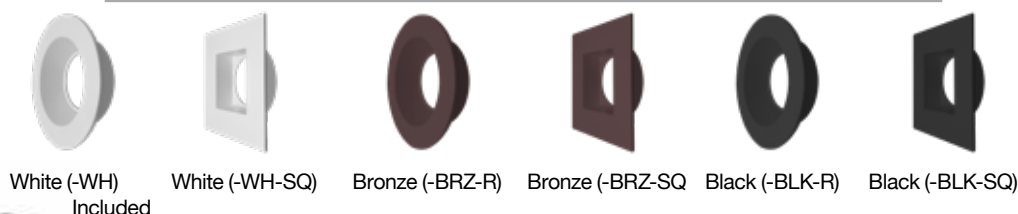

6" Regressed Downlight: SnapTrim-Line

5-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-6RG-24W-5CCT-WH-R	120V	24w	1800	50/40/35/30/27K

Accessory	Description
Add '-EMB-' to model #	Emergency backup (external 25W)
DLJBX-6RG-TRIM-WH-SQ	6" regressed gimbal white square trim
DLJBX-6RG-TRIM-BLK-R	6" regressed gimbal black round trim
DLJBX-6RG-TRIM-BLK-SQ	6" regressed gimbal black square trim



4" Adjustable Downlight: SnapTrim-Line

- External j-box & spring mount clips for easy installation
- Canless module does not require housing
- Beam angle: 38° standard, 24° & 60° available

5-CCT Select






Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-ADJ-4-12W-5CCT-WH-R	120V	12w	750	50/40/35/30/27K
LED-DLJBX-ADJ-4-12W-5CCT-BLK-R	120V	12w	750	50/40/35/30/27K
LED-DLJBX-ADJ-4-12W-5CCT-BN-R	120V	12w	750	50/40/35/30/27K
LED-DLJBX-ADJ-4-18W-5CCT-WH-R	120V	18w	1500	50/40/35/30/27K
LED-DLJBX-ADJ-4-18W-5CCT-BLK-R	120V	18w	1500	50/40/35/30/27K

Warm Dimming


Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-ADJ-4-12W-3WD-WH-R	120V	12w	750	30-->18k

Accessory	Description
JBX-EXT-6'-2PIN	6" Extension cable for fixture to J-box unit
JBX-EXT-10'-2PIN	10" Extension cable for fixture to J-box unit
Add '-EMB' to model #	Emergency backup (external 25W)



Display featuring 10 of our canless downlights. Place a \$3,000+ stock orders of downlights and get a free counter display.

Display

6" Adjustable Downlight: SnapTrim-Line

5-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-ADJ-6-18W-5CCT-WH-R	120V	18w	1500	50/40/35/30/27K
LED-DLJBX-ADJ-6-18W-5CCT-BLK-R	120V	18w	1500	50/40/35/30/27K

Accessory	Description
Add: -24D to Model #	24D Optic
Add: -60D to Model #	60D Optic
Add '-EMB' to model #	Emergency backup (external 25W)

Optic Lens Options

Accessory	Description
OPTIC-35X17-24D	60D Optic: DLJBX-2, DLJBX-TML-2
OPTIC-35X17-60D	60D Optic: DLJBX-2, DLJBX-TML-2
OPTIC-42X14-24D	24D Optic: DLJBX-ADJ-3, ADJ-3RG, SLP-ADJ-4R, TML-GMB-2R, SCP-4R
OPTIC-42X14-60D	60D Optic: DLJBX-ADJ-3, ADJ-3RG, SLP-ADJ-4R, TML-GMB-2R, SCP-4R
OPTIC-50X26-20D	20D Optic: LED-SQM
OPTIC-50X26-60D	60D Optic: LED-SQM
OPTIC-61X23-38D	38D Optic: LED-SQM-TML
OPTIC-61X23-60D	60D Optic: LED-SQM-TML
OPTIC-63X22-24D	24D Optic: DLJBX-4RG, SL-FLT-4R, DLJBX-TML-4, LED-SQM
OPTIC-63X22-60D	60D Optic: DLJBX-4RG, SL-FLT-4R, DLJBX-TML-4, SQM-TML
OPTIC-75X24-24D	24D Optic: DLJBX-ADJ-4
OPTIC-75X24-60D	60D Optic: DLJBX-ADJ-4
OPTIC-90X25-24D	24D Optic: LED-DLJBX-6RG
OPTIC-90X25-60D	60D Optic: LED-DLJBX-6RG



4" Slim Panel Tilt Downlight: SnapTrim-Line

- Canless module does not require housing
- Fixture is adjustable up to 45°
- Accessories including color trims

5-CCT Select

← DIMMABLE → 90° HIGH CRI JAB TITLE 24 ENERGY STAR Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-TLT-4R-9W-5CCT-WH	120V	9w	600	50/40/35/30/27K



3-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-TLT-4R-9W-TRI	120V	9w	600	50/40/30k



Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)



6" Slim Panel Tilt Downlight: SnapTrim-Line

5-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-TLT-6R-12W-5CCT-WH	120V	12w	800	50/40/35/30/27K



3-CCT Select

Box Qty. 18


Model	Voltage	Watts	Lumens	Color
LED-SL-TLT-6R-12W-TRI	120V	12w	800	50/40/30k




Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)



6' / 10' Extension Cable



CUNV-NC-ICAT-7H
Universal Pre-Mounting Plate
13 7/8" x 15 1/8"

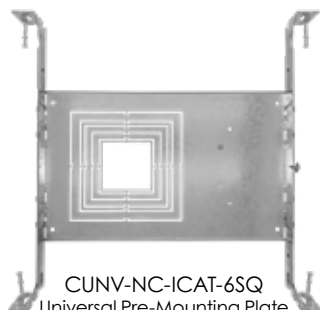


CUNV-NC-ICAT-6SQ
Universal Pre-Mounting Plate
14" x 13.75"

Canless LED Downlight Accessories


Accessory	Description
CUNV-NC-ICAT-7H	1" / 2" / 3" / 3.5" / 4" / 6" Universal pre-mounting new construction plate
CUNV-NC-ICAT-6SQ	1" 2 3.5" 4" 5" 6" Canless downlights (only for trimless squares) new construction plate
CUNV-JBX-RI-XL	2" 3" 3.5" 4" 5" 6" Universal construction plate canless downlights
C4-JBX-RI	4" Rough in plate
C6-JBX-RI	6" Rough in plate
C8-JBX-RI	8" Rough in plate
JBX-EXT-6'-2PIN	6' Extension cable for fixture to J-box
JBX-EXT-10'-2PIN	10' Extension cable for fixture to J-box
JBX-EXT-12'-2PIN	12' Extension cable for fixture to J-box
JBX-EXT-6'-TRI	6' Extension cable for fixture to J-box
JBX-EXT-10'-TRI	10' Extension cable for fixture to J-box



CUNV-JBX-RI-XL
Universal Pre-Mounting Plate
26" x 8.4"



C4-JBX-RI
4" Rough In Plate
6 1/2" x 13 1/4"

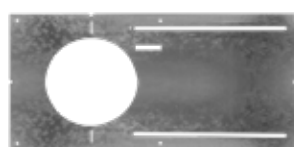

C6-JBX-RI
6" Rough In Plate
8 1/2" x 17 1/4"



C8-JBX-RI
8" Rough In Plate
10 1/2" x 26"



3" Slim Panel Downlight: SnapTrim-Line

- Canless module does not require housing
- Check spec sheet for dimmer compatibility. Triac and 0-10V options are available.
- Accessories including color trims (see page 36)

5-CCT Select

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-3R-8W-5CCT-WH	120V	8w	500	50/40/35/30/27K
LED-SL-PNL-3SQ-8W-5CCT-WH	120V	8w	500	50/40/35/30/27K



4" Slim Panel Downlight: SnapTrim-Line

Round 5-CCT & 3-Power Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-4R-3P12W-5CCT-WH	120V	8/10/12w	500/700/840	50/40/35/30/27K



Round - Fire Rated

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-4R-12W-5CCT-FR-WH	120V	12w	840	50/40/35/30/27K



Round Low-Voltage 12V

Use Electronic Low Voltage drivers see CV series

Box Qty. 18

NEW

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-4R-9W-5CCT-12V	120V	9w	750	50/40/35/30/27K



Round 3-CCT Select 0-10V

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-4R-11W-TRI-0/10V	120/277V	11w	750	50/40/30k



Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)



Square 5-CCT & 3-Power Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-4SQ-3P12W-5CCT-WH	120V	8/10/12w	500/700/840	50/40/35/30/27K



Square - Fire Rated

Box Qty. 18

NEW

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-4SQ-12W-5CCT-FR-WH	120V	12w	840	50/40/35/30/27K



Square 5-CCT Select 0-10V

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-4SQ-11W-5CCT-0/10V	120/277V	11w	750	50/40/35/30/27K



Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)





Final Production

Final Production

6" Slim Panel Downlight: SnapTrim-Line

5-CCT & 3-Power Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-6R-3P15W-5CCT-WH	120V	15/12/9w	1150/950/750	50/40/35/30/27K

Round 5-CCT Select - Fire Rated

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-6R-15W-5CCT-FR-WH	120V	15w	1150	50/40/35/30/27K

Round 5-CCT Select 0-10V

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-6R-14W-5CCT-0/10V	120/277V	14w	1000	50/40/35/30/27K

Square 5-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-6SQ-15W-5CCT-WH	120V	15w	1050	50/40/35/30/27K

Square 5-CCT & 3-Power Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-6SQ-3P15W-5CCT-WH	120V	9/12/15w	1150/950/750	50/40/35/30/27K

Square 5-CCT Select - Fire Rated

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-6SQ-15W-5CCT-FR-WH	120V	15w	1150	50/40/35/30/27K

Square 3-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-6SQ-14W-TRI	120V	14w	1000	50/40/30k

Round 3-CCT Select 0-10V

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-6SQ-14W-TRI-0/10V	120/277V	14w	1000	50/40/30k

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)

8" Slim Panel Downlight: SnapTrim-Line

Round 5-CCT & 3-Power Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-8R-3P22W-5CCT-WH	120V	16/19/22w	1600/1400/1200	50/40/35/30/27K

Round 5-CCT Select 0-10V

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-8R-22W-5CCT-0/10V	120-277V	22w	1600	50/40/35/30/27K

Square 5-CCT & 3-Power Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-8SQ-3P22W-5CCT-WH	120V	16/19/22w	1600/1400/1200	50/40/35/30/27K

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)

10" Slim Panel Downlight: SnapTrim-Line


Round 5-CCT Select 0-10V

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-10R-22W-5CCT-0/10V	120/277V	22w	1600	50/40/35/30/27K

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)

SnapTrim LED Downlight Accessories

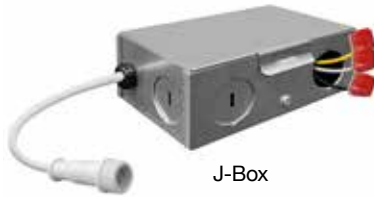

J-Box




LED-EMB-25W-HV-0/10V



6' / 10' Extension Cable


Accessory	Description
JBX-11W-HV-0/10V	SL-PNL-4SQ 120/277V 0-10V driver
JBX-11W-277-347V	SL-PNL-4SQ 277-347V driver
JBX-14W-HV-0/10V	SL-PNL-6SQ 120/277V 0-10V driver
JBX-14W-277-347V	SL-PNL-6SQ 277-347V driver
JBX-18W-277-347V	SL-PNL-8R 277-347V driver
CUNV-NC-ICAT-7H	1" 2" 3" 3.5" 4" 5" 6" Universal pre-mounting new construction plate
CUNV-NC-ICAT	2" 3" 4" 6" Universal pre-mounting new construction plate
CUNV-JBX-RI-XL	2" 3" 3.5" 4" 5" 6" Universal construction plate: Canless downlights
CUNV-NC-ICAT-6SQ	1" 2 3.5" 4" 5" 6" New construction plate: Canless downlights (only for trimless squares)
C4-JBX-RI	4" Rough in plate
CUNV-SQM-NC-ICAT	New construction plate: SQM fixtures
C6-JBX-RI	6" Rough In plate
C8-JBX-RI	8" Rough In plate
JBX-EXT-6'-TRI	6' Extension cable for fixture to J-box
JBX-EXT-10'-TRI	10' Extension cable for fixture to J-box




CUNV-NC-ICAT
Universal Pre-Mounting Plate
5 3/10" x 14 1/2"




CUNV-JBX-RI-XL
Universal Pre-Mounting Plate
8.4" x 26"

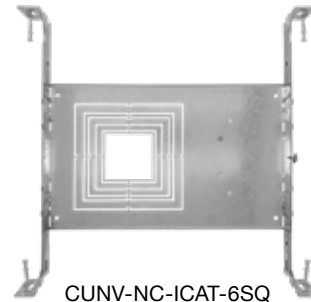


CUNV-NC-ICAT-6SQ
Universal Construction Plate
14" x 13.75"

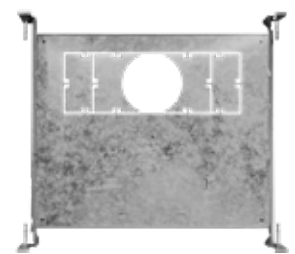


CUNV-SQM-NC-ICAT
Universal Pre-Mounting Plate
14 3/4" x 11 3/4"

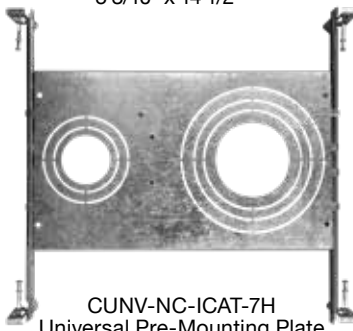

CUNV-NC-ICAT-7H
Universal Pre-Mounting Plate
13 7/8" x 15 1/8"



C4-JBX-RI
4" Rough In Plate
6 1/2" x 13 1/4"



C6-JBX-RI
6" Rough In Plate
8 1/2" x 17 1/4"



C8-JBX-RI
8" Rough In Plate
10 1/2" x 26"



BLK

BZ

BN



BLK

BZ

BN

SLPNL Trims

Accessory	Description
SLPNL-TRIM-3R-BLK	3" Round black trim
SLPNL-TRIM-3R-BRZ	3" Round bronze trim
SLPNL-TRIM-3R-BNI	3" Round brushed nickel trim
SLPNL-TRIM-4R-BLK	4" Round black trim
SLPNL-TRIM-4R-BRZ	4" Round bronze trim
SLPNL-TRIM-4R-BNI	4" Round brushed nickel trim
SLPNL-TRIM-4SQ-BLK	4" Square black trim
SLPNL-TRIM-4SQ-BRZ	4" Square bronze trim

Accessory	Description
SLPNL-TRIM-4SQ-BNI	4" Square brushed nickel trim
SLPNL-TRIM-6R-BLK	6" Round black trim
SLPNL-TRIM-6R-BRZ	6" Round bronze trim
SLPNL-TRIM-6R-BNI	6" Round brushed nickel trim
SLPNL-TRIM-6SQ-BLK	6" Square black trim
SLPNL-TRIM-6SQ-BRZ	6" Square bronze trim
SLPNL-TRIM-6SQ-BNI	6" Square brushed nickel trim




4" Trimless Multiple Head Downlights

- Beam angle 20° standard, 38° and 60° available
- 360° rotation and 15° tilt gimble light source
- Canless module does not require housing

Single Head

← REFLECTOR → DIMMABLE 90° HIGH CRI JA8 TITLE 24 COMPLIANT Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SQM1-TML-4-15W-5CCT-WH-20	120V	15w	1000	50/40/35/30/27K
LED-SQM1-TML-4-15W-5CCT-BLK-20	120V	15w	1000	50/40/35/30/27K

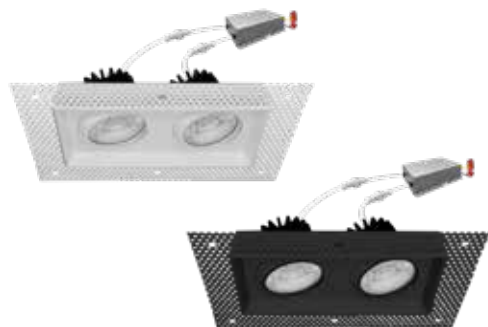

Double Head

Box Qty. 8

Model	Voltage	Watts	Lumens	Color
LED-SQM2-TML-4-30W-5CCT-WH-20	120V	30w	2000	50/40/35/30/27K
LED-SQM2-TML-4-30W-5CCT-BLK-20	120V	30w	2000	50/40/35/30/27K



Triple Head

Box Qty. 8

Model	Voltage	Watts	Lumens	Color
LED-SQM3-TML-4-45W-5CCT-WH-20	120V	45w	3000	50/40/35/30/27K
LED-SQM3-TML-4-45W-5CCT-BLK-20	120V	45w	3000	50/40/35/30/27K



Pre-installed Accessory Model	Description
Add: -20D to Model #	20D Optic
Add: -38D to Model #	38D Optic
Add: -60D to Model #	60D Optic
Add: '-EMB' to model #	Emergency backup (external 25W)





4" Multiple Head Downlights

- Beam angle 38° standard, 24° and 60° available
- 360° rotation and 8° tilt gimble light source
- External j-box & spring mount clips for easy installation
- Canless module does not require housing

Single Head




Model	Voltage	Watts	Lumens	Color
LED-SQM1-4-15W-5CCT-WH	120V	15w	1000	50/40/35/30/27K
LED-SQM1-4-15W-5CCT-BLK	120V	15w	1000	50/40/35/30/27K



Double Head

Box Qty.
8

Model	Voltage	Watts	Lumens	Color
LED-SQM2-4-30W-5CCT-WH	120V	30w	2000	50/40/35/30/27K
LED-SQM2-4-30W-5CCT-BLK	120V	30w	2000	50/40/35/30/27K

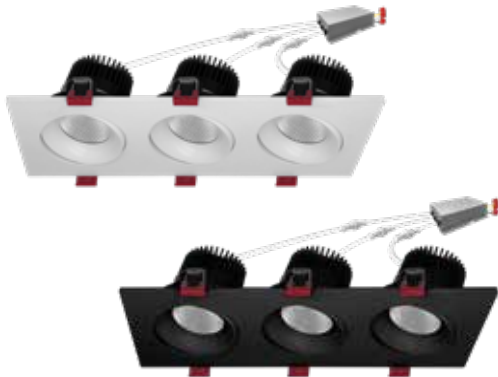

Triple Head

Box Qty.
8

Model	Voltage	Watts	Lumens	Color
LED-SQM3-4-45W-5CCT-WH	120V	45w	3000	50/40/35/30/27K
LED-SQM3-4-45W-5CCT-BLK	120V	45w	3000	50/40/35/30/27K



CUNV-SQM-NC-ICAT
Universal Pre-Mounting Plate
14 3/4" x 11 3/4"

Pre-installed Accessory Model	Description
Add: -20D to Model #	20D Optic
Add: -38D to Model #	38D Optic
Add: -60D to Model #	60D Optic
Add ' -EMB' to model #	Emergency backup (external 25W)

Accessory	Description
CUNV-SQM-NC-ICAT	New construction plate: SQM fixtures

4" / 6" / 8" Commercial Downlight External J-Box

- 0-10V dimmable
- 10ft. & 20ft. extension cords available

5-CCT & 3-Power Select

SELECT SWITCH DIMMABLE 90 HIGH CRI ENERGY STAR Box Qty. 6

NEW
E.T.A. 08/2024

Model	Voltage	Watts	Lumens	Color
LED-CMDEX-4-3M12-5CCT-CUNV	120-347V	12/9/6	See Chart	50/40/35/30/27k
LED-CMDEX-6-3M24-5CCT-CUNV	120-347V	24/16/12	See Chart	50/40/35/30/27k
LED-CMDEX-8-3M30-5CCT-CUNV	120-347V	30/22/16	See Chart	50/40/35/30/27k

5CCT

4-3M12

WATT	LUMENS
6	650
9	900
12	1,100

6-3M24

WATT	LUMENS
12	1,100
16	1,500
24	1,950

8-3M30

WATT	LUMENS
16	1,500
22	2,000
30	2,500

Commercial Downlight Trims

Box Qty. 12

NEW

Accessory	Description
CMDEX-TRIM-4-CSH-WH	4" CMDEX: Clear-specular haze reflector
CMDEX-TRIM-4-BLK	4" CMDEX : Black reflector
CMDEX-TRIM-6-CSH-WH	6" CMDEX: Clear-specular haze reflector
CMDEX-TRIM-6-BLK	6" CMDEX : Black reflector
CMDEX-TRIM-8-CSH-WH	8" CMDEX: Clear-specular haze reflector
CMDEX-TRIM-8-BLK	8" CMDEX : Black reflector

E.T.A. 08/2024


Accessories for CMD-3M Series

NEW


Accessory Model	Description
GR-4-WH	4" Goof ring, inner dim: 4" Outer Dim: 8"
GR-6-WH	6" Goof ring, inner dim: 6.3" Outer Dim: 10.5"
GR-8-WH	8" Goof ring, inner dim: 8" Outer Dim: 12.5"
GR-10-WH	10" Goof ring, inner dim: 9" Outer Dim: 14.1"
JBOX-ALM	Junction box (6 knock-outs)
CUNV-NC-RI-J-JBX	4/6/8/10" Commercial new construction plate with joist bar + J-box
EXT-10FT	10' Extension cable for remote mounting
EXT-20FT	20' Extension cable for remote mounting

E.T.A. 08/2024

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)

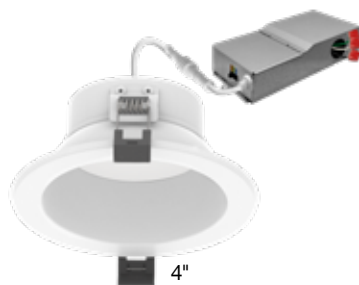

4"

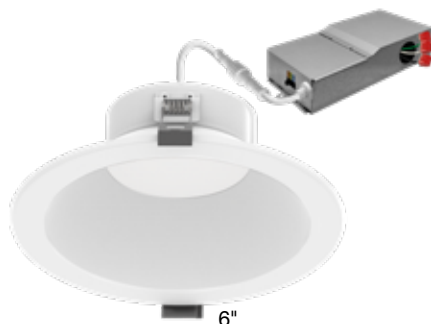


6"




8"



-BLK



-CSH-WH



-GR



CUNV-NC-RI-J-JBX
Universal Construction Plate
21" x 17"



4" / 6" / 8" / 10" Commercial Downlight

- 4" & 6": TRI mode dimming: 0-10V, Triac, ELV down to 5%
- 8" & 10": 0-10V dimmable down to 5%
- 27" Flex whip included on each fixture

5-CCT & 3-Power Select



Model	Voltage	Watts	Lumens	Color
LED-CMD-4-3M19-5CCT-UNV	120-277V	19/14/9	See Chart	50/40/35/30/27k
LED-CMD-6-3M19-5CCT-UNV	120-277V	19/13/9w	See Chart	50/40/35/30/27k
LED-CMD-6-3M30-5CCT-CUNV	120-277V	30/20/15w	See Chart	50/40/35/30/27k
LED-CMD-8-3M29-5CCT-UNV	120-277V	29/23/16.5w	See Chart	50/40/35/30/27k
LED-CMD-8-3M36-5CCT-CUNV	120-277V	22/32/36w	See Chart	50/40/35/30/27k
LED-CMD-10-3M38-5CCT-UNV	120-277V	38/30/21w	See Chart	50/40/35/30/27k

4-3M19		6-3M19	
WATT	LUMENS	WATT	LUMENS
9	750	9	800
14	1,000	14	1,200
19	1,500	19	1,600

6-3M30		8-3M29	
WATT	LUMENS	WATT	LUMENS
15	1,500	16.5	1,500
20	2,000	23	2,000
30	3,000	29	2,500

8-3M36		10-3M38	
WATT	LUMENS	WATT	LUMENS
21	2,500	21	2,000
30	3,500	30	2,500
38	3,900	38	3,300

Wall Wash Trims

- 85° beam angle

Box Qty.
24

Accessory	Description
CMD-4-WASH-WH	4" CMD: Wall wash trim
CMD-6-WASH-WH	6" CMD: Wall wash trim
CMD-8-WASH-WH	8" CMD: Wall wash trim

Trim Accessories for CMD-3M Series


Box Qty.
12

Accessory	Description
CMD-TRIM-4-HZ-SM	4" Clear-specular haze reflector
CMD-TRIM-4-BLK-SM	4" Black reflector
CMD-TRIM-6-HZ-SM	6" Clear-specular haze reflector
CMD-TRIM-6-BLK-SM	6" Black reflector
CMD-TRIM-8-HZ-SM	8" Clear-specular haze reflector
CMD-TRIM-8-BLK-SM	8" Black reflector
CMD-TRIM-10-HZ-SM	10" Clear-specular haze reflector
CMD-TRIM-10-BLK-SM	10" Black reflector

Accessories for CMD-3M Series

Accessory Model	Description
GR-4-WH	4" Goof ring, inner dim: 4" outer dim: 8"
GR-6-WH	6" Goof ring, inner dim: 6.3" outer dim: 10.5"
GR-8-WH	8" Goof ring, inner dim: 8" outer dim: 12.5"
GR-10-WH	10" Goof ring, inner dim: 9" outer dim: 14.1"
JBOX-ALM	Junction box (6 knock-outs)
CUNV-NC-RI-J-JBX	4/6/8/10" Commercial new construction plate with joist bar + J-box
LED-EMB-25W-HV-0/10V	Emergency back up for internal drivers (works with all 0-10V dim or <25W fixtures)

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)

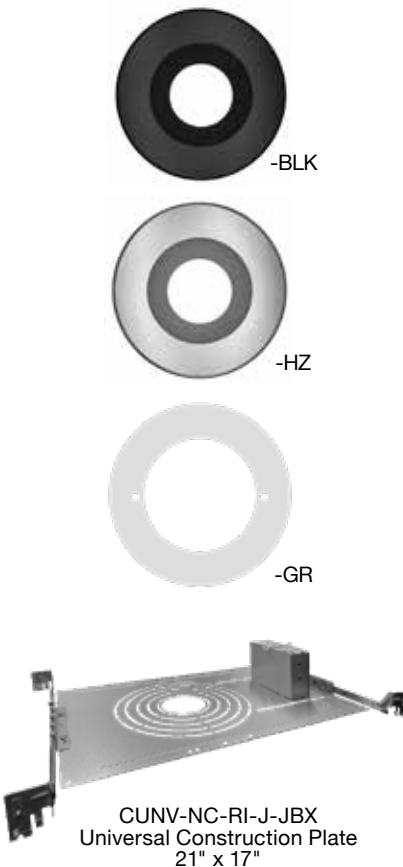



3M20		3M30	
WATT	LUMENS	WATT	LUMENS
10	750	20	1,700
12	1,000	24	2,000
20	1,500	30	2,400

3M55	
WATT	LUMENS
32	3,200
40	4,000
55	5,000



-CSH



-WH





-BLK



-SQ



GR

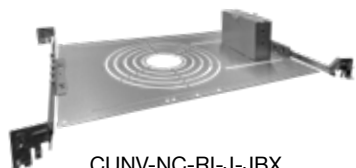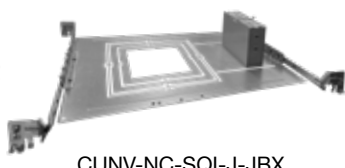J-BOX ALM
4.46" W x 3.04" D x 1.37" HCUNV-NC-RI-J-JBX
21.2" W x 12" D x 1.6" H
(Assembly Required)CUNV-NC-SQI-J-JBX
21.2" W x 12" D x 1.6" H
(Assembly Required)

4" / 6" / 8" / 10" Commercial Downlight Module

- Choose between 3 wattages
- 24°-45° field adjustable beam angle, in 5° increments
- Must purchase trim for each module
- 4" trim is only compatible with 3M20, 3M30 only

5-CCT & Single CCT w/ 3-Power Select



Model	Voltage	Watts	Lumens	Color
LED-CADM-3M20-5CCT-UNV	120-277V	20/12/10w	See Chart	50/40/35/30/27K
LED-CADM-3M30-5CCT-UNV	120-277V	30/24/20w	See Chart	50/40/35/30/27K
LED-CADM-3M55-30K-UNV	120-277V	55/40/32w	See Chart	3000k
LED-CADM-3M55-35K-UNV	120-277V	55/40/32w	See Chart	3500k
LED-CADM-3M55-40K-UNV	120-277V	55/40/32w	See Chart	4000k



4" / 6" / 8" / 10" Commercial Downlight Trims

Box Qty.
6

Model	Description
CADM-4-CSH	4" Clear-specular haze reflector/white trim (3M20, 3M30 & 3M35 only)
NEW CADM-4-CSH-BLK	4" Clear-specular haze reflector/black trim (3M20, 3M30 & 3M35 only)
CADM-4-CSH-SQ	4" Clear-specular haze reflector/white square trim (3M20, 3M30 & 3M35 only)
CADM-4-WH	4" White reflector + trim (3M20 & 3M35 only)
CADM-6-CSH	6" Clear-specular haze reflector/white trim
NEW CADM-6-CSH-BLK	6" Clear-specular haze reflector/black trim
CADM-6-CSH-SQ	6" Clear-specular haze reflector/white square trim (3M20, 3M30 & 3M35 only)
CADM-6-WH	6" White reflector + trim
NEW CADM-8-CSH-BLK	8" Clear-specular haze reflector/black trim
CADM-8-CSH-SQ	8" Clear-specular haze reflector/white square trim (3M20, 3M30 & 3M35 only)
CADM-8-WH	8" White reflector + trim
CADM-10-CSH	10" Clear-specular haze reflector/white trim
CADM-10-WH	10" White reflector + trim

* Custom color trims are available

Accessories for CADM Series

Accessory Model	Description
GR-4-WH	4" Goof ring, inner dim: 4.9" outer dim: 6.5"
GR-6-WH	6" Goof ring, inner dim: 6.3" outer dim: 10.5"
GR-8-WH	8" Goof ring, inner dim: 8" outer dim: 12.5"
GR-10-WH	10" Goof ring, inner dim: 9" outer dim: 14.1"
JBOX-ALM	Junction box (6 knock-outs)
NEW CUNV-NC-RI-J-JBX	New construction plate: 4" 6" 8" 10" CADM or CMD round
NEW CUNV-NC-SQI-J-JBX	New construction plate: 4" 6" 8" CADM square
CUNV-NC-ICAT-7H	New construction plate: 1" 2" 3" 3.5" 4" 5" 6" canless downlights
CUNV-JBX-RI-XL	Universal construction plate: 2" 3" 3.5" 4" 5" 6" canless downlights

24°-45°
Adjustable
Beam AngleTwist-On for
Easy Installation

4" SnapTrim Baffle Downlight

- Baffled trim design
- Integrated j-box & spring mount clips for easy installation
- Compatible with most dimmers (e.g. Lutron DVCL-153P)
- Canless module does not require housing

5-CCT Select

← DIMMABLE → DIMMABLE IP67 WATER 90+ HIGH CRI JA8 TITLE 24 ENERGY STAR Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-4B-11W-5CCT-WH	120V	11w	750	50/40/35/30/27K

Final Production



6" SnapTrim Baffle Downlight

5-CCT Select

Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-6B-15W-5CCT-WH	120V	14w	1000	50/40/35/30/27K

Final Production

4" SnapTrim Downlight

Single CCT

Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-4B-7W-30K	120V	7w	550	3000k
LED-DLJBX-4B-7W-40K	120V	7w	550	4000k
LED-DLJBX-4B-7W-50K	120V	7w	550	5000k

Final Production



6" SnapTrim Downlight

Single CCT

Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-6B-9W-27K	120V	9w	650	2700k

Final Production





4"



5/6"



Smart Downlight RGB+W

- RGB+W technology: Tunable from 27K-50K + RGB colors
- Dimmable and controllable via bluetooth from your smartphone
- Music mode: RGB colors dance to music
- Suitable for retrofit or new construction
- Set timing schedule and group fixtures together
- Connect to multiple phones
- Control your lights with WIFI

4" Smart Retrofit Kit Downlight RGB+W

Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-ECODL-4-10W-RGB+W	120V	10.5w	800	RGB+W

5/6" Smart Retrofit Kit Downlight RGB+W

Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-ECODL-5/6-12W-RGB+W	120V	12w	1000	RGB+W

Pre-installed Accessory Model	Description
Add '-EMB-' to model #	Emergency backup (external 25W)

4" SnapTrim Round Downlight RGB+W

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-4R-9W-RGB+W-WH	120V	9w	600	RGB+W

6" SnapTrim Round Downlight RGB+W

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-6R-12W-RGB+W-WH	120V	12w	1000	RGB+W

6" Cusp Disk RGB+W

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-CDSK-6-15W-RGB+W-WH	120V	15w	1000	RGB+W

7" Round Slimline Disk RGB+W

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-SLDSKR-7-15W-RGB+W-WH	120V	15w	1000	RGB+W

Envision
CONNECTDownload on
APP STORE

COLOR



WHITE



SCENE



MUSIC RHYTHM

4" & 5/6" RDL Downlights

Internal J-Box

- Canless model, no housing required
- Triac dimmable down to 5%



Model	Voltage	Watts	Lumens	Color
LED-RDL-JBX-4-15W-5CCT-WH-SM	120V	15w	1125lm	50/40/35/30/27K
LED-RDL-JBX-5/6-15W-5CCT-WH-SM	120V	15w	1125lm	50/40/35/30/27K



External J-Box

- Canless model, no housing required
- Triac dimmable down to 5%

Box Qty.
24

Model	Voltage	Watts	Lumens	Color
LED-RDL-EX-4-3P12-5CCT-WH-SM	120V	12/10/8w	See Chart	50/40/35/30/27K
LED-RDL-EX-6-3P18-5CCT-WH-SM	120V	18/15/12w	See Chart	50/40/35/30/27K



WATT	LUMENS
8	560
10	700
12	960

WATT	LUMENS
12	700
15	1,100
18	1,500

Retrofit Kit Models

- Compatible with 4" or 6" housings
- Triac dimmable down to 5%
- Title 24 connector (E26 adapter included)

Box Qty.
RDL-4- 60
RDL-5/6- 96

Model	Voltage	Watts	Lumens	Color
LED-RDL-4-PC-CCT-WH-SM	120V	12/10/8w	See Chart	50/40/35/30/27K
LED-RDL-5/6-PC-CCT-WH-SM	120V	18/15/12w	See Chart	50/40/35/30/27K



WATT	LUMENS
8	560
10	680
12	800

WATT	LUMENS
12	900
15	1,100
18	1,300

Retrofit Kit Models: Multi-Volt

- Compatible with 4" or 6" housings
- 0-10V dimmable down to 5%
- Title 24 connector (E26 adapter included)

Box Qty.
RDL-4- 60
RDL-5/6- 36


Model	Voltage	Watts	Lumens	Color
LED-RDL-4-3P12-5CCT-UNV-0/10V	120-277V	12/10/8w	See Chart	50/40/35/30/27K
LED-RDL-5/6-3P18-5CCT-UNV-0/10V	120-277V	18w/14/10w	See Chart	50/40/35/30/27K



WATT	LUMENS
8	600
10	850
12	1,100

WATT	LUMENS
10	700
14	1,100
18	1,500

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)
RDL-5/6CLIP	Tension clip for 5/6" downlight. For use in old housings



Watt Selection
5-CCT Selection



RDL-6CLIP

DISPLAY

Display featuring 10 of our canless downlights. Place a \$3,000+ stock orders of downlights and get a free counter display.



BLK-SM

BZ-SM

BN-SM



BLK-BFL

BZ-BFL

BN-BFL

RDL Trims

Accessory Model	Description
RDL-TRIM-4-BLK-SM	4" Black trim smooth
RDL-TRIM-4-BZ-SM	4" Bronze trim smooth
RDL-TRIM-4-BN-SM	4" Brushed nickel trim smooth
RDL-TRIM-4-WH-BFL	4" White trim baffle
RDL-TRIM-4-BLK-BFL	4" Black trim baffle
RDL-TRIM-4-BZ-BFL	4" Bronze trim baffle
RDL-TRIM-4-BN-BFL	4" Brushed nickel trim baffle
RDL-TRIM-5/6-BLK-SM	5/6" Black trim smooth
RDL-TRIM-5/6-BZ-SM	5/6" Bronze trim smooth
RDL-TRIM-5/6-BN-SM	5/6" Brushed nickel trim smooth
RDL-TRIM-5/6-WH-BFL	5/6" White trim baffle
RDL-TRIM-5/6-BLK-BFL	5/6" Black trim baffle
RDL-TRIM-5/6-BRZ-BFL	5/6" Bronze trim baffle
RDL-TRIM-5/6-BN-BFL	5/6" Brushed nickel trim baffle

Final
Production

4" ADL Retrofit Kit Downlight

- Fits into standard 4" recessed can
- Title 24 connector (E26 adapter included)
- Compatible with most dimmers down to 5%

Single CCT

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-ADL-4-10W-40K	120V	10w	665	3000k
LED-ADL-4-10W-50K	120V	10w	665	4000k



Square Retrofit Kit ADL Downlight

- Selectable 5CCT (27/30/35/40/50K)
- Title 24 connector (E26 adapter included)
- Compatible with most dimmers down to 5%

4" Model

Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-DL-SQ-4-11W-5CCT	120V	11w	750	50/40/35/30/27k



4" Trims

Box Qty. 50

Accessory Model	Description
DL-SQ-4-TRIM-BLK-SM	DL-SQ-4 black smooth trim
DL-SQ-4-TRIM-BZ-SM	DL-SQ-4 bronze smooth trim



-BLK



-BZ



6" Model

Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-DL-SQ-6-14W-5CCT	120V	14w	1100	50/40/35/30/27k



6" Trims

Box Qty. 50

Accessory Model	Description
DL-SQ-6-TRIM-BLK-SM	DL-SQ-6 black smooth trim
DL-SQ-6-TRIM-BZ-SM	DL-SQ-6 bronze smooth trim



-BLK



-BZ



5-CCT

Selectable Switch

Switch between 27, 30, 35, 40, and 50K color temperatures with the flip of a switch, located on the back of the fixture.





4" 12V Innovate Retrofit Kit Downlight

- Easy-mount spring clips allow tool-less retrofit installation
- Heavy-duty die-cast aluminum heatsink
- Only ideal with magnetic transformers
- Dimmable with low voltage dimmers
- Uses standard MR16 connector

5-CCT Select

Box Qty:
24

Model	Voltage	Watts	Lumens	Color
LED-EDL-4-10W-5CCT-WH-12V	12V	10w	600	50/40/35/30/27K



5-CCT Select

Box Qty:
24

NEW

Model	Voltage	Watts	Lumens	Color
LED-EDL-SQ-4-10W-5CCT-WH-12V	12V	10w	600	50/40/35/30/27K



Adjustable Retrofit Kit Downlight

- Adjustable fixture allows 360° free rotation, and 60° pitch angle
- 5CCT Color Selectable (27/30/35/40/50K)
- Title 24 connector (E26 adapter included)

4" Models

Box Qty:
24

Model	Voltage	Watts	Lumens	Color
LED-DL-ADJ-4-10W-5CCT-WH	120V	10w	750	50/40/35/30/27k
LED-DL-ADJ-4-10W-5CCT-BLK	120V	10w	750	50/40/35/30/27k



5/6" Models

Box Qty:
16

Model	Voltage	Watts	Lumens	Color
LED-DL-ADJ-5/6-16.5W-5CCT-WH	120V	16.5w	1200	50/40/35/30/27k
LED-DL-ADJ-5/6-16.5W-5CCT-BLK	120V	16.5w	1200	50/40/35/30/27k




5/6" Models

Box Qty:
16

Model	Voltage	Watts	Lumens	Color
LED-DL-ADJ-5/6-16.5W-WW	120V	16.5w	1200	3000k

Final
Production



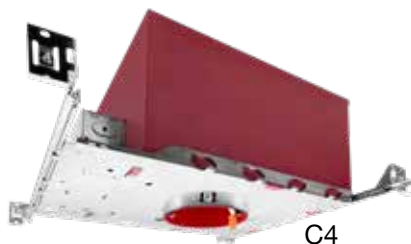

C4

5-7 Day
Lead Time

C6

LED Cans (IC-Rated)

- Features Title 24 quick connect for LED trims
- 0/10V: Made to order, compatible with 0-10V fixtures

Fire-Rated Models

 Box Qty.
4

Model	Voltage	Description
C4-NC-ICAT-LED-FR	120-277V	4" Fire rated IC can (new construction)
C6-NC-ICAT-LED-FR	120-277V	6" Fire rated IC can (new construction)
C4-NC-ICAT-LED-FR-0/10V	120-277V	4" Fire rated IC can (new construction)
C6-NC-ICAT-LED-FR-0/10V	120-277V	6" Fire rated IC can (new construction)



C4-NC-ICAT-LED

5-7 Day
Lead Time


C6-NC-ICAT-LED

Regular Models

 Box Qty.
6

Model	Voltage	Description
C4-NC-ICAT-LED	120-277V	4" IC rated can (new construction)
C4-RM-ICAT-LED	120-277V	4" IC rated can (remodel)
C6-NC-ICAT-LED	120-277V	6" IC rated can (new construction)
C6-RM-ICAT-LED	120-277V	6" IC rated can (remodel)
C4-NC-ICAT-LED-0/10V	120-277V	4" IC rated can (new construction)
C4-RM-ICAT-LED-0/10V	120-277V	4" IC rated can (remodel)
C6-NC-ICAT-LED-0/10V	120-277V	6" IC rated can (new construction)
C6-RM-ICAT-LED-0/10V	120-277V	6" IC rated can (remodel)

0-10V Connection

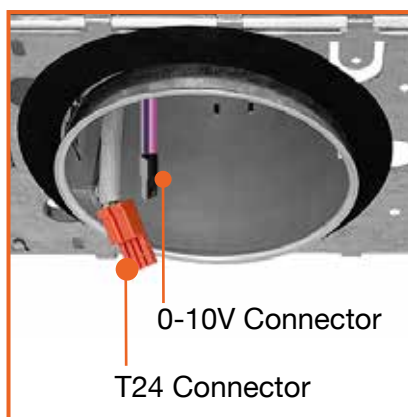

C4-RM-ICAT-LED



C6-RM-ICAT-LED

- Ultra thin, easy to install, and perfect for any kitchens, corridors
- Compatible with 30/40 junction box or recessed can installation
- Super thin modern frame



WH



BLK



BN



Shown with E26 Base



WH



BLK



BN



7" & 9"

Shown with E26 Base



LED-EMB-25W-HV-0/10V

Trimless Surface Downlight

5" 5-CCT Select

90 HIGH CRI
JAB TITLE 24 COMPLIANT
Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-TSM-5R-12W-5CCT-WH	120V	12w	850	50/40/35/30/27K

5" Single CCT

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-TSM-5R-12W-30K-BLK	120V	12w	850	3000k
LED-TSM-5R-12W-30K-BN	120V	12w	850	3000k

7" 5-CCT Select

Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-TSM-7R-15W-5CCT-WH	120V	15w	1100	50/40/35/30/27K

7" Single CCT

Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-TSM-7R-15W-30K-BLK	120V	15w	1100	3000k
LED-TSM-7R-15W-30K-BN	120V	15w	1100	3000k

7" Emergency Backup

Box Qty. 20

Model	Voltage	Watts	Lumens
TSM-7R-EMB-UNV	120V	15w	1100
TSM-7R-EMB-UNV-EMPTY	-	-	-

9" 5-CCT Select

Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-TSM-9R-18W-5CCT-WH	120V	18w	1300	50/40/35/30/27K

9" Single CCT

Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-TSM-9R-18W-30K-WH	120V	18w	1300	3000k
LED-TSM-9R-18W-30K-BLK	120V	18w	1300	3000k
LED-TSM-9R-18W-30K-BN	120V	18w	1300	3000k

9" Emergency Backup

Box Qty. 10

Model	Voltage	Watts	Lumens
TSM-9R-EMB-UNV	120V	18w	1300
TSM-9R-EMB-UNV-EMPTY	-	-	-

11" 5-CCT Select

Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-TSM-11R-20W-5CCT-WH	120V	20w	1500	50/40/35/30/27K

11" Single CCT

Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-TSM-11R-20W-30K-WH	120V	20w	1500	3000k
LED-TSM-11R-20W-30K-BLK	120V	20w	1500	3000k
LED-TSM-11R-20W-30K-BN	120V	20w	1500	3000k

Accessory Model	Description
LED-EMB-25W-HV-0/10V	Emergency back up for internal drivers (works with all 0-10V dim or <25W fixtures) single sided flex

Slim Surface Downlight: PIR + Daylight Sensor

- Compatible with 30/40 junction box or recessed can installation
- Title 24 connector (E26 adapter included)

Triac Dimmable










NEW


Model	Voltage	Watts	Lumens	Color
LED-SLDSKR-5-12W-5CCT-WH-BMS	120-277V	12w	750	50/40/35/30/27K
LED-SLDSKR-7-13W-5CCT-WH-BMS	120-277V	13w	1,050	50/40/35/30/27K
LED-SLDSKR-12-23W-5CCT-WH-BMS	120-277V	23w	1950	50/40/35/30/27K

5CCT

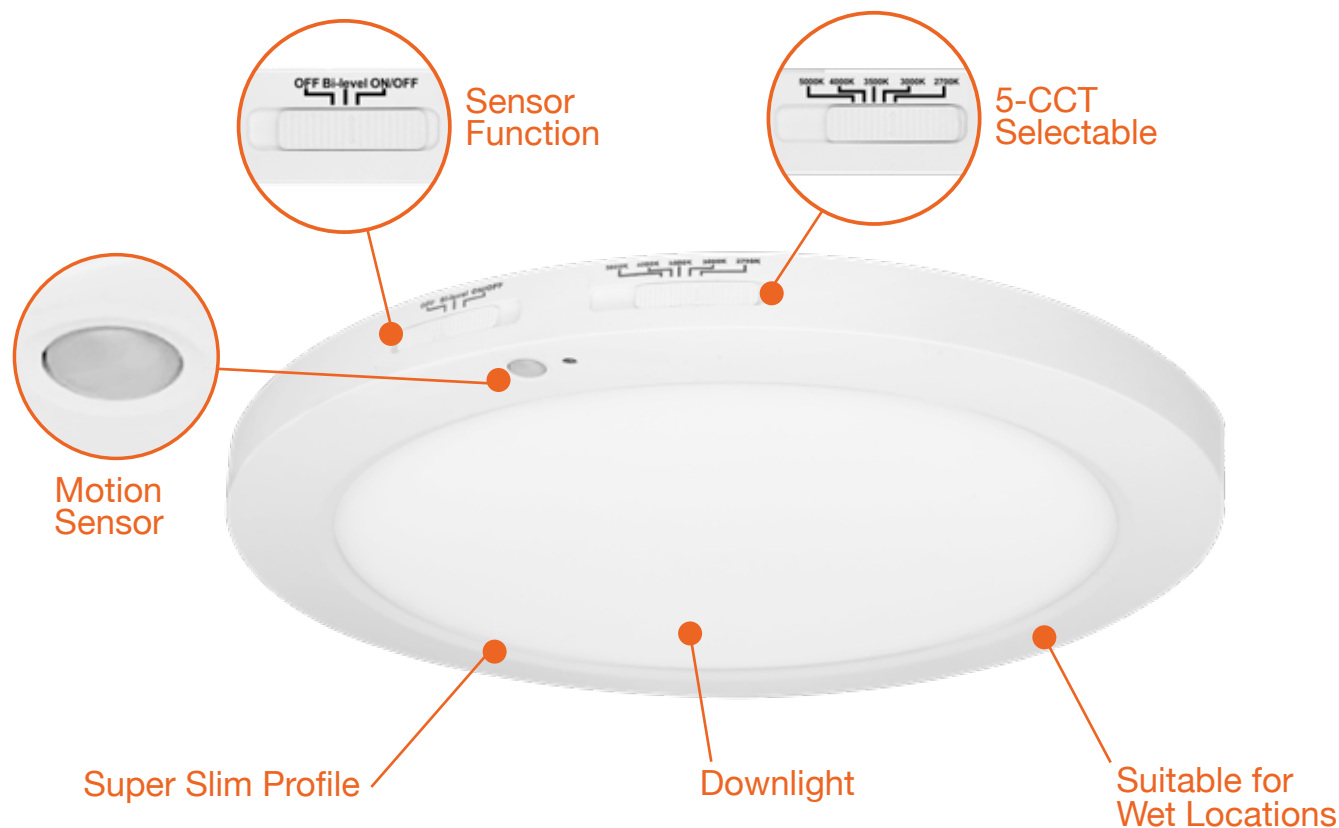

3 SENSOR SETTINGS

- OFF: Sensor will be inactive
- ON/OFF: Fixture will turn off after 1 minute
- Bi-Level: Fixture will dim to 30% after 1 minute, never turns off

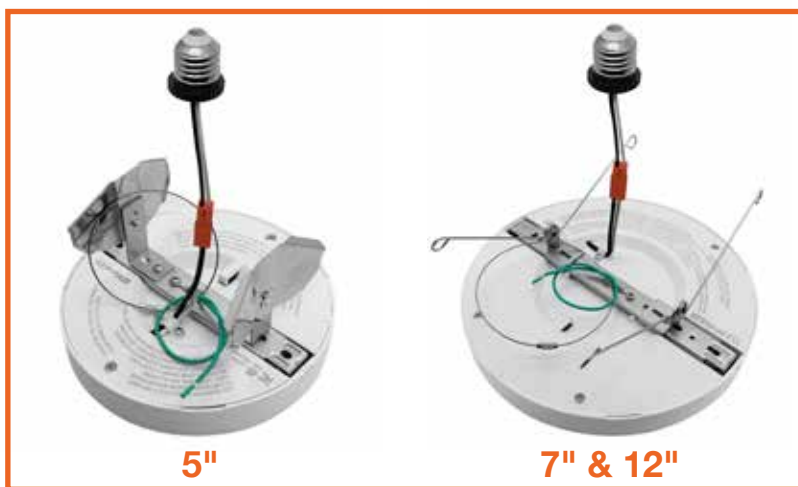

RETROFIT KIT CAN CONVERTER

Slim Surface Downlight: Round

- Edge-lit design provides even light distribution
- Compatible with 30/40 junction box or E26 recessed can installation
- 0-10V version only 40
- Wet location rated
- Newly updated CCT switch, allows for installation into pancake J-box

Box Qty.
5- 20
7- 20
12- 6
15- 5
19- 4

Triac Dimmable



Model	Voltage	Watts	Lumens	Color
LED-SLDSKR-5-10W-5CCT-WH	120V	10w	650	50/40/35/30/27K
LED-SLDSKR-7-15W-5CCT-WH	120V	15w	1000	50/40/35/30/27K
LED-SLDSKR-12-22W-5CCT-WH	120V	22w	1400	50/40/35/30/27K
LED-SLDSKR-12-24W-5CCT-WH	120V	24w	1800	50/40/35/30/27K
LED-SLDSKR-15-30W-5CCT-WH	120V	30w	2000	50/40/35/30/27K
LED-SLDSKR-15-30W-5CCT-BLK	120V	30w	2000	50/40/35/30/27K
LED-SLDSKR-15-30W-5CCT-BN	120V	30w	2000	50/40/35/30/27K
LED-SLDSKR-19-35W-TRI-WH	120V	35w	2200	50/40/30k
LED-SLDSKR-19-35W-5CCT-WH	120V	35w	2200	50/40/35/30/27K
LED-SLDSKR-19-35W-5CCT-BLK	120V	35w	2200	50/40/35/30/27K
LED-SLDSKR-19-35W-5CCT-BN	120V	35w	2200	50/40/35/30/27K
NEW LED-SLDSKR-24-40W-5CCT-WH	120V	40w	2700	50/40/35/30/27K
NEW LED-SLDSKR-24-40W-5CCT-BL	120V	40w	2700	50/40/35/30/27K

0-10V 120-277V

Box Qty.
5- 20 7- 20
12- 6

Model	Voltage	Watts	Lumens	Color
LED-SLDSKR-5-10W-5CCT-WH-0/10V	120-277V	10w	650	50/40/35/30/27K
LED-SLDSKR-7-15W-5CCT-WH-0/10V	120-277V	15w	1000	50/40/35/30/27K
LED-SLDSKR-12-22W-5CCT-WH-0/10V	120-277V	22w	1450	50/40/35/30/27K
LED-SLDSKR-15-30W-5CCT-WH-0/10V	120-277V	30w	2000	50/40/35/30/27K

Round Trim Options

Box Qty.
20

Model	Description
SLDSKR-5-TRIM-BLK	5" Round snap on trim black
SLDSKR-5-TRIM-BRZ	5" Round snap on trim bronze
SLDSKR-5-TRIM-BNI	5" Round snap on trim brushed nickel
SLDSKR-7-TRIM-BLK	7" Round snap on trim black
SLDSKR-7-TRIM-BRZ	7" Round snap on trim bronze
SLDSKR-7-TRIM-BNI	7" Round snap on trim brushed nickel
SLDSKR-12-TRIM-BLK	12" Round snap on trim black
SLDSKR-12-TRIM-BRZ	12" Round snap on trim bronze
SLDSKR-12-TRIM-BNI	12" Round snap on trim brushed nickel

Round Accessories

Box Qty.
7- 20
12- 6

Accessory Model	Description
SLDSKR-7-EMB-UNV	7" Round EM backup for all models
SLDSKR-7-EMB-EMPTY-UNV	7" Round backup empty body for all models
SLDSKR-12-EMB-UNV	12" Round EM backup for all models
SLDSKR-12-EMB-EMPTY-UNV	12" Round backup empty body for all models



WH



BLK




BN




BN

BLK

BZ



EMB-UNV



EMB-EMPTY-UNV



5"



7"

Shown with E26 Base




12"/15"/19"

2'/4'/6' Pendant Stem Mount

Box Qty.
6

NEW

Accessory Model	Description
STM-JBX-6-WH	Stem pendant mount for surface mount fixtures
STM-JBX-6-BLK	Stem pendant mount for surface mount fixtures

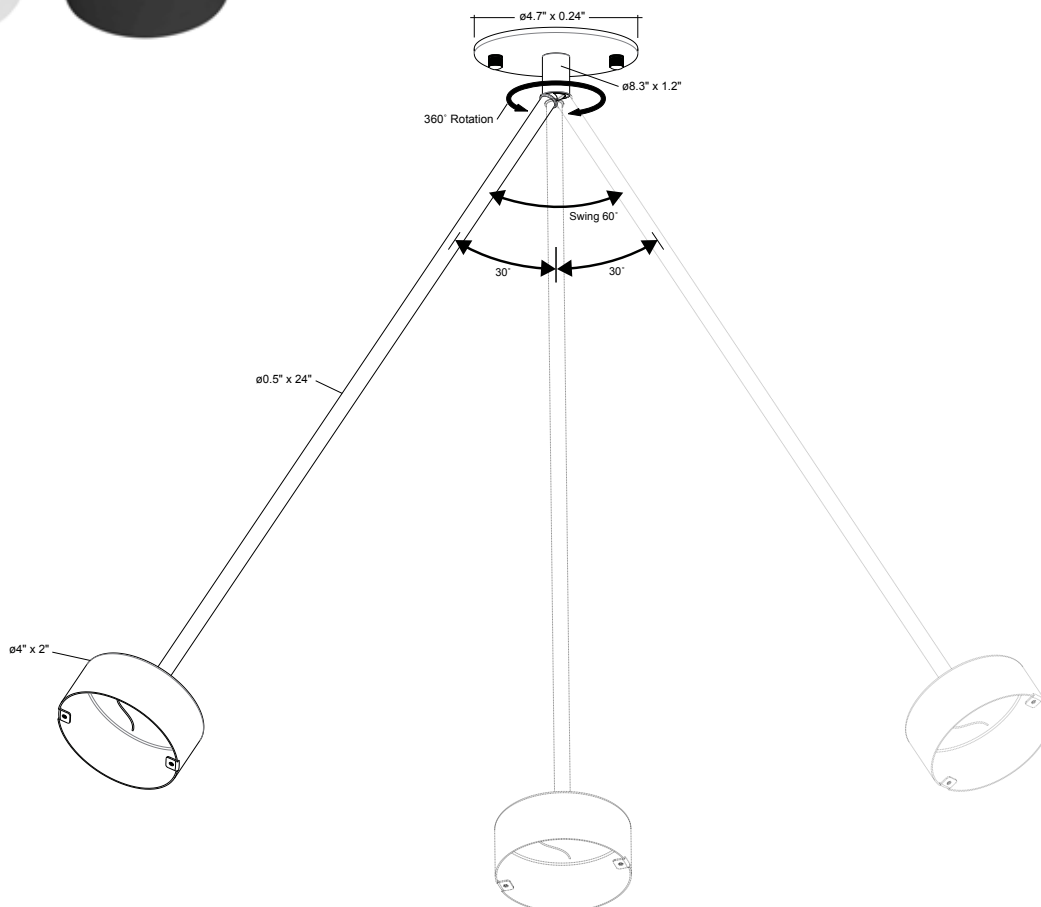



5"

Final Production




7"

Final Production



12"



-BLK



-BNI



-BRZ

Slim Surface Downlight: Square

- Edge-lit design provides even light distribution
- Compatible with 30/40 junction box or E26 recessed can installation
- - 0-10V version only 40
- Wet location rated
- Newly updated CCT switch, allows for installation into pancake J-box

Triac-Dimmable



Model	Voltage	Watts	Lumens	Color
LED-SLDSKSQ-5-10W-5CCT-WH	120V	10w	650	50/40/35/30/27K
LED-SLDSKSQ-5-10W-TRI	120V	10w	650	50/40/30k
LED-SLDSKSQ-7-15W-5CCT-WH	120V	15w	1000	50/40/35/30/27K
LED-SLDSKSQ-7-15W-TRI	120V	15w	1000	50/40/30k
LED-SLDSKSQ-12-22W-5CCT-WH	120V	22w	1450	50/40/35/30/27K

5CCT

3CCT

0-10V 120-277V

Box Qty.
20


Model	Voltage	Watts	Lumens	Color
LED-SLDSKSQ-5-10W-30K-WH-0/10V	120-277V	10w	650	3000k
LED-SLDSKSQ-5-10W-5CCT-WH-0/10V	120-277V	10w	650	50/40/35/30/27K
LED-SLDSKSQ-7-15W-5CCT-WH-0/10V	120-277V	15w	1000	50/40/30k
LED-SLDSKSQ-7-15W-TRI-0/10V	120-277V	15w	1000	50/40/30k

5CCT

3CCT

Square Trim Options

Model	Description
SLDSKSQ-5-TRIM-BLK	5" Square snap on trim black
SLDSKSQ-5-TRIM-BRZ	5" Square snap on trim bronze
SLDSKSQ-5-TRIM-BNI	5" Square snap on trim brushed nickel
SLDSKSQ-7-TRIM-BLK	7" Square snap on trim black
SLDSKSQ-7-TRIM-BRZ	7" Square snap on trim bronze
SLDSKSQ-7-TRIM-BNI	7" Square snap on trim brushed nickel
SLDSKSQ-12-TRIM-BLK	12" Square snap on trim black
SLDSKSQ-12-TRIM-BRZ	12" Square snap on trim bronze
SLDSKSQ-12-TRIM-BNI	12" Square snap on trim brushed nickel

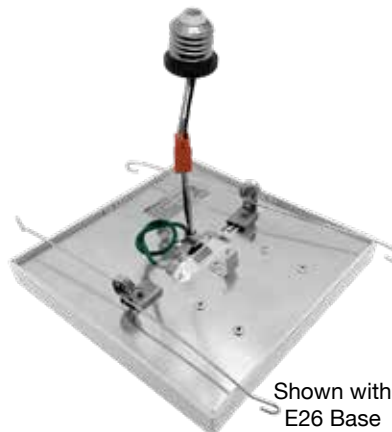

Shown with
E26 Base



-BZ


-BN

Shown with
E26 Base

-BLK

-BZ

-BN

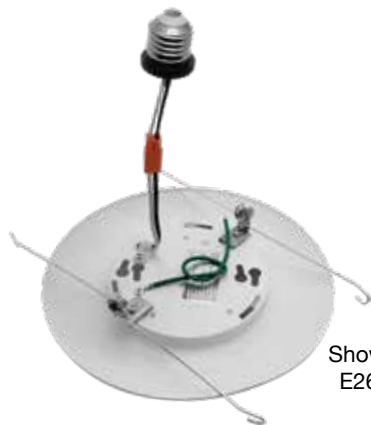Shown with
E26 Base

4" Cusp Disk Downlight

- Compatible with 30/40 junction box or E26 recessed can installation
- Fixture is damp rated. Silicone sealant required for wet location
- Newly updated CCT switch, allows for installation into pancake J-box

5-CCT Select

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-CDSK-4-10W-5CCT-WH	120V	10w	650	50/40/35/30/27K
LED-CDSK-4-10W-5CCT-BZ	120V	10w	650	50/40/35/30/27K

5CCT

3-CCT Select

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-CDSK-4-10W-TRI-BN	120V	10w	650	50/40/30k

3CCT

6" Cusp Disk Downlight

5-CCT Select

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-CDSK-6-15W-5CCT-WH	120V	15w	1000	50/40/35/30/27K
LED-CDSK-6-15W-5CCT-BZ	120V	15w	1000	50/40/35/30/27K
LED-CDSK-6-15W-5CCT-BLK	120V	15w	1000	50/40/35/30/27K

5CCT

3-CCT Select

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-CDSK-6-15W-TRI-BN	120V	15w	1000	50/40/30k

3CCT

Single CCT

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-CDSK-6-15W-30K	120V	15w	1000	3000k

8" Cusp Disk CCT Select

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-CDSK-8-27W-5CCT-WH	120V	27w	2100	50/40/35/30/27K

5CCT



4" Cusp Disk w/ PIR Sensor

- Motion sensor turns off after one minute
- Compatible with 30/40 junction box or E26 recessed can installation
- Fixture is damp rated. Silicone sealant required for wet location
- This item is not dimmable
- Newly updated CCT switch, allows for installation into pancake J-box
- Closet rated

5-CCT Select

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-CDSK-4-10W-5CCT-WH-PIR	120V	10w	650	50/40/35/30/27K



Shown with E26 Base

3-CCT Select

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-CDSK-4-10W-TRI-WH-PIR	120V	10w	650	50/40/30k



6" Cusp Disk w/ PIR Sensor

5-CCT Select

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-CDSK-6-15W-5CCT-WH-PIR	120V	15w	1000	50/40/35/30/27K



Cylinder Downlight: Snaptrim Model

- Rotation 350° (horizontal) adjustable to 90° (vertical)
- Canless module does not require housing

5-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-3-CYL-ADJ-5CCT-WH	120V	15w	1000	50/40/35/30/27K
LED-DLJBX-3-CYL-ADJ-5CCT-BL	120V	15w	1000	50/40/35/30/27K



Up to 90° Angle





ATH-SM

Track Lights

- Rotation 350° (horizontal) adjustable to 90° (vertical)
- Interchangeable beam angle options
- Compatible with 3-wire single circuit track systems (H-Type)
- COB chip and PMMA lens



Box Qty.
30D- 24
36D- 12

5-CCT Select

Model	Voltage	Watts	Lumens	Color
LED-ATH-10W-5CCT-30D-WH	120V	10w	1000	50/40/35/30/27K
LED-ATH-10W-5CCT-30D-BLK	120V	10w	1000	50/40/35/30/27K
LED-ATH-20W-5CCT-36D-WH	120V	20w	2000	50/40/35/30/27K
LED-ATH-20W-5CCT-36D-BLK	120V	20w	2000	50/40/35/30/27K
LED-ATH-30W-5CCT-36D-WH	120V	30w	3000	50/40/35/30/27K
LED-ATH-30W-5CCT-36D-BLK	120V	30w	3000	50/40/35/30/27K



Optic Lens

Box Qty.
12


Model	Description
ATH-10W-24D	Track heads: ACRY-line 24D optic
ATH-10W-60D	Track heads: ACRY-line 60D optic
ATH-20W-24D	Track heads: ACRY-line 24D optic
ATH-20W-60D	Track heads: ACRY-line 60D optic
ATH-30W-24D	Track heads: ACRY-line 24D optic
ATH-30W-60D	Track heads: ACRY-line 60D optic
Replace: -24D to Model #	Factory installed 24D optic
Replace: -60D to Model #	Factory installed 60D optic

Single Circuit 3-Wire Track

Model	Description
TS3-2FT-SM-WH	2' Track single circuit 3-wire
TS3-2FT-SM-BL	2' Track single circuit 3-wire
TS3-4FT-SM-WH	4' Track single circuit 3-wire
TS3-4FT-SM-BL	4' Track single circuit 3-wire
TS3-8FT-SM-WH	8' Track single circuit 3-wire
TS3-8FT-SM-BL	8' Track single circuit 3-wire

Track Accessories

Model	Description
TS3-SM-LIVE-WH	Live end: Required to start a run
TS3-SM-LIVE-BL	Live end: Required to start a run
TS3-SM-END-WH	End cap: Required to end a run
TS3-SM-END-BL	End cap: Required to end a run
TS3-SM-MJ-WH	Mini joiner: Low profile joiner for two straight track sections
TS3-SM-MJ-BL	Mini joiner: Low profile joiner for two straight track sections
TS3-SM-SC-WH	Straight connector: Connect two track sections end to end with a center
TS3-SM-SC-BL	Straight connector: Connect two track sections end to end with a center
TS3-SM-L-WH	L-Connector: Connect two track sections at a right angle
TS3-SM-L-BL	L-Connector: Connect two track sections at a right angle
TS3-SM-T-WH	T-Connector: Connect two track sections at a T angle
TS3-SM-T-BL	T-Connector: Connect two track sections at a T angle
TS3-SM-X-WH	X-Connector: Connect two track sections at an cross angle
TS3-SM-X-BL	X-Connector: Connect two track sections at an cross angle
TS3-SM-FLX-WH	Flexible Connector: Connect two track sections at any angle up to 90°
TS3-SM-FLX-BL	Flexible Connector: Connect two track sections at any angle up to 90°
TS3-SM-FC-WH	Floating Canopy: Track can be connected to existing outlet box along the track.
TS3-SM-FC-BL	Floating Canopy: Track can be connected to existing outlet box along the track.
ATH-SM	Track Heads: ACRY-line surface mount

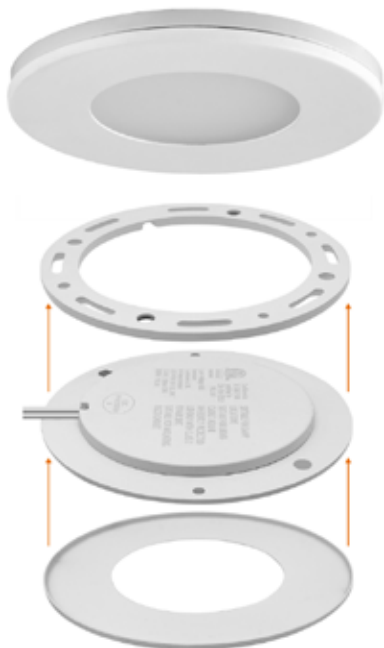

Undercabinet Puck Light

- Mounting options include either recessed or surface mounted
- Embedded magnets allow for easily interchangeable face plate
- Split-wire connectors allow easy daisy-chaining of fixtures
- Dimmable with electronic constant voltage transformer. Do not use magnetic system.
- 5-100% dimming with compatible electronic dimming drivers (See CV drivers)

Single CCT

Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-PCK-3W-27K-12V	12V	3w	300	2700k
LED-PCK-3W-30K-12V	12V	3w	300	3000k
LED-PCK-3W-40K-12V	12V	3w	300	4000k
LED-PCK-3W-50K-12V	12V	3w	300	5000k
LED-PCK-3W-27K-24V	24V	3w	300	2700k
LED-PCK-3W-30K-24V	24V	3w	300	3000k



-BLK

Undercabinet Puck Light Accessories

Box Qty. 10

Model	Description
LED-PCK-TRIM-BRZ	Undercabinet puck trim (bronze)
LED-PCK-TRIM-BLK	Undercabinet puck trim (black)
LED-PCK-TRIM-SL	Undercabinet puck trim (silver)
LED-PCK-TRIM-BNI	Undercabinet puck trim (nickel)
LED-PCK-TRIM-CP	Undercabinet puck trim (copper)
ET-12V-12W	12W undercabinet transformer



-BZ



-CP



-NCK




-SLVR



Transformer



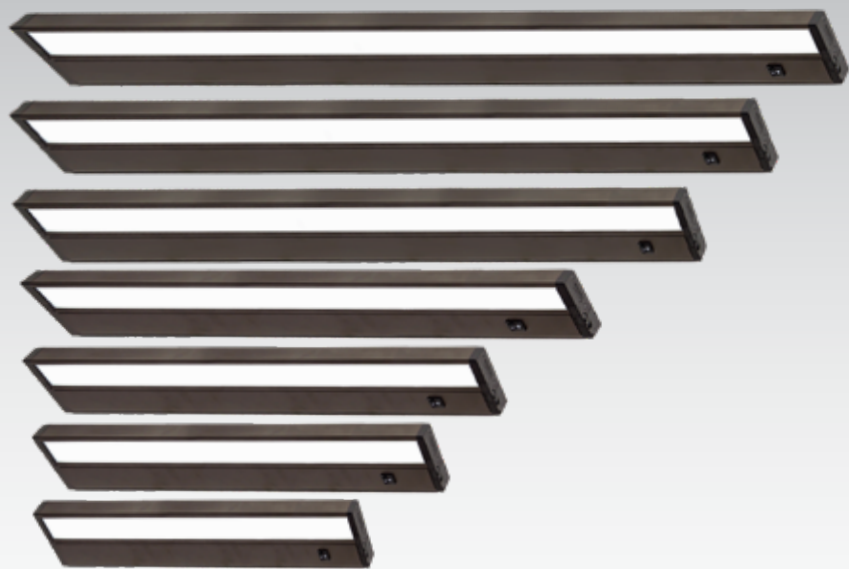

DISPLAY

End Connectors

Daisy chain multiple fixtures


Edge-Lit Technology

Produces uniform, diffuse light

Hardware Knockouts

No external wiring necessary

- Toggles between selectable colors, as well as high & low light intensity modes
- Frosted lens will not yellow or deform over time
- Use jumper connectors to daisy-chain multiple fixtures
- Compatible with most dimmers (e.g. Lutron DVCL-153P)
- Install as a hardwire or use included power cord
- Built-in screws in the front make installation easy

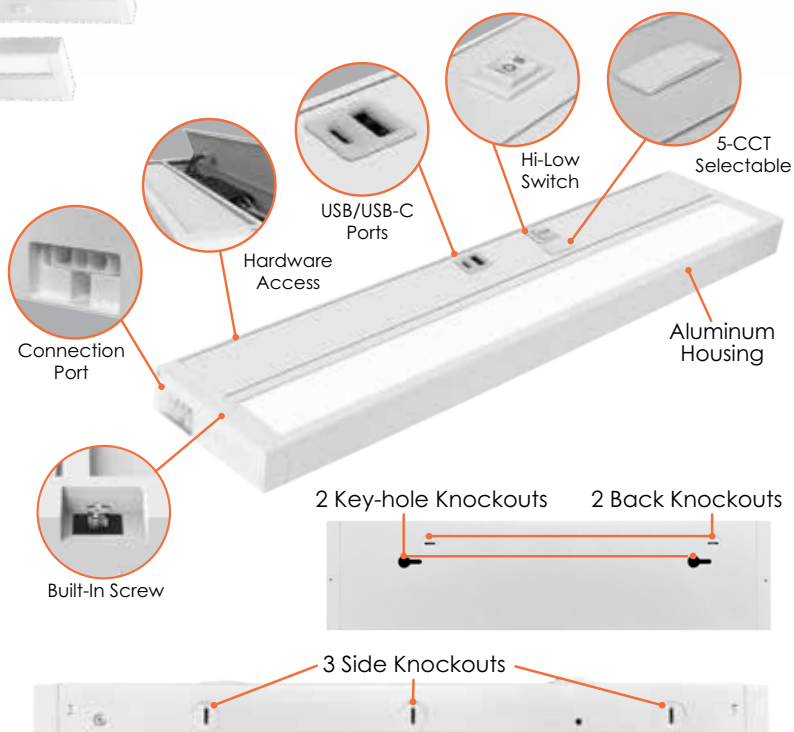

Undercabinet Bar Light

5-CCT Select Triac Dimmable

Box Qty.
8, 11, 14- 12
22, 28, 33, 42- 6

90 JA8
HIGH CRI TITLE 24



Model	Voltage	Watts	Lumens	Color
LED-UC-8I-4W-5CCT-WH	120V	4w	180	50/40/35/30/27K
LED-UC-11I-6W-5CCT-WH	120V	6w	350	50/40/35/30/27K
LED-UC-14I-8W-5CCT-WH	120V	8w	570	50/40/35/30/27K
LED-UC-22I-10W-5CCT-WH	120V	10w	750	50/40/35/30/27K
LED-UC-28I-12W-5CCT-WH	120V	12w	900	50/40/35/30/27K
LED-UC-33I-15W-5CCT-WH	120V	15w	1,050	50/40/35/30/27K
LED-UC-42I-18W-5CCT-WH	120V	18w	1,250	50/40/35/30/27K
LED-UC-8I-4W-5CCT-BZ	120V	4w	180	50/40/35/30/27K
LED-UC-11I-6W-5CCT-BZ	120V	6w	350	50/40/35/30/27K
LED-UC-14I-8W-5CCT-BZ	120V	8w	570	50/40/35/30/27K
LED-UC-22I-10W-5CCT-BZ	120V	10w	750	50/40/35/30/27K
LED-UC-28I-12W-5CCT-BZ	120V	12w	900	50/40/35/30/27K
LED-UC-33I-15W-5CCT-BZ	120V	15w	1,050	50/40/35/30/27K
LED-UC-42I-18W-5CCT-BZ	120V	18w	1,250	50/40/35/30/27K

5-CCT Select w/ USB & USB-C Triac Dimmable

NEW

Model	Voltage	Watts	Lumens	Color
LED-UC-11I-6W-5CCT-USB-WH	120V	6w	350	50/40/35/30/27K
LED-UC-14I-8W-5CCT-USB-WH	120V	8w	570	50/40/35/30/27K
LED-UC-22I-10W-5CCT-USB-WH	120V	10w	750	50/40/35/30/27K
LED-UC-28I-12W-5CCT-USB-WH	120V	12w	900	50/40/35/30/27K
LED-UC-42I-18W-5CCT-USB-WH	120V	18w	1,250	50/40/35/30/27K


5-CCT Select w/ USB & USB-C 0-10V Dimmable

NEW

Model	Voltage	Watts	Lumens	Color
LED-UC-14I-8W-5CCT-USB-WH-UNV	120-277V	8w	570	50/40/35/30/27K
LED-UC-22I-10W-5CCT-USB-WH-UNV	120-277V	10w	750	50/40/35/30/27K
LED-UC-28I-12W-5CCT-USB-WH-UNV	120-277V	12w	900	50/40/35/30/27K
LED-UC-42I-18W-5CCT-USB-WH-UNV	120-277V	18w	1,250	50/40/35/30/27K

Included in the box

Optional Accessories

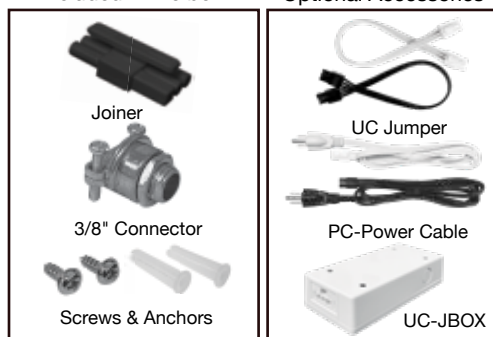

Accessory Model	Description
UC-JUMPER-6"-W	6" UC jumper
UC-JUMPER-12"-W	12" UC jumper
UC-JUMPER-24"-W	24" UC jumper
UC-JUMPER-6"-B	6" UC jumper
UC-JUMPER-12"-B	12" UC jumper
UC-JUMPER-24"-B	24" UC jumper
UC-5'-PC-WH	5' Power cable
UC-5'-PC'-BZ	5' Power cable
UC-JBOX	Undercabinet junction box

Undercabinet Fixtures: C-Line

(Economical Models) - Hardwire Only

5-CCT Select Triac Dimmable

90 JA8
HIGH CRI TITLE 24



Box Qty.
11, 18- 24
24, 36, 42- 12



Model	Voltage	Watts	Lumens	Color
LED-EUC-11I-6W-5CCT-WH	120V	6w	450	50/40/35/30/27K
LED-EUC-18I-8W-5CCT-WH	120V	8w	600	50/40/35/30/27K
LED-EUC-24I-12W-5CCT-WH	120V	12w	900	50/40/35/30/27K
LED-EUC-36I-15W-5CCT-WH	120V	15w	1,125	50/40/35/30/27K
LED-EUC-42I-18W-5CCT-WH	120V	18w	1,350	50/40/35/30/27K





LED Step Lights

- Available in white, bronze, or black finish
- 3 faceplates included in the box: horizontal angled louvre, vertical angled louvre, and flat frosted lens
- Rated for indoor and outdoor use (IP67)
- Non-dimmable

90+ HIGH CRI Box Qty. 24

Model	Voltage	Watts	Lumens	Color
LED-STEP-AGL-2W-27K-120V-WH	120V	2w	150	2700k
LED-STEP-AGL-2W-27K-120V-BLK	120V	2w	150	2700k
LED-STEP-AGL-2W-27K-120V-BZ	120V	2w	150	2700k
LED-STEP-AGL-2W-30K-120V-WH	120V	2w	150	3000k
LED-STEP-AGL-2W-30K-120V-BLK	120V	2w	150	3000k
LED-STEP-AGL-2W-30K-120V-BZ	120V	2w	150	3000k
LED-STEP-AGL-2W-40K-120V-WH	120V	2w	150	4000k
LED-STEP-AGL-2W-40K-120V-BLK	120V	2w	150	4000k
LED-STEP-AGL-2W-40K-120V-BZ	120V	2w	150	4000k



LED ARCY Step Lights

- Available in white, brushed nickel and black
- Vertical (VT) or Horizontal (HZ) versions available
- Rated for indoor and outdoor use (IP67)
- Non-dimmable

5-CCT Select

90+ HIGH CRI Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-STEP-ARC-3W-5CCT-HZ-WH	120V	3w	150	50/40/35/30/27k
LED-STEP-ARC-3W-5CCT-VT-WH	120V	3w	150	50/40/35/30/27k
LED-STEP-ARC-3W-5CCT-HZ-BLK	120V	3w	150	50/40/35/30/27k
LED-STEP-ARC-3W-5CCT-VT-BLK	120V	3w	150	50/40/35/30/27k
LED-STEP-ARC-3W-5CCT-HZ-BN	120V	3w	150	50/40/35/30/27k
LED-STEP-ARC-3W-5CCT-VT-BN	120V	3w	150	50/40/35/30/27k





Emergency Exit Sign (Single/Double Sided)

- Film protectant for extra shatter protection (food industry OK)
- Non-dimmable
- For indoor use only

 Box Qty.
12

Model	Voltage	Watts	Color
LED-EM-EXT-R-WH	120-277V	3w	Red
LED-EM-EXT-G-WH	120-277V	3w	Green



Emergency Exit Sign (Single/Double Sided)

- Film protectant for extra shatter protection (food industry OK)
- Non-dimmable
- For indoor use only
- Red and green selectable

 Box Qty.
12

Model	Voltage	Watts	Color
LED-EM-EXT-RG-WH	120-277V	3w	Red/Green selectable
LED-EM-EXT-RG-BL	120-277V	3w	Red/Green selectable



Emergency Exit Sign Combo (Single/Double Sided)

- Test switch and charge indicator
- Non-Dimmable
- Film protectant for extra shatter protection (food industry OK)
- For indoor use only

 Box Qty.
10

Model	Voltage	Watts	Lumens	Color
LED-EM-EXT-R-WH-CMB	120-277V	3.5w	140	Red
LED-EM-EXT-G-WH-CMB	120-277V	3.5w	140	Green



Emergency Exit Sign Combo (Single/Double Sided)

- Test switch and charge indicator
- Non-dimmable
- Film protection for extra shatter protection (food industry OK)
- For indoor use only
- Red and green selectable

 Box Qty.
10

Model	Voltage	Watts	Lumens	Color
LED-EM-EXT-RG-WH-CMB	120-277V	3.5w	140	Red/Green selectable
LED-EM-EXT-RG-BL-CMB	120-277V	3.5w	140	Red/Green selectable



Edge-Lit Emergency Exit Sign (Single/Double Sided)

- Can be illuminated single or double sided (removeable plate in middle)
- Test switch and charge indicator
- Film protectant for extra shatter protection (food industry OK)
- For indoor use only

 Box Qty.
10

Model	Voltage	Watts	Color
LED-EM-EXT-EL-R (S)	120-277V	3w	Red
LED-EM-EXT-EL-G (S)	120-277V	3w	Green
LED-EM-EXT-EL-R (D)	120-277V	3w	Red
LED-EM-EXT-EL-G (D)	120-277V	3w	Green



Emergency Exit Sign (Single/Double Sided)

- Film protectant for extra shatter protection (food industry OK)
- Non-dimmable
- For indoor use only
- Remote capable

Box Qty.
8

Model	Voltage	Watts	Lumens	Color
LED-EM-EXT-R-WH-CMB-RC	120-277V	3.5w	140	Red
LED-EM-EXT-G-WH-CMB-RC	120-277V	3.5w	140	Green



Emergency Exit Sign (Single/Double Sided)

- Film protectant for extra shatter protection (food industry OK)
- Non-dimmable
- For indoor use only
- Remote capable
- Red and green selectable

Box Qty.
8

Model	Voltage	Watts	Lumens	Color
LED-EM-EXT-RG-WH-CMB-RC	120-277V	3.5w	140	Red/Green



Single Remote Head

- Film protectant for extra shatter protection (food industry OK)
- Non-dimmable
- For indoor and outdoor use
- Only compatible with RC-EMB

Box Qty.
20

Model	Voltage	Watts	Lumens	Color
LED-EM-RC-1	120-277V	1.5w	160	5000K
LED-EM-RC-2	120-277V	3w	320	5000K



Emergency LED Light

- Film protectant for extra shatter protection (food industry OK)
- Non-dimmable
- For indoor use only

Box Qty.
12

Model	Voltage	Watts	Lumens	Color	CRI
LED-EM-DH	120-277V	3w	N/A	5000k	N/A



Emergency LED Light

- Film protectant for extra shatter protection (food industry OK)
- Non-dimmable
- For indoor use only

Box Qty.
12

Model	Voltage	Watts	Lumens	Color	CRI
LED-EM-DHC-WH	120-277V	3w	N/A	5000k	N/A
LED-EM-DHC-BL	120-277V	3w	N/A	5000k	N/A



Slim Wall Pack: EGG-Line

- Die-cast aluminum housing
- Polycarbonate lens and mirror reflector
- Lithium battery 4.8V 1800mAh
- Backup time up to 90 min.
- EMB- Emergency Back-up
- Emergency mode- 690 lumens

3-CCT Select

Box Qty.
10

Model	Voltage	Watts	Lumens	Color
LED-WPE-15W-TRI-PC-BZ	120-277V	15w	1950	50/40/30k
LED-WPE-15W-TRI-PC-BZ-EMB	120-277V	15w	1950	50/40/30k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.



Corn Bulbs - 3-Color and 3-Power Selectable

- Select between 3 different wattages and 3 different colors
- Includes 4K surge protection
- Multiple base types available
- Twist-C technology

Box Qty.
3M36- 12
3M54- 12
3M80- 6
3M120- 6



3-CCT & 3-Power Select

Model	Voltage	Watts	Lumens	Color
LED-CRN-3M36-TRI-E26	120-277V	18/27/36w	145lm/w	50/40/30k
LED-CRN-3M36-TRI-EX39	120-277V	18/27/36w	145lm/w	50/40/30k
LED-CRN-3M54-TRI-E26	120-277V	36/45/54w	145lm/w	50/40/30k
LED-CRN-3M54-TRI-EX39	120-277V	36/45/54w	145lm/w	50/40/30k
LED-CRN-3M80-TRI-EX39	120-277V	54/63/80w	145lm/w	50/40/30k
LED-CRN-3M120-TRI-EX39	120-277V	80/100/120w	145lm/w	50/40/30k



Accessory Model	Description
HB01DMS-A	Bi-level motion + daylight sensor
HB03R	Controller for HB01DMS-A (controls multiple)

WATT	LUMENS
18	2,610
27	3,915
36	5,220
45	6,525
54	7,830
63	9,135
80	11,600
100	14,500
120	17,400

3-CCT Selectable



3 Power Selectable



E26 Base



EX39 Base



Optional Motion
+ Daylight Sensor



HB03R
Controller for
HB01DMS-A



HB01DMS-A
Bi Level Motion Sensor and
Daylight Harvesting Sensor



GX23 PL Lamp Type A+B

- Compatible with existing ballast or direct AC wiring
- Easily upgrade fluorescent fixtures, no rewiring required
- Not dimmable

8 HIGH CRI  Box Qty. 50

Model	Voltage	Watts	Lumens	Color
LED-PL-GX23-6W-40K	120-277V	6w	600	4000k
LED-PL-GX23-6W-50K	120-277V	6w	600	5000k



G24 PL Lamp Type A+B

- Easily upgrade fluorescent fixtures, no rewiring required
- Not dimmable
- Compatible with existing ballast or direct AC wiring

8 HIGH CRI  Box Qty. 50

Model	Voltage	Watts	Lumens	Color
LED-PL-G24-7W-40K 13W Equivalent	120-277V	7w	650	4000k
LED-PL-G24-7W-50K 13W Equivalent	120-277V	7w	650	5000k
LED-PL-G24-11W-30K 13W Equivalent	120-277V	11w	1,300	3000k
LED-PL-G24-11W-40K 13W Equivalent	120-277V	11w	1,300	4000k
LED-PL-G24-11W-50K 13W Equivalent	120-277V	11w	1,300	5000k

2G11 PL Lamp

- Compatible with existing ballast
- Easily upgrade fluorescent fixtures, no rewiring required
- Not dimmable

8 HIGH CRI  Box Qty. 50

Final
Production

Model	Voltage	Watts	Lumens	Color
LED-PL-2G11-15W-30K	120V	15w	1600lm	3000k





Filament LED Bulbs

- Compatible with most dimmers
- View spec sheets for JA8 Models

3-CCT & 3-Power Select




 Box Qty. 40

Model	Voltage	Watts	Lumens	Color
LED-FLM-A19-HM-4W-18K	120V	4w	400	1800k



A19

Box Qty. 40

Model	Voltage	Watts	Lumens	Color
LED-FLM-A19-8.5W-30K-D	120V	8.5w	550	3000k
LED-FLM-A19-4W-30K-12V	12v	4w	550	3000k
LED-FLM-A19-10W-27K	120V	10w	1,000	2700k



Candelabra

Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-FLM-E12T-4W-30K-12V	12v	4w	400	3000k
LED-FLM-E12T-4W-27K	120V	4w	400	2700k
LED-FLM-E12T-4W-30K	120V	4w	400	3000k
LED-FLM-E12T-4W-60K	120V	4w	400	6000k
LED-FLM-E12FL-4W-27K	120V	4w	400	2700k
LED-FLM-E12T-6W-27K	120V	6w	600	2700k
LED-FLM-E12T-6W-30K	120V	6w	600	3000k
LED-FLM-E12T-6W-40K	120V	6w	600	4000k



ST64 Edison

Box Qty. 40

Model	Voltage	Watts	Lumens	Color
LED-FLM-ST64-4W-18K	120V	4w	400	1800k
LED-FLM-ST64-5W-30K	120V	5w	400	3000k



Globes

Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-FLM-G16.5C-4W-27K	120V	4w	400	2700k
LED-FLM-G16.5M-4W-27K	120V	4w	400	2700k
LED-FLM-G25-5W-27K	120V	4w	400	2700k



Tubular

Box Qty. 40

Model	Voltage	Watts	Lumens	Color
LED-FLM-T30-4W-18K	120V	4w	400	1800k
LED-FLM-T30-5W-30K	120V	5w	400	3000k
LED-FLM-T30-5W-50K	120V	5w	400	5000k





5-CCT LED Bulbs

- Triac-dimmable
- Direct replacement for halogen bulbs
- Must be purchased in inner carton quantities

A Series

Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-A19-9W-5CCT	120V	9w	800lm	50/40/35/30/27k
LED-A21-15W-5CCT	120V	15w	1600lm	50/40/35/30/27k



Carton Qty.	A-19	A-21
Inner Carton	10	10
Master Carton	100	100



BR Series

Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-BR20-6W-5CCT	120V	6w	450lm	50/40/35/30/27k
LED-BR30-8.5W-5CCT	120V	8.5w	650lm	50/40/35/30/27k
LED-BR40-13W-5CCT	120V	13w	1050lm	50/40/35/30/27k



Carton Qty.	BR-20	BR-30	BR-40
Inner Carton	10	6	6
Master Carton	100	48	48



PAR Series

Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-P20-7W-5CCT	120V	7w	450lm	50/40/35/30/27k
LED-P30-10W-5CCT	120V	10w	750lm	50/40/35/30/27k
LED-P38-13W-5CCT	120V	13w	1000lm	50/40/35/30/27k



Carton Qty.	BR-20	BR-30	BR-40
Inner Carton	10	6	6
Master Carton	100	48	48



E.T.A. 07/2024

NEW

GU10 Series

Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-GU10-6.5W-5CCT	120V	6.5w	500lm	50/40/35/30/27k



Carton Qty.	GU10
Inner Carton	10
Master Carton	100



A19 6-Pack Screw-Base LED Non-Dimmable Bulb

- High intensity: ready to replace existing 60W halogen
- Suitable for use in existing fixtures
- Sold in a 6-pack



Model	Voltage	Watts	Lumens	Color
LED-A19-9W-30K-ND6	120V	9w	800	3000k



Final
Production

A21 Screw-Base LED Bulb

- High intensity: ready to replace existing 100W halogen
- Suitable for use in existing fixtures
- Compatible with most dimmers



Model	Voltage	Watts	Lumens	Color
LED-A21-16W-30K-HD	120V	16w	1,600	3000k
LED-A21-16W-40K-HD	120V	16w	1,600	4000k
LED-A21-16W-50K-HD	120V	16w	1,600	5000k



A19 GU24 Bulb

- High intensity: ready to replace existing 65W halogen
- Suitable for use in existing fixtures
- Compatible with most dimmers



Model	Voltage	Watts	Lumens	Color
LED-A19GU24-9W-WW	120V	9w	800	3000k



PAR38 12K Jewelry Bulb

- Shine our new 12,000K bulb on diamonds to add an extra sparkle
- Very powerful COB Chip provides 3,000 lumens
- Universal voltage 120-277 for commercial applications



Model	Voltage	Watts	Lumens	Color
LED-PAR38-32W-12K-UNV	120/277V	32w	3,000	12000k



Final
Production

Candelabra Bulbs

- E12 'candelabra' base
- '-ND' models are non-dimmable
- '-D' models are dimmable



Model	Voltage	Watts	Lumens	Color
LED-E12-5W-30K-D	120V	5w	280	3000k
LED-E12-3W-27K-ND	120V	3w	280	2700k



MR Series Bulbs

- Ideal replacements for MR-base halogens
- Integrated aluminum heatsink



Model	Voltage	Watts	Lumens	Color
LED-MR11-3W-30K-2PK	12V	3w	280	3000k
LED-MR11-3W-50K-2PK	12V	3w	280	5000k
LED-MR16-5W-27K-HD	12V	5w	350	2700k
LED-MR16-5W-30K-HD	12V	5w	350	3000k
LED-MR16-7W-27K-HD	12V	7w	500	2700k
LED-MR16-7W-30K-HD	12V	7w	500	3000k
LED-MR16-7W-40K-HD	12V	7w	500	4000k
LED-MR16-7W-50K-HD	12V	7w	500	5000k
LED-MR16-9W-D-DIM	12V	9w	500	6500k



GU10 Bulbs

- Drop-in GU10 halogen replacement
- Compatible with most dimmers



Model	Voltage	Watts	Lumens	Color
LED-GU10-5.5W-30K-HD	120V	5.5w	450	3000k
LED-GU10-5.5W-50K-HD	120V	5.5w	450	5000k



G9 Bulbs

- Drop-in G9 halogen replacement
- Compatible with most dimmers

8 HIGH CRI DIMMABLE ETL LISTED JA8 TITLE 24 COMPLIANT LAW Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-G9-5W-HL-30K	120V	5w	500	3000k
LED-G9-5W-HL-40K	120V	5w	500	4000k



G9 Bulbs

- Drop-in G9 halogen replacement
- Compatible with most dimmers

8 HIGH CRI DIMMABLE ETL LISTED JA8 TITLE 24 COMPLIANT LAW Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-G9-4.5W-27K	120V	4.5w	450	2700k
LED-G9-4.5W-30K	120V	4.5w	450	3000k



Bayonet Base Bulbs

- Available in single and double contact (-SC & -DC)
- Drop-in 12V halogen replacement

8 HIGH CRI DIMMABLE ETL LISTED JA8 TITLE 24 COMPLIANT LAW Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-BNWP-3W-WW-SC	12V	3w	280	3000k
LED-BNWP-3W-CW-SC	12V	3w	280	4000k
LED-BNWP-3W-WW-DC	12V	3w	280	3000k



Wedge-Base Bulbs

- Available in single and double contact (-SC & -DC)
- Drop-in 12V halogen replacement
- Compatible with most dimmers

8 HIGH CRI DIMMABLE ETL LISTED JA8 TITLE 24 COMPLIANT LAW Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-WGWP-3W-WW	12V AC/DC	3w	280	3000k



Bi-Pin 12V Bulbs

- Pin-compatible drop-in replacement for 12V halogens
- Compatible with most dimmer modules
- Fully waterproof silicone enclosure

8 HIGH CRI Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-G4WP-1.5W-SW	12V AC/DC	1.5w	110	2700k
LED-G4WP-1.5W-WW	12V AC/DC	1.5w	110	3000k
LED-G4WP-1.5W-CW	12V AC/DC	1.5w	110	4000k
LED-G4WP-2.5W-SW	12V AC/DC	2.5w	210	2700k
LED-G4WP-2.5W-WW	12V AC/DC	2.5w	210	3000k
LED-G4WP-2.5W-CW	12V AC/DC	2.5w	210	4000k
LED-G4WP-3.5W-SW	12V AC/DC	3.5w	280	2700k
LED-G4WP-3.5W-WW	12V AC/DC	3.5w	280	3000k
LED-G4WP-3.5W-CW	12V AC/DC	3.5w	280	4000k
LED-GY6.35-4W-27K	12V AC/DC	4w	350	2700k
LED-GY6.35-4W-30K	12V AC/DC	4w	350	3000k



PAR LUX Series Bulb (40°)

- Ideal for landscape lighting (IP67)
- Compatible with most dimmers
- Integrated aluminum heatsink

DIMMABLE 8 HIGH CRI CERTIFIED Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-PAR36-13W-W	12V	13w	780	3000k



120V Architectural Striplights

- Lumen & watt ratings are per-foot
- Compatible with most dimmer modules
- Cutable every 18"
- Available in 100ft rolls



Model	Voltage	Watts	Lumens	Color
ST-2835-120V-4W-30K	120V	4w/ft	320/ft	3000k
ST-2835-120V-4W-40K	120V	4w/ft	320/ft	4000k
ST-2835-120V-4W-50K	120V	4w/ft	320/ft	5000k



ST-POWSET-18
ST-POWSET-36
ST-POWSET-72



ST-JBX-POW-1200-36"
ST-POW-UNV-400W-36"

120V Architectural Striplight Accessories

Box Qty.
100

Model	Voltage	Watts	Lumens	Color
ST-POWSET-18	120V	N/A	N/A	White
ST-POWSET-36	120V	N/A	N/A	White
ST-POWSET-72	120V	N/A	N/A	White
ST-JBX-POW-1200W-36"	120V	N/A	N/A	White
ST-POW-UNV-400W-36"	120V	N/A	N/A	White
ST-JUMPER-6	120V	N/A	N/A	White
ST-JUMPER-12	120V	N/A	N/A	White
ST-120-WP-COUP	120V	N/A	N/A	Clear
120V-STRAP-100PK	120V	N/A	N/A	N/A
ST-COUP-PIN-25PK	120V	N/A	N/A	N/A
ST-END-CAP-20PK	120V	N/A	N/A	N/A



ST-JUMPER-6
ST-JUMPER-12



ST-120-WP-COUP



120V-STRAP-100PK




ST-COUP-PIN



ST-END-CAP

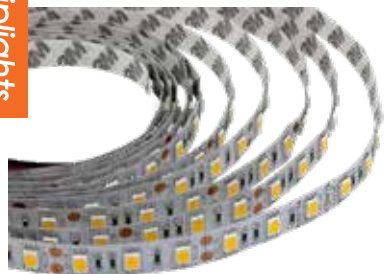

Final
Production

Low Voltage Striplights (12V)

- Lumen & watt ratings are per-foot
- Mains-dimmable with magnetic transformer
- Available in 16.4ft rolls





 Box Qty.
20

Model	Voltage	Watts	Lumens	Color
LED-TP-3528-12V-DL	12V DC	1.5w/ft	120/ft	5000k
LED-TP-3528-12V-R	12V DC	1.5w/ft	120/ft	Red
LED-TP-3528-12V-B	12V DC	1.5w/ft	120/ft	Blue
LED-TP-3528-12V-G	12V DC	1.5w/ft	120/ft	Green
LED-TP-2835-12V-DL	12V DC	2.2w/ft	180/ft	5000k
LED-TP-5050-12V-DL	12V DC	4w/ft	285/ft	5000k

Low Voltage Striplights (24V)





 Box Qty.
20

Model	Voltage	Watts	Lumens	Color
LED-TP-2216-2W-24V95-WW	24V DC	2w/ft	150/ft	3000k
LED-TP-2216-2W-24V95-DL	24V DC	2w/ft	150/ft	5000k
LED-TP-2216-3W-24V95-DL	24V DC	3w/ft	225/ft	5000k
LED-TP-2216-4W-24V95-DL	24V DC	4w/ft	300/ft	5000k

Final
Production



Constant Voltage Triac Dimmable Transformers

Box Qty.
20W- 12
12V 60- 12
12V 150- 6
24V 60- 6

Model	Voltage	Watts
CV-12V-DC-20W-DIM	Input: 120-277V Output: 12V DC	20w
CV-12V-DC-60W-DIM	Input: 120-277V Output: 12V DC	60w
CV-12V-DC-150W-DIM	Input: 120-277V Output: 12V DC	150w
CV-24V-DC-60W-DIM	Input: 120-277V Output: 24V DC	60w

Magnetic Transformers

- Suitable for use with EnVision 12V strip lights, puck lights, etc.
- Allows mains dimming for compatible 12V fixtures
- Rated for 120VAC input only

Box Qty.
10



Model	Input Voltage	Output Voltage	Watts
MT-12V-DC-20W-DIM	120VAC	12V	20W
MT-12V-DC-40W-DIM	120VAC	12V	40W
MT-12V-DC-60W-DIM	120VAC	12V	60w
MT-12V-DC-100W-DIM	120VAC	12V	100w
MT-12V-DC-150W-DIM	120VAC	12V	150w
MT-12V-DC-200W-DIM	120VAC	12V	200w
MT-12V-DC-300W-DIM	120VAC	12V	300w
MT-24V-DC-20W-DIM	120VAC	24V	20W
MT-24V-DC-40W-DIM	120VAC	24V	40W
MT-24V-DC-60W-DIM	120VAC	24V	60w
MT-24V-DC-100W-DIM	120VAC	24V	100w
MT-24V-DC-150W-DIM	120VAC	24V	150w
MT-24V-DC-200W-DIM	120VAC	24V	200w
MT-24V-DC-300W-DIM	120VAC	24V	300w

Electronic Magnetic Transformers

- Suitable for use with EnVision 24V strip lights, puck lights, etc.
- Allows mains dimming for compatible 24V fixtures
- Rated for 120VAC input only

Box Qty.
12V 30-80W: 12
12V 120-300W: 6
24V 30-80W: 12
24V 120-300W: 6



Model	Input Voltage	Output Voltage	Watts
MLE-12V-DC-30W-DIM	120VAC	12V	30w
MLE-12V-DC-60W-DIM	120VAC	12V	60w
MLE-12V-DC-80W-DIM	120VAC	12V	80w
MLE-12V-DC-120W-DIM	120VAC	12V	120w
MLE-12V-DC-150W-DIM	120VAC	12V	150w
MLE-12V-DC-200W-DIM	120VAC	12V	200w
MLE-12V-DC-300W-DIM	120VAC	12V	300w
MLE-24V-DC-30W-DIM	120VAC	24V	30w
MLE-24V-DC-60W-DIM	120VAC	24V	60w
MLE-24V-DC-80W-DIM	120VAC	24V	80w
MLE-24V-DC-120W-DIM	120VAC	24V	120w
MLE-24V-DC-150W-DIM	120VAC	24V	150w
MLE-24V-DC-200W-DIM	120VAC	24V	200w
MLE-24V-DC-300W-DIM	120VAC	24V	300w



Waterproof Junction Box Coupling

Box Qty.
100

Model	Item Description
JBX-WP-3P	Waterproof J-box coupling: 3-wire
JBX-WP-4P	Waterproof J-box coupling: 4-wire
JBX-WP-5P	Waterproof J-box coupling: 5-wire
JBX-WP-6P	Waterproof J-box coupling: 6-wire



Y-LC-PD



Y-LC-CB

Suspension Kits & Chain Kits

Model	Item Description
SK-10FT-Y-LC-PD	Suspension kit: 10' Y-shape, loop top, paddle bottom (adjustable length)
SK-20FT-Y-LC-PD	Suspension kit: 20' Y-shape, loop top, paddle bottom (adjustable length)
SK-10FT-Y-LC-CB	Suspension kit: 10' Y-shape, loop top, carabiner bottom (adjustable length)
SK-20FT-Y-LC-CB	Suspension kit: 20' Y-shape, loop top, carabiner bottom (adjustable length)
LED-PNL-2X4-SK	Suspension kit: Panels, troffers
CK-6FT-V	6ft Chain hanging kit



CK-6FT-V



Step Down Transformer



Box Qty.
10

NEW

Model	Input	Watt
STD-480-277-465A-FLX	120-277V	<1W



Surge Protectors



Box Qty.
10

NEW

Model	Input	Watt
SG-20KV-UNV	120-277V	<1W
SG-20KV-HV	277-480V	<1W



Button Photocell Universal



Box Qty.
10

Model	Input	Output
PC-BTN-UNV-1/2"	120/277V	25-48v DC
PC-BTN-UNV-3/8"	120/277V	25-48v DC
PC-TWL-RC	120/277V	25-48v DC
PC-TWL-UNV	120/277V	25-48v DC
PC-TWL-HV	120/277V	25-48v DC



S-TWC-MW-1
S-TWC-MW-BT
TWC-DL



S-TWC-PIR-1



S-TWC-90



HB01DMS-A



HB01DMS-C



HB03R



HD406VRH-D-WH



HD407V-CR



HD03R



HD05R

Twist-C Control Sensors

Box Qty.
1

Model	Item Description	Output Voltage	Watts
S-TWC-MW-1	Twist-C microwave sensor brightness: 100% / hold time: 10 min. Bi-level dim: 50% stand by time: 10 min. sensitivity: 100% daylight: enabled"	12V	<1W
S-TWC-PIR-1	"Twist-C microwave sensor brightness: 100% / hold time: 10 min. Bi-level dim: 50% stand by time: 10 min. sensitivity: 100% daylight: enabled"	12V	<1W
S-TWC-MW-BT	"Twist-C microwave sensor w/ bluetooth app control and group: Brightness, hold time, bi level dim, stand by time, sensitivity, daylight: disabled"	12V	<1W
S-TWC-PIR-BT	"Twist-C PIR sensor w/ bluetooth app control and group: brightness, hold time, bi level dim, stand by time, sensitivity, daylight: disabled"	12V	<1W
TWC-DL	Twist-C daylight sensor: Dusk to dawn, works like a photocell	12V	<1W
S-TWC-90	TWC extension arm 90 degree	12V	<1W

- Universal input voltage (100-277v AC, 50/60Hz)
- Selectable emergency power (3/5/8W)
- Constant output power (auto-sensing output)
- UL listed for field installation

S-Line Sensors

Box Qty.
1

Model	Item Description	Voltage	Watts
S-BMS-INT-1	S-Line: Bi level motion sensor w/ daylight harvesting, Ideal for use with LED-CBT. 12V Aux REQD. (remote optional)	12V	<1w
S-BMS-INT-1-BT	S-Line: Bi level motion sensor w/ daylight harvesting, ideal for use w/ LED-CBT 12V Aux Req. (remote for Envision Smart App)	12V	<1w
S-BMS-EXT-1	S-Line: Bi level motion sensor w/ daylight harvesting, ideal for use with LED wallpacks. 12V Aux reqd. (remote required)	12V	<1w
S-TWC-90	S-Line 90DG receptacle extender	12V	<1w
S-PP-BT	S-Line: Dimmable power pack. Dim any 0-10V fixture (remote or Envision Smart App)	12V	<1w
S-LINE-R	Remote for S-line series sensors	12V	<1w
S-LINE-DIM-BT	Dimmer for S-Line series bluetooth sensors	12V	<1w

HB-Line Sensors

Box Qty.
1

Model	Item Description	Voltage	Watts
HB01DMS-A	Bi level motion sensor w/ daylight harvesting, works with ARL2, RHB, CRN twist into female 12V sensor auxiliary, remote required	12V	<1w
HB01DMS-C	Bi level motion sensor w/ daylight harvesting 1/2" knockout includes auxiliary	12V	<1w
HB03R	Remote for HB01 series	12V	<1w

H-Line Sensors

Box Qty.
1

Model	Item Description	Voltage	Watts
HD406VRH-D-WH	Bi level motion sensor w/ daylight harvesting white finish with side 1/2" knock out -remote control compatible	120-277V	<1w
HD407V-CR	Bi level motion sensor w/ daylight harvesting detachable version w/ external sensor -remote control compatible	120-277V	<1w
HD016VCR-8	Bi level motion sensor w/ daylight harvesting internal version w/ antenna -remote control compatible	120-277V	<1w
HD03R	Remote for H-line sensors	120-277V	<1w
HD05R	Remote for H-line sensors w/ screen	120-277V	<1w



S-BMS-INT-1
S-BMS-INT-1-BT



S-BMS-EXT-1



S-PP-BT



S-LINE-R



S-LINE-DIM-BT

Smart Sensors

- Universal input voltage (100-277v AC, 50/60Hz)
- Selectable emergency power (3/5/8W)
- Constant output power (auto-sensing output)
- UL Listed for field installation

Box Qty. 1

Model	Item Description	Voltage	Watts
SMART-MOD-BT	Smart bluetooth module - dim, group, controls, via bluetooth (connect to any 0-10V dim fixture)	120-277V	<1w
SMART-MOD-WF	Smart wifi module - dim, group, controls, via wifi (connect to any triac dimmable fixture)	120-277V	<1w
SMART-MOD-BT-GTW	Gateway: Add time control, smart home capability	120-277V	<1w





Battery Backup (30W High Voltage)

- Universal input voltage (100-347v AC, 50/60Hz)
- Constant output power (auto-sensing output)
- UL Listed for field installation
- Battery protection: over/under voltage, over-temp., short circuit
- Backup runtime: 90 minutes
- For use with internal driver - includes round UFO highbay EM kit



Model	Input	Watt	Output
LED-EMB-30W-HV-UFO	120/347V	30W	175V DC
LED-EMB-30W-HV-UFO-BL	120/347V	30W	175V DC
LED-EMB-30W-HV-UFO-WH	120/347V	30W	175V DC
UFO-TEST-CTR	N/A	N/A	N/A



Battery Backup (15W Low Voltage Double Flex)

- For use with external driver fixtures including: flat panels, troffers, high bays, wraps, etc.



Model	Input	Watt	Output
LED-EMB-15W-LV	120/277V	15W	25-48V DC



Battery Backup (25W Low Voltage Single Flex)

- For use with external driver fixtures including: flat panels, troffers, high bays, wraps, etc.



Model	Input	Watt	Output
LED-EMB-25W-HV-T8	120/277V	25W	120V DC



Battery Backup (15W Low Voltage Single Flex)

- For use with external driver fixtures including: flat panels, troffers, high bays, wraps, etc.



Model	Input	Watt	Output
LED-EMB-15W-LV-S	120/277V	15W	25-48V DC



Battery Backup (30W High Voltage Single Flex)

- For use with external driver fixtures including: flat panels, troffers, high bays, wraps, etc.



Model	Input	Watt	Output
LED-EMB-30W-HV-480-0/10V	277/480V	30W	400V DC

Battery Backup (Split Design)

- Universal input voltage (100-277v AC, 50/60Hz)
- Constant output power (auto-sensing output)
- UL Listed for field installation
- Battery protection: over/under voltage, over-temp., short circuit
- Backup runtime: 90 minutes
- For use with external driver w/ internal housing space: wall packs, canopy, etc.



Model	Input	Watt	Output
LED-EMB-8W-HV-0/10V-2P	120/277V	8W	120-277V
LED-EMB-15W-HV-0/10V-2P	120/277V	15W	120-277V
LED-EMB-25W-HV-0/10V-2P	120/277V	25W	120-277V
LED-EMB-40W-HV-0/10V	120/277V	25W	120-277V
LED-EMB-25W-HV-2P	120/277V	25W	120-277V



Battery Backup (Split Design)

- Universal input voltage (100-277v AC, 50/60Hz)
- Constant output power (auto-sensing output)
- UL Listed for field installation
- Battery protection: over/under voltage, over-temp., short circuit
- Backup runtime: 90 minutes
- CW: Cold weather EMB



Model	Input	Watt	Output
LED-EMB-4W-LV-INT	120/277V	4W	25-48V DC
LED-EMB-8W-LV-INT	120/277V	8W	25-48V DC
LED-EMB-8W-LV-INT-150	120/277V	8W	60-150V DC
LED-EMB-8W-LV-INT-CW	120/277V	8W	36-56V DC
LED-EMB-8W-LV-INT-150-CW	120/277V	8W	60-150V DC
LED-EMB-20W-LV-INT	120/277V	20W	25-48V DC



Displays



Retrofit Display
DISPLAY-RDL



Back



Undercabinet Display
DISPLAY-UC



EnVisionLED™



EnVision LED Lighting, Inc.
Los Angeles, CA
Phone: 323.604.0066

www.envisionledlighting.com



CATALOG-2024-V1

