

2" LED Downlights: Trimless-Line

5-CCT Selectable



R	Round
SQ	Square
WH	White
BLK	Black

Detail Specification:

- Finish: White, Black
- Wet Location Rated
- Beam Angle: 38° standard, other options available
- Chip: COB Chip, R9 >50, CRI >90
- 2 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Clear
- Average life (L70) of 50,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- 5-CCT Selectable: 27/30/35/40/50K
- Mud-In ring included with each fixture
- Various sizes, finishes, and trims available
- Metal housing and trim for better heat dissipation
- Gimbal models available on a separate spec sheet
- Optional emergency backup available: delivers full lumens in EM mode up to 25W

Driver Options:

- 120V Triac Dimmable
- Built in 2.5Kv Surge Protector
- Flicker Free

Mounting & Installation:

- Cut Out Dimension:
 - 2" Round: 2-3/5"
 - 4" Round: 3-7/8"
 - 2" Square: 2-7/8" x 2-7/8"
 - 4" Square: 3-7/8" x 3-7/8"
- Optional new construction plate available
- This fixture does not fit into a recessed can
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight

Series	Finish	Beam Angle	Emergency
LED-DLJBX-TML-2R-8W-5CCT 2" Round 600Lm	WH White	(Blank) 38° Degree	(Blank) White
LED-DLJBX-TML-2SQ-8W-5CCT 2" Square 600Lm	BLK Black	24D 24° Degree	EMB Emergency Backup
LED-DLJBX-TML-2R-15W-5CCT 2" Round 1,000Lm		60D 60° Degree	
LED-DLJBX-TML-2SQ-15W-5CCT 2" Square 1,000Lm			
LED-DLJBX-TML-4R-15W-5CCT 4" Round 1,000Lm			
LED-DLJBX-TML-4SQ-15W-5CCT¹ 4" Square 1,000Lm			

1. Only available in white

Optional Accessories (Order Separately)

New Construction Plates	Extension Cables	Emergency Backup ¹ (field install)	Optics
CUNV-NC-ICAT-7H Universal Plate with hanging bars (Round fixtures only)	JBX-EXT-6'-2PIN 6' Extension	LED-EMB-25W-HV-0/10V-2P Up to 24W fixtures	OPTIC-35X17-24D 2" 24 Degree Field Install Lens
CUNV-JBX-RI-XL Universal Rough In Plate Extra long (Round fixtures only)	JBX-EXT-10'-2PIN 10' Extension		OPTIC-35X17-60D 2" 60 Degree Field Install Lens
CUNV-NC-ICAT-6SQ 1, 2, 3.5, 4, 5, 6" w/ hanging bars. (Square fixtures only)	JBX-EXT-12'-2PIN 12' Extension		OPTIC-63X22-24D 4" 24 Degree Field Install Lens
			OPTIC-63X22-60D 4" 60 Degree Field Install Lens

1. Field installable. Lasts 90 minutes.

Specs and model numbers are subject to change with or without notice.

FEATURES

Diecast Aluminum
Heatsink

Trimless
Mud Frame

J-Box

1/2" Knockouts

Twist and Lock Design

5-CCT Selectable








Round




Square

DIMENSIONS

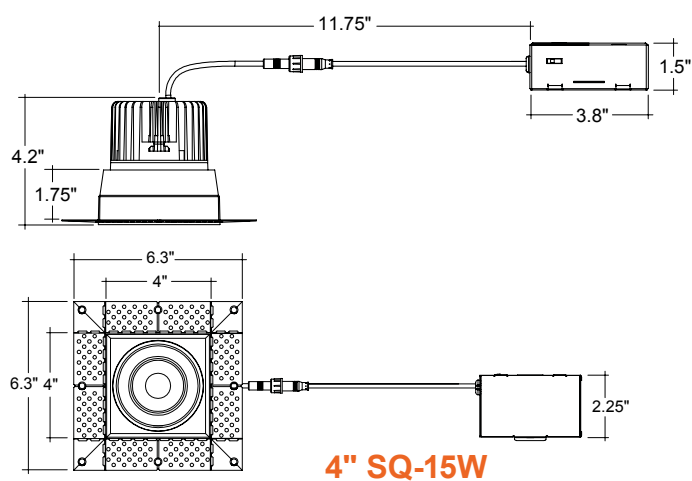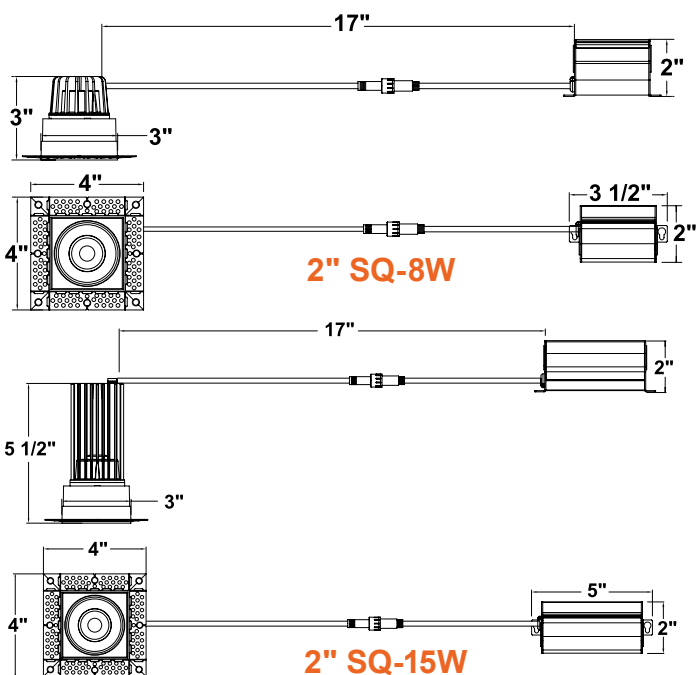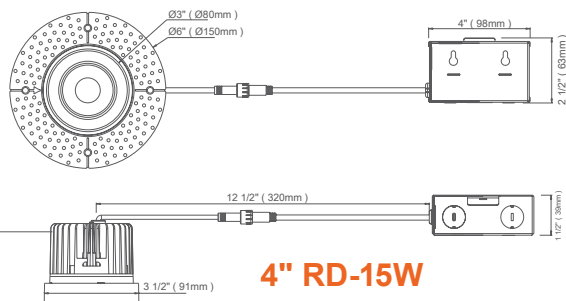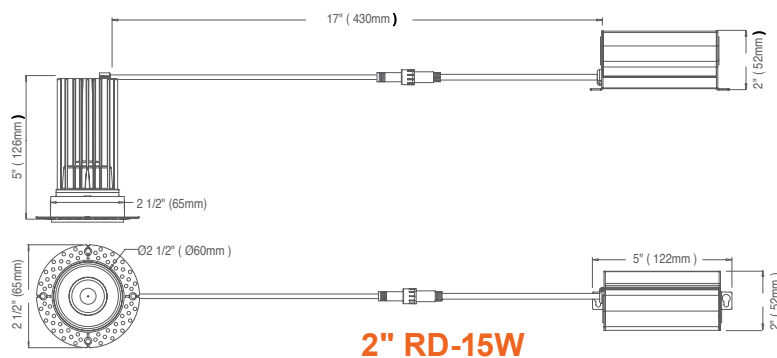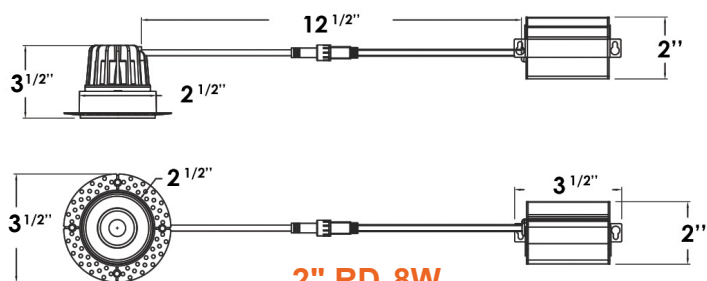


2" LED Downlights: Trimless-Line


5-CCT Selectable

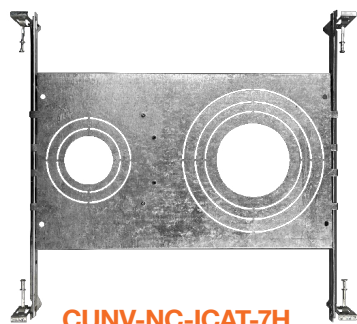

CUNV-NC-ICAT-7H
Universal Pre-Mounting Plate
13 7/8" x 15 1/8"

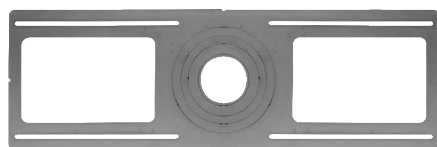

CUNV-JBX-RI-XL
7" x 26"

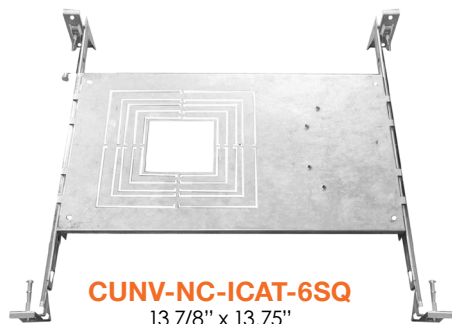

CUNV-NC-ICAT-6SQ
13 7/8" x 13.75"



JBX-EXT
6' / 10' / 12' Extension Cable



LED-EMB-25W-HV-0/10V-2P



OPTIC-35X17-24D
OPTIC-35X17-60D
OPTIC-63X22-24D
OPTIC-63X22-60D

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-TML-2R-8W-5CCT-WH	120V	8w	600	27/30/35/40/50K	>90
LED-DLJBX-TML-2R-8W-5CCT-BLK	120V	8w	600	27/30/35/40/50K	>90
LED-DLJBX-TML-2R-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K	>90
LED-DLJBX-TML-2R-15W-5CCT-BLK	120V	15w	1000	27/30/35/40/50K	>90
LED-DLJBX-TML-4R-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K	>90
LED-DLJBX-TML-4R-15W-5CCT-BLK	120V	15w	1000	27/30/35/40/50K	>90
LED-DLJBX-TML-2SQ-8W-5CCT-WH	120V	8w	600	27/30/35/40/50K	>90
LED-DLJBX-TML-2SQ-8W-5CCT-BLK	120V	8w	600	27/30/35/40/50K	>90
LED-DLJBX-TML-2SQ-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K	>90
LED-DLJBX-TML-2SQ-15W-5CCT-BLK	120V	15w	1000	27/30/35/40/50K	>90
LED-DLJBX-TML-4SQ-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K	>90

CONSTRUCTION PLATES

Accessory	Description
CUNV-NC-ICAT-7H	1" 2"3" 3.5" 4" 5" 6" Universal Pre-Mounting New Construction Plate (Round fixtures only)
CUNV-JBX-RI-XL	Universal tough in plate Extra Long (Round fixtures only)
CUNV-NC-ICAT-6SQ	1, 2, 3.5, 4, 5, 6" w/ hanging bars. (Square fixtures only)

EXTENSION CABLE

Accessory	Description
JBX-EXT-6'-2PIN	6" Extension Cable
JBX-EXT-10'-2PIN	10" Extension Cable
JBX-EXT-12'-2PIN	12" Extension Cable

EMERGENCY BACKUP

Accessory	Description
LED-EMB-25W-HV-0/10V-2P	Up to 24W fixtures

OPTICS

Accessory	Description
OPTIC-35X17-24D	2" 24 Degree Field Install Lens
OPTIC-35X17-60D	2" 60 Degree Field Install Lens
OPTIC-63X22-24D	4" 24 Degree Field Install Lens
OPTIC-63X22-6	4" 60 Degree Field Install Lens

TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested.
Please contact us for more information.

TRIAC/ELV Dimmers

Lutron	Leviton	Legrand	Cooper
AYCL-153P	6633	ADTP703TU	9540
DV-600PR	6674	H703PTW	DAL06P
DVCL-153P	6602		
MACL-153MH	IPL06		
MRF2-6CL			
D-600P			
NTELV-300P			
S-600P			
CT-600P			
CTCL-153P			
TG-600P			
TCCL-153P			
L-153P			

0-10V Dimmers

Lutron	Leviton	Wattstopper	Lightolier
DVTV	Illumitech - IP7	DCLV1	ZP600FAM120
NFTV			SR1200ZTUNV
NTFTV			