Project:	Part #:
Type:	

## **LED Commercial Growlight**





Foldable design for easy

transportation

## **FULL SPECTRUM**





### **Detail Specifications**

- · Finish: Dark Gray
- IP Rating: IP65 Wet Location
- Beam Angle: 120°
- · Chip: SMD, Full Spectrum
- Operating Temperature: -4° 122° F
- Operating Humidity: 10-90%
- · Lens: Clear with optics
- · Average life (L70) of 50,000 hours

### **Applications**

- Growing Facility
- Horticulture
- · Indoor without sun
- · Greenhouse with daytime sun

#### **Product Information**

- Aluminum housing
- Replace existing fixtures or use in new construction
- Foldable design for easy transportation
- · Compact design for easier installation
- Select-n-Switch Technology: 5-Power Selectable
- Power selection: 100%/75%/50%/25%/ Manual Dimming Lumen Modes

## **Driver Options**

- UNV: 120-277V 0-10V Dimmable
- Compatible with horticultural ethernet control systems
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

#### **Mounting & Installation**

- · 6' adjustable suspension kit included
- 10' power cord included
- Linkable connector to daisy chain multiple fixtures included

## Why QUBES FULL SPECTRUM for your next project?

- Works in both indoor or greenhouse applications
- Competitors grow lights are specific for certain applications
- QUBE grow lights work in both settings

#### Certifications

- UL Listed for USA and CA
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Item


**QB-FSG-8B-7T660W** 1716 μmols **QB-FSG-8B-7T960W** 2596 μmols


Specs and model numbers are subject to change with or without notice


# Qube LED Commercial Growlight



## **SPECTRUM**








# Qube LED Commercial Growlight

## 660W

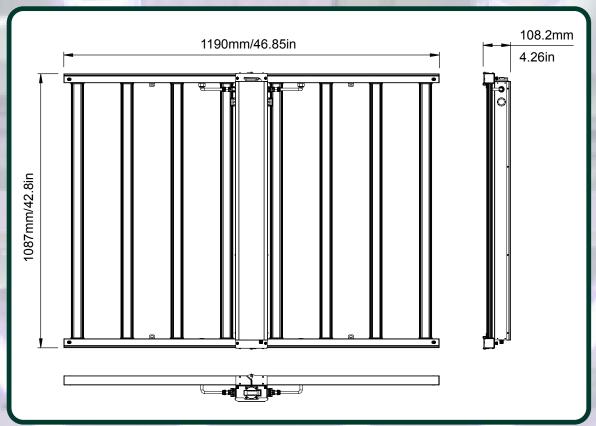

## 960W

