

INSTALLATION INSTRUCTIONS FOR LED BULLET RGB + 5CCT SPOT LIGHTS


LED-BLF-5W-RGB+5CCT-ALM-BZ-LV • LED-BLF-5W-RGB+5CCT-ALM-BZ-LV

Warning: PLEASE READ AND UNDERSTAND THIS ENTIRE MANUAL BEFORE ATTEMPTING TO ASSEMBLE, OPERATE OR INSTALL THE PRODUCT.

- ONLY use this fixture on 12-24V AC/DC circuits.
- The maximum load (combined total wattage of all fixtures) should NOT exceed 80% of the total power rating of the transformer.
- The wire is intended for shallow burial (less than 6 inches deep).
- Install ALL fixtures at least 10ft away from pools, spas, or fountains.
- Keep the fixtures away from flammable or combustible materials.
- DO NOT touch the lens, guard, or fixture housing while in use.
- DO NOT operate or install a fixture with missing or damaged parts.
- DO NOT submerge this fixture in water as this may damage it.
- Vertically mount the transformer at least 12 inches above the ground.
- Keep this fixture out of the reach of children under 3 years old.
- DO NOT connect this fixture to electrical systems that DO NOT have grounding

PRODUCT

- A - Light Fixture
- B - Spike
- C - Wire nuts



INSTALLATION

Step 1: Prepare a 120V to 12-24V transformer (not included), a main power cord (not included).


NOTE: The total power of the light fixtures should NOT exceed 80% of the total rating of the transformer. It is recommended to use 12AWG, 14AWG, 16AWG or 18AWG as the main power cord.

Step 2: Turn the power off, and connect the main power cord to the transformer.


Step 3: Move the main power cord to the proper position of the light fixture.

Step 4: Swivel the light bar (A) onto the stake (B) (Fig. 1), then put them in the positions you want.

Step 5: Cut the main power cord into two parts and separate the main power cord into two wires from the ends until there's enough length to connect a fixture.




Step 6: Strip approximately 1/2 inches of insulation off the ends.



Step 7: Separate the fixture wire into two wires. Connect one input power cord, one output power cord and a fixture wire together through waterproof wire nuts (C) (Fig. 1). Fasten the wires tightly together and make sure there isn't a loose wire. Continue to install the rest of the light fixtures by repeating Steps

NOTE: If using connectors (not included) to install, attach the light fixture wires to the connectors and attach the connector to the main power cord. There is no need to strip the main power cord. If using waterproof wire nuts to install, please follow Steps 4 to 7 to reach the performance.

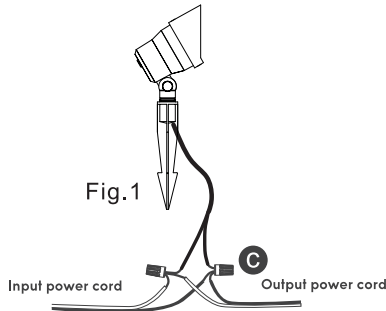


Step 8: Loosen the knob, adjust to the angle you need then tighten the knob (Fig 2).

Step 9: Use a shove to loosen the ground or soften it with water, then insert the fixture into the ground. And place the wires inside the dug ditch, then cover the wires with the surrounding dirt.



Step 10: After finishing the wire connection, turn on the power. Find the Push Button on the light, you can choose color or change the color by pressing this button.

17 SCENE OPTIONS

2700K		RED/GREEN/BLUE	
3000K		• 2 Second Smooth Color Change	
3500K		RED/GREEN/BLUE	
4000K		• 2 Second Flash Color Change	
5000K		ALL COLORS	
WHITE		• 2 Second Smooth Color Change	
RED		ALL COLORS	
GREEN		• 2 Second Flash Color Change	
BLUE		ALL COLORS	
ORANGE		• 2 Second Smooth Color Change	
PURPLE		• 2 Second Smooth Color Change	
CYAN		• 2 Second Flash Color Change	
		OFF	

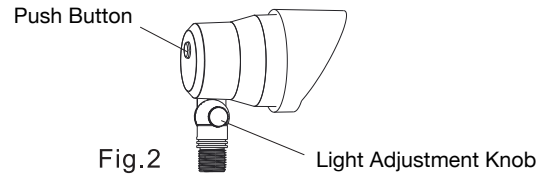

NOTE: DO NOT use a hammer. DO NOT attempt to use your weight to push the fixture into the ground. If your layout requires shorter distances between fixtures, roll up and bury the excess wire.

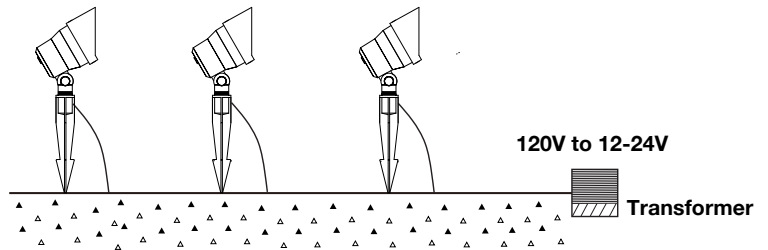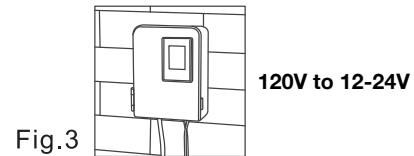

CARE AND MAINTENANCE

- Before attempting to clean the fixture, disconnect the power by turning off the breaker or by removing the fuse from the box.
- DO NOT USE ANY CLEANERS WITH CHEMICALS, SOLVENTS OR HARSH ABRASIVES.

TROUBLE SHOOTING

If all lights are not working properly:

- Check if the power is turned on.
- Check to make sure the input voltage is 12-24V
- Check to make sure that the transformer is properly connected.

IF SOME LIGHTS ARE NOT WORKING PROPERLY

- Check the wiring, make sure that all connections between the lights and the main power cord are tightened properly.
- Check the connectors, if any, make sure that the connectors work correctly. If the lights still do not work after several adjustments, please contact our customer service as soon as possible.