

INSTALLATION INSTRUCTIONS FOR LOW-VOLTAGE L SHAPE LED PATH LIGHTS

LED-PL-L-21-5W-RGB+5CCT-ALM-BL-LV • LED-PL-L-21-5W-RGB+5CCT-ALM-BZ-LV


PLEASE READ AND UNDERSTAND THIS ENTIRE MANUAL BEFORE ATTEMPTING TO ASSEMBLE, OPERATE OR INSTALL THE PRODUCT.

Warning:

- ONLY use this fixture on 12-24V AC/DC circuits.
- The maximum load (combined total wattage of all fixtures) should NOT exceed 80% of the total power rating of the transformer.
- The wire is intended for shallow burial (less than 6 inches deep).
- Install ALL fixtures at least 10ft away from pools, spas, or fountains.
- Keep the fixtures away from flammable or combustible materials.
- DO NOT touch the lens, guard, or fixture housing while in use.
- DO NOT operate or install a fixture with missing or damaged parts.
- DO NOT submerge this fixture in water as this may damage it.
- Vertically mount the transformer at least 12 inches above the ground.
- Keep this fixture out of the reach of children under 3 years old.
- DO NOT connect this fixture to electrical systems that DO NOT have grounding


PRODUCT DIAGRAM

- A. Light Bar
- B. Stake



WHAT YOU NEED FOR INSTALLATION (NOT INCLUDED)

- C. Transformer
- D. Power cable
- E. Wire connector

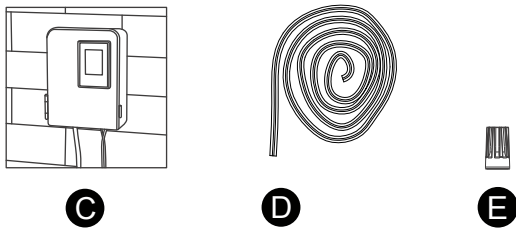


WARNING

Light up all the products one by one to check if the lights are properly working before installation.


- NOTE:
1. Make sure the input voltage is between 12-24V AC/DC
 2. No positive/Negative
 3. Make sure the wires are properly connected, if the product is defective or damaged, please contact us by email.

17 SCENE OPTIONS

2700K		RED/GREEN/BLUE	
3000K		• 2 Second Smooth Color Change	
3500K		RED/GREEN/BLUE	
4000K		• 2 Second Flash Color Change	
5000K		ALL COLORS	
WHITE		• 2 Second Smooth Color Change	
RED		ALL COLORS	
GREEN		• 2 Second Flash Color Change	
BLUE		ALL COLORS	
ORANGE		• 2 Second Smooth Color Change	
PURPLE		ALL COLORS	
CYAN		• 2 Second Flash Color Change	
		OFF	


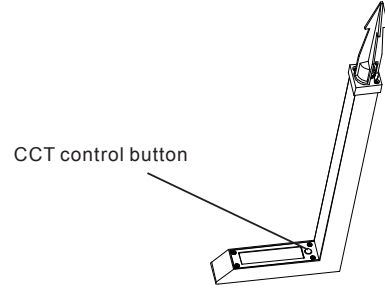


Step 2: Install the light bar, swivel the light bar into the stake, then put them in the position you want.

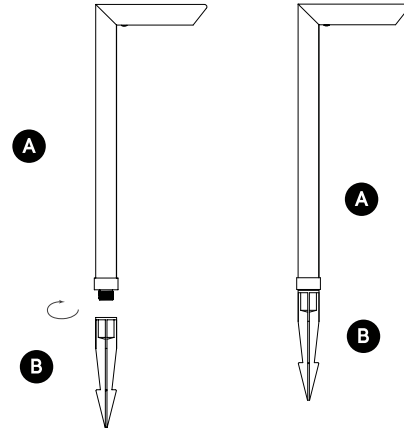

Step 3: Connect the light

Connect the power cord and the light wire with waterproof wire nuts (not included) Fasten the wires tightly together and make sure there isn't a loose wire. Continue to install the rest of the light fixtures by repeating this step.

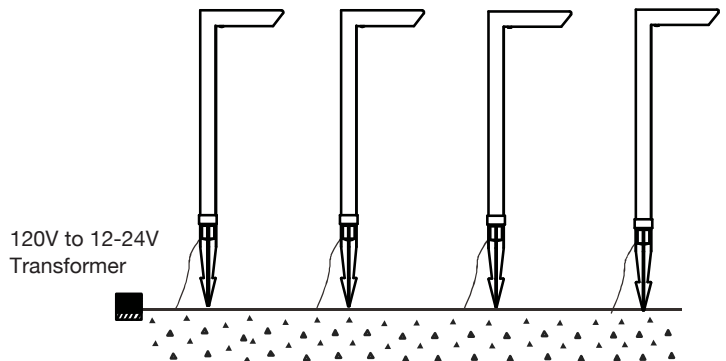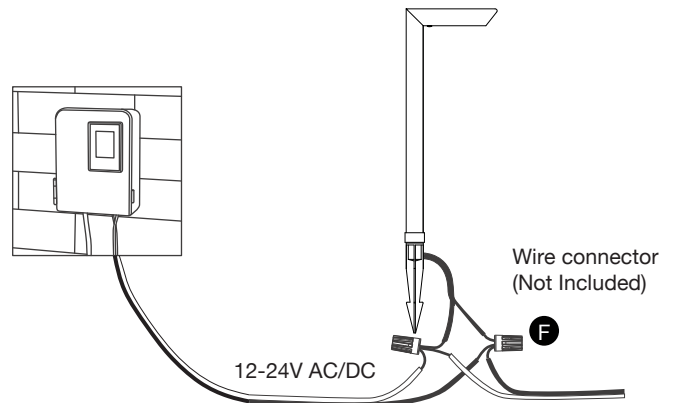

Separate the fixture wire into two wires. Connect one input power cord, one output power cord and a fixture wire together through waterproof wire nuts (not included). Fasten the wires tightly together and make sure there isn't a loose wire. Continue to install the rest of the light fixtures by repeating this step.