

Slim-Line: Round Canopy Fixtures

3-CCT & 3-Power Selectable



WATT	LUMENS
22	3,190
30	4,350
38.5	5,582
47	6,815
55	7,975
60	8,700
70	10,150
80	11,600
90	13,050
100	14,500



Motion Sensor



HB03R
Remote Control

Detail Specification:

- Finish: White or Bronze
- IP Rating: Wet Location (IP65)
- Beam Angle: 150°
- Chip: SMD 2835, R9 >50, CRI >80
- 3 Step MacAdam Ellipses
- BUG Rating
 - 3P55: B3-U3-G2
 - 3P100: B3-U3-G3
- Operating Temperature: -4° - 124° F
- Lens: Clear Ribbed
- Average life (L70) of 50,000 hours

Applications:

- Utility & Storage
- Garage & Parking Structures
- Dock and loading
- Soffits
- Outdoor corridor
- Commercial and Industrial

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Four 1/2" knockouts: 1 one each side for convenient installation
- Twist-C Control: Control ready receptacle built into the fixture
- Select-n-Switch Technology: 4-CCT + 3-Power Selectable

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- THD: <15% (=-5% tolerance), PF >0.9, 50/60Hz
- Isolated Driver
- Flicker Free

Mounting & Installation:

- 30 or 40 J-Box Surface Mount
- 3/4" Pendant Mount

Certifications:

- UL Listed for USA and CA
- DLC Premium Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	Wattage	CCT	Finish	EMB
LED-RCP -		- TRI -		-
Round Slim	5P55	30/40	BZ	(Blank)
Canopy Light	22/30/38.5/47/55W	50K	Bronze	No Emergency
	120-277V		WH	Back-Up
	5P100		White	EMB
	60/70/80/90/100W			90 Min.
	120-277V			Emergency
				Back-up

Optional Accessories (Order Separately)

Sensor Remote



- HB01DMS-A**
Bi-Level Motion + Day-light Sensor
- HB03R**
Remote for HB01DMS-A

Specs and model numbers are subject to change with or without notice.

Slim-Line: Round Canopy Fixtures


3-CCT & 3-Power Selectable

FEATURES

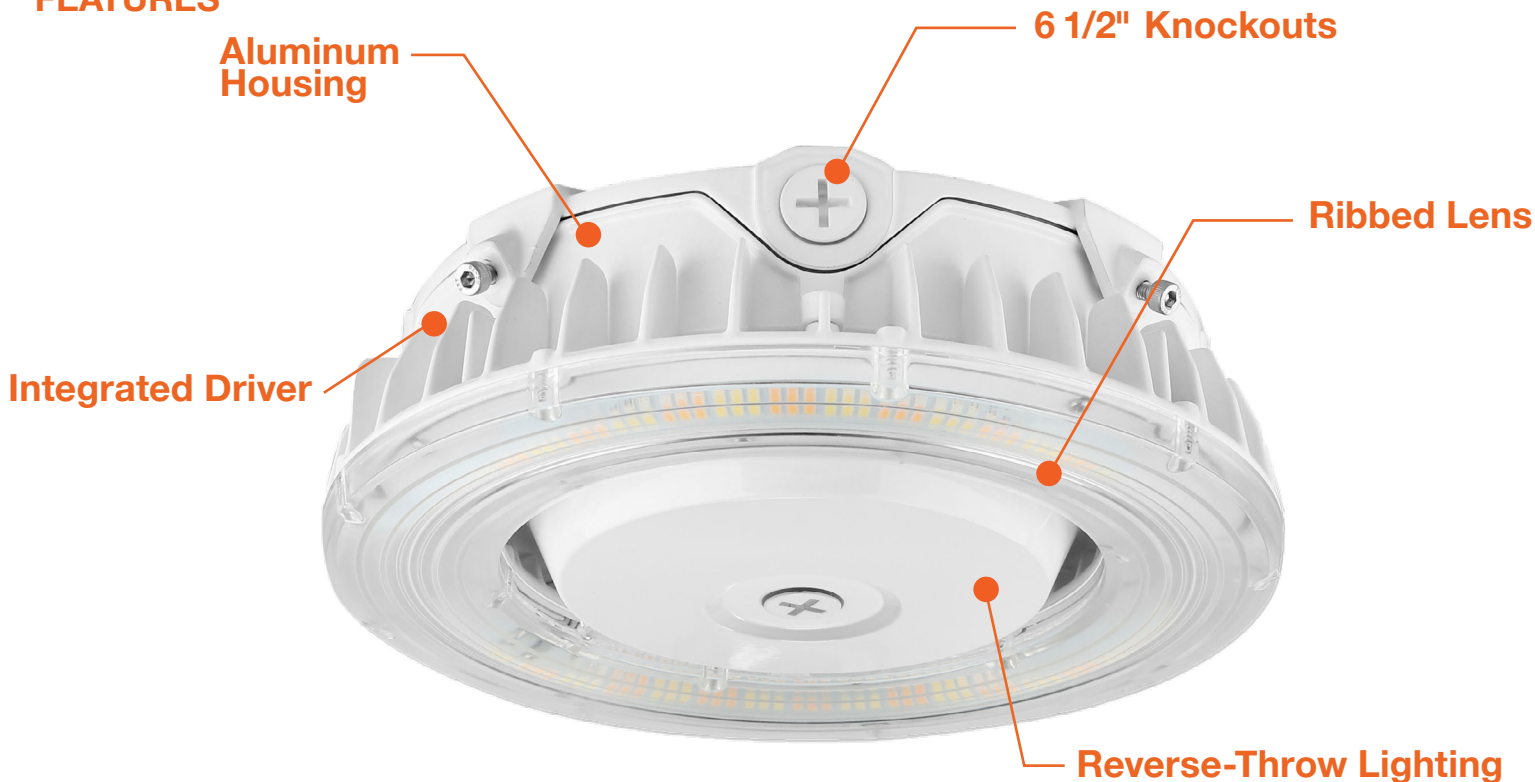

5-Watt Selectable


Select between 5 different wattages

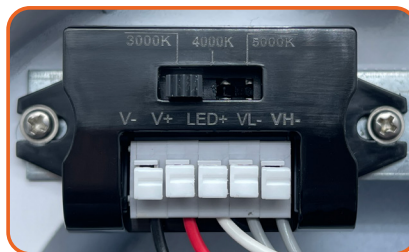

3-CCT Selectable

Select between 3 different colors

DIMENSIONS

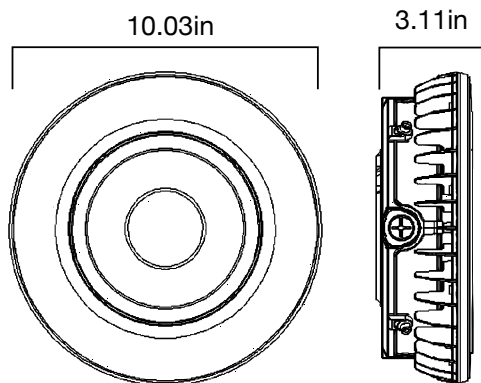

HB03R
Controller



HB01DMS-A
Sensor

Model	Voltage	Watts	Lumens	Color	CRI
LED-RCP-5P55W-TRI-WH	120-277V	22/30/38.5/47/55w	145lm/w	30/40/50k	>80
LED-RCP-5P55W-TRI-BZ	120-277V	22/30/38.5/47/55w	145lm/w	30/40/50k	>80
LED-RCP-5P100W-TRI-WH	120-277V	22/30/38.5/47/55w	145lm/w	30/40/50k	>80
LED-RCP-5P100W-TRI-BZ	120-277V	22/30/38.5/47/55w	145lm/w	30/40/50k	>80

ACCESSORIES

Accessory Model	Description
HB03R	Remote for HD Sensors
HB01DMS-A	Motion+Daylight Sensor (HB03R Remote Req)

Mounting:

- Easy surface mount installation with universal mounting plate
- Easy Ø 3/4" pendant mount/stem installation
- Pre-wired circuit wiring built in (3 in / 3 out)
- Ø 3/4" Knockouts located on 4 sides