

EnVisionLED™
2025 Catalog V2

Indoor
Outdoor
Controls
Lamps
Landscape
Emergency

Warehouse Locations

- | | |
|------------------|------------------|
| • Bell, CA (HQ) | • Midland, NC |
| • Dallas, TX | • Freehold, NJ |
| • S. Windsor, CT | • Cincinnati, OH |

History

Established in 2010, EnVision LED Lighting, Inc is a Los Angeles based LED lighting leader that provides an endless amount of lighting solutions. Our highly efficient and low energy-consuming lighting products have been engineered strategically to best suit multiple different industries: residential, multifamily, hospitality, commercial, industrial, and more. As a family owned and operated business, ownership is actively engaged daily. The EnVision LED Family team is one of the best. We continue to grow our team of seasoned professionals to best service you.

Quality

At EnVision LED, we never sacrifice the quality of components we use to maintain aggressive market pricing. What does this mean? The higher quality components we use will ensure our products last and live up to the expected life hours and warranty. We back it up with our warranty policy and have a team of engineers to help resolve any issues that may arise.

Price Friendly

Quality products at a competitive level are what we believe to be best practices to support your growth as our customer. Although we have faced an immense amount of pressure with the national supply chain issues, we have kept our prices relatively low compared to the product increases we have incurred.

Envision LED Certifications



Safety Certification Listings



All EnvisionLED products carry either a UL or ETL nationally recognized safety certification listing to ensure the highest level of safety.



Energy Efficient Certifications



DLC or Energy Star qualifications are shown in each product specification table.



JA8 Title 24 Compliance

Look for the JA8 icon for products that have been qualified and listed in California's JA8 MAEDBS database provided to help comply with California Title 24 requirements.

Envision LED Product Features



CCT Selectable

A specification for white light sources used to describe the dominant color tone along the dimension from warm (yellows and reds) to cool (blue).



Select-N-Switch Technology

EnVisions technology which allows you to choose your desired power/lumens, CCT, optics, & photocell. Just Select-N-Switch!

Envision LED Controls

Twist-C Control



EnVision's new Twist-C technology allows for an easy sensor installation without any wiring necessary! Purchase any Twist-C control ready fixture and simply twist the sensor into the fixture to activate. Choose from our basic, ENVISIONLS, or SILVAIR sensors.

Envision Connect App



Download our new smart home app on your favorite Android or Apple devices to connect our Bluetooth/Wifi enabled fixtures!


NEW	Wall Packs	8-13
NEW	Steel Poles	14-15
NEW	Area Lights	16-22
	Cylinders	22
NEW	Security	23
NEW	Wall Sconces	24
	Tenon Mounts for Poles	25
NEW	Area Lights	26-28
NEW	Sports Lights	29
	Bollard Lights	30
	Aquarium Lights/Grow Lights	31
NEW	Linear Highbays	32-34
	UFO Highbays	35
NEW	Canopy Lights	36-37
NEW	Panels	38-41
NEW	Troffers	42-43
NEW	Tubes	44-46
NEW	Linear Fixtures	47-49
NEW	Linear	50-51
NEW	Strips	52-53
NEW	Wraps	54-55
	Vapor Tights	56
	1" Mini Downlights	57
	Trimless Downlights	58-59
NEW	Canless Downlights	60-69
	EXT Snaptrim Downlight Accessories	70
	Trimless Multiple Downlights	71
	Canless Downlights	72
	Commercial Downlights	73-74
	Canless Downlights	75
	Smart Downlights	76
NEW	Retrofit Downlights	77-80
	LED Cans	81
NEW	Surface Mounts	82-88
	Cylinder Downlights	89-90
NEW	Vanity Lights	91-92
NEW	Track Lights	93
	Puck Lights	94
NEW	Linkable Lights	95-96
	Undercabinet Fixtures	97-98
NEW	 EnVisionSCAPE	
	Landscape Lights	99-100
	Landscape Path Lights	101-106
	In-Ground Lights	107-108
	Hardscape	109
	Step Lights	110
	Accessories	111-112
	Step Lights	113
NEW	Emergency Exit Signs	114-115
NEW	Corn Bulbs	116-117
NEW	MR Series	118
	PL Lamps	119
	Filament Bulbs	120
	LED Bulbs	121-123
	LED Lightstrips	124-125
NEW	Magnetic & Electronic Transformers	126-127
	Sensors	128-129
NEW	Emergency Battery Backups	130-131
	Displays	132



Shipping & Logistics

With 5 warehouse locations and over 200,000 sq.ft. of space, we are stocked up and ready to ship. Our strategically located warehouses allows for quicker transit and potential will call options for our distributors.

All of our in-stock orders ship within 24 hours.
Need an order shipped same day?
Contact our customer service department and our team will get it done.

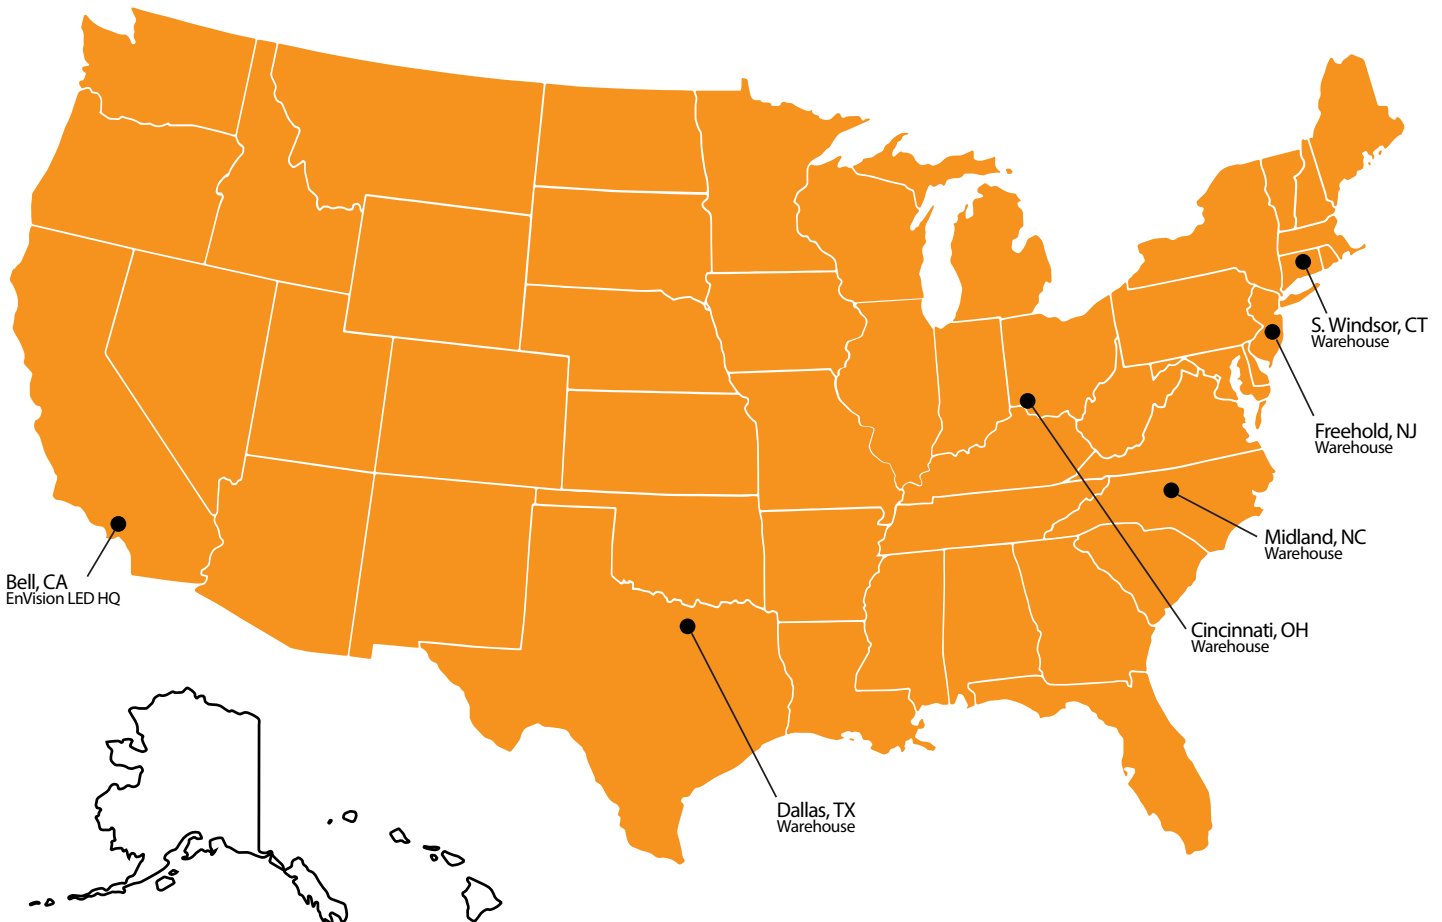




Lighting Layout Designs

Take advantage of our FREE & FAST lighting layout designs for your next project. Not sure which product to use? We would be happy to provide our recommendations.



Easy RGA

Need a replacement? No questions asked! E-mail your request to rga@envisionledlighting.com and we will process it as quick as we process our orders.



Lighting Payback Calculator

Simplify the process of showcasing energy savings, rebates, and return on investment with our intuitive Payback Calculator Tool. Designed for LED conversions, this tool delivers a downloadable, project-specific report featuring: energy savings, utility rebates, ROI, payback periods, and environmental impact—all tailored to your project's details. Easily customize reports with multiple rooms, fixture types, and even separate locations within a single project.



Rebate Finder

EnVision's rebate finder makes it easy to find available rebates. Choose your fixture, state and utility to find all our products that qualify for a rebate in your region.





Product Customization

From emergency back up solutions, longer cords, flex whips, photocells, sensors, and custom finishes we are here to help!



FREE Samples!

Get your free sample today: light it up, show it off, and experience our lighting solutions. Send us your sample request today, we can't wait to impress you!



Case Studies

View our growing selection of case studies to see how we helped our customers.



Portal Access

View inventory, check status of your orders, & more. Contact your sales rep and request access today!

Customer Portal



Agent Portal



EnVisionLED™ Control Options

EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS 	EnVisionLED™ X SILVAIR 
Description	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
Recommended Quantity (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
Maximum Zone Quantity	N/A	100	3,000
Commissioning Tool	Remote Only	  ENVISIONLS App 	  SILVAIR App 
Commissioning Process	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
Floor Plan Upload	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
Gateway	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
Individual Luminaire Control	Yes	Yes	Yes
Luminaire Grouping Zoning	N/A	Yes	Yes
High End Power Low End Power	Yes but limited (View Remote)	Yes	Yes
Cost	\$	\$\$	\$\$\$
DLC NLC Listed	N/A	Yes	Yes
Energy Monitoring & Data Reporting	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting



Compatible Products:

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.



Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight

Basic Note: -1 • ENVISIONLS Models Note: -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	

Group Controls ENVISIONLS Models Note : -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

Gateway (Silvaire Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvaire Controls. Gateway is not required.



Mini Wall Pack: M-Line - w/ Photocell

- Frosted polycarbonate lens will not yellow over time
- Built-in photocell with EZ-disconnect

3-CCT Select

Model	Voltage	Watts	Lumens	Color
LED-WPM-20W-TRI-F-BZ-PC	120-277V	20w	2,860	30/40/50k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.



Small Body Wall Pack: S-Line - w/ Photocell

- Frosted polycarbonate lens will not yellow over time
- Built-in photocell with EZ-disconnect

3-CCT Select

Model	Voltage	Watts	Lumens	Color
LED-WPS-29W-TRI-BZ-PC	120-277V	29w	3,799	30/40/50k

Single CCT

Model	Voltage	Watts	Lumens	Color
LED-WPS-60W-50K-BZ-PC	120-277V	60w	7,860	5000k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Final Production



Regular Wall Pack: Optic Line

- Selectable beam angle (Narrow, Medium, Wide)
- Selectable photocell

3-CCT & 5-Power Select w/ Photocell

Model	Voltage	Watts	Lumens	Color
LED-WPFA-3P60-TRI-BZ-CUNV-PC	120-347V	60/50/40w	140 lm/w	30/40/50k
LED-WPFA-3P60-TRI-BL-CUNV-PC	120-347V	60/50/40w	140 lm/w	30/40/50k
LED-WPFA-3P60-TRI-WH-CUNV-PC	120-347V	60/50/40w	140 lm/w	30/40/50k
LED-WPFA-3P120-TRI-BZ-CUNV-PC	120-347V	120/100/80w	140 lm/w	30/40/50k
LED-WPFA-3P120-TRI-BL-CUNV-PC	120-347V	120/100/80w	140 lm/w	30/40/50k
LED-WPFA-3P120-TRI-WH-CUNV-PC	120-347V	120/100/80w	140 lm/w	30/40/50k

3P60	
WATT	LUMENS
40	5,800
50	7,250
60	8,700

3P120	
WATT	LUMENS
80	11,600
100	14,500
120	17,400



Regular Wall Pack: Full-Line

- Thick glass lens wall pack will not yellow over time
- Built-in photocell with EZ-disconnect

3-CCT & 5-Power Select w/ Photocell

Model	Voltage	Watts	Lumens	Color
LED-WPF-5P60-TRI-BZ-PC	120/277V	60/50/40/30/20w	140 lm/w	30/40/50k
LED-WPF-5P60-TRI-BL-PC	120/277V	60/50/40/30/20w	140 lm/w	30/40/50k
LED-WPF-5P60-TRI-WH-PC	120/277V	60/50/40/30/20w	140 lm/w	30/40/50k
LED-WPF-5P120-TRI-BZ-PC	120/277V	120/100/80/60/40w	140 lm/w	30/40/50k
LED-WPF-5P120-TRI-BL-PC	120/277V	120/100/80/60/40w	140 lm/w	30/40/50k
LED-WPF-5P120-TRI-WH-PC	120/277V	120/100/80/60/40w	140 lm/w	30/40/50k

5P60		5P120	
WATT	LUMENS	WATT	LUMENS
20	2,300	40	5,600
30	4,200	60	8,400
40	5,600	80	11,200
50	7,000	100	14,000
60	8,400	120	16,800

Single CCT

Model	Voltage	Watts	Lumens	Color
LED-WPF-40W-40K-BZ	120/277V	40w	5,600	4000k

Final Production



Pre-Installed Accessory Model	Description
Add: -EMB' to model #	Emergency Backup: 90 Minutes 30"-120°F
Add: -CEMB' to model #	Emergency Backup: 90 Minutes Cold Weather -4"-120°F
Add: -BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add: -BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisionLS App)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
Add: -HV to model#	347-480V step down transformer





Slim Wall Pack: SL-Line

- Thick glass lens wall pack will not yellow over time
- Selectable photocell

3-CCT & 5-Power Select w/ Photocell




Model	Voltage	Watts	Lumens	Color
LED-WPF-SL-3P60-TRI-BZ-UNV-PC	120-277V	60/40/30w	130 lm/w	30/40/50k
LED-WPF-SL-3P120-TRI-BZ-UNV-PC	120-277V	120/100/80w	130 lm/w	30/40/50k
LED-WPF-SL-3P60-TRI-BZ-HV-PC	277-480V	60/40/30w	130 lm/w	30/40/50k
LED-WPF-SL-3P120-TRI-BZ-HV-PC	277-480V	120/100/80w	130 lm/w	30/40/50k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

WATT	LUMENS	WATT	LUMENS
30	3,900	80	10,400
40	5,200	100	13,000
60	7,800	120	15,600



Shield



Wire Guard

NEW




Emergency Back-Up



Bi-Level Motion

Accessory Model	Description
WPF-SHIELD	Cut off shield for WPF wall packs
WPF-WG	Wire guard for WPF wall packs
WPF-SL-SHIELD	Cut off Shield for WPF-SL wall packs
Pre-Installed Accessory Model	Description
Add: -EMB' to model #	Emergency Backup: 90 Minutes 30°-120°F
Add: -CEMB' to model #	Emergency Backup: 90 Minutes Cold Weather -4°-120°F
Add: -BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add: -BMSBT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisionLS App)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
Add: -HV to model#	347-480V step down transformer

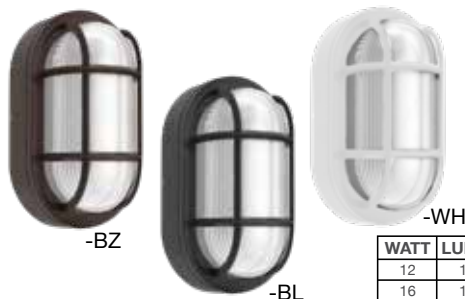

Bulk Head Wall Pack

- Frosted glass lens will not yellow over time
- Selectable photocell

3-CCT Select



Model	Voltage	Watts	Lumens	Color
LED-WPBH-3P20-TRI-BZ-PC	120-277V	20/16/12	85 lm/w	30/40/50k
LED-WPBH-3P20-TRI-BL-PC	120-277V	20/16/12	85 lm/w	30/40/50k
LED-WPBH-3P20-TRI-WH-PC	120-277V	20/16/12	85 lm/w	30/40/50k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

WATT	LUMENS
12	1,020
16	1,360
20	1,700

Full Cut Off Wall Packs Adjustable: AFC-Line

- Optical lens on individual LED chips, full forward throw light
- Dark sky compliant
- Adjustable up to 90° easy

3-CCT & 3-Power Select




Model	Voltage	Watts	Lumens	Color
LED-WPFC-ADJ-3P30W-TRI-BZ	120-277V	30/20/10W	145 lm/w	30/40/50k
LED-WPFC-ADJ-3P30W-TRI-BL	120-277V	30/20/10W	145 lm/w	30/40/50k
LED-WPFC-ADJ-3P30W-TRI-WH	120-277V	30/20/10W	145 lm/w	30/40/50k
LED-WPFC-ADJ-3P50W-TRI-BZ	120-277V	50/40/30W	145 lm/w	30/40/50k
LED-WPFC-ADJ-3P50W-TRI-BL	120-277V	50/40/30W	145 lm/w	30/40/50k
LED-WPFC-ADJ-3P50W-TRI-WH	120-277V	50/40/30W	145 lm/w	30/40/50k
LED-WPFC-ADJ-3P80W-TRI-BZ	120-277V	80/70/60W	145 lm/w	30/40/50k
LED-WPFC-ADJ-3P80W-TRI-BL	120-277V	80/70/60W	145 lm/w	30/40/50k
LED-WPFC-ADJ-3P80W-TRI-WH	120-277V	80/70/60W	145 lm/w	30/40/50k

Single CCT

Model	Voltage	Watts	Lumens	Color
LED-WPFC-ADJ-55W-50K-BZ	120-277V	55w	6,150	5000k

Pre-Installed Accessory Model	Description
Add: -EMB' to model #	Emergency Backup: 90 Minutes 30°-120°F
Add: -CEMB' to model #	Emergency Backup: 90 Minutes Cold Weather -4°-120°F
Add: -BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add: -BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisionLS App)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring

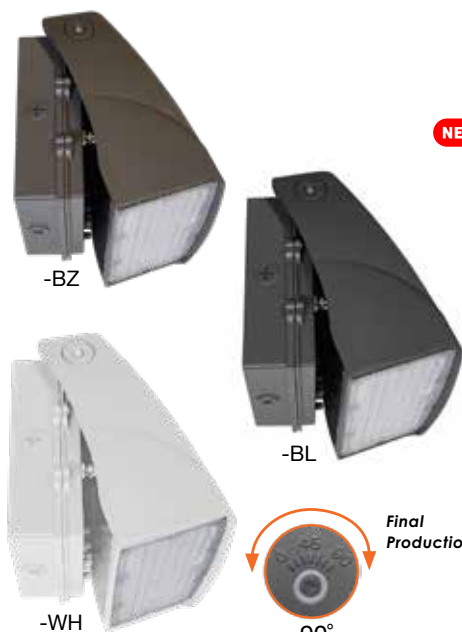

Final Production

90°

NEW

3P30		3P50		3P80	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
10	1,350	30	4,350	60	8,100
20	2,700	40	5,800	70	9,450
30	4,050	50	7,250	80	13,882

Rotating Wall Pack: R-Line

- Optical lens on individual LED chips, full forward throw light
- Upgraded housing design includes back cover for more installation applications
- Dark sky compliant
- Full 360° rotating in any angle
- Toolless rotation and locking system

Single Module



Shown
with Shield

-BZ



360°

WATT	LUMENS
40	4,890
60	8,280
80	10,875

 360° 

Shield



Model	Voltage	Watts	Lumens	Color
LED-WPROT2-25WS-TRI-BZ	120-277V	25w	3,600	30/40/50k
LED-WPROT2-40WS-30K-BZ	120-277V	40w	4,890	3000k
LED-WPROT2-40WS-40K-BZ	120-277V	40w	4,890	4000k
LED-WPROT2-40WS-50K-BZ	120-277V	40w	4,890	5000k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Double Module

Model	Voltage	Watts	Lumens	Color
LED-WPROT2-3P80WD-TRI-BZ	120-277V	80/60/40w	130 lm/w	30/40/50k
LED-WPROT2-60WD-TRI-BZ	120-277V	60w	8,280	30/40/50k
LED-WPROT2-80WD-30K-BZ	120-277V	80w	10,875	3000k
LED-WPROT2-80WD-40K-BZ	120-277V	80w	10,875	4000k
LED-WPROT2-80WD-50K-BZ	120-277V	80w	10,875	5000k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required
Please contact us for pricing based on qty. for custom finish orders.

Accessory Model	Description
WPROT-SHIELD	Wall pack: R-line shield

Pre-Installed Accessory Model	Description
Add: -EMB' to model #	Emergency Backup: 90 Minutes 30°-120°F
Add: -CEMB' to model #	Emergency Backup: 90 Minutes Cold Weather -4°-120°F
Add: -BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add: -BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisionLS App)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
Add: -HV to model#	347-480V step: down transformer



Full-Cutoff Wall Pack: Flat-FC Line

- Optical lens on individual LED chips for full forward throw light
- Dark sky compliant
- Built-in photocell with EZ-disconnect

3-CCT & 5-Power Select w/ Photocell



Model	Voltage	Watts	Lumens	Color
LED-WPFC-FL-5P60W-TRI-BZ-PC	120-277V	60/50/40/30/20W	145 lm/w	30/40/50k
LED-WPFC-FL-5P60W-TRI-BL-PC	120-277V	60/50/40/30/20W	145 lm/w	30/40/50k
LED-WPFC-FL-5P60W-TRI-WH-PC	120-277V	60/50/40/30/20W	145 lm/w	30/40/50k
LED-WPFC-FL-5P120W-TRI-BZ-PC	120-277V	120/110/100/90/80W	145 lm/w	30/40/50k
LED-WPFC-FL-5P120W-TRI-BL-PC	120-277V	120/110/100/90/80W	145 lm/w	30/40/50k
LED-WPFC-FL-5P120W-TRI-WH-PC	120-277V	120/110/100/90/80W	145 lm/w	30/40/50k

Pre-Installed Accessory Model	Description
Add: -EMB' to model #	Emergency Backup: 90 Minutes 30°-120°F
Add: -CEMB' to model #	Emergency Backup: 90 Minutes Cold Weather -4°-120°F
Add: -BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add: -BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisionLS App)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
Add: -HV to model#	347-480V step down transformer



WATT	LUMENS
20	2,900
30	4,350
40	5,800
50	7,250
60	8,700

WATT	LUMENS
80	11,600
90	13,050
100	14,500
110	15,950
120	17,400



Photocell

Emergency Back-Up

Bi-Level Motion

Full Cut Off Wall Packs- Modern Trapezoid

- Optical lens on individual LED chips for full forward throw light
- Dark sky compliant
- Built-in photocell with EZ-disconnect

3-CCT & 5-Power Select w/ Photocell



Model	Voltage	Watts	Lumens	Color
LED-WPFC-TRZ-5P60-TRI-BZ-PC	120-277V	60/50/40/30/20w	145 lm/w	30/40/50k
LED-WPFC-TRZ-5P60-TRI-BL-PC	120-277V	60/50/40/30/20w	145 lm/w	30/40/50k
LED-WPFC-TRZ-5P60-TRI-WH-PC	120-277V	60/50/40/30/20w	145 lm/w	30/40/50k
LED-WPFC-TRZ-5P120-TRI-BZ-PC	120-277V	120/110/100/90/80w	145 lm/w	30/40/50k
LED-WPFC-TRZ-5P120-TRI-BL-PC	120-277V	120/110/100/90/80w	145 lm/w	30/40/50k
LED-WPFC-TRZ-5P120-TRI-WH-PC	120-277V	120/110/100/90/80w	145 lm/w	30/40/50k

5P60		5P120	
WATT	LUMENS	WATT	LUMENS
20	2,900	80	11,600
30	4,350	90	13,050
40	5,800	100	14,500
50	7,250	110	15,950
60	8,700	120	17,400

Full-Cutoff Wall Pack: FC-Line

- Optical lens on individual LED chips for full forward throw light
- Dark sky compliant
- Built-in photocell with EZ-disconnect

3-CCT & 5-Power Select w/ Photocell




Model	Voltage	Watts	Lumens	Color
LED-WPFC-5P80-TRI-BZ-PC	120-277V	80/64/48/32/16w	145 lm/w	30/40/50k
LED-WPFC-5P80-TRI-BL-PC	120-277V	80/64/48/32/16w	145 lm/w	30/40/50k
LED-WPFC-5P80-TRI-WH-PC	120-277V	80/64/48/32/16w	145 lm/w	30/40/50k
LED-WPFC-5P80-TRI-BZ-HV-PC	277-480V	80/64/48/32/16w	145 lm/w	30/40/50k
LED-WPFC-5P150-TRI-BZ-PC	120-277V	150/120/90/60/30w	145 lm/w	30/40/50k
LED-WPFC-5P150-TRI-BL-PC	120-277V	150/120/90/60/30w	145 lm/w	30/40/50k
LED-WPFC-5P150-TRI-WH-PC	120-277V	150/120/90/60/30w	145 lm/w	30/40/50k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

5P80		5P150	
WATT	LUMENS	WATT	LUMENS
16	2,320	30	4,350
32	4,640	60	8,700
48	6,960	90	13,050
64	9,280	120	17,400
80	11,600	150	21,750

Pre-Installed Accessory Model	Description
Add: -T2 to Model #	Factory installed type II optic (80W: 1 PC) (150W: 2 Pcs)
Add: -T4 to Model #	Factory installed type IV optic (80W: 1 PC) (150W: 2 Pcs)
Add: -EMB' to model #	Emergency Backup: 90 Minutes 30°-120°F
Add: -CEMB' to model #	Emergency Backup: 90 Minutes Cold Weather -4°-120°F
WPFC-T-II	Wall pack: FC-line: type II optics lens req'd: (80W: 1 PC) (150W: 2 PCs)
WPFC-T-IV	Wall pack: FC-line: type IV optics lens req'd: (80W: 1 PC) 150W: 2 PCs)
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor w/ bluetooth control (EnvisionLS App)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring

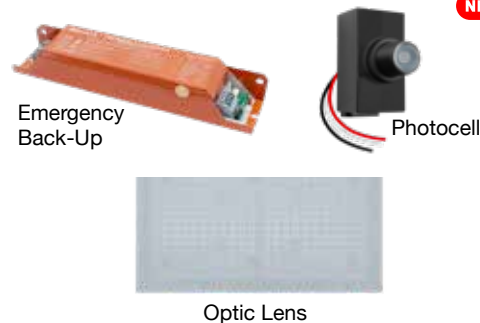



-BZ



-BL



-WH

WATT	LUMENS
48	6,480
64	8,640
80	10,800

Semi-Circle Full Cut Off Wall Pack: CIRCLE-Line

- Type III standard, • Dark sky compliant
- Slim and architectural IP67-rated housing • Selectable photocell

3-CCT & 3-Power Select



Model	Voltage	Watts	Lumens	Color
LED-WPFC-SC-3P80-TRI-BZ-PC	120-347V	80/64/48w	135 lm/w	30/40/50k
LED-WPFC-SC-3P80-TRI-BL-PC	120-347V	80/64/48w	135 lm/w	30/40/50k
LED-WPFC-SC-3P80-TRI-WH-PC	120-347V	80/64/48w	135 lm/w	30/40/50k

Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisionLS App)
Add: -T4 to Model #	Factory installed type IV
Add: -T5 to Model #	Factory installed type V
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
NEW SC-T-IV	Wall pack: FC-line: Type IV optic lens
NEW SC-T-V	Wall pack: FC-Line: Type V optics Lens



Optic Lens



Bi-Level Motion



Emergency Back-Up




-BZ



-BL



-WH



Half Cylinder Up/Down Wall Pack: CIRCLE-Line

- Type III standard
- Downlight only or 20% up & 80% down selectable
- Selectable photocell

3-CCT & 3-Power Select



Model	Voltage	Watts	Lumens	Color
LED-WPUD-SC-3P80-TRI-BZ-PC	120-347V	80/64/48w	130 lm/w	30/40/50k
LED-WPUD-SC-3P80-TRI-BL-PC	120-347V	80/64/48w	130 lm/w	30/40/50k
LED-WPUD-SC-3P80-TRI-WH-PC	120-347V	80/64/48w	130 lm/w	30/40/50k

Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisionLS App)
Add: -T4 to Model #	Factory installed type IV
Add: -T5 to Model #	Factory installed type V
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
NEW SC-T-IV	Wall pack: FC-line: Type IV optic lens
NEW SC-T-V	Wall pack: FC-Line: Type V optics Lens

DOWNLIGHT ON ONLY		DOWN & UP LIGHT ON			
WATT	LUMENS	DOWN		UP	
48	6,960	WATT	LUMENS	WATT	LUMENS
64	9,280	38	5,510	10	1,450
80	11,600	51	7,395	13	1,885
		64	9,280	16	2,320



Bi-Level Motion



Optic Lens



Emergency Back-Up

Slim Wall Pack: EGG-Line

- Backup time up to 90 min. • Emergency mode 690 Lumens
- EMB- Emergency Back-up • Built-in photocell with EZ-disconnect

3-CCT Select



Model	Voltage	Watts	Lumens	Color
LED-WPE-15W-TRI-PC-BZ	120-277V	15w	1950	30/40/50k
LED-WPE-15W-TRI-PC-BZ-EMB	120-277V	15w	1950	30/40/50k
LED-WPE-15W-TRI-PC-BL	120-277V	15w	1950	30/40/50k
LED-WPE-15W-TRI-PC-BL-EMB	120-277V	15w	1950	30/40/50k



-BZ

-BL

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.



-BZ



Full Cut Off Wall Packs: Full-FC-Line

- Optical lens on individual LED chips, full forward throw light
- Slim and architectural IP67-rated housing
- Dark sky compliant
- Selectable photocell

3-CCT & 3-Power Select



NEW


Model	Voltage	Watts	Lumens	Color
LED-WPFC-FC-21-3P100-TRI-BZ-PC	120-277V	100/80/60W	130 lm/w	30/40/50k
LED-WPFC-FC-21-3P100-TRI-BL-PC	120-277V	100/80/60W	130 lm/w	30/40/50k



Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-CEMB' to model #	Emergency Backup: 90 Minutes Cold Weather -4°-120°F
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisionLS App)
Add: -T4 to Model #	Factory installed type IV
Add: -T5 to Model #	Factory installed type V
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring



WATT	LUMENS
60	8,100
80	10,800
100	13,500



Downlight Application



Uplight Application




-BL



-WH

Adjustable Angle

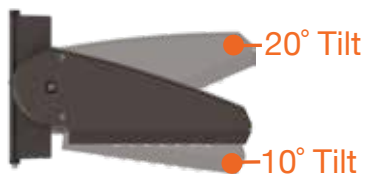

Full Cut Off Wall Packs: ARCY-Line

- Optical lens on individual LED chips, full forward throw light
- Slim and architectural IP67-rated housing
- Dark sky compliant
- Fixture tilts up and down
- Selectable photocell

3-CCT & 3-Power Select



NEW

NEW

NEW

NEW

Model	Voltage	Watts	Lumens	Color
LED-WPFC-ARC-3P65-TRI-BZ-PC	120-347V	65/50/30W	130 lm/w	30/40/50k
LED-WPFC-ARC-3P65-TRI-BL-PC	120-347V	65/50/30W	130 lm/w	30/40/50k
LED-WPFC-ARC-3P65-TRI-WH-PC	120-347V	65/50/30W	130 lm/w	30/40/50k
LED-WPFC-ARC-3P100-TRI-BZ-PC	120-347V	100/80/60W	130 lm/w	30/40/50k
LED-WPFC-ARC-3P100-TRI-BL-PC	120-347V	100/80/60W	130 lm/w	30/40/50k
LED-WPFC-ARC-3P100-TRI-WH-PC	120-347V	100/80/60W	130 lm/w	30/40/50k



Accessory Model	Description
WPFC-ARC-S-T-IV	Wall pack: ARCY-line optic for 3P65
WPFC-ARC-M-T-IV	Wall pack: ARCY-line optic for 3P100
WPFC-ARC-S-T-V	Wall pack: ARCY-line optic for 3P65
WPFC-ARC-M-T-V	Wall pack: ARCY-line optic for 3P100


NEW

Accessory Model	Description
WPFC-ARC-JBOX-BZ	WPFC-ARC : Wall Mount Bracket for conduit runs
WPFC-ARC-JBOX-BL	WPFC-ARC : Wall Mount Bracket for conduit runs
WPFC-ARC-JBOX-WH	WPFC-ARC : Wall Mount Bracket for conduit runs

Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisionLS App)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
Add: -T4 to Model #	Factory installed type IV
Add: -T5 to Model #	Factory installed type V



Square Straight Steel Poles




1 SQUARE STRAIGHT STEEL SERIES	EFFECTIVE PROJECTED AREAS				BOLT CIRCLE	BASE PLATE	
	80	90	100	120		SQUARE	HEIGHT
ENV-SQ-SS-10FT-4-11G-AB 10 Feet 4" • 11 Gauge	25.7	20.8	16.8	11.8	8.5	8.0	0.75
ENV-SQ-SS-12FT-4-11G-AB 12 Feet 4" • 11 Gauge	20.5	16.6	13.4	9.4	8.5	8.0	0.75
ENV-SQ-SS-14FT-4-11G-AB 14 Feet 4" • 11 Gauge	16.6	13.5	10.9	7.7	8.5	8.0	0.75
ENV-SQ-SS-15FT-4-11G-AB 15 Feet 4" • 11 Gauge	15.1	12.3	9.8	7.0	8.5	8.0	0.75
ENV-SQ-SS-16FT-4-11G-AB 16 Feet 4" • 11 Gauge	13.6	11.0	8.9	6.3	8.5	8.0	0.75
ENV-SQ-SS-18FT-4-11G-AB 18 Feet 4" • 11 Gauge	11.1	9.0	7.2	5.1	8.5	8.0	0.75
ENV-SQ-SS-20FT-4-11G-AB 20 Feet 4" • 11 Gauge	9.0	7.3	5.9	4.2	8.5	8.0	0.75
ENV-SQ-SS-20FT-4-7G-AB 20 Feet 4" • 7 Gauge	15.9	12.5	10.1	7.1	8.5	8.0	0.75
ENV-SQ-SS-20FT-5-11G-AB 20 Feet 5" • 11 Gauge	16.0	12.9	10.4	7.4	11.0	11.0	0.75
ENV-SQ-SS-20FT-5-7G-AB 20 Feet 5" • 7 Gauge	26.4	21.3	17.2	12.1	11.0	11.0	1.0
ENV-SQ-SS-25FT-4-11G-AB 25 Feet 4" • 11 Gauge	9.7	7.8	6.3	4.5	8.5	8.0	0.75
ENV-SQ-SS-25FT-4-7G-AB 25 Feet 4" • 7 Gauge	9.7	7.8	6.3	4.5	8.5	8.0	0.75
ENV-SQ-SS-25FT-5-11G-AB 25 Feet 5" • 11 Gauge	8.5	6.9	5.6	4.0	11.0	11.0	0.75
ENV-SQ-SS-25FT-5-7G-AB 25 Feet 5" • 7 Gauge	17.5	14.5	11.4	8.1	11.0	11.0	1.0
ENV-SQ-SS-25FT-6-7G-AB 25 Feet 6" • 7 Gauge	27.5	22.3	18.0	12.6	11.5	12.0	1.0
ENV-SQ-SS-30FT-5-11G-AB 30 Feet 5" • 11 Gauge	4.2	3.4	2.7	1.9	11.0	11.0	0.75
ENV-SQ-SS-30FT-5-7G-AB 30 Feet 5" • 7 Gauge	10.6	8.6	6.9	4.9	11.0	11.0	1.0
ENV-SQ-SS-30FT-6-7G-AB 30 Feet 6" • 7 Gauge	17.9	14.5	11.7	8.3	11.5	12.0	1.0
ENV-SQ-SS-35FT-5-7G-AB 35 Feet 5" • 7 Gauge	6.1	4.9	4.0	2.8	11.0	11.0	1.0
ENV-SQ-SS-35FT-6-7G-AB 35 Feet 6" • 7 Gauge	11.8	9.6	7.7	5.5	11.5	12.0	1.0
ENV-SQ-SS-39FT-6-7G-AB 39 Feet 6" • 7 Gauge	7.7	6.2	4.0	3.5	11.5	12.0	1.0

EPA RATINGS INCLUDE A 1.3 GUST FACTOR
VIBRATION DAMPENERS INCLUDED AND INSTALLED ON POLES 25' HIGHER

GAUGE	ANCHOR BOLT DIAMETER
11 Gauge	.75 X 20
7 Gauge	1 X 40

ANCHOR BOLTS SHOULD BE SET USING FACTORY
SUPPLIED TEMPLATES

Round Straight Steel Poles



1 ROUND STRAIGHT STEEL SERIES	EFFECTIVE PROJECTED AREAS			
	80	90	100	120
ENV-RD-SS-8FT-3-11G-AB 8 Feet 3" • 11 Gauge	11.2	8.4	6.2	3.7
ENV-RD-SS-10FT-3-11G-AB 10 Feet 3" 11 Gauge	9.0	6.7	5.0	3.0
ENV-RD-SS-12FT-3-11G-AB 12 Feet 3" 11 Gauge	6.9	5.0	3.9	2.1
ENV-RD-SS-14FT-3-11G-AB 14 Feet 3" 11 Gauge	5.5	3.9	2.9	1.4
ENV-RD-SS-14FT-4-11G-AB 14 Feet 4" 11 Gauge	11.7	8.9	7.1	4.0
ENV-RD-SS-16FT-4-11G-AB 16 Feet 4" 11 Gauge	9.0	6.8	5.3	2.9
ENV-RD-SS-18FT-4-11G-AB 18 Feet 4" 11 Gauge	7.1	5.2	4.0	2.2
ENV-RD-SS-20FT-4-11G-AB 20 Feet 4" 11 Gauge	5.6	4.1	3.1	1.7
ENV-RD-SS-25FT-5-11G-AB 25 Feet 5" 11 Gauge	6.7	5.0	3.7	2.0
ENV-RD-SS-25FT-5-7G-AB 25 Feet 5" 7 Gauge	12.0	9.2	7.5	4.2
ENV-RD-SS-30FT-5-11G-AB 30 Feet 5" 11 Gauge	4.0	2.8	2.0	N/A
ENV-RD-SS-30FT-5-7G-AB 30 Feet 5" 7 Gauge	7.9	6.6	4.8	2.7

EPA RATINGS INCLUDE A 1.3 GUST FACTOR

VIBRATION DAMPENERS INCLUDED AND INSTALLED ON POLES 25' HIGHER



GAUGE	ANCHOR BOLT DIAMETER	BOLT CIRCLE	BASE PLATE
11 Gauge	.75 X 20	8.5	8 SQ X 0.75 Height
7 Gauge	1 X 40	10.0	10 SQ X 1 Height

ANCHOR BOLTS SHOULD BE SET USING FACTORY SUPPLIED TEMPLATES

FIXTURE ARRANGEMENT NOTES	COLOR FINISH NOTES
D1 1 Fixture	BZ RAL8019
D2@90 2 Fixtures	BL
D2@180 2 Fixtures Opposite Sides	WH
D3@90 3 Fixtures 3 Sides	GRY Cardinal 6403-26307
D4 4 Fixtures All Sides	SLV Cardinal 6423-GR06-P



SFA Bracket works as a straight arm or slip fitter mount



Mini Area Flood Lights: M-Line

- Knuckle option is 1/2"
- All bracket options fully adjust up and down
- Corrosion-resistant bronze powder coat
- Full weatherproof IP67 rating housing
- Built-in photocell with EZ-disconnect

3-CCT & Power Select w/ Photocell

Box Qty.
2P30- 8
2P50- 6
3P80- 5

Model	Voltage	Watts	Lumens	Color
LED-ARL-2P30-TRI-BZ-TR-PC	120-277V	30/15w	3,819	30/40/50k
LED-ARL-2P30-TRI-BZ-KN-PC	120-277V	30/15w	3,819	30/40/50k
LED-ARL-2P30-TRI-WH-KN-PC	120-277V	30/15w	3,819	30/40/50k
LED-ARL-2P50-TRI-BZ-TR-PC	120-277V	50/35w	7,000	30/40/50k
LED-ARL-2P50-TRI-BZ-KN-PC	120-277V	50/35w	7,000	30/40/50k
LED-ARL-2P50-TRI-WH-KN-PC	120-277V	50/35w	7,000	30/40/50k
LED-ARL-2P50-TRI-WH-TR-PC	120-277V	50/35w	7,000	30/40/50k
LED-ARL-3P80-TRI-BZ-KN-PC	120-277V	80/70/60w	11,200	30/40/50k
LED-ARL-3P80-TRI-WH-KN-PC	120-277V	80/70/60w	11,200	30/40/50k
LED-ARL-3P80-TRI-BZ-TR-PC	120-277V	80/70/60w	11,200	30/40/50k

15W 3-CCT Select

Box Qty.
8

Model	Voltage	Watts	Lumens	Color
LED-ARL-15W-TRI-BZ-TR	120-277V	15w	2,100	30/40/50k
LED-ARL-15W-TRI-BZ-KN	120-277V	15w	2,100	30/40/50k

30W 3-CCT Select

Box Qty.
8

Model	Voltage	Watts	Lumens	Color
LED-ARL-30W-TRI-BZ-TR	120-277V	30w	3,819	30/40/50k

80W 3-CCT Select

Box Qty.
KN- 5 SFA- 1

Model	Voltage	Watts	Lumens	Color
LED-ARL-80W-TRI-BZ-SFA	120-277V	80w	11,200	30/40/50k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Single CCT

Box Qty.
8

Model	Voltage	Watts	Lumens	Color
LED-ARL-15W-30K-BZ-TR	120-277V	15W	2,100	3000k
LED-ARL-15W-50K-WH-KN	120-277V	15W	2,100	5000k
LED-ARL-30W-30K-BZ-TR	120-277V	30W	3,800	3000k
LED-ARL-30W-30K-WH-KN	120-277V	30W	3,800	3000k
LED-ARL-50W-30K-BZ-TR	120-277V	50W	6,800	3000k

Accessory Model	Accessory Description
ARL-15/30W-SHIELD-BZ	Area light 15W shield
ARL-15/30W-SHIELD-WH	Area light 15W shield
ARL-15/30W-WG	Area light 15W wire guard
ARL-50W-SHIELD-BZ	Area light 50W shield
ARL-50W-SHIELD-WH	Area light 50W shield
ARL-50W-WG	Area light 50W wire guard
ARL-80W-SHIELD-BZ	Area light 80W shield
ARL-80W-SHIELD-WH	Area light 80W shield
ARL-80W-WG	Area light 80W wire guard

Mini Area Floodlights: XS-Line

- Includes 1/2" knuckle (installed on to the fixture)
- Yoke mount included separate in the box
- All bracket options fully adjust up and down
- Selectable photocell

3-CCT & Power Select w/ Photocell

80 HIGH CRI
DLC E17
Box Qty. 8



-BZ



-BL



-WH

NEW

NEW

NEW

NEW

NEW

NEW

NEW

NEW

NEW

NEW

NEW

Model	Voltage	Watts	Lumens	Color
LED-FL-15W-TRI-BZ-KNYK-PC	120-277V	15w	1,950	30/40/50k
LED-FL-15W-TRI-BL-KNYK-PC	120-277V	15w	1,950	30/40/50k
LED-FL-15W-TRI-WH-KNYK-PC	120-277V	15w	1,950	30/40/50k
LED-FL-30W-TRI-BZ-KNYK-PC	120-277V	30w	3,900	30/40/50k
LED-FL-30W-TRI-BL-KNYK-PC	120-277V	30w	6,800	30/40/50k
LED-FL-30W-TRI-WH-KNYK-PC	120-277V	30w	6,800	30/40/50k
LED-FL-3P60-TRI-BZ-KNYK-PC	120-277V	60/50/40w	130lm/w	30/40/50k
LED-FL-3P60-TRI-BL-KNYK-PC	120-277V	60/50/40w	130lm/w	30/40/50k
LED-FL-3P60-TRI-WH-KNYK-PC	120-277V	60/50/40w	130lm/w	30/40/50k
LED-FL-3P100-TRI-BZ-KNYK-PC	120-277V	100/80/60	135lm/w	30/40/50k
LED-FL-3P100-TRI-BL-KNYK-PC	120-277V	100/80/60	135lm/w	30/40/50k
LED-FL-3P100-TRI-WH-KNYK-PC	120-277V	100/80/60	135lm/w	30/40/50k
LED-FL-3P150-TRI-BZ-KNYK-PC	120-277V	150/120/100w	135lm/w	30/40/50k
LED-FL-3P150-TRI-BL-KNYK-PC	120-277V	150/120/100w	135lm/w	30/40/50k
LED-FL-3P150-TRI-WH-KNYK-PC	120-277V	150/120/100w	135lm/w	30/40/50k

15W		30W		3P60		3P100		3P150	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	1,950	30	3,900	40	5,200	60	8,100	100	13,500
				50	6,500	80	10,800	120	16,200
				60	7,800	100	13,500	150	20,250

Mini Flood Light: ARCY-Line

- Includes 1/2" knuckle (installed on to the fixture)
- Trunnion mount included separate in the box
- All bracket options fully adjust up and down
- Selectable photocell

3-CCT & Power Select w/ Photocell

80 HIGH CRI
DLC E17
Box Qty. 2



-BZ



-BZ



-BZ

3P30		3P60		3P100	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	2,250	40	6,000	60	9,000
25	3,750	50	7,500	80	12,000
30	4,500	60	9,000	100	15,000



Trunnion Included

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.



3P150	
WATT	LUMENS
80	12,000
120	18,000
150	22,500

3P300	
WATT	LUMENS
180	27,000
240	36,000
300	45,000

Large Flood Lights: ARCY-Line

- Bracket options shown on page 21 (brackets sold separately)
- NEMA 7Hx6V optic
- Selectable photocell
- Twist-C technology: Sensor ready socket

3-CCT & Power Select w/ Photocell



Model	Voltage	Watts	Lumens	Color
LED-ARL3-ARC-3P150-TRI-BZ-UNV-PC	120-277V	150/120/80w	150lm/w	30/40/50k
LED-ARL3-ARC-3P150-TRI-BL-UNV-PC	120-277V	150/120/80w	150lm/w	30/40/50k
LED-ARL3-ARC-3P150-TRI-WH-UNV-PC	120-277V	150/120/80w	150lm/w	30/40/50k
LED-ARL3-ARC-3P150-TRI-BZ-HV-PC	277-480V	150/120/80w	150lm/w	30/40/50k
LED-ARL3-ARC-3P300-TRI-BZ-UNV-PC	120-277V	300/240/180w	150lm/w	30/40/50k
LED-ARL3-ARC-3P300-TRI-BL-UNV-PC	120-277V	300/240/180w	150lm/w	30/40/50k
LED-ARL3-ARC-3P300-TRI-WH-UNV-PC	120-277V	300/240/180w	150lm/w	30/40/50k
LED-ARL3-ARC-3P300-TRI-BZ-HV-PC	277-480V	300/240/180w	150lm/w	30/40/50k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.


Area Light: OPTIC-Line (Selectable)

- Bracket options shown on page 21 (brackets sold separately)
- Selectable beam angle: Type III, IV, V - Type I, II, III lens available
- 0-10V Dimmable
- Twist-C technology: Sensor ready socket

3-CCT & 5-Power Select



Model	Voltage	Watts	Lumens	Color
LED-ARL3-3B-5P150-TRI-BZ-UNV	120-277V	150/125/100/75/50w	145lm/w	30/40/50k
LED-ARL3-3B-5P150-TRI-BZ-HV	277-480V	150/125/100/75/50w	145lm/w	30/40/50k
LED-ARL3-3B-5P150-TRI-BL-UNV	120-277V	150/125/100/75/50w	145lm/w	30/40/50k
LED-ARL3-3B-5P150-TRI-BL-HV	277-480V	150/125/100/75/50w	145lm/w	30/40/50k
LED-ARL3-3B-5P150-TRI-WH-UNV	120-277V	150/125/100/75/50w	145lm/w	30/40/50k
LED-ARL3-3B-5P150-TRI-WH-HV	277-480V	150/125/100/75/50w	145lm/w	30/40/50k
LED-ARL3-3B-5P150-TRI-GRY-UNV	120-277V	150/125/100/75/50w	145lm/w	30/40/50k
LED-ARL3-3B-5P150-TRI-GRY-HV	277-480V	150/125/100/75/50w	145lm/w	30/40/50k
LED-ARL3-3B-5P300-TRI-BZ-UNV	120-277V	300/270/240/210/180w	145lm/w	30/40/50k
LED-ARL3-3B-5P300-TRI-BZ-HV	277-480V	300/270/240/210/180w	145lm/w	30/40/50k
LED-ARL3-3B-5P300-TRI-BL-UNV	120-277V	300/270/240/210/180w	145lm/w	30/40/50k
LED-ARL3-3B-5P300-TRI-BL-HV	277-480V	300/270/240/210/180w	145lm/w	30/40/50k
LED-ARL3-3B-5P300-TRI-WH-UNV	120-277V	300/270/240/210/180w	145lm/w	30/40/50k
LED-ARL3-3B-5P300-TRI-WH-HV	277-480V	300/270/240/210/180w	145lm/w	30/40/50k
LED-ARL3-3B-5P300-TRI-GRY-UNV	120-277V	300/270/240/210/180w	145lm/w	30/40/50k
LED-ARL3-3B-5P300-TRI-GRY-HV	277-480V	300/270/240/210/180w	145lm/w	30/40/50k
LED-ARL3-3B-5P430-TRI-BZ-UNV	120-277V	430/400/370/340/310w	145lm/w	30/40/50k
LED-ARL3-3B-5P430-TRI-BZ-HV	277-480V	430/400/370/340/310w	145lm/w	30/40/50k
LED-ARL3-3B-5P430-TRI-BL-UNV	120-277V	430/400/370/340/310w	145lm/w	30/40/50k
LED-ARL3-3B-5P430-TRI-BL-HV	277-480V	430/400/370/340/310w	145lm/w	30/40/50k
LED-ARL3-3B-5P430-TRI-WH-UNV	120-277V	430/400/370/340/310w	145lm/w	30/40/50k
LED-ARL3-3B-5P430-TRI-WH-HV	277-480V	430/400/370/340/310w	145lm/w	30/40/50k
LED-ARL3-3B-5P430-TRI-GRY-UNV	120-277V	430/400/370/340/310w	145lm/w	30/40/50k
LED-ARL3-3B-5P430-TRI-GRY-HV	277-480V	430/400/370/340/310w	145lm/w	30/40/50k

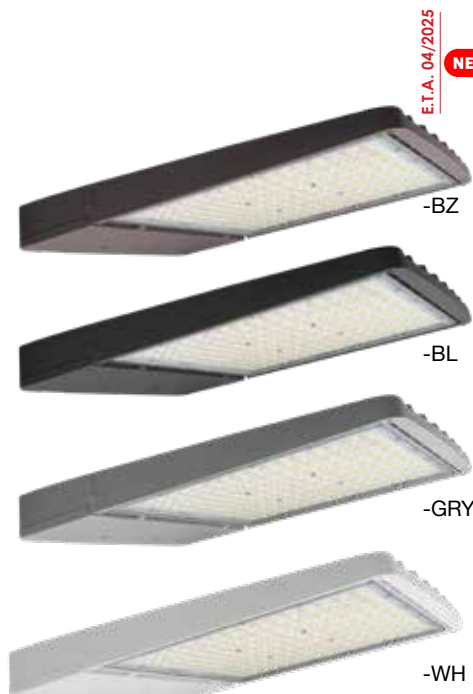

Beam Angle

5P150		5P300	
WATT	LUMENS	WATT	LUMENS
50	7,500	180	27,000
75	11,250	210	31,500
100	15,000	240	36,000
125	18,750	270	40,500
150	22,500	300	45,000

5P430	
WATT	LUMENS
310	46,500
340	51,000
370	55,500
400	60,000
430	64,500

Lens

Accessory Model	Description
ARL3-3P150-3B-1-2-3	Area Light: OPTIC-Line (Selectable): Lens for Type I, II, III 5P150
ARL3-3P300-3B-1-2-3	Area Light: OPTIC-Line (Selectable): Lens for Type I, II, III 5P300

Shields


Accessory Model	Description
ARL3-3B-L-HSS-BZ	ARL3: OPTIC-Line: House Side Shield for 5P150
ARL3-3B-L-HSS-BL	ARL3: OPTIC-Line: House Side Shield for 5P150
ARL3-3B-L-HSS-WH	ARL3: OPTIC-Line: House Side Shield for 5P150
ARL3-3B-L-HSS-GRY	ARL3: OPTIC-Line: House Side Shield for 5P150
ARL3-3B-XL-HSS-BZ	ARL3: OPTIC-Line: House Side Shield for 5P300
ARL3-3B-XL-HSS-BL	ARL3: OPTIC-Line: House Side Shield for 5P300
ARL3-3B-XL-HSS-WH	ARL3: OPTIC-Line: House Side Shield for 5P300
ARL3-3B-XL-HSS-GRY	ARL3: OPTIC-Line: House Side Shield for 5P300

Large Area Light: Optic-Line

- Bracket options shown on page 21 (brackets sold separately)
- Easy optic swap: Type III optics installed, Type II, IV, V included
- 0-10V Dimmable
- Twist-C technology: Sensor ready socket

3-CCT & 5-Power Select

Box Qty. 4
5P150- 4
5P300- 2

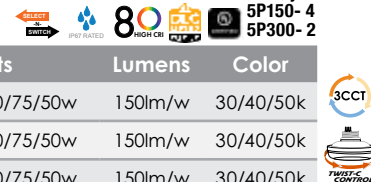

Model	Voltage	Watts	Lumens	Color
LED-ARL3-OPT-5P150-TRI-BZ-UNV	120-277V	150/125/100/75/50w	150lm/w	30/40/50k
LED-ARL3-OPT-5P150-TRI-BZ-HV	277-480V	150/125/100/75/50w	150lm/w	30/40/50k
LED-ARL3-OPT-5P150-TRI-BL-UNV	120-277V	150/125/100/75/50w	150lm/w	30/40/50k
LED-ARL3-OPT-5P150-TRI-BL-HV	277-480V	150/125/100/75/50w	150lm/w	30/40/50k
LED-ARL3-OPT-5P150-TRI-WH-UNV	120-277V	150/125/100/75/50w	150lm/w	30/40/50k
LED-ARL3-OPT-5P150-TRI-WH-HV	277-480V	150/125/100/75/50w	150lm/w	30/40/50k
LED-ARL3-OPT-5P300-TRI-BZ-UNV	120-277V	300/270/240/210/180w	150lm/w	30/40/50k
LED-ARL3-OPT-5P300-TRI-BZ-HV	277-480V	300/270/240/210/180w	150lm/w	30/40/50k
LED-ARL3-OPT-5P300-TRI-BL-UNV	120-277V	300/270/240/210/180w	150lm/w	30/40/50k
LED-ARL3-OPT-5P300-TRI-BL-HV	277-480V	300/270/240/210/180w	150lm/w	30/40/50k
LED-ARL3-OPT-5P300-TRI-WH-UNV	120-277V	300/270/240/210/180w	150lm/w	30/40/50k
LED-ARL3-OPT-5P300-TRI-WH-HV	277-480V	300/270/240/210/180w	150lm/w	30/40/50k
LED-ARL3-OPT-5P450-TRI-BZ-UNV	120-277V	450/420/390/360/330w	150lm/w	30/40/50k
LED-ARL3-OPT-5P450-TRI-BL-UNV	120-277V	450/420/390/360/330w	150lm/w	30/40/50k
LED-ARL3-OPT-5P450-TRI-WH-UNV	120-277V	450/420/390/360/330w	150lm/w	30/40/50k

Shields

Accessory Model	Description
ARL3-OPT-L-HSS-BZ	ARL3: Optic-line: House side shield for 5P150
ARL3-OPT-L-HSS-BL	ARL3: Optic-line: House side shield for 5P150
ARL3-OPT-L-HSS-WH	ARL3: Optic-line: House side shield for 5P150
ARL3-OPT-XL-HSS-BZ	ARL3: Optic-line: House side shield for 5P300
ARL3-OPT-XL-HSS-BL	ARL3: Optic-line: House side shield for 5P300
ARL3-OPT-XL-HSS-WH	ARL3: Optic-line: House side shield for 5P300

Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 40W/field install)
Add '-PC' to model #	Photocell
Add: 20KV to model#	Add: 20KV to model#



5P150	
WATT	LUMENS
50	7,500
75	11,250
100	15,000
125	18,750
150	22,500

5P300	
WATT	LUMENS
180	27,000
210	31,500
240	36,000
270	40,500
300	45,000

5P450	
WATT	LUMENS
330	49,500
360	54,000
390	58,500
420	63,000
450	67,500



Toolless Access to Optic Lens




Toolless Access to Driver



Rotatable Optic Lens

Field rotation eases lighting design implementation. Rotate lens and receive different light distribution in different directions.

No change to fixture installation and EPA.

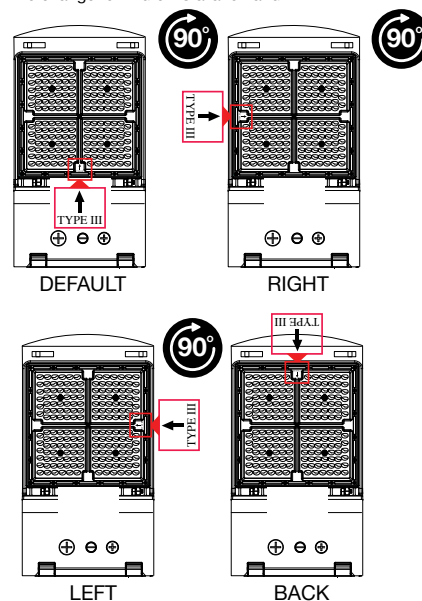


-BZ

WATT	LUMENS	WATT	LUMENS
20	2,800	200	28,000
40	5,600	215	30,100
60	8,400	225	31,500
70	10,150	240	33,600
90	12,600	250	35,000
100	14,000	275	38,500
110	15,400	300	42,000
130	18,200	330	46,200
140	19,600	360	50,400
150	21,000	390	54,600
165	23,100	420	58,800
190	26,600	450	63,000


**House
Side Shield**

Optics Lens

**S-TWC-MW-1 S-TWC-PIR-1
S-TWC-MW-BT S-TWC-PIR-BT
TWC-DL**

S-LINE-R

Large Area Light: Bolt-Line

- Bracket options shown on page 21 (brackets sold separately)
- Type III optics standard, other optics available
- 0-10V dimmable
- Twist-C technology: Sensor ready socket
- 10Kv surge protector built in

3-CCT & 5-Power Select

Model	Voltage	Watts	Lumens	Color
LED-ARL3-5P100-TRI-BZ-UNV	120-277V	100/80/60/40/20w	140 lm/w	30/40/50k
LED-ARL3-5P150-TRI-BZ-UNV	120-277V	150/130/110/90/80w	140 lm/w	30/40/50k
LED-ARL3-5P240-TRI-BZ-UNV	120-277V	150/130/110/90/80w	140 lm/w	30/40/50k
LED-ARL3-5P300-TRI-BZ-UNV	120-277V	300/275/250/225/200w	140 lm/w	30/40/50k
LED-ARL3-5P450-TRI-BZ-UNV	120-277V	450/420/390/360/330w	140 lm/w	30/40/50k



Large Area Light High Voltage: Bolt-Line

3-CCT & 5-Power Select

Model	Voltage	Watts	Lumens	Color
LED-ARL3-5P150-TRI-BZ-HV	277-480V	150/130/110/90/80w	140 lm/w	30/40/50k
LED-ARL3-5P300-TRI-BZ-HV	277-480V	300/275/250/225/200w	140 lm/w	30/40/50k
LED-ARL3-5P450-TRI-BZ-HV	277-480V	450/420/390/360/330w	140 lm/w	30/40/50k



*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

Accessory Model	Description
ARL3-100-150W-HSS-BZ	ARL3: House side shield for 100W and 150W
ARL3-240-300W-HSS-BZ	ARL3: House side shield for 240W and 300W
ARL3-450W-HSS-BZ	ARL3: House side shield for 450W

Accessory Model	Description
ARL3-T-II-100-150	ARL: Type II optics lens (25° beam) lens
ARL3-T-IV-100-150	ARL2: Type IV optics lens (60/90° beam) lens
ARL3-T-V-100-150	ARL2: Type V optics lens (360° beam) lens
ARL3-T-II-240-300	ARL: Type II optics lens (25° beam) lens
ARL3-T-IV-240-300	ARL2: Type IV optics lens (60/90° beam) lens
ARL3-T-V-240-300	ARL2: Type V optics lens (360° beam) lens
ARL3-T-II-450	ARL: Type II optics lens (25° beam) lens
ARL3-T-IV-450	ARL2: Type IV optics lens (60/90° beam) lens
ARL3-T-V-450	ARL2: Type V optics lens (360° beam) lens

Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 40W/field install)
Add '-PC' to model #	Photocell
Add: 20KV to model#	Add: 20KV to model#



Slip Fitter

Straight Arm
Adjustable

Wall Mount

Trunnion



Yoke

Slip Fitter
& Straight ArmHouse
Side Shield

S-TWC-J-90

S-TWC-MW-1
TWC-DLS-TWC-PIR-1
S-TWC-PIR-BT

S-LINE-R

Brackets for ARL3 Fixtures



Accessory Model	Description
ARL3-SF	ARL3: Slip fitter
ARL3-SF-BL	ARL3: Slip fitter (black)
ARL3-SF-WH	ARL3: Slip fitter (white)
ARL3-SF-GRY	ARL3: Slip fitter (gray)
ARL3-SA	ARL3: Straight arm
ARL3-SA-BL	ARL3: Straight arm (black)
ARL3-SA-WH	ARL3: Straight arm (white)
ARL3-SA-GRY	ARL3: Straight arm (gray)
ARL3-WM	ARL3: Wall mount bracket (requires ARL3-SA for mounting)
ARL3-WM-BL	ARL3: Wall mount bracket (requires ARL3-SA for mounting) (black)
ARL3-WM-WH	ARL3: Wall mount bracket (requires ARL3-SA for mounting) (white)
ARL3-WM-GRY	ARL3: Wall mount bracket (requires ARL3-SA for mounting) (gray)
ARL3-SFA	ARL3: Slip fitter/straight arm combo
ARL3-SFA-BL	ARL3: Slip fitter/straight arm combo (black)
ARL3-SFA-WH	ARL3: Slip fitter/straight arm combo (white)
ARL3-SFA-GRY	ARL3: Slip fitter/straight arm combo (gray)
ARL3-ARC-TR	ARL3 Arc: Trunnion (only works with arc)
ARL3-ARC-TR-BL	ARL3 Arc: Trunnion (only works with arc) (black)
ARL3-ARC-TR-WH	ARL3 Arc: Trunnion (only works with arc) (white)
ARL3-TR	ARL3: Trunnion (only works with bolt & optic-line)
ARL3-TR-BL	ARL3: Trunnion (only works with bolt & optic-line) (black)
ARL3-TR-WH	ARL3: Trunnion (only works with bolt & optic-line) (white)
ARL3-TR-GRY	ARL3: Trunnion (only works with bolt & optic-line) (gray)
ARL3-YK-100-150	ARL3: Yoke
ARL3-YK-240-450	ARL3: Yoke

Sensors for ARL3 Fixtures

Accessory Model	Description
S-TWC-J-90	"Twist-C microwave sensor Brightness: 100%/ hold time: 10 min. Bi-level dim: 50% stand by time: 10 min. Sensitivity: 100% daylight: Enabled"
S-TWC-MW-1	"Twist-C microwave sensor Brightness: 100%/ hold time: 10 min. Bi-level dim: 50% stand by time: 10 min. Sensitivity: 100% daylight: Enabled"
S-TWC-PIR-1	"Twist-C PIR sensor Brightness: 100%/ hold time: 10 min. Bi-level dim: 50% stand by time: 10 min. Sensitivity: 100% daylight: Enabled"
S-TWC-PIR-ON/OFF	PIR On/Off Only: Twist-C 5/10/15 Min
TWC-DL	Twist-C daylight sensor: Dusk to dawn, works like a photocell
S-TWC-PIR-BT	PIR Bi-Level + Daylight: Twist-C Bluetooth EnVisionLS App
S-TWC-PIR-SL	PIR Bi-Level + Daylight: Twist-C SILVAIR Enabled



Pre-Installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 8W)



**Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.*



-WH



LIGHT DIRECTION



WATT	LUMENS	WATT	LUMENS
12	1,250	22	2,200
16	1,600	29	2,750
20	2,000	35	3,100

Security Flood Light with Motion Sensor

- XS Sized body with powerful lumen output
- Selectable optional ambient light
- Integrated photocell + PIR sensor

3-CCT & 3-Power Select w/ Photocell





 Box Qty.
12



-BZ

E.T.A. 04/2025

NEW

Model	Voltage	Watts	Lumens	Color
LED-XSL2R-2P25-TRI-BZ-PIR	120V	25/16w	120 lm/w	30/40/50k
LED-XSL2R-2P25-TRI-BL-PIR	120V	25/16w	120 lm/w	30/40/50k
LED-XSL2R-2P25-TRI-WH-PIR	120V	25/16w	120 lm/w	30/40/50k

WATT	LUMENS
16	2,080
25	3,250



-BL



-WH

Modern Square Sconce Light: M-Line

- Frosted glass lens
- 5-CCT

5" x 5" w/ Up & Down Light

IP65 RATED 90 HIGH CRI ETL LISTED Box Qty. 10

NEW


Model	Voltage	Watts	Lumens	Color
LED-WSC-UD-15W-5CCT-WH	120-277V	15W	1,000	27/30/35/40/50k
LED-WSC-UD-15W-5CCT-BL	120-277V	15W	1,000	27/30/35/40/50k

-BL

-WH



-BL



-WH



5" x 10" w/ Selectable Up & Down Light

IP65 RATED 90 HIGH CRI ETL LISTED Box Qty. 10


E.T.A. 02/2025

NEW

Model	Voltage	Watts	Lumens	Color
LED-WSC-5X10-UD-24W-5CCT-WH	120-277V	24W	2,400	27/30/35/40/50k
LED-WSC-5X10-UD-24W-5CCT-BL	120-277V	24W	2,400	27/30/35/40/50k



3-Selectable Light Options
Up Only, Down Only, Up & Down Light
& 5-CCT Selectable



-BL



-WH



12" x 12" w/ Selectable Up & Down Light

IP65 RATED 90 HIGH CRI ETL LISTED Box Qty. 10

E.T.A. 02/2025

NEW

Model	Voltage	Watts	Lumens	Color
LED-WSC-12-UD-30W-5CCT-WH	120-277V	30w	2,700	27/30/35/40/50k
LED-WSC-12-UD-30W-5CCT-BL	120-277V	30w	2,700	27/30/35/40/50k



3-Selectable Light Options
Up Only, Down Only, Up & Down Light
& 5-CCT Selectable

Indoor Use





Outdoor Use





Tenon Mount For Poles

- Compatible with 2 3/8" slip fitter brackets

Box Qty: 4





Accessory Model	Description
TN-WM-90-7	Tenon: Wall mount 90 degree arm 7" mounting bracket bronze finish




Box Qty: 4

Accessory Model	Description
TN-WM-7	Tenon: Wall mount straight 4" mounting bracket bronze finish




Box Qty: 10

Accessory Model	Description
TN-RD-3	Tenon: Round 3" pole reducer to 2.36"





Box Qty: 10

Accessory Model	Description
TN-RD-4	Tenon: Round 4" pole reducer to 2.36"





Box Qty: 6

Accessory Model	Description
TN-RD-5	Tenon: Round 5" pole reducer to 2.36"




Box Qty: 10

Accessory Model	Description
TN-SQ-3	Tenon: Square 3" pole reducer to 2.36"





Box Qty: 10

Accessory Model	Description
TN-SQ-4	Tenon: Square 4" pole reducer to 2.36"





Box Qty: 10

Accessory Model	Description
TN-SQ-5	Tenon: Square 5" pole reducer to 2.36"





Box Qty: 1

Accessory Model	Description
TN-BH-SQ-180-2S	Tenon: Square bullhorn 2-head adapter





Box Qty: 1

Accessory Model	Description
TN-BH-SQ-180-3S	Tenon: Square bullhorn 3-head adapter



Box Qty: 1

Accessory Model	Description
TN-BH-SQ-180-3Y	Tenon: Square bullhorn 3-head Y-adaptor



Box Qty: 1

Accessory Model	Description
TN-BH-SQ-90-4X	Tenon: Square bullhorn 4-head X-adaptor



-BZ



-BL



PC-TWL-HV



PC-TWL-UNV



PC-TWL-RC



PC-SHORT-CAP

Post Top Fixture: Bolt-Line

- Foldable design for easy stocking and transportation
- Dark sky compliant
- Fits 2 3/4" pole

3-CCT & 3-Power Select



Model	Voltage	Watts	Lumens	Color
LED-PST-3P75-TRI-BZ-UNV	120-277V	75/50/35w	135lm/w	30/40/50k
NEW LED-PST-3P75-TRI-BL-UNV	120-277V	75/50/35w	135lm/w	30/40/50k
LED-PST-3P150-TRI-BZ-UNV	120-277V	150/125/100w	135lm/w	30/40/50k
NEW LED-PST-3P150-TRI-BL-UNV	120-277V	150/125/100w	135lm/w	30/40/50k

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 15W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
Add '-HV' to model #	High voltage (internal 480V)
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector

WATT	LUMENS
35	4,700
50	7,400
75	10,200
100	13,900
125	17,400
150	20,400

Accessory Model	Description
PC-TWL-HV	LC4535INT 3PIN Locking Type Thermal Photo Control 480V Intermatic
PC-TWL-UNV	JL207C 3PIN Locking Type Thermal Photo Control 120-277V Intermatic
PC-TWL-RC	Twist Lock photocell receptacle
PC-SHORT-CAP	3 Pin Shorting Cap





-BZ




-WH

Bullet Flood Lights: S-Line

- 40° beam spread
- IP65 wet location rated
- Bracket allows for full adjustability
- KN (1/2" knuckle)
- TR (Trunnion)

3-CCT Select

Model	Voltage	Watts	Lumens	Color
LED-BLT-25W-TRI-BZ-KN-UNV	120-277V	25w	3,500	30/40/50k
LED-BLT-25W-TRI-WH-KN-UNV	120-277V	25w	3,500	30/40/50k

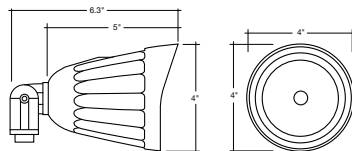


1/2" Knuckle Mount

Bullet Flood Lights: Magna-Line

3-CCT & 3-Power Select with Photocell

Model	Voltage	Watts	Lumens	Color
LED-BLT-3P25W-TRI-BZ-KN-UNV	120-277V	25/20/15w	125lm/w	30/40/50k
LED-BLT-3P25W-TRI-WH-KN-UNV	120-277V	25/20/15w	125lm/w	30/40/50k
LED-BLT-3P25W-TRI-BZ-TR-UNV	120-277V	25/20/15w	125lm/w	30/40/50k

WATT	LUMENS
15	1,875
20	2,500
25	3,125




1/2" Knuckle Mount

Bullet Flood Lights: M-Line

Model	Voltage	Watts	Lumens	Color
LED-BLT-28W-30K-BZ-KN-UNV	120-277V	28w	3,500	3000k
LED-BLT-42W-30K-BZ-KN-UNV	120-277V	42w	5,250	3000k
LED-BLT-42W-50K-BZ-KN-UNV	120-277V	42w	5,250	5000k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.



1/2" Knuckle Mount

Final
Production



Area Barn Dusk to Dawn Flood Light: Bolt-Line

- Dusk to dawn photocell sensor included
- 3 Selectable color temps.: 30/40/50K
- High luminous efficacy: up to 155lm/W

3-CCT Select








Model	Voltage	Watts	Lumens	Color
LED-BDD-40W-TRI-BZ-PC	120-277V	40w	6,200	30/40/50k
LED-BDD-60W-TRI-SL-PC	120-277V	60w	9,300	30/40/50k
LED-BDD-60W-TRI-BZ-PC	120-277V	60w	9,300	30/40/50k



-SLV




-BZ



J-Box Installation Cover
Available in Silver and Bronze

Accessory Model	Description
BDD-JBX-SLV	Silver J-box installation cover
BDD-JBX-BZ	Bronze J-box installation cover
TN-L-POLE	Pole installation tenon bracket

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

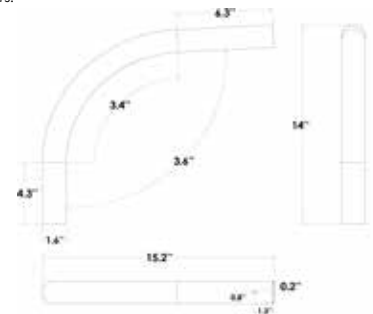

Tenon Bracket Dimensions

Gooseneck Area Light: Bolt-Line

- Selectable photocell
- Adjustable rotation

3-CCT Select








Model	Voltage	Watts	Lumens	Color
LED-GNB-3P50-TRI-BZ-PC	120-277V	50/40/30w	130 lm/w	30/40/50k
LED-GNB-3P50-TRI-BL-PC	120-277V	50/40/30w	130 lm/w	30/40/50k
LED-GNB-3P50-TRI-WH-PC	120-277V	50/40/30w	130 lm/w	30/40/50k



-BZ



-BL



-WH

WATT	LUMENS
30	3,900
40	5,200
50	6,500





Sports Light Fixture: Magna-Line

- All fixtures includes a yoke mount
- Slip fitter can be added to the fixture (20-30 min. field install)
- Shield is included with the fixture
- Fixture can be adjusted up or down
- Fixture is stocked in black finish
- Free lighting layouts are available
- Product can be customized but with a longer lead time
- Perfect for stadiums and outdoor fields

Round

- LED driver can be remote mounted away from fixture for easy maintenance
- 0-10V dimmable



WATT	LUMENS	WATT	LUMENS
300	52,500	800	124,000
450	63,000	1000	130,000
600	105,000	1200	168,000

WATT	LUMENS
900	126,000
1200	168,000
1500	210,000


RGB	WATTS	LUMENS
Red/Green/Blue	500	26,600
R	175	3,400
G	175	22,400
B	175	1,866



Remote Mountable
Driver up to 70ft.



WATT	LUMENS
400	60,000
600	90,000
800	120,000



Anti-Glare Shield



SPL-SF



Laser



Slip Fitter

Model	Voltage	Watts	Lumens	Color
LED-SPL-3P600W-50K-YK-UNV-BLK	120-277V	600/450/300w	145 lm/w	5000k
LED-SPL-3P600XS-50K-YK-UNV-BLK	120-277V	600/450/300w	145 lm/w	5000k
LED-SPL-3P1200W-50K-YK-UNV-BLK	120-277V	1,200/1,000/800w	145 lm/w	5000k
LED-SPL-3P1500XS-50K-YK-UNV-BLK	120-277V	1,500/1,200/900w	145 lm/w	5000k

Round RGB

- Compatible with DMX controller (required)

Model	Voltage	Watts	Lumens	Color
LED-SPL-500W-RGB-YK-BLK	120-277V	500w	See Chart	RGB

*RGB model custom order only

Accessory Model	Description
SPL-3P600-30D	SPL 3P600: 30D optic lens
SPL-3P600-60D	SPL 3P600: 30D optic lens
SPL-480V-D	480V added for SPL fixture (600w requires 1. 1200w requires 2)
SPL-EC-35FT	35FT Extension cord for remote mount driver

Square Sports Light: Arcy-Line



Model	Voltage	Watts	Lumens	Color
LED-SQSPL-3P800W-50K-YK-UNV-BLK	120-277V	800/600/400w	130lm/w	5000k

Accessory Model	Description
SQSPL-AG	SQSPL: Anti-glare louver shield
SQSPL-20D	SQSPL: 20D optic lens
SQSPL-55D	SQSPL: 55D optic lens

Accessory Model	Description
SPL-SF	Slip fitter for sports light fixture
SPL-SF-XS	Slip Fitter for SPL-3P600
SPL-SF-XL	Slip Fitter for SPL-3P600
SPL-LSR	Laser aiming device

Accessory Model	Description
Add: -PC to Model #	On/off photocell
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
Add: -HV to model#	480V added for SPL fixture (600w/800w requires 1. 1200w requires 2)

ROUND



WATT	LUMENS
12	1,560
16	2,080
22	2,860

Round Bollard Base: Bolt-Line

- 5 different head options
- Round version: Base and head sold separately
- Square version: Base and head sold as a set

3-Power Select / Order Your Base

Box Qty.
1

Model	Height	Finish
BLD-3P22-RD-UNV-BZ-22	22"	Bronze
BLD-3P22-RD-UNV-BL-22	22"	Black
BLD-3P22-RD-UNV-BZ-44	44"	Bronze
BLD-3P22-RD-UNV-BL-44	44"	Black

Round Bollard Head: Bolt-Line

5-CCT Select / Order Your Head

5-CCT Select / Order Your Head

Box Qty.
4

Model	Voltage	Watts	Lumens	Color
LED-BLD-RD-5CCT-CN-DM-BZ	120-277V	22/16/12W	130lm/w	27/30/35/40/50K
LED-BLD-RD-5CCT-CN-DM-BL	120-277V	22/16/12W	130lm/w	27/30/35/40/50K
LED-BLD-RD-5CCT-LV-DM-BZ	120-277V	22/16/12W	130lm/w	27/30/35/40/50K
LED-BLD-RD-5CCT-LV-DM-BL	120-277V	22/16/12W	130lm/w	27/30/35/40/50K
LED-BLD-RD-5CCT-CN-FL-BZ	120-277V	22/16/12W	130lm/w	27/30/35/40/50K
LED-BLD-RD-5CCT-CN-FL-BL	120-277V	22/16/12W	130lm/w	27/30/35/40/50K
LED-BLD-RD-5CCT-LV-FL-BZ	120-277V	22/16/12W	130lm/w	27/30/35/40/50K
LED-BLD-RD-5CCT-LV-FL-BL	120-277V	22/16/12W	130lm/w	27/30/35/40/50K

DOME



WATT	LUMENS
12	1,560
16	2,080
22	2,860

Factory Installed Frosted Lens Available: BLD-RD-FRL

Factory Installed Frosted Lens Available: BLD-RD-SHIELD

Square Bollard (Base & Head Included)

5-CCT Select / Order Your Head

Box Qty.
1

WATT	LUMENS
12	1,560
16	2,080
22	2,860

Model	Voltage	Watts	Lumens	Color
LED-BLD-3P22-SQ-5CCT-UNV-CN-FL-BZ-44	120-277V	22/16/12W	130lm/w	27/30/35/40/50K
LED-BLD-3P22-SQ-5CCT-UNV-CN-FL-BL-44	120-277V	22/16/12W	130lm/w	27/30/35/40/50K

SQUARE



BL-BLACK

SQUARE FLAT



CONE

ROUND DOME



LOUVER



CONE



FROSTED LENS



CONE LENS LED

ROUND FLAT



LOUVER



CONE



FROSTED LENS



LOUVER LENS LED





*Custom finishes include black, white, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Round Bollard Accessories	Description
BLD-RD-FRL	Frosted lens for round heads. Must be factory installed.
BLD-RD-SHIELD-BZ	Field installed round 180° shield
BLD-RD-SHIELD-BL	Field installed round 180° shield

Pre-Installed Accessory	Description
Add: -EMB to Model #	90 minute emergency backup
Add: -PC to Model #	On/Off photocell
Add: -BMS to Model #	HD407VC-R: Bi level motion + daylight sensor
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
Add: -HV to model#	347-480V Step down transformer

Qube Extendable LED Aquarium Light

- Extendable
- 3 light modes
- 5 levels of brightness
- 3 / 6 / 12 hour timer
- 20,000 lifetime hours
- Waterproof sealant
- Acrylic baffle



Box Qty. 1



Model	Voltage	Watts	Lumens	Color	CRI
QB-AQUA-12I-9W-FS	100-240V	9w	650	Red, Blue, 6500K	>80
QB-AQUA-16I-14W-FS	100-240V	14w	850	Red, Blue, 6500K	>80
QB-AQUA-22I-16W-FS	100-240V	16w	920	Red, Blue, 6500K	>80
QB-AQUA-28I-20W-FS	100-240V	20w	1,250	Red, Blue, 6500K	>80
QB-AQUA-36I-25W-FS	100-240V	25w	1,600	Red, Blue, 6500K	>80
QB-AQUA-46I-32W-FS	100-240V	32w	1,800	Red, Blue, 6500K	>80

Qube LED Commercial Growlight

FULL SPECTRUM

- Adjust power for any stage of plant life
- Linkable connector to daisy chain multiple lights included
- 10 foot power cord
- 6 foot suspension kit included
- Energy saving LED technology
- Features 8 LED bars compared to industry standard of 6
- Ideal for cannabis growing use
- 0-10V dimmable to work with grow light control systems

8000K HIGH CRI Box Qty. 1

Model	Voltage	Watts	Lumens	Color
QB-FSG-8B-7T660W	120-277V	660w	1716 μMols / 2.6μMol/J	Full Spectrum
QB-FSG-8B-7T960W	120-277V	960w	2496 μMols / 2.6μMol/J	Full Spectrum

- ⚡ INPUT: AUTO 120-277V
- ☔ IP65 RATED
- 🔍 FULL SPECTRUM LED
- ⏻ BUILT-IN POWER CONTROL KNOB
- 🔧 0-10V DIMMABLE FOR CONTROL COMPATIBILITY



Linear Highbay: Bolt-Line

- 0-10V dimmable integrated driver
- Optional internally-mounted motion sensor
- Twist-C technology: Sensor ready socket

3-Power Select



Box Qty.
2ft- 2
4ft- 1



WATT	LUMENS	WATT	LUMENS
60	8,700	200	29,000
80	11,600	240	34,800
110	15,950	260	37,700
125	18,125	280	40,600
150	21,750	290	42,050
160	23,200	320	46,400
165	23,925		




SK-10FT-Y-LC-PD
SK-20FT-Y-LC-PD




SK-10FT-Y-LC-CB
SK-20FT-Y-LC-CB




CK-6FT-V




LHB-3P-PDM



LHB-3P-SM

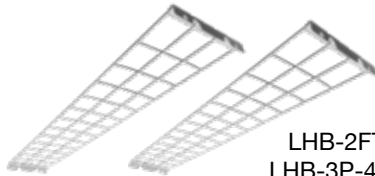

LHB-2FT-WG
LHB-3P-4FT-WG



6'-WHIP-1/2KO
10'-WHIP-1/2KO
20'-WHIP-1/2KO



S-TWC-PIR -ON/OFF



S-TWC-PIR-1
S-TWC-PIR-SL
S-TWC-PIR-BT



S-LINE-R



SB



TL

Model	Voltage	Watts	Lumens	Color
LED-LHB-2FT-3P110-F-40K-UNV	120-277V	110/80/60w	145lm/w	4000k
LED-LHB-2FT-3P110-F-50K-UNV	120-277V	110/80/60w	145lm/w	5000k
LED-LHB-2FT-3P165-F-40K-UNV	120-277V	165/150/125w	145lm/w	4000k
LED-LHB-2FT-3P165-F-50K-UNV	120-277V	165/150/125w	145lm/w	5000k
LED-LHB-4FT-3P320-F-50K-UNV-30D	120-277V	320/280/240/200/160w	145lm/w	5000k
LED-LHB-4FT-5P320-CTRI-UNV	120-277V	320/280/240/200/160w	145lm/w	5000k

Accessory Model	Description
SK-10FT-Y-LC-PD	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-10FT-Y-LC-CB	10' Y-Shape, Loop Top, Carabiner Bottom (Adjustable Length)
SK-20FT-Y-LC-CB	20' Y-Shape, Loop Top, Carabiner Bottom (Adjustable Length)
CK-6FT-V	6' Chain Hanging Kit

Accessory Model	Description
LHB-3P-PDM	LHB: Pendant mount bracket up to 320W
LHB-3P-SM	LHB: Surface mount bracket up to 320W

Accessory Model	Description
LHB-2FT-WG	Linear Highbay Wire Guard 2ft
LHB-3P-4FT-WG	Linear Highbay Wire Guard 4ft

Accessory Model	Description
6'-WHIP-1/2KO	6' Whip
10'-WHIP-1/2KO	10' Whip
20'-WHIP-1/2KO	20' Whip

Accessory Model	Description
S-TWC-PIR-ON/OFF	PIR Sensor On/Off Only 5/10/15min
S-TWC-PIR-1	PIR Bi-Level Motion + Daylight Sensor (Remote Req'd: S-LINE-R)
S-TWC-PIR-BT	PIR EnvisionLS Bluetooth Control
S-TWC-PIR-SL	PIR SILVAIR Bluetooth Mesh + Daylight Sensor



Accessory Model	Description
SB	5-15P Straight Blade Plug
TL	L5-15P Twist Lock Plug

Pre-installed Accessory Model	Description
3Whip-(3)ft -specify ft in place of #	3 Wire whip hot, neutral, ground (\$15 min)
5Whip-(5)ft - specify ft in place of #	5 Wire whip hot, neutral, ground, dim (\$21min)
Add: -EMB to model #	90 Minute emergency backup
Add: -20KV to model#	SG-20KV-UNV: 20KV surge protector
Add; SB to model #	5-15P Straight Blade Plug
Add; TL to model #	L5-15P Twist Lock Plug

Linear Highbay: C-Line

4-CCT & 3-Power Select

Box Qty.
1ft- 4
2ft- 2



Model	Voltage	Watts	Lumens	Color
LED-LHB-1FT-3P165-4CCT-UNV	120-277V	165/110/60w	150lm/w	30/35/45/50k
LED-LHB-1FT-3P165-4CCT-HV	277-480V	165/110/60w	150lm/w	30/35/45/50k
LED-LHB-2FT-3P220-4CCT-UNV	120-277V	220/200/180w	150lm/w	30/35/45/50k
LED-LHB-2FT-3P220-4CCT-HV	277-480V	220/200/180w	150lm/w	30/35/45/50k
LED-LHB-2FT-3P320-4CCT-UNV	120-277V	320/290/260w	150lm/w	30/35/45/50k
LED-LHB-2FT-3P320-4CCT-HV	277-480V	320/290/260w	150lm/w	30/35/45/50k
LED-LHB-2FT-3P440-4CCT-UNV	120-277V	440/410/380w	150lm/w	30/35/45/50k
LED-LHB-2FT-3P440-4CCT-HV	277-480V	440/410/380w	150lm/w	30/35/45/50k

3P165/3P220/3P320				3P440	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
60	9,000	220	31,900	380	57,000
110	16,500	260	39,000	410	61,500
165	24,750	290	43,500	440	66,000
180	27,000	320	48,000		
200	30,000				



Accessory	Description
SK-10FT-Y-LC-PD	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-10FT-Y-LC-CB	10' Y-Shape, Loop Top, Carabiner Bottom (Adjustable Length)
SK-20FT-Y-LC-CB	20' Y-Shape, Loop Top, Carabiner Bottom (Adjustable Length)
CK-6FT-V	6' Chain Hanging Kit





Accessory Model	Description
LHB-3P-PDM	LHB: Pendant mount bracket up to 320W
LHB-3P440-PDM	LHB: Surface mount bracket up to 440W
LHB-3P-SM	LHB: Surface mount bracket up to 320W
LHB-3P440-SM	LHB: Surface mount bracket up to 440W


Accessory Model	Description	Accessory Model	Description
LHB-3P165-1FT-WG	LHB: Wire Guard 1ft 3P165	6'-WHIP-1/2KO	6' Whip
LHB-3P220-2FT-WG	LHB: Wire Guard 2ft 3P220	10'-WHIP-1/2KO	10' Whip
LHB-3P320-2FT-WG	LHB: Wire Guard 2ft 3P320	20'-WHIP-1/2KO	20' Whip
LHB-3P440-2FT-WG	LHB: Wire Guard 2ft 3P440		

Accessory Model	Description
S-TWC-PIR-ON/OFF	PIR Sensor On/Off Only 5/10/15min
S-TWC-PIR-1	PIR Bi-Level Motion + Daylight Sensor (Remote Req'd: S-LINE-R)
S-TWC-PIR-BT	PIR EnvisionLS Bluetooth Control
S-TWC-PIR-SL	PIR SILVAIR Bluetooth Mesh + Daylight Sensor

Accessory Model	Description
SB	5-15P Straight Blade Plug
TL	L5-15P Twist Lock Plug

Pre-installed Accessory Model	Description
3Whip-(3)ft -specify ft in place of #	3 Wire whip hot, neutral, ground (\$15 min)
5Whip-(5)ft - specify ft in place of #	5 Wire whip hot, neutral, ground, dim (\$21min)
Add: -EMB to model #	90 Minute emergency backup
Add: -20KV to model#	SG-20KV-UNV: 20KV surge protector
Add: SB to model #	5-15P Straight Blade Plug
Add: TL to model #	L5-15P Twist Lock Plug

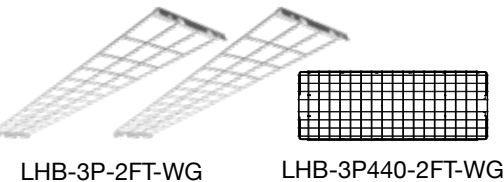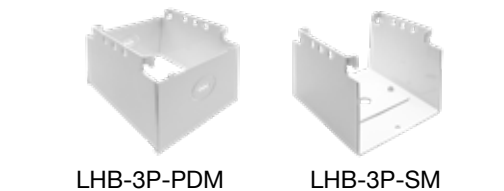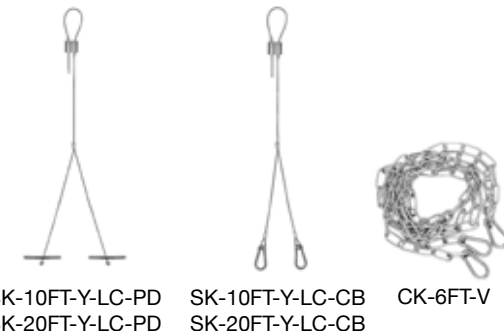

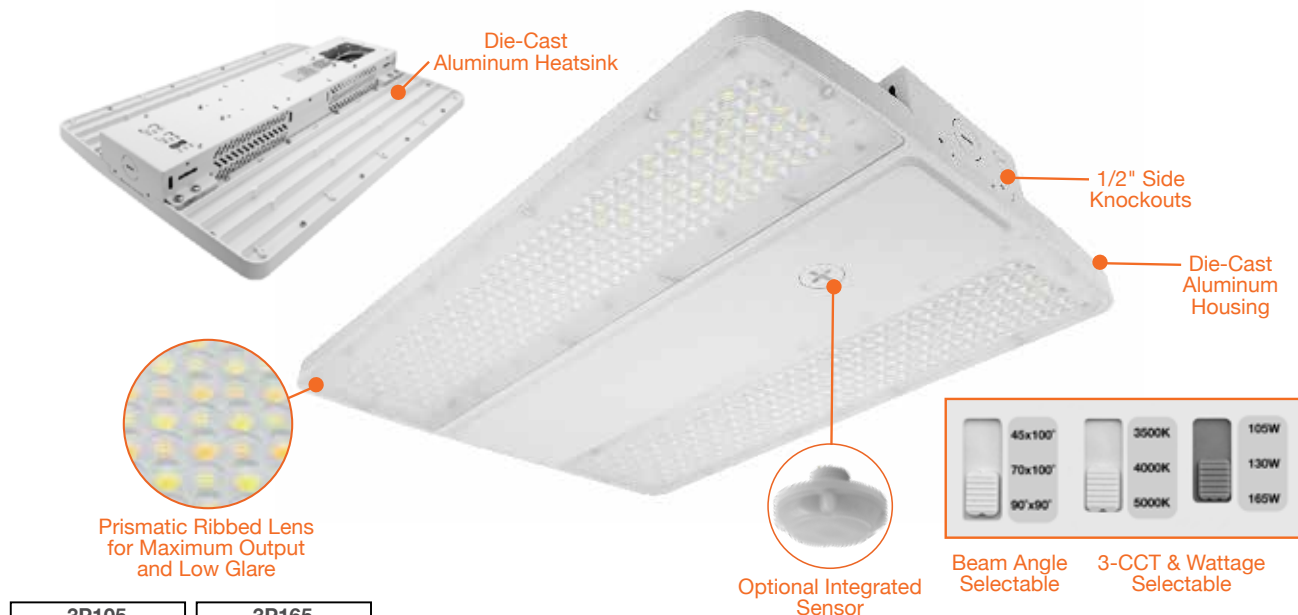

3P105		3P165	
WATT	LUMENS	WATT	LUMENS
60	9,000	110	16,500
85	12,750	130	19,500
105	15,750	165	24,750

3P240		3P320	
WATT	LUMENS	WATT	LUMENS
180	27,000	260	39,000
215	32,250	290	43,500
240	36,000	320	48,000


Linear Highbay: Optic-Line

- 0-10V dimmable integrated driver
- Optional internally-mounted motion sensor
- Twist-C technology: Sensor ready socket
- Beam angle selectable: 45x100°/70x100°/90x90°


3-CCT & 3 Power Select



Box Qty.
3P105- 4
3P165- 2
3P240- 2
3P320- 2

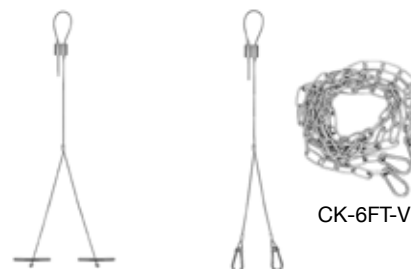

SK-10FT-Y-LC-PD SK-10FT-Y-LC-CB
SK-20FT-Y-LC-PD SK-20FT-Y-LC-CB

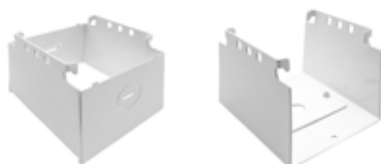

LHB-OPT-PDM LHB-OPT-SM



6'-WHIP-1/2KO
10'-WHIP-1/2KO
20'-WHIP-1/2KO



S-TWC-PIR-ON/OFF
S-TWC-PIR-1
S-TWC-PIR-SL
S-TWC-PIR-BT



S-LINE-R



SB



TL

Model	Voltage	Watts	Lumens	Color
LED-LHB-OPT-3P105-CTRI-UNV	120-347V	105/85/60w	145lm/w	35/40/50k
LED-LHB-OPT-3P165-CTRI-UNV	120-347V	165/130/110w	145lm/w	35/40/50k
LED-LHB-OPT-3P240-CTRI-UNV	120-347V	240/215/180w	145lm/w	35/40/50k
LED-LHB-OPT-3P320-CTRI-UNV	120-347V	320/290/260w	145lm/w	35/40/50k

Accessory	Description
SK-10FT-Y-LC-PD	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-10FT-Y-LC-CB	10' Y-Shape, Loop Top, Carabiner Bottom (Adjustable Length)
SK-20FT-Y-LC-CB	20' Y-Shape, Loop Top, Carabiner Bottom (Adjustable Length)
CK-6FT-V	6' Chain Hanging Kit

Accessory Model	Description
LHB-OPT-PDM	LHB: Pendant mount bracket for OPT
LHB-OPT-SM	LHB: Surface mount bracket for OPT

Accessory Model	Description
6'-WHIP-1/2KO	6' Whip
10'-WHIP-1/2KO	10' Whip
20'-WHIP-1/2KO	20' Whip

Accessory Model	Description
SB	5-15P Straight Blade Plug
TL	L5-15P Twist Lock Plug

Pre-installed Accessory Model	Description
3Whip-(3)ft -specify ft in place of #	3 Wire whip hot, neutral, ground (\$15 min)
5Whip-(5)ft - specify ft in place of #	5 Wire whip hot, neutral, ground, dim (\$21min)
Add: -EMB to model #	90 Minute emergency backup
Add: -20KV to model#	SG-20KV-UNV: 20KV surge protector
Add; SB to model #	5-15P Straight Blade Plug
Add; TL to model #	L5-15P Twist Lock Plug



-BL




-WH

LED-RHB3C-3P		LED-RHB3C-3P	
WATT	LUMENS	WATT	LUMENS
60	9,000	180	27,000
100	15,000	210	31,500
150	22,250	240	36,000

Final
Production

-BL

LED-RHB3C-3P-400	
WATT	LUMENS
300	50,400
350	58,800
400	67,000



Aluminum Reflector (90°)



Surface Mount Yoke

Pendant
Emergency BackupUFO Emergency
Test Controller

Acrylic Reflector (90°)

Acrylic Reflector
Bottom CoverS-TWC-MW-1 S-TWC-PIR-1
S-TWC-MW-BT S-TWC-PIR-BT
TWC-DL

Pendant Mount



S-LINE-R

RHB3 UFO High Bay: C-Line

- 0-10V dimmable integrated driver
- Durable die-cast aluminum housing
- IP67 fully waterproof for hosing down
- Twist-C technology: Sensor ready socket

3-CCT & 3 Power Select



Model	Voltage	Watts	Lumens	Color
LED-RHB3C-3P150-CTRI-BL-10-UNV	120-277V	150/100/60w	150lm/w	35/40/50k
LED-RHB3C-3P150-CTRI-WH-10-UNV	120-277V	150/100/60w	150lm/w	35/40/50k
LED-RHB3C-3P240-CTRI-BL-10-UNV	120-277V	240/210/180w	150lm/w	35/40/50k
LED-RHB3C-3P240-CTRI-WH-10-UNV	120-277V	240/210/180w	150lm/w	35/40/50k
LED-RHB3C-3P150-CTRI-BL-10-HV	277-480V	150/100/60w	150lm/w	35/40/50k
LED-RHB3C-3P150-CTRI-WH-10-HV	277-480V	150/100/60w	150lm/w	35/40/50k
LED-RHB3C-3P240-CTRI-BL-10-HV	277-480V	240/210/180w	150lm/w	35/40/50k
LED-RHB3C-3P240-CTRI-WH-10-HV	277-480V	240/210/180w	150lm/w	35/40/50k
LED-RHB3C-3P400-CTRI-BL-10-UNV	277-480V	400/350/300w	150lm/w	35/40/50k
LED-RHB3C-3P400-CTRI-BL-10-HV	277-480V	400/350/300w	150lm/w	35/40/50k

Single CCT w/ 6' Whip



Model	Voltage	Watts	Lumens	Color
LED-RHB3-100W-40K-BL-6	120-277V	100w	14,000	4000k
LED-RHB3-100W-50K-BL-6	120-277V	100w	14,000	5000k
LED-RHB3-240W-40K-BL-6	120-277V	240w	33,600	4000k
LED-RHB3-240W-40K-WH-6	120-277V	240w	33,600	4000k

Pre-installed Accessory Model	Description
3Whip-(3)ft -specify ft in place of #	3 Wire whip hot, neutral, ground (\$15 min)
5Whip-(5)ft - specify ft in place of #	5 Wire whip hot, neutral, ground, dim (\$21min)
Add: -EMB to model #	90 Minute emergency backup
Add: -EMBV to model #	90 Minute emergency backup for 480V
Add: -20KV to model#	SG-20KV-UNV: 20KV surge protector

Accessory Model	Description
RHB-100/150-SM-BLK	RHB3: 100/150w surface mount
RHB-100/150-SM-WH	RHB3: 100/150w surface mount
RHB-240-SM-BLK	RHB3: 240w surface mount
RHB-240-SM-WH	RHB3: 240w surface mount
RHB-400-SM-BLK	RHB3: 400w surface mount
RHB-PDM-HK	RHB3: Pendant mount hook 1/2" Pipe
RHB3-100/150-WG	RHB3: 100/150w wire guard
RHB3-240-WG	RHB3: 240w wire guard
RHB3-100/150-ALM-RF	RHB3: 100/150w aluminum reflector 90°
RHB3-240-ALM-RF	RHB3: Aluminum reflector 90°
RHB3-400-ALM-RF	RHB3: Aluminum reflector 90°
RHB3-100/150-ACR-RF	RHB3: 100/150w acrylic reflector 90°
RHB3-240-ACR-RF	RHB3: 240w acrylic reflector 90°
RHB3-400-ACR-RF	RHB3: 400w Acrylic Reflector 90°
RHB3-UNV-ACR-BC	RHB3: Acrylic bottom cover universal fit
LED-EMB-30W-HV-UFO-WH	RHB3: Emergency back up (uninstalled)
LED-EMB-30W-HV-UFO-BL	RHB3: Emergency back up (black) (uninstalled)
LED-EMB-40W-HV-UFO-BL	RHB3: Emergency back Up (white) (uninstalled)

Accessory Model	Description
S-TWC-MW-1	"Twist-C microwave sensor • Brightness: 100%/ hold time: 10 min. Bi-level dim: 50% stand by time: 10 min. • Sensitivity: 100% daylight: Enabled"
S-TWC-PIR-1	"Twist-C PIR sensor • Brightness: 100%/ hold time: 10 min. Bi-level dim: 50% stand by time: 10 min. • Sensitivity: 100% daylight: Enabled"
S-TWC-PIR-ON/OFF	PIR On/Off Only: Twist-C 5/10/15 Min
TWC-DL	Twist-C daylight sensor: Dusk to dawn, works like a photocell
S-TWC-PIR-BT	PIR Bi-Level + Daylight: Twist-C Bluetooth EnVisionLS App
S-TWC-PIR-SL	PIR Bi-Level + Daylight: Twist-C SILVAIR Enabled





-BZ



-WH

HD03R
Controller

WATT	LUMENS
25	3,625
40	5,800
60	8,700

S-TWC-PIR-ON/OFF
S-TWC-PIR-BT
S-TWC-PIR-SL

Square Canopy Light: Slim-Line

- Rugged powder-coated die-cast aluminum housing
- Integrated heatsink
- Silicone seals inhibit moisture ingress

3-CCT & 3-Power Select



Model	Voltage	Watts	Lumens	Color
LED-SCP-3P60W-TRI-WH	120-277V	60/40/25W	145lm/w	30/40/50k
LED-SCP-3P60W-TRI-BZ	120-277V	60/40/25W	145lm/w	30/40/50k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
Add: -BMSPIR to Model #	PIR Bi Level Motion + Daylight Sensor
Add: -BMSBT to Model #	EnvisionLS Bluetooth Control: PIR/Daylight/Zoning
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring

Remote for Sensor	Description
HD03R	Remote for HD sensors
HD05R	Remote for HD sensors w/ screen

Accessory Model	Description
S-TWC-PIR-ON/OFF	PIR On/Off Only: Twist-C 5/10/15 Min
S-TWC-PIR-BT	PIR Bi-Level + Daylight: Twist-C Bluetooth EnVisionLS App
S-TWC-PIR-SL	PIR Bi-Level + Daylight: Twist-C SILVAIR Enabled



-BZ



-WH

3P60		3P90	
WATT	LUMENS	WATT	LUMENS
30	4,200	70	10,150
45	6,300	80	11,600
60	8,400	90	13,050

S-TWC-PIR-1
S-TWC-PIR-BT

S-LINE-R

Square Canopy Light: Arcy-Line

- Rugged powder-coated die-cast aluminum housing
- 10% uplight standard
- Integrated heatsink
- Silicone seals inhibit moisture ingress
- Twist-C technology: Sensor ready socket

3-CCT & 3-Power Select



Model	Voltage	Watts	Lumens	Color
LED-SQUC-3P60-TRI-WH	120-277V	60/45/30W	145lm/w	30/40/50k
LED-SQUC-3P60-TRI-BZ	120-277V	60/45/30W	145lm/w	30/40/50k
LED-SQUC-3P90-TRI-WH	120-277V	90/80/70W	145lm/w	30/40/50k
LED-SQUC-3P90-TRI-BZ	120-277V	90/80/70W	145lm/w	30/40/50k

Large Square Canopy Light: Slim-Line

2-CCT Selectable



Model	Voltage	Watts	Lumens	Color
LED-CP2-WH-150W-40/50K	120-277V	150w	18,000lm	40/50k


*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

Accessory Model	Description
24x24-GF-CP2	24x24 goof ring

Made to Order 10-15 Days



-WH



Goof Ring



-BZ



-WH

5P55		5P100	
WATT	LUMENS	WATT	LUMENS
22	3,190	60	8,700
30	4,350	70	10,150
38.5	5,582	80	11,600
47	6,815	90	13,050
55	7,975	100	14,500

Round Canopy Light: Slim-Line

- Wattage selectable and CCT switchable (30/40/50K color temps avail.)
- Rugged powder-coated die-cast aluminum housing
- Silicone seals inhibit moisture ingress
- Twist-C technology: Sensor ready socket

3-CCT & 5-Power Select



Model	Voltage	Watts	Lumens	Color
LED-RCP-5P55W-TRI-WH	120-277V	55/47/38.5/30/22W	145lm/w	30/40/50k
LED-RCP-5P55W-TRI-BZ	120-277V	55/47/38.5/30/22W	145lm/w	30/40/50k
LED-RCP-5P100W-TRI-WH	120-277V	100/90/80/70/60w	145lm/w	30/40/50k
LED-RCP-5P100W-TRI-BZ	120-277V	100/90/80/70/60w	145lm/w	30/40/50k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Pre-installed Accessory Model	Description
Add: -EMB to Model #	90 minute emergency backup
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
View spec sheet for ordering guide	Paint: Black, white, gray standard. custom RAL available

Accessory Model	Description
HB01DMS-A	Microwave Bi-Level + Daylight: Twist-C
S-TWC-PIR-ON/OFF	PIR On/Off Only: Twist-C 5/10/15 Min
S-TWC-PIR-BT	PIR Bi-Level + Daylight: Twist-C Bluetooth EnVisionLS App
S-TWC-PIR-SL	PIR Bi-Level + Daylight: Twist-C SILVAIR Enabled



HB01DMS-A



S-TWC-PIR-BT
S-TWC-PIR-SL
S-TWC-PIR-ON/OFF



S-LINE-R



4" x 8' / 4" x 4' / 4" x 2' LED Panel: Backlit-Line

- Flicker-free integrated driver, 0-10V dimmable
- Backlit design provides diffused, shadowless light
- No UV, no RF, non-yellowing lens
- Powder-coated white frame
- Lay-in t-bar ceiling or with optional drywall flange kit

6-CCT & 3-Power Select

DIMMABLE
 PST RATED
 80 HIGH CRI
 EneC
 cUL
 JAB TITLE 24
 Box Qty. 2

NEW

Model	Voltage	Watts	Lumens	Color
LED-BPL-4ix8ft-3M80-6CCT	120-277V	80/60/40w	145lm/w	27/30/35/40/50/65k
LED-BPL-4ix4ft-3M40-6CCT	120-277V	40/30/20w	145lm/w	27/30/35/40/50/65k
LED-BPL-4ix2ft-3M20-6CCT	120-277V	20/15/10w	145lm/w	27/30/35/40/50/65k


4ix8ft		4ix4ft		4ix2ft	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
40	5,000	20	2,500	10	1,250
60	7,000	30	3,500	15	1,750
80	8,800	40	4,400	20	2,200

Pre-installed Factory Add-Ons	Description
S-TWC-PIR-BT	PIR Bi-Level + Daylight: Twist-C Bluetooth EnVisionLS App
S-TWC-PIR-SL	PIR Bi-Level + Daylight: Twist-C SILVAIR Enabled
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector
Add: -HV to model#	347-480V Step Down Transformer
Add '-EMB' to model #	Emergency backup (external 15W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
3Whip-(3)ft - Specify ft in place of #	3 wire whip hot, neutral, ground
5Whip-(5)ft - Specify ft in place of #	5 wire whip hot, neutral, ground, dim

Accessory	Description
SK-10FT-Y-LC-CB	10' Suspension Kit
SK-20FT-Y-LC-CB	20' Chain Hanging Kit
CK-6FT-V	6' Chain Hanging Kit

Accessory	Description
S-AUD-PIR-1	PIR Bi-Level Motion + Daylight Sensor Remote Required: (S-LINE-R)
S-AUD-PIR-BT	PIR EnvisionLS Bluetooth Control
S-AUD-PIR-SL	PIR SILVAIR Bluetooth Mesh



Accessory	Description
4ix2ft-FLNG	4"x2' Flange (Drywall) Kit
4ix4ft-FLNG	4"x4' Flange (Drywall) Kit
4ix8ft-FLNG	4"x8' Flange (Drywall) Kit

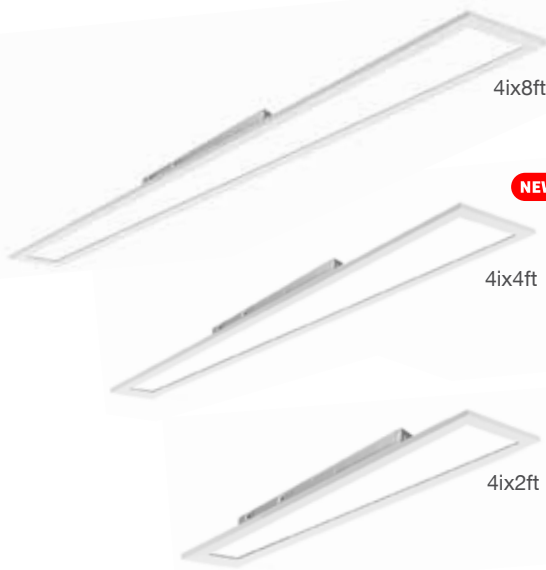

4ix8ft

4ix4ft

4ix2ft

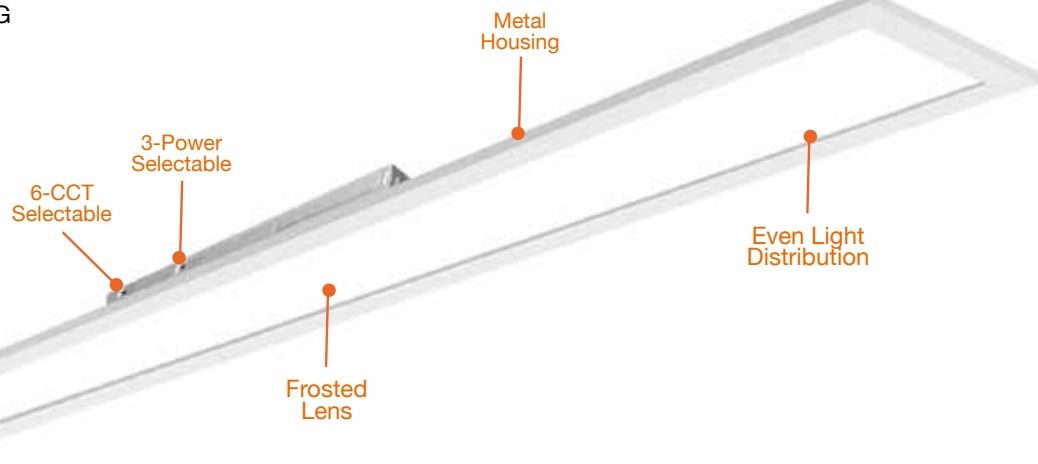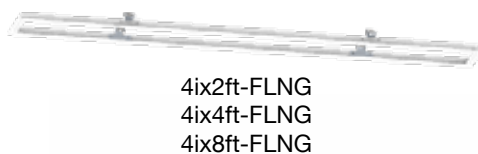



2x2 with Sensor

NEW

Backlit Panels

- Flicker-free integrated driver, 0-10V dimmable
- Backlit design provides diffuse, shadowless light
- No UV, no RF, non-yellowing lens
- Powder-coated white frame

Sensor Ready Models - DLC Premium

Box Qty. 2

Model	Voltage	Watts	Lumens	Color
LED-BPL-2x2-5P32-5CCT-HL-SR	120/277V	32/27/22/17/12w	125lm/w	30/35/40/50/65k
LED-BPL-2x4-5P50-5CCT-HL-SR	120/277V	50/40/30/25/20w	125lm/w	30/35/40/50/65k



2X2		2X4	
WATT	LUMENS	WATT	LUMENS
12	1,500	20	2,500
17	2,125	25	3,125
22	2,750	30	3,750
27	3,375	40	5,000
32	4,000	50	6,250

Sensor Options	Description
S-AUD-PIR-1	PIR Bi-Level Motion + Daylight Sensor
S-AUD-PIR-BT	EnvisionLS Bluetooth Sensor
S-AUD-PIR-SL	SILVAIR Bluetooth Sensor



1x4	
WATT	LUMENS
20	2,200
30	3,300
40	4,400


 S-AUD-PIR-1
 S-AUD-PIR-BT
 S-AUD-PIR-SL

Standard Models

Box Qty. 4

Model	Voltage	Watts	Lumens	Color
LED-BPL-1x4-3M40-5CCT	120/277V	40/30/20w	110lm/w	30/35/40/50/65k
LED-BPL-2x2-3M40-5CCT	120/277V	40/30/20w	110lm/w	30/35/40/50/65k
LED-BPL-2x2-3M50-5CCT-HL	120/277V	50/40/30w	125lm/w	30/35/40/50/65k
LED-BPL-2x4-3M50-5CCT	120/277V	40/30/20w	110lm/w	30/35/40/50/65k
LED-BPL-2x4-3M65-5CCT-HL	120/277V	65/55/45w	125lm/w	30/35/40/50/65k



Optional Black Trims

Accessory	Description
BPL-2X4-TRIM-BL	2X4 LED panel: Backlit-line black trim
BPL-2X2-TRIM-BL	2X2 LED panel: Backlit-line black trim
BPL-1X4-TRIM-BL	1x4 LED panel: Backlit-line black trim

Single CCT

Model	Voltage	Watts	Lumens	Color
LED-BPL-1x4-20W-35K-HL	120/277V	20w	2,600	3500k
LED-BPL-1x4-20W-40K-HL	120/277V	20w	2,600	4000k
LED-BPL-1x4-30W-50K-HL	120/277V	30w	3,900	5000k
LED-BPL-2x2-20W-35K-HL	120/277V	20w	2,600	3500k

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (External 15W)
Add '-SR' to model #	Sensor ready (See sensor options)
3Whip-(3)ft - Specify ft in place of #	3 wire whip hot, neutral, ground
5Whip-(5)ft - Specify ft in place of #	5 wire whip hot, neutral, ground, dim



NEW



3M40		3M50	
WATT	LUMENS	WATT	LUMENS
20	2,200	30	3,750
30	3,300	40	5,000
40	4,400	50	6,250



Final Production

3M50		3M65	
WATT	LUMENS	WATT	LUMENS
20	2,200	45	6,250
30	3,300	55	6,875
40	4,400	65	8,125



1x4 / 2x2 / 2x4 LED Panel: EdgeLit

- LiFud-brand flicker-free integrated driver, 0-10V dimmable
- Edge-lit design provides diffuse, shadowless light
- No UV, no RF, non-yellowing PMMA lens
- Powder-coated white frame



Inner Box Qty. 2
Master Box Qty. 4
Must Purchase in
Box Quantity to
Avoid Breakage

1x4
Final
Production

2x2

2x4

Model	Voltage	Watts	Lumens	Color
LED-PNL-1x4-40W-35K-LF	120/277V	40w	4,600	3500K
LED-PNL-2x2-40W-50K-LF	120-277V	40w	4,600	5000k
LED-PNL-2x2-40W-40K-LF	120-277V	40w	4,600	4000k
LED-PNL-2x4-50W-30K-LF	120-277V	50w	5,750	3000k
LED-PNL-2x4-60W-50K-LF	120-277V	60w	6,900	5000k
LED-PNL-2x4-72W-50K-LF	120-277V	72w	8,280	5000k

Pre-installed Accessory Model	Description
Add: 3Whip-(3)ft - specify ft in place of #	3 wire flex whip hot, neutral, ground (\$15 min)
Add: 5Whip-(5)ft - specify ft in place of #	5 wire flex whip hot, neutral, ground, dim (\$21min)
Add '-EMB' to model #	Emergency backup (external 15W)

Surface Mount Frame

1x4

2x2

2x4

Flange (Drywall) Kit

1x4

2x2

2x4

1x4 / 2x2 / 2x4 Panel Accessories

Accessories also work with other 2x2 and 2x2 fixtures
(SM only compatible with edge-lit panels)

Final
Production

Model	Description
LED-PNL-2X2-SM	2x2 surface mount kit 2.5" height (for edge lit series only)
LED-PNL-2X4-SM	2x4 surface mount kit 2.5" height (for edge lit series only)
LED-PNL-1X4-SM	1X4 surface mount kit 2.5" height (for edge lit series only)
2X2-SM-3	2x2 surface mount kit 3" height for all panels and troffers
2X4-SM-3	2x4 surface mount kit 3" height for all panels and troffers
1X4-SM-3	1x4 surface mount kit 3" height for all panels and troffers
LED-PNL-2X2-FLNG	2x2 flange (drywall) kit
LED-PNL-2X4-FLNG	2x4 flange (drywall) kit
LED-PNL-1X4-FLNG	1x4 flange (drywall) kit
LED-PNL-2X4-SK	Suspension kit for panels

1x1 / 1x2 LED Surface Mount Panels: Slim-Line

- Internal flicker-free triac-dimmable driver
- Included surface mount bracket mounts directly to j-box
- Edge-lit design provides diffuse, shadowless light
- Only 1" thick in size

5-CCT Select

SELECT DIMMABLE 80+ HIGH CRI DLC E17535 Box Qty. 4

Model	Voltage	Watts	Lumens	Color
LED-PNL-SM-1X1-18W-5CCT	120V	18w	1,500	27/30/35/40/50K
LED-PNL-SM-1X2-22W-5CCT	120V	22w	2,000	27/30/35/40/50K



Accessory Model	Description
LED-EMB-25W-HV-0/10V-2P	Emergency backup (external 25W) field install

*Custom finishes include bronze, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

1x4 / 2x2 / 2x4 LED Surface Mount Panels: Slim-Line

- Internal flicker-free 0-10V dimmable driver
- Included surface mount bracket mounts directly to 30 or 40 j-box
- Edge-lit design provides diffuse, shadowless light
- Only 1.34" thick in size!

5-CCT Select

SELECT DIMMABLE 80+ HIGH CRI DLC E17535 Box Qty. 4

Model	Voltage	Watts	Lumens	Color
LED-BPL-SM-1X4-3M40-5CCT	120/277v	40/30/20w	110lm/w	27/30/35/40/50K
LED-BPL-SM-2X2-3M40-5CCT	120/277v	40/30/20w	110lm/w	27/30/35/40/50K
LED-BPL-SM-2X4-3M50-5CCT	120/277v	50/40/30w	110lm/w	27/30/35/40/50K



3-CCT Select

Model	Voltage	Watts	Lumens	Color
LED-PNL-SM-1X4-40W-TRI	120/277v	40w	4,000	30/40/50k
LED-PNL-SM-2X2-40W-TRI	120/277v	40w	4,000	30/40/50k
LED-PNL-SM-2X4-50W-TRI	120/277v	50w	5,000	30/40/50k



Accessory Model	Description
LED-EMB-25W-HV-0/10V-2P	Emergency backup (external 25W) field install

*Custom finishes include bronze, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.

2x2 / 2x4 Frame LED Lights - One Piece

- Internal flicker-free 0-10V dimmable driver
- One piece design, uniformed light output
- For drop in ceiling applications

3-CCT Select

Model	Voltage	Watts	Lumens	Color
LED-FRM-2X2-3P32-TRI	120/277v	32/24/16w	4,000/3,000/2,000	35/40/50k
LED-FRM-2X4-3P45-TRI	120/277v	45/32/24w	5,900/4,000/3,000	35/40/50k



E.T.A. 04/2025

NEW

3M40		3M50	
WATT	LUMENS	WATT	LUMENS
20	2,200	30	3,300
30	3,300	40	4,400
40	4,400	50	5,500



2x2 & 2x4 LED Troffer: GLIDE-Line

- Flicker-free integrated driver, 0-10V dimmable
- Backlit design provides diffused, shadowless light
- No UV, no RF, non-yellowing lens
- Powder-coated white frame

5-CCT & 3-Power Select + Sensor

Box Qty. 4

NEW

Model	Voltage	Watts	Lumens	Color
LED-CBT-GL-2X2-3P35-5CCT-SR	120/277V	35/30/25w	110lm/w	30/35/40/50/65k
LED-CBT-GL-2X4-3P50-5CCT-SR	120/277V	50/40/30w	110lm/w	30/35/40/50/65k

2x2		2x4	
WATT	LUMENS	WATT	LUMENS
25	2,800	30	3,450
30	3,300	40	4,400
35	4,000	50	5,750

Pre-installed Accessory Model	Description
Add: -EMB to Model #	90 minute emergency backup
Add: -HV to model#	347-480V step down transformer
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector
3Whip-(3)ft - Specify ft in place of #	3 wire whip hot, neutral, ground
5Whip-(5)ft - Specify ft in place of #	5 wire whip hot, neutral, ground, dim

Sensor Options	Description
S-AUD-PIR-1	PIR Bi-Level Motion + Daylight Sensor
S-AUD-PIR-BT	EnvisionLS Bluetooth Sensor
S-AUD-PIR-SL	SILVAIR Bluetooth Sensor



S-AUD-PIR-1
 S-AUD-PIR-BT
 S-AUD-PIR-SL

2x2 & 2x4 LED Center Basket Thin LuxLume Troffer

- Flicker-free 0-10V dimmable internal driver
- Metal body fixture

4-CCT & 3-Power Select

Box Qty. 1
 Must Purchase in Box Quantity to Avoid Breakage

NEW

Model	Voltage	Watts	Lumens	Color
LED-CBT-TL-2X2-3P40-4CCT	120-277V	40/35/24w	See Chart	30/35/40/50k
LED-CBT-TL-2X4-3P50-4CCT	120-277V	50/40/30w	See Chart	30/35/40/50k

2X2		2X4	
WATT	LUMENS	WATT	LUMENS
20	2,400	30	3,600
30	3,600	40	4,800
40	4,800	50	6,000

Pre-installed Accessory Model	Description
Add: -EMB to Model #	90 minute emergency backup
Add: -BMS to Model #	S-BMS-INT-1: Bi level motion + daylight sensor
Add: -BMS-BT to Model #	S-BMS-INT-1-BT: Bi level motion + daylight sensor w/ bluetooth control (EnvisionLS)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight Zoning/Monitoring
Add: -HV to model#	347-480V step down transformer
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector
3Whip-(3)ft - Specify ft in place of #	3 wire whip hot, neutral, ground
5Whip-(5)ft - Specify ft in place of #	5 wire whip hot, neutral, ground, dim

2x2 & 2x4 LED Center Basket Troffer: Arcy-Line

- Flicker-free 0-10V dimmable internal driver
- PC body fixture

4-CCT & 4-Power Select



Box Qty. 2
Must Purchase in
Box Quantity to
Avoid Breakage

Model	Voltage	Watts	Lumens	Color
LED-CBT-2X2-PC-CCT-HL	120-277V	35/30/25/20w	See Chart	30/35/40/50k
LED-CBT-2X4-PC-CCT-HL	120-277V	50/45/40/35w	See Chart	30/35/40/50k



2X2	
WATT	LUMENS
20	2,600
25	3,250
30	3,900
35	4,550

2X4	
WATT	LUMENS
35	4,550
40	5,200
45	5,850
50	6,500

2x2 & 2x4 LED Center Basket Troffer: C-Line

- Flicker-free 0-10V dimmable internal driver
- Metal body fixture

5-CCT & 5-Power Select



Box Qty. 2
Must Purchase in
Box Quantity to
Avoid Breakage

Model	Voltage	Watts	Lumens	Color
LED-CBT-2X2-5P40-5CCT	120-277V	40/35/30/25/20w	See Chart	27/30/35/40/50k
LED-CBT-2X4-5P50-5CCT	120-277V	50/40/30/25/20W	See Chart	27/30/35/40/50k



5P40	
WATT	LUMENS
20	2,500
25	3,125
30	3,750
35	4,375
40	5,000

5P50	
WATT	LUMENS
20	3,750
25	4,375
30	5,000
40	5,625
50	6,250

2x2 & 2x4 LED Center Basket Troffer - Retrofit Kit

5-CCT & 5-Power Select

Model	Voltage	Watts	Lumens	Color
LED-CBT-RK-2X2-5P40-5CCT	120-277V	40/35/30/25/20w	See Chart	27/30/35/40/50k
LED-CBT-RK-2X4-5P50-5CCT	120-277V	50/40/30/25/20W	See Chart	27/30/35/40/50k



5P40	
WATT	LUMENS
20	2,500
25	3,125
30	3,750
35	4,375
40	5,000

5P50	
WATT	LUMENS
20	3,750
25	4,375
30	5,000
40	5,625
50	6,250

Model	Item Description	Voltage	Watts
S-LINE-R	Remote for S-LINE Series Sensors	12V	<1w

Pre-installed Accessory Model	Description
Add: -EMB to Model #	90 minute emergency backup
Add: -BMS to Model #	S-BMS-INT-1: Bi level motion + daylight sensor
Add: -BMS-BT to Model #	S-BMS-INT-1-BT: Bi level motion + daylight sensor w/ bluetooth control (EnvisionLS App)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight Zoning/Monitoring
Add: -HV to model#	347-480V step down transformer
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector
3Whip-(3)ft - Specify ft in place of #	3 wire whip hot, neutral, ground
5Whip-(5)ft - Specify ft in place of #	5 wire whip hot, neutral, ground, dim
Add: -90CRI to model#	CRI90 LED Board (For standard CBT Only)



S-LINE-R

4' T8 Dimmable Bypass Tubes

- Install tubes without the ballast (single or double sided) any two pins
- Light beam spread replicates the same look as a fluorescent, but with improved light output and efficiency
- PC film protectant for shatter protection (food industry OK)

Box Qty. 30
Must Purchase in
Box Quantity to
Avoid Breakage

5-CCT & 3-Power Select



Model	Voltage	Watts	Lumens	Color
LED-T8-RFD-GL-4FT-3P18-5CCT	120-277V	12/15/18w	145lm/w	30/35/40/50/65k



WATT	LUMENS
12	1,560
15	1,950
18	2,300

2' / 3' / 4' T8 Type A+B Tube

- Install tubes with or without the existing ballast (single or double sided)
- See ballast compatibility chart to ensure compatibility.
- Light beam spread replicates the same look as a fluorescent, but with improved light output and efficiency
- PC film protectant for shatter protection (food industry OK)

Box Qty. 30
Must Purchase in
Box Quantity to
Avoid Breakage

5-CCT Select



NEW

Model	Voltage	Watts	Lumens	Color
LED-T8-DF-GL-2FT-8W-5CCT	120-277V	8w	1,000	30/35/40/50/65k
LED-T8-DF-GL-3FT-12W-5CCT	120-277V	12w	1,500	30/35/40/50/65k
LED-T8-DF-GL-4FT-15W-5CCT	120-277V	15w	1,950	30/35/40/50/65k
LED-T8-DF-GL-4FT-18W-5CCT	120-277V	18w	2,200	30/35/40/50/65k



3-CCT Select

Model	Voltage	Watts	Lumens	Color
LED-T8-DF-GL-2FT-8W-CTRI	120-277V	8w	1,000	35/40/50k
LED-T8-DF-GL-3FT-12W-CTRI	120-277V	12w	1,500	35/40/50k
LED-T8-DF-GL-4FT-15W-CTRI	120-277V	15w	1,950	35/40/50k



Single CCT

Model	Voltage	Watts	Lumens	Color
LED-T8-DF-GL-2FT-8W-30K	120-277V	8w	1,000	3000k
LED-T8-DF-GL-2FT-8W-35K	120-277V	8w	1,000	3500k
LED-T8-DF-GL-3FT-12W-30K	120-277V	12w	1,500	3000k
LED-T8-DF-GL-3FT-12W-35K	120-277V	12w	1,500	3500k
LED-T8-DF-GL-4FT-15W-35K	120-277V	15w	1,950	3500k
LED-T8-DF-GL-4FT-15W-40K	120-277V	15w	1,950	4000k
LED-T8-DF-GL-4FT-15W-50K	120-277V	15w	1,950	5000k
LED-T8-DF-GL-4FT-18W-30K	120-277V	18w	2,200	3000k
LED-T8-DF-GL-4FT-18W-35K	120-277V	18w	2,200	3500k
LED-T8-DF-GL-4FT-18W-40K	120-277V	18w	2,200	4000k
LED-T8-DF-GL-4FT-18W-50K	120-277V	18w	2,200	5000k
LED-T8-DF-GL-4FT-18W-65K	120-277V	18w	2,200	6500k

Accessory	Description
T8-8FT-4FT-KIT	T8 conversion kit. One 8ft bulb to two 4ft bulbs.

8' T8 Type A+B Tube


- Install tubes with or without the existing ballast (double sided connection only)
- See ballast compatibility chart to ensure compatibility.
- 2 Piece LED Design allows for shipping in 4ft box
- Pins are interchangeable: includes double pin and single pin, R17D optional
- Light beam spread replicates the same look as a fluorescent, but with improved light output and efficiency.

Box Qty. 15
Must Purchase in
Box Quantity to
Avoid Breakage



Model	Voltage	Watts	Lumens	Color
LED-T8-DF-GL-8FT-42W-40K	120-277V	42w	5,500	4000k
LED-T8-DF-GL-8FT-42W-50K	120-277V	42w	5,500	5000k

Accessory	Description
R17D-EC	R17(D) end cap converter (switchable end cap for 8' tube)

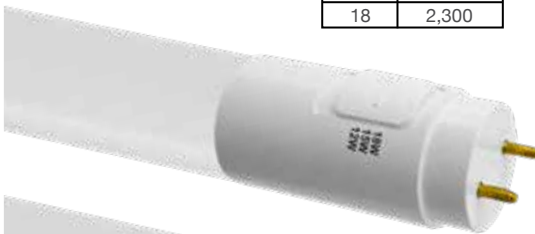

Single Pin Included



R17D Pin Optional



2-Piece Design



4' T5 Type A+B LED Tube

- Install tubes with or without the existing ballast (single or double sided)
- See ballast compatibility chart to ensure compatibility.
- Light beam spread replicates the same look as a fluorescent, but with improved light output and efficiency
- PC film protectant for shatter protection (food industry OK)



Box Qty. 30
Must Purchase in
Box Quantity to
Avoid Breakage

Model	Voltage	Watts	Lumens	Color
LED-T5-DF-4FT-24W-40K	120-277V	24w	3,200	4000k
LED-T5-DF-4FT-24W-50K	120-277V	24w	3,200	5000k



T8 4ft Emergency LED Tube

- Equipped with a self-test function, tests itself monthly/yearly
- Built-in emergency system, easy installation and replacement
- 90 minute emergency duration
- For use without existing ballast, AC only (see installation guide)



Box Qty. 30
Must Purchase in
Box Quantity to
Avoid Breakage

Model	Voltage	Watts	Lumens	Color
LED-T8-EM-4FT-15W-CTRI	120-277V	15w	2,000	35/40/50k
LED-T8-EM-4FT-15W-30K	120-277V	15w	2,000	3000k



T8 Type A + B U-Shaped LED Bulbs

- Install tubes with or without the existing ballast (single or double sided)
- See ballast compatibility chart to ensure compatibility.
- Light beam spread replicates the same look as a fluorescent, but with improved light output and efficiency
- PC film protectant for shatter protection (food industry OK)



Box Qty. 20
Must Purchase in
Box Quantity to
Avoid Breakage

3-CCT Select

Model	Voltage	Watts	Lumens	Color
LED-T8U-DF-GL-22X6-15W-CTRI	120-277V	15w	1,950	35/40/50k



Common Applications: Panel Fixture Bulb Replacement



T9 Circline LED Bulbs

- Install tubes with or without the existing ballast
- See ballast compatibility chart to ensure compatibility
- Light beam spread replicates the same look as a fluorescent, but with improved light output and efficiency
- PC film protectant for shatter protection (food industry OK)



Box Qty. 20
Must Purchase in
Box Quantity to
Avoid Breakage

4-CCT Select

NEW

Model	Voltage	Watts	Lumens	Color
LED-T9-DF-8I-11W-4CCT	120-277V	11w	1,200	30/35/40/50k
LED-T9-DF-12I-16W-4CCT	120-277V	16w	1,700	30/35/40/50k



T8 Strip Fixtures (Tubes Not Included)

- LED T8 ready fixtures
- Aligner locks in place for easy continuous row mounting
- Suitable for use in damp locations
- Mount individually or in continuous rows to ceiling or wall

Box Qty. 10

Model	Description
T8-4FT-2LAMP-STRIP	4 ft T8 2 lamp strip fixture (single sided connection)
T8-4FT-2/1L-STRIP	4 ft T8 1 or 2 lamp strip fixture (double sided connection)
T8-8FT-4/2L-STRIP	8 ft T8 2 or 4 lamp strip fixture (double sided connection)
T8-4FT-RF	4 ft symmetric white reflector

T8 Conversion Kit

Box Qty. 25

Model	Description
T8-8FT-4FT-KIT	T8 conversion kit. One 8ft bulb to two 4ft bulbs.

Dimmable Driver

- Connect the driver to any EnVision tube to dim via 0-10V control

Box Qty. 10

Model	Description
DIM-MOD-0/10V-TUBE	0-10V dimmable driver for EnVision LED tubes

ALIN & TBL Linear Custom Finish Options *Made to Order, 18-21 days*

GLOSS OPTIONS

								
Statuary Bronze 60 Gloss T026-BR340 Order Code: GL-BZ-1	RAL 7042 Grey 80 Gloss T009-GR230 Order Code: GL-GY-1	Silver Metallic 30 Gloss T353-GR06 Order Code: GL-SL-1	Chrome Metallic 80 Gloss T358-GR539 Order Code: GL-CH-1	Brass Metallic 30 Gloss T353-YL02 Order Code: GL-BM-1	Dark Red 90 Gloss P009-RD02 Order Code: GL-RD-1	Red 90 Gloss T009-RD01 Order Code: GL-RD-2	Dark Yellow 90 Gloss T009-YL71 Order Code: GL-YL-1	Designer Beige 90 Gloss T009-BG16 Order Code: GL-BG-1
								
Yellow 90 Gloss T009-YL01 Order Code: GL-YL-2	Terra Brown 90 Gloss (RAL8028) • C209-BR358 Order Code: GL-BR-1	Traffic Green 70 Gloss T007-GN16 Order Code: GL-GR-1	DOT Green 70 Gloss FS14066 • T007-GN13 Order Code: GL-GR-2	Green 60 Gloss C006-GN03 Order Code: GL-GR-3	Blue 90 Gloss T009-BL01 Order Code: GL-BU-1	Light Blue 90 Gloss T009-BL05 Order Code: GL-BU-2	Dark Blue 80 Gloss T008-BL20 Order Code: GL-BU-3	Black 10 Semi-Gloss T001-BK120 Order Code: SGL-BL-1

HAMMER OPTIONS

			
Black Hammer T013-BK62 Order Code: HM-BL-1	Black Hammer Low Gloss E311-BK04 Order Code: HM-BL-2	White Hammer T013-WH09 Order Code: HM-WH-1	Red Hammer T013-RD15 Order Code: HM-RD-1


HAMMERTONE OPTIONS


			
Bronze Hammertone T064-BR24 Order Code: HT-BZ-1	Silver Hammertone T064-GR05 Order Code: HT-SL-1	Blue Hammertone T064-BL95 Order Code: HT-BU-1	Green Hammertone T064-GN81 Order Code: HT-GR-1

VEIN OPTIONS

	
Copper Vein T375-BK07 Order Code: VN-CP-1	Gold Vein T375-BK10 Order Code: VN-GD-1

TEXTURE OPTIONS

			
FS 25109 Blue Texture T032-WH15 Order Code: TX-BU-1	White Texture T032-WH15 Order Code: TX-WH-1	Oil Rubbed Bronze Texture T291-BR251 Order Code: TX-BZ-1	Mock Rock Texture T091-GR309 Order Code: TX-GY-1

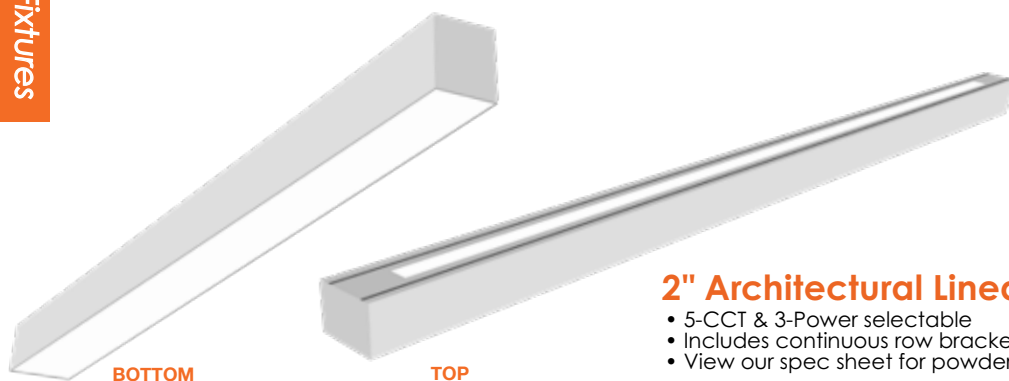

2" Architectural Linear Fixture: ARCY-Line

- 5-CCT & 3-Power selectable
- Includes continuous row brackets & jumper cables
- View our spec sheet for powder coated color options

Suspended or Surface Mounted Linear Models: Downlight Only

Box Qty.
3P12- 9 3P25- 9
3P50- 6 3P75- 4
3P100- 4



Model	Voltage	Watts	Lumens	Color
LED-ALIN2-1FT-3P12-D-5CCT-WH	120-277V	9.5/7/5	1,200/840/600	27/30/35/40/50k
LED-ALIN2-2FT-3P25-D-5CCT-WH	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
NEW LED-ALIN2-3FT-3P38-D-5CCT-WH	120-277V	30/22.5/14.5w	3,600/2,700/1,740	27/30/35/40/50k
LED-ALIN2-4FT-3P50-D-5CCT-WH	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k
LED-ALIN2-6FT-3P75-D-5CCT-WH	120-277V	60/45/30w	7,200/5,400/5,040	27/30/35/40/50k
LED-ALIN2-8FT-3P100-D-5CCT-WH	120-277V	80/60/40w	9,600/7,200/4,800	27/30/35/40/50k

Suspended Linear Models: 80% Downlight & 20% Uplight

Made to order, 5-7 days



Model	Voltage	Watts	Lumens	Color
LED-ALIN2-2FT-3P25-UD-5CCT-WH	120-277V	25/19/13w	3,000/2,280/1,560	27/30/35/40/50k
NEW LED-ALIN2-3FT-3P38-UD-5CCT-WH	120-277V	37.5/28/18	4,560/3,500/2,250	27/30/35/40/50k
LED-ALIN2-4FT-3P50-UD-5CCT-WH	120-277V	50/38/25w	6,000/4,560/3,000	27/30/35/40/50k
LED-ALIN2-6FT-3P75-UD-5CCT-WH	120-277V	75/56/38w	9,000/6,720/4,560	27/30/35/40/50k
LED-ALIN2-8FT-3P100-UD-5CCT-WH	120-277V	100/75/50w	12,000/9,000/6,000	27/30/35/40/50k

Recessed Linear Models

Made to order, 5-7 days



Model	Voltage	Watts	Lumens	Color
LED-ALIN2-1FT-3P12-D-5CCT-WH-RTK	120-277V	9.5/7/5	1,200/840/600	27/30/35/40/50k
LED-ALIN2-2FT-3P25-D-5CCT-WH-RTK	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
NEW LED-ALIN2-3FT-3P38-D-5CCT-WH-RTK	120-277V	30/22.5/14.5w	3,600/2,700/1,740	27/30/35/40/50k
LED-ALIN2-4FT-3P50-D-5CCT-WH-RTK	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k
LED-ALIN2-6FT-3P75-D-5CCT-WH-RTK	120-277V	60/45/30w	7,200/5,400/5,040	27/30/35/40/50k
LED-ALIN2-8FT-3P100-D-5CCT-WH-RTK	120-277V	80/60/40w	9,600/7,200/4,800	27/30/35/40/50k

Recessed Linear Models for T-Bar



Model	Voltage	Watts	Lumens	Color
NEW LED-ALIN2-2FT-3P25-D-5CCT-WH-TB	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-4FT-3P50-D-5CCT-WH-TB	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k
LED-ALIN2-6FT-3P75-D-5CCT-WH-TB	120-277V	60/45/30w	7,200/5,400/5,040	27/30/35/40/50k
LED-ALIN2-8FT-3P100-D-5CCT-WH-TB	120-277V	80/60/40w	9,600/7,200/4,800	27/30/35/40/50k



D

Trimless Linear Models

Made to order, 5-7 days

SCCT


NEW

Model	Voltage	Watts	Lumens	Color
LED-ALIN2-1FT-3P12-D-5CCT-WH-TML	120-277V	9.5/7/5	1200/840/600	27/30/35/40/50k
LED-ALIN2-2FT-3P25-D-5CCT-WH-TML	120-277V	20/15/10w	2400/1800/1200	27/30/35/40/50k
LED-ALIN2-3FT-3P38-D-5CCT-WH-TML	120-277V	30/22.5/14.5w	3600/2700/1740	27/30/35/40/50k
LED-ALIN2-4FT-3P50-D-5CCT-WH-TML	120-277V	40/30/20w	4800/3600/2400	27/30/35/40/50k
LED-ALIN2-6FT-3P75-D-5CCT-WH-TML	120-277V	60/45/30w	7200/5400/5040	27/30/35/40/50k
LED-ALIN2-8FT-3P100-D-5CCT-WH-TML	120-277V	80/60/40w	9600/7200/4800	27/30/35/40/50k

Suspended or Surface Mounted Special Shape Models: Downlight Only

Box Qty: 4

D



LED-ALIN2-12X12-L-3P25


Model	Voltage	Watts	Lumens	Color
LED-ALIN2-12X12-L-3P25-D-5CCT-WH	120-277V	20/15/10w	2400/1800/1200	27/30/35/40/50k
LED-ALIN2-12X12-120L-3P25-D-5CCT-WH	120-277V	20/15/10w	2400/1800/1200	27/30/35/40/50k
LED-ALIN2-24X24-L-3P50-D-5CCT-WH	120-277V	40/30/20w	4800/3600/2400	27/30/35/40/50k
LED-ALIN2-22X10-T-3P36-D-5CCT-WH	120-277V	29/20/13.5w	3480/2400/1620	27/30/35/40/50k
LED-ALIN2-22X22-X-3P50-D-5CCT-WH	120-277V	40/30/20w	4800/3600/2400	27/30/35/40/50k

Suspended Special Shape Models:
80% Downlight & 20% Uplight

Made to order, 5-7 days

Box Qty: 4

UD



LED-ALIN2-24X24-L-3P50


Model	Voltage	Watts	Lumens	Color
LED-ALIN2-12X12-L-3P25-UD-5CCT-WH	120-277V	25/19/13w	3000/2280/1560	27/30/35/40/50k
LED-ALIN2-12X12-120L-3P25-UD-5CCT-WH	120-277V	25/19/13w	3000/2280/1560	27/30/35/40/50k
LED-ALIN2-24X24-L-3P50-UD-5CCT-WH	120-277V	50/38/25w	6000/4560/3000	27/30/35/40/50k
LED-ALIN2-22X10-T-3P36-UD-5CCT-WH	120-277V	36/25/17w	4320/3000/2040	27/30/35/40/50k
LED-ALIN2-22X22-X-3P50-UD-5CCT-WH	120-277V	50/38/25w	6000/4560/3000	27/30/35/40/50k

Recessed Special Shape Models

Made to order, 5-7 days

Box Qty: 4

D



LED-ALIN2-12X12-120L-3P25


Model	Voltage	Watts	Lumens	Color
LED-ALIN2-12X12-L-3P25-D-5CCT-WH-RTK	120-277V	20/15/10w	2400/1800/1200	27/30/35/40/50k
LED-ALIN2-12X12-120L-3P25-D-5CCT-WH-RTK	120-277V	20/15/10w	2400/1800/1200	27/30/35/40/50k
LED-ALIN2-24X24-L-3P25-D-5CCT-WH-RTK	120-277V	40/30/20w	4800/3600/2400	27/30/35/40/50k
LED-ALIN2-22X10-T-3P36-D-5CCT-WH-RTK	120-277V	29/20/13.5w	3480/2400/1620	27/30/35/40/50k
LED-ALIN2-22X22-X-3P50-D-5CCT-WH-RTK	120-277V	40/30/20w	4800/3600/2400	27/30/35/40/50k

Trimless Special Shape Models

Made to order, 5-7 days

Box Qty: 4

D




LED-ALIN2-22X10-T-3P36

Model	Voltage	Watts	Lumens	Color
LED-ALIN2-12X12-L-3P25-D-5CCT-WH-TML	120-277V	20/15/10w	2400/1800/1200	27/30/35/40/50k
LED-ALIN2-12X12-120L-3P25-D-5CCT-WH-TML	120-277V	20/15/10w	2400/1800/1200	27/30/35/40/50k
LED-ALIN2-24X24-L-3P25-D-5CCT-WH-TML	120-277V	40/30/20w	4800/3600/2400	27/30/35/40/50k
LED-ALIN2-22X10-T-3P36-D-5CCT-WH-TML	120-277V	29/20/13.5w	3480/2400/1620	27/30/35/40/50k
LED-ALIN2-22X22-X-3P50-D-5CCT-WH-TML	120-277V	40/30/20w	4800/3600/2400	27/30/35/40/50k

Suspended or Surface Mounted Connector Models: Downlight Only


Box Qty: 10

D




LED-ALIN2-22X22-X-3P50


Model	Voltage	Watts	Lumens	Color
LED-ALIN2-L-D-5CCT-WH	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k
LED-ALIN2-X-D-5CCT-WH	120-277V	10/7.5/5w	1200/900/600	27/30/35/40/50k
LED-ALIN2-Y-D-5CCT-WH	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k
LED-ALIN2-T-D-5CCT-WH	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k
LED-ALIN2-120L-D-5CCT-WH	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k




LED-ALIN2-120L-D-5CCT-WH



LED-ALIN2-L-D-5CCT-WH



LED-ALIN2-X-D-5CCT-WH



LED-ALIN2-Y-D-5CCT-WH



ALIN-WM-WH



ALIN2-2/4FT-SRK-WH
ALIN2-2/4FT-SRK-BL



SK-6FT-CPR-1WR-WH
SK-6FT-CPR-1WR-BL SK-
12FT-CPR-1WR-WH
SK-12FT-CPR-1WR-BL



ALIN2-SM

Recessed Connector Models

Made to order, 5-7 days Box Qty: 10



Model	Voltage	Watts	Lumens	Color
LED-ALIN2-L-D-5CCT-WH-RTK	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k
LED-ALIN2-X-D-5CCT-WH-RTK	120-277V	10/7.5/5w	1200/900/600	27/30/35/40/50k
LED-ALIN2-Y-D-5CCT-WH-RTK	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k
LED-ALIN2-T-D-5CCT-WH-RTK	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k
LED-ALIN2-120L-D-5CCT-WH-RTK	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k

Trimless Connector Models

Made to order, 5-7 days Box Qty: 10



Model	Voltage	Watts	Lumens	Color
LED-ALIN2-L-D-5CCT-WH-TML	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k
LED-ALIN2-X-D-5CCT-WH-TML	120-277V	10/7.5/5w	1200/900/600	27/30/35/40/50k
LED-ALIN2-Y-D-5CCT-WH-TML	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k
LED-ALIN2-T-D-5CCT-WH-TML	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k
LED-ALIN2-120L-D-5CCT-WH-TML	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k

Field Install Uplight

Box Qty:
2ft-1 4ft-2



Model	Voltage	Watts	Lumens	Color
ALIN-12x12L-UL-5CCT	120-277V	5/4/2.5w	600/480/300	27/30/35/40/50k
ALIN-2FT-UL-5CCT	120-277V	5/4/2.5w	600/480/300	27/30/35/40/50k
ALIN-4FT-UL-5CCT	120-277V	10/7.5/5w	1200/900/600	27/30/35/40/50k

Field Install Wall Mount - Includes Power Cord

Model	Description
ALIN-WM-WH	Wall Mount (Includes 2 pieces)

Suspension Rods

Model	Description
ALIN2-2/4FT-SRK-WH	Suspension rod kit 2'/4' length
ALIN2-2/4FT-SRK-BL	Suspension rod kit 2'/4' length

Suspension Kit

Model	Description
SK-6FT-CPR-1WR-WH	Suspension Kit: 6' Canopy Top 1 Wire (2 pcs)
SK-6FT-CPR-1WR-BL	Suspension Kit: 6' Canopy Top 1 Wire (2 pcs)
SK-12FT-CPR-1WR-WH	Suspension kit: 12' canopy top 1 wire (2 pcs)
SK-12FT-CPR-1WR-BL	Suspension kit: 12' canopy top 1 wire (2 pcs)

Accessory Model	Description
ALIN2-TWC-RC	ALIN2 Sensor Cap - For Field Install Quickship Sensors
S-TWC-PIR-1	"Twist-C PIR sensor • Brightness: 100%/ hold time: 10 min. Bi-level dim: 50% stand by time: 10 min. • Sensitivity: 100% daylight: Enabled"
S-TWC-PIR-ON/OFF	PIR On/Off Only: Twist-C 5/10/15 Min
S-TWC-PIR-BT	PIR Bi-Level + Daylight: Twist-C Bluetooth EnVisionLS App
S-TWC-PIR-SL	PIR Bi-Level + Daylight: Twist-C SILVAIR Enabled
ALIN2-SM	ALIN2 Surface Mount Kit



Pre-installed	Description
Add '-EMB' to model #	Emergency backup (external 15W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
Add: 20KV to model #	SG-20KV-UNV: 20KV surge protector



2' / 4' / 8' LED Suspended Tubular Linear: Arcy-Line

- Seamless linkable connection
- 0-10V dimming for controls
- Fixture can be surface mounted, wall mounted, or suspended

Suspended or Surface Mounted Linear
Models: Downlight Only



Box Qty for 2FT: 12
Box Qty for 4FT: 6 Box Qty
for 8FT: 6

Model	Voltage	Watts	Lumens	Color
LED-TBL-2FT-20W-D-4CCT-WH	120-277V	20w	2,300	30/35/40/50k
LED-TBL-4FT-40W-D-4CCT-WH	120-277V	40w	4,600	30/35/40/50k
LED-TBL-8FT-80W-D-4CCT-WH	120-277V	80w	9,200	30/35/40/50k



WATT	LUMENS
20	2,300
40	4,600
80	9,200

D

UD



SK-6FT-I-CP-TH



TBL-L

Suspended Linear Models: 80% Downlight & 20% Uplight

Model	Voltage	Watts	Lumens	Color
LED-TBL-2FT-20W-UD-4CCT-WH	120-277V	20w	2,300	30/35/40/50k
LED-TBL-4FT-40W-UD-4CCT-WH	120-277V	40w	4,600	30/35/40/50k
LED-TBL-8FT-80W-UD-4CCT-WH	120-277V	80w	9,200	30/35/40/50k



Accessories

Model	Description
SK-6FT-I-CP-TH	6" Suspension kit for ATL
TBL-L	L-shape connector

Pre-installed Accessory Model	Description
Add: -EMB to model #	90 minute emergency backup
Add: -BMS to model #	Bi level motion + daylight sensor
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector



4' Drop Lens Suspended Linear: C-Line

- Includes 6' power cord and canopy suspension kit
- 50,000-hour LED lifespan based on IES LM-90 results

Suspended Linear Models:
Downlight Only



Box Qty.
6

Model	Voltage	Watts	Lumens	Color
LED-ELIN-4FT-3P50-5CCT-WH	120-277V	50/40/30w	130lm/w	27/30/35/40/50k
LED-ELIN-4FT-3P50-5CCT-BL	120-277V	50/40/30w	130lm/w	27/30/35/40/50k



WATT	LUMENS
30	3,900
40	5,200
50	6,500

Pre-installed Accessory Model	Description
Add: -EMB to model #	90 minute emergency backup



2' / 4' / 8' Suspended Linear Up & Downlight: C-Line

- 0-10V dimmable
- 50,000-hour LED lifespan based on IES LM-90 results
- Up and downlight selectable

Suspended Linear Models: Down or Uplight

0-10V DIMMABLE 90+ HIGH CRI DLC ETL LISTED Box Qty. 6

Model	Voltage	Watts	Lumens	Color
LED-UDL2-2FT-3P25-5CCT-WH	120-277V	25/20/15w	125lm/w	27/30/35/40/50k
LED-UDL2-2FT-3P25-5CCT-BL	120-277V	25/20/15w	125lm/w	27/30/35/40/50k
LED-UDL2-4FT-3P50-5CCT-WH	120-277V	50/40/30w	125lm/w	27/30/35/40/50k
LED-UDL2-4FT-3P50-5CCT-BL	120-277V	50/40/30w	125lm/w	27/30/35/40/50k
LED-UDL2-8FT-3P100-5CCT-WH	120-277V	100/80/60w	125lm/w	27/30/35/40/50k
LED-UDL2-8FT-3P100-5CCT-BL	120-277V	100/80/60w	125lm/w	27/30/35/40/50k

2FT		4FT		8FT	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	1,875	30	3,750	60	7,500
20	2,500	40	5,000	80	10,000
25	3,125	50	6,250	100	12,500



Wattage Select 5-CCT Select Uplight Select

5-Wire Power Cables

NEW

Accessory	Description
SJT-18-5-6FT-WH	6' 5-Wire Power Cord (White)
SJT-18-5-6FT-BL	6' 5-Wire Power Cord (Black)

Canopy Kit Accessories

NEW

Accessory	Description
UDL2-6FT-CPR-1WR-WH	Suspension Kit: 6' Canopy Top 1 Wire (2 pcs)
UDL2-6FT-CPR-1WR-BL	Suspension Kit: 6' Canopy Top 1 Wire (2 pcs)

Emergency Canopy Kit

Accessory	Description
UDL2-6FT-CPR-1WR-WH-EMB	6' Canopy Kit w/ EMB & 6' SJT Cord (Black)
UDL2-6FT-CPR-1WR-BL-EMB	6' Canopy Kit w/ EMB & 6' SJT Cord (White)

NEW

Accessory	Description
UDL-J	Straight joiner
UDL-4XJ-WH	4-way joiner (White)
UDL-4XJ-BL	4-way joiner (Black)

23" Suspended Cylinder: Arcy-Line


- 50% up & down light LGP diffuser
- Includes 6' power cord and canopy suspension kit

3-CCT Select

0-10V DIMMABLE 80+ HIGH CRI DLC ETL LISTED Box Qty. 2

Model	Voltage	Watts	Lumens	Color
LED-SRD-23-50W-UD-RTRI-WH	120-277V	50w	5,000	35/40/50k
LED-SRD-23-50W-UD-RTRI-BL	120-277V	50w	5,000	35/40/50k

Pre-installed Accessory Model	Description
Add: -EMB to Model #	90 minute emergency backup

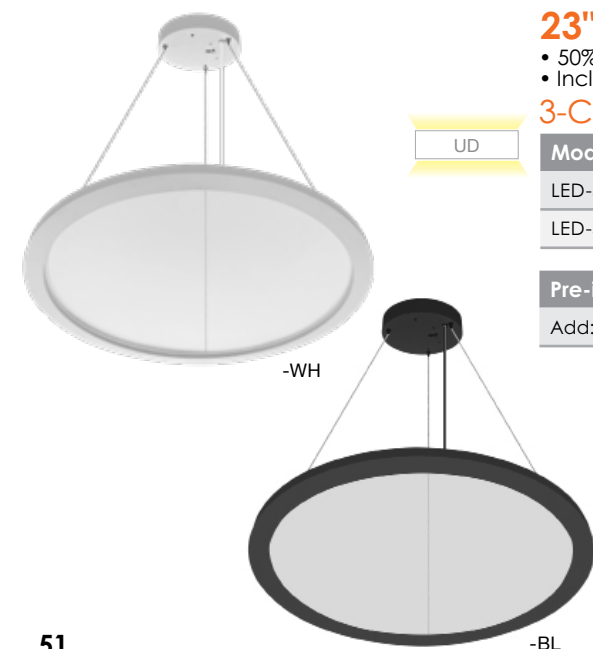



Round Strip LED Fixture

- 4' & 8' models are wattage selectable
- Includes 40 J-box cover
- Fixture can be surface mounted, wall mounted, or suspended
- BMS: Bi-level motion + daylight sensor
- EMB: Emergency back up: 90 minutes

2' Models



Model	Voltage	Watts	Lumens	Color
LED-RST-2FT-20W-4CCT	120-277V	20w	2,600	30/35/40/50k
LED-RST-2FT-20W-4CCT-BL	120-277V	20w	2,600	30/35/40/50k

4' Models

Box Qty.
6

Model	Voltage	Watts	Lumens	Color
LED-RST-4FT-3M40W-4CCT	120-277V	40/30/20w	145lm/w	30/35/40/50k
LED-RST-4FT-3M40W-4CCT-BL	120-277V	40/30/20w	145lm/w	30/35/40/50k
LED-RST-4FT-3M80W-4CCT	120-277V	80/65/50w	145lm/w	30/35/40/50k

8' Models

Box Qty.
6

Model	Voltage	Watts	Lumens	Color
LED-RST-8FT-3M60W-4CCT	120-277V	60/50/40w	145lm/w	30/35/40/50k
LED-RST-8FT-3M60W-4CCT-BL	120-277V	60/50/40w	145lm/w	30/35/40/50k
LED-RST-8FT-3M100W-4CCT	120-277V	100/85/70w	145lm/w	30/35/40/50k
LED-RST-8FT-3M100W-4CCT-BL	120-277V	100/85/70w	145lm/w	30/35/40/50k

3M40		3M80	
WATT	LUMENS	WATT	LUMENS
20	2,600	50	6,500
30	3,900	65	8,450
40	5,200	80	10,400

3M60		3M100	
WATT	LUMENS	WATT	LUMENS
40	5,200	70	9,100
50	6,500	85	11,050
60	7,800	100	13,000

Accessories for RST Fixtures

Model	Description
RST-SM-CN	Surface mount linkable bracket
RST-PDM-CN	Pendant mount linkable bracket
RST-2FT-WG	2ft long wire guard for 2ft RST
RST-4FT-WG	4ft long wire guard, use 2 pieces for 8ft
SK-10FT-Y-LC-PD	Suspension kit: 10' Y-shape, loop top, paddle bottom (adjustable length)
SK-20FT-Y-LC-PD	Suspension Kit: 20' Y-Shape, loop top, paddle bottom (adjustable length)

Pre-installed Accessory Model	Description
Add: -EMB to Model #	90 minute emergency backup
Add: -BMS to Model #	Microwave bi level motion + daylight sensor
Add: -BMSPIR to Model #	PIR bi level motion + daylight sensor
S-TWC-PIR-BT	PIR Bi-Level + Daylight: Twist-C Bluetooth EnVisionLS App
S-TWC-PIR-SL	PIR Bi-Level + Daylight: Twist-C SILVAIR Enabled
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector



RST-2FT-WG
RST-4FT-WG



RST-SM-CN



RST-PDM-CN



SK-10FT-Y-LC-PD
SK-20FT-Y-LC-PD



4' / 8' Mini Square LED Strip Fixtures

- Seamless linkable connectors allows for multiple fixtures on one power source
- Link several fixtures together
- Sensors: Only one fixture with motion sensor is required when linking fixtures together. The sensor will activate all the fixtures. Place the fixture with sensor in desired order.
- Emergency: No additional wiring needed in EMB scenarios. Our patent pending connector allows for universal plug & play.

Plug & Play Linkable 150LM/W

REPLACEABLE DIMMABLE 90 HIGH CRI DLC E1784 Intertek Box Qty. 6

Model	Voltage	Watts	Lumens	Color
LED-MSTL-4FT-3P40-5CCT-HL	120-277V	40/30/20w	125lm/w	27/30/35/40/50k
LED-MSTL-8FT-3P80-5CCT-HL	120-277V	80/60/40w	125lm/w	27/30/35/40/50k

3P40		3P80	
WATT	LUMENS	WATT	LUMENS
20	3,000	40	6,000
30	4,500	60	9,000
40	6,000	80	12,000




SK-10FT-Y-LC-PD
SK-20FT-Y-LC-PD



Seamless Linkable Connector

Accessory Model	Description
SK-10FT-Y-LC-PD	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
L6-BK-6P	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
L6-JBX	20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
L6-5FT-PC-3P	MSTL: 5' Power Cord 3-Prong
L6-5FT-PC-LE	MSTL: 5' Power Cord Hardwire
L6-0.5FT-JUMPER	MSTL: 6" Jumper Cable
L6-2FT-JUMPER	MSTL: 2' Jumper Cable

Pre-installed Accessory Model	Description
Add: -EMB to Model #	90 minute emergency backup
Add: -BMS to Model #	Microwave bi level motion + daylight sensor
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector



L6-JBX



L6-BK-6P



L6-2FT-JUMPER



L6-5FT-PC-LE



L6-5FT-PC-3P

2' & 4' LED Linear Corner Strip Fixture

- Lens is removeable for easy surface mount installation
- Sturdy aluminum housing prevents bending
- 0-10V dimming for controls

5-CCT & 3 Power Select

REPLACEABLE DIMMABLE 80 HIGH CRI DLC E1784 Intertek

Box Qty for 2ft: 4
Box Qty for 4ft: 2

Model	Voltage	Watts	Lumens	Color
LED-RSCN-2FT-3P25-5CCT	120-277V	25/20/15W	115lm/w	27/30/35/40/50k
LED-RSCN-4FT-3P50-5CCT	120-277V	50/40/30W	115lm/w	27/30/35/40/50k

3P25		3P50	
WATT	LUMENS	WATT	LUMENS
15	1,850	30	3,900
20	2,600	40	5,200
25	3,250	50	6,500

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
Add: -BMSBT to Model #	EnvisionLS Bluetooth Control: PIR/Daylight/Zoning
Add: -BMS-SL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: -US-SIL to Model #	SILVAIR Enable Bluetooth Control: Ultrasonic/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector





2' & 4' Prismatic LED Lens Wraps

- Lens is held by a spring making it easily removable for surface mount installation
- Single CCT is non-dimmable
- 6-CCT is 0-10V dimmable
- Fixture can be surface mounted, wall mounted, or suspended



Box Qty for 2ft: 12
Box Qty for 4ft: 6



Model	Voltage	Watts	Lumens	Color
LED-WRP-PRM-2FT-20W-6CCT-UNV	120-277V	20w	2,300	27/30/35/40/50/65k
LED-WRP-PRM-4FT-40W-6CCT-UNV	120-277V	40w	4,600	27/30/35/40/50/65k

Model	Voltage	Watts	Lumens	Color
LED-WRP-PRM-2FT-40W-35K	120-277V	40w	1,900	3500k
LED-WRP-PRM-2FT-20W-40K	120-277V	20w	1,900	4000k
LED-WRP-PRM-2FT-20W-50K	120-277V	20w	1,900	5000k
LED-WRP-PRM-4FT-40W-35K	120-277V	40w	3,800	3500k

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
Add: -BMSPIR to Model #	PIR Bi Level Motion + Daylight Sensor
Add: -BMSBT to Model #	EnvisionLS Bluetooth Control: PIR/Daylight/Zoning
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector



Features a spring design allowing easy removal of lens for installation



2' & 4' Frosted LED Lens Wraps

- Lens is removeable for easy surface mount installation
- Sturdy aluminum housing prevents bending
- 0-10V dimming for controls
- Fixture can be surface & wall mounted or suspended



Box Qty for 2ft: 12
Box Qty for 4ft: 6




3P24		3P48	
WATT	LUMENS	WATT	LUMENS
16	1,840	32	3,680
20	2,300	40	4,600
24	2,760	48	5,520

Model	Voltage	Watts	Lumens	Color
LED-WRP-FR-2FT-3P24-6CCT-UNV	120-277V	24/20/16w	115lm/w	27/30/35/40/50/65k
LED-WRP-FR-4FT-3P48-6CCT-UNV	120-277V	48/40/32w	115lm/w	27/30/35/40/50/65k

Model	Voltage	Watts	Lumens	Color
LED-WRP-FR-2FT-20W-50K	120-277V	20w	2,200	5000k

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
Add: -BMSPIR to Model #	PIR Bi Level Motion + Daylight Sensor
Add: -BMSBT to Model #	EnvisionLS Bluetooth Control: PIR/Daylight/Zoning
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector



1/2" Knockout

2' & 4' LED Wrap: ARCY-Line

- Lens is removeable for easy surface mount installation
- Sturdy aluminum housing prevents bending
- 0-10V dimming for controls
- Fixture can be surface & wall mounted or suspended

9.8" Wide Models



Box Qty for 2ft: 6
Box Qty for 4ft: 4

NEW	Model	Voltage	Watts	Lumens	Color
	LED-WRP-ARC-10ix2FT-3P25-5CCT	120-277V	25/20/15w	115lm/w	30/35/40/50/65k
	LED-WRP-ARC-10ix4FT-3P50-5CCT	120-277V	50/40/30w	115lm/w	30/35/40/50/65k



14" Wide Models




Box Qty for 2ft: 6
Box Qty for 4ft: 4

NEW	Model	Voltage	Watts	Lumens	Color
	LED-WRP-ARC-14ix2FT-3P25-5CCT	120-277V	25/20/15W	115lm/w	30/35/40/50/65k
	LED-WRP-ARC-14ix4FT-3P50-5CCT	120-277V	50/40/30W	115lm/w	30/35/40/50/65k



10ix2FT		10ix4FT	
WATT	LUMENS	WATT	LUMENS
15	1,850	30	3,900
20	2,600	40	5,200
25	3,250	50	6,500

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
Add: -BMSPIR to Model #	PIR Bi Level Motion + Daylight Sensor
Add: -BMSBT to Model #	EnvisionLS Bluetooth Control: PIR/Daylight/Zoning
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector

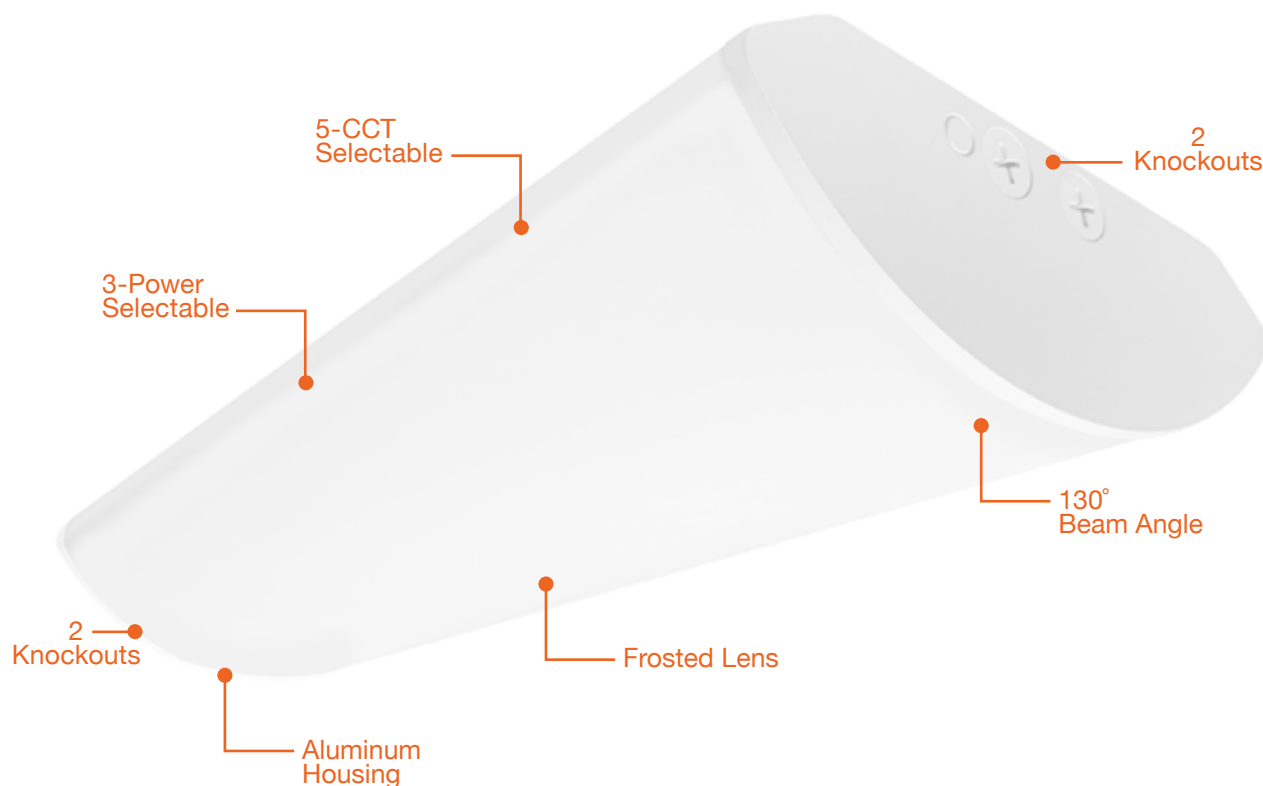



2' / 4' / 8' Vapor Tight LED Fixture: Bolt-Line

- Environmental friendly polyester powder coated
- Anti-rust durable plastic housing
- 50,000-hour LED lifespan based on IES LM-90 results

Box Qty:
3M25 - 12
3M50 - 6
3M80 - 6
3M100 - 4



5-CCT & 3 Power Select

NEW

Model	Voltage	Watts	Lumens	Color
LED-VPT-2FT-3P25-5CCT-UNV	120-277V	25/20/15w	150lm/w	30/35/40/50/65k
LED-VPT-4FT-3P50-5CCT-UNV	120-277V	50/40/30w	150lm/w	30/35/40/50/65k
LED-VPT-4FT-3580-5CCT-UNV	120-277V	80/70/60w	150lm/w	30/35/40/50/65k
LED-VPT-8FT-3P100-5CCT-UNV	120-277V	100/80/60w	150lm/w	30/35/40/50/65k

5CCT

5-CCT			
WATT	LUMENS	WATT	LUMENS
15	2,250	50	7,500
20	3,000	60	9,000
25	3,750	70	10,500
30	4,500	80	12,000
40	6,000	100	15,000

4-CCT	
WATT	LUMENS
15	1,950
20	2,600
25	3,250
60	7,800
70	9,100
80	10,400

Model	Description
VPT-2FT-WG	2ft Long Wire Guard for 2ft RST
VPT-4FT-WG	4ft Long Wire Guard for 4, 8ft RST

4' Green Vapor Tight LED Fixture: Bolt-Line

- Ideal for use in horticultural neutral light applications

Model	Voltage	Watts	Lumens	Color
LED-VPT-4FT-80W-GREEN	120-277V	80w	4200	Green




Pre-installed Accessory Model	Description
Add: -EMB to Model #	90 minute emergency backup
Add: -BMS to Model #	HD407VC-R Bi level motion + daylight sensor
Add: 20KV to Model #	SG-20KV-UNV: 20KV surge protector
Add: -HV to Model #	347-480V step down transformer

Model	Description
VPT-ANGLE	Angle Mount Accessory

Model	Description
VPT-2FT-WG	2ft Long Wire Guard for 2ft RST
VPT-4FT-WG	4ft Long Wire Guard for 4, 8ft RST

NEW

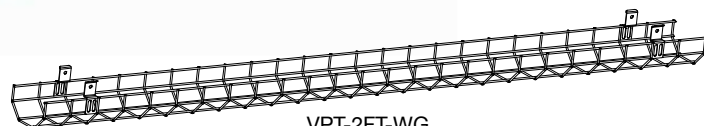

VPT-2FT-WG
VPT-4FT-WG

Jelly Jar Vapor Tight / Vertical & Horizontal: Bolt-Line

- All in one: Works for vertical or horizontal installation
- 0-10V dimming standard

3-CCT Select

Box Qty. 12



Model	Voltage	Watts	Lumens	Color	CRI
LED-JJ-21W-TRI	120-277V	21w	2700	30/40/50k	>80

3CCT



Vertical



Horizontal



1" Low Voltage Downlights: Mini-Line

- Smaller lamp body for flexible application
- Low-voltage daisy-chain wiring
- 5-100% dimming compatible with electronic low voltage drivers (see CV series)



Model	Voltage	Watts	Lumens	Color
LED-MDL-1-6W-30K-RD-WH-12V	12V	6w	500	3000k

Accessory Model	Description
MDL-TRIM-RD-BLK	1" mini downlight round black trim
MDL-TRIM-RD-BZ	1" mini downlight round bronze trim
MDL-TRIM-SQ-WH	1" mini downlight square white trim
MDL-TRIM-SQ-BLK	1" mini downlight square black trim
MDL-TRIM-SQ-BZ	1" mini downlight square bronze trim
MDL-24°-OPTIC	1" mini downlight optic lens 24°



-BZ




-BLK



-BZ



-BLK



-WH



-WH



-BLK



-BZ

1" Low Voltage Downlight Adjustable: Mini-Line

- Adjustable fixture allows 60° pitch angle
- Low-voltage daisy-chain wiring
- 5-100% dimming compatible with electronic low voltage drivers (see CV series)



Model	Voltage	Watts	Lumens	Color
LED-MDL-1-ADJ-6W-30K-RD-WH-12V	12V	6w	500	3000k
LED-MDL-1-ADJ-6W-30K-RD-BLK-12V	12V	6w	500	3000k
LED-MDL-1-ADJ-6W-30K-RD-BZ-12V	12V	6w	500	3000k
LED-MDL-1-ADJ-6W-30K-SQ-WH-12V	12V	6w	500	3000k
LED-MDL-1-ADJ-6W-30K-SQ-BLK-12V	12V	6w	500	3000k
LED-MDL-1-ADJ-6W-30K-SQ-BZ-12V	12V	6w	500	3000k



-WH



-BLK



-BZ

2" LED Downlights: Trimless-Line

- External J-box eliminates recessed can
- New construction mounting plate available
- Suitable for use in wet locations
- IC & airtight-rated fixture
- EMB: Emergency back up: 90 minutes
- Beam angle: 38° standard, 24° & 60° available

Round






 Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-TML-2R-8W-5CCT-WH	120V	8w	600	27/30/35/40/50K
LED-DLJBX-TML-2R-8W-5CCT-BLK	120V	8w	600	27/30/35/40/50K
LED-DLJBX-TML-2R-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K
LED-DLJBX-TML-2R-15W-5CCT-BLK	120V	15w	1000	27/30/35/40/50K



2" LED Downlights: Trimless-Line

Round Gimbal

Box Qty:
18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-TML-GMB-2R-8W-5CCT-WH	120V	8w	600	27/30/35/40/50K
LED-DLJBX-TML-GMB-2R-8W-5CCT-BLK	120V	8w	600	27/30/35/40/50K



4" LED Downlight: Trimless-Line

Round

Box Qty:
18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-TML-4R-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K
LED-DLJBX-TML-4R-15W-5CCT-BLK	120V	15w	1000	27/30/35/40/50K





2" LED Downlights: Trimless-Line

- External J-box eliminates recessed can
- New construction mounting plate available
- Suitable for use in wet locations
- IC & airtight-rated fixture
- EMB: Emergency back up: 90 minutes
- Beam angle: 38° standard, 24° & 60° available

Square

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-TML-2SQ-8W-5CCT-WH	120V	8w	600	27/30/35/40/50K
LED-DLJBX-TML-2SQ-8W-5CCT-BLK	120V	8w	600	27/30/35/40/50K
LED-DLJBX-TML-2SQ-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K
LED-DLJBX-TML-2SQ-15W-5CCT-BLK	120V	15w	1000	27/30/35/40/50K



4" LED Downlights: Trimless-Line

Square

Box Qty: 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-TML-4SQ-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K
LED-DLJBX-TML-4SQ-15W-5CCT-BLK	120V	15w	1000	27/30/35/40/50K

Pre-installed Accessory Model	Description
Add '-EMB-' to model #	Emergency backup (external 15W)



Pre-installed Accessory Model	Description
Add: -EMB to Model #	90 Minute Emergency Backup
Add: -24D to Model #	24D Optic
Add: -60D to Model #	60D Optic

Optic Lens Options

Accessory	Description
OPTIC-35X17-24D	24D Optic: DLJBX-2, DLJBX-TML-2
OPTIC-35X17-60D	60D Optic: DLJBX-2, DLJBX-TML-2
OPTIC-63X22-24D	24D Optic: DLJBX-4RG, SL-FLT-4R, DLJBX-TML-4, LED-SQM
OPTIC-63X22-60D	60D Optic: DLJBX-4RG, SL-FLT-4R, DLJBX-TML-4, SQM-TML





3" LED J-Box Canless Downlight: M-Line

- External J-box eliminates recessed can
- New construction mounting plate available
- Suitable for use in wet locations
- IC & airtight-rated fixture
- EMB: Emergency back up: 90 minutes

5-CCT Select



Model	Voltage	Watts	Lumens	Color
LED-MDJBX-3-10W-5CCT-WH-R	120V	10w	800	27/30/35/40/50K

Accessory	Description
MDJBX-3-TRIM-WH-SQ	MDJBX-3: White square smooth trim
MDJBX-3-TRIM-BLK-R	MDJBX-3: Black round smooth trim
MDJBX-3-TRIM-BLK-SQ	MDJBX-3: Black square smooth trim

Pre-installed Accessory Model	Description
Add '-EMB-' to model #	Emergency backup (external 15W)



White (-WH-SQ)



Black (-BLK-R)



Black (-BLK-SQ)



4" LED J-Box Canless Downlight: M-Line

5-CCT Select



Model	Voltage	Watts	Lumens	Color
LED-MDJBX-4-15W-5CCT-WH-R	120V	15w	1300	27/30/35/40/50K

Accessory	Description
MDJBX-4-TRIM-WH-SQ	MDJBX-3: White square smooth trim
MDJBX-4-TRIM-BLK-R	MDJBX-3: Black round smooth trim
MDJBX-4-TRIM-BLK-SQ	MDJBX-3: Black square smooth trim

Pre-installed Accessory Model	Description
Add '-EMB-' to model #	Emergency backup (external 15W)



White (-WH-SQ)



Black (-BLK-R)



Black (-BLK-SQ)



1" LED Canless Downlight: SnapTrim-Line

- External J-box eliminates recessed can
- New construction mounting plate available
- Suitable for use in wet locations
- IC & airtight-rated fixture
- EMB: Emergency back up: 90 minutes

5-CCT Select

SELECT SWITCH DIMMABLE PREPARED 90 HIGH CRI JAB TITLE 24 24 Box Qty. 24

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-1RG-7W-5CCT-WH-R	120V	7w	550	27/30/35/40/50K

Trim Options

Accessory	Description
DLJBX-1-TRIM-WH-SQ	1" White square smooth trim
DLJBX-1-TRIM-BLK-R	1" Black round smooth trim
DLJBX-1-TRIM-BLK-SQ	1" Black square smooth trim



2" LED Canless Downlight: SnapTrim-Line

- Beam angle: 38° standard, 24° & 60° available

5-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-2-8W-5CCT-W/W-SM	120V	8w	600	27/30/35/40/50K
LED-DLJBX-2-15W-5CCT-W/W-S	120V	15w	1000	27/30/35/40/50K

Single CCT

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-2-15W-30K-W/W-S	120V	15w	1000	3000k
LED-DLJBX-2-15W-50K-W/W-S	120V	15w	1000	5000k

Warm Dimming



Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-2-6W-3WD-W/W-S	120V	6w	450	30—>18k
LED-DLJBX-2-12W-3WD-W/W-S	120V	12w	850	30—>18k

5-CCT Select-Fire Rated

Box Qty. 18

NEW



FIRE RATED

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-2-8W-5CCT-FR-WW-SM	120V	8w	600	27/30/35/40/50K



White (-WH-S)
Included
(-WH-BFL)



Black (-BLK-S)
(BLK-BFL)



Bronze (-BZ-S)
(BZ-BFL)



Chrome (-CH-S)



Nickel (-BN-S)



White (-WH-S)
(WH-BFL)



Black (-BLK-S)
(BLK-BFL)




Bronze (-BZ-S)
(BZ-BFL)



Nickel (-BN-S)

Trim Options

Accessory	Description
DLJBX-2-TRIM-BLK-S	2" Black in and out smooth trim
DLJBX-2-TRIM-BL-BFL	2" Black in and out baffle trim
DLJBX-2-TRIM-BZ-S	2" Bronze in and out smooth trim
DLJBX-2-TRIM-BZ-BFL	2" Bronze in and out baffle trim
DLJBX-2-TRIM-BN-S	2" Brushed nickel in and out smooth trim
DLJBX-2-TRIM-CH-S	2" Chrome in and out smooth trim
DLJBX-2-TRIM-WH-BFL	2" White in and out baffle trim
DLJBX-2-TRIM-BN-S-SQ	2" Brushed nickel smooth square trim
DLJBX-2-TRIM-BL-S-SQ	2" Black smooth square trim
DLJBX-2-TRIM-BZ-S-SQ	2" Bronze smooth square trim
DLJBX-2-TRIM-WH-S-SQ	2" White smooth square trim

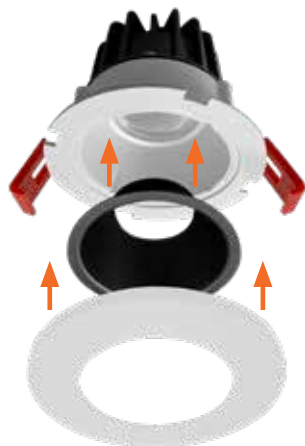



2" LED Adjustable Downlight: SnapTrim-Line

- External J-box eliminates recessed can
- New construction mounting plate available
- 35° tilt and up to 360° rotation
- Suitable for use in wet locations
- IC & airtight-rated fixture

5-CCT Select



Model	Voltage	Watts	Lumens	Color
LED-DLJBX-ADJ-2-5W-5CCT-WH	120V	5w	350	27/30/35/40/50K

12V Version

Use Electronic Low Voltage drivers see CV series

Box Qty.
18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-ADJ-2-5W-30K-WH-12V	12V	5w	350	3000k
LED-DLJBX-ADJ-2-5W-30K-BLK-12V	12V	5w	350	3000k

120V Version

Box Qty.
18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-ADJ-2-5W-27K	120V	5w	350	2700k
LED-DLJBX-ADJ-2-5W-40K	120V	5w	350	4000k
LED-DLJBX-ADJ-2-5W-50K	120V	5w	350	5000k

Accessory	Description
JBX-EXT-6'-2PIN	6' extension cable for fixture to J-box
JBX-EXT-10'-2PIN	10' extension cable for fixture to J-box



3" LED Adjustable Downlight: SnapTrim-Line

- External J-box eliminates recessed can
- New construction mounting plate available
- 35° tilt and up to 360° rotation
- Suitable for use in wet locations
- IC & airtight-rated fixture
- EMB: Emergency back up: 90 minutes
- Beam angle: 38° standard, 24° & 60° available

5-CCT Select




Model	Voltage	Watts	Lumens	Color
LED-DLJBX-ADJ-3-8W-5CCT-WH-R	120V	8w	600	27/30/35/40/50K
LED-DLJBX-ADJ-3-8W-5CCT-BLK-R	120V	8w	600	27/30/35/40/50K
LED-DLJBX-ADJ-3-12W-5CCT-WH-R	120V	12w	1000	27/30/35/40/50K
LED-DLJBX-ADJ-3-12W-5CCT-BLK-R	120V	12w	1000	27/30/35/40/50K

Warm Dimming



Model	Voltage	Watts	Lumens	Color
LED-DLJBX-ADJ-3-6W-3WD-WH-R	120V	6w	450	30-->18k
LED-DLJBX-ADJ-3-6W-3WD-BLK-R	120V	6w	450	30-->18k

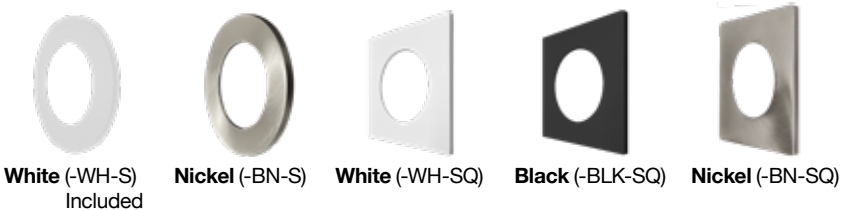

Trim Options

Accessory	Description
DLJBX-ADJ-3-TRIM-WH-SQ	3" Gimbal square trim white finish
DLJBX-ADJ-3-TRIM-BN-R	3" Gimbal round trim brushed nickel
DLJBX-ADJ-3-TRIM-BN-SQ	3" Gimbal square trim brushed nickel
DLJBX-ADJ-3-TRIM-BLK-SQ	3" Gimbal square trim black finish



3" Regressed Gimbal Downlight: SnapTrim-Line

- External j-box & spring mount clips for easy installation
- Beam angle: 38° standard, 24° & 60° available

5-CCT Select

SELECT DIMMABLE 90° HIGH CRI JA8 TITLE 24 COMPLIANT Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-ADJ-3RG-8W-5CCT-WH-R	120V	8w	600	27/30/35/40/50K
LED-DLJBX-ADJ-3RG-8W-5CCT-BLK-R	120V	8w	600	27/30/35/40/50K
LED-DLJBX-ADJ-3RG-8W-5CCT-WH-SQ	120V	8w	600	27/30/35/40/50K
LED-DLJBX-ADJ-3RG-8W-5CCT-BLK-SQ	120V	8w	600	27/30/35/40/50K

Factory Add-Ons	Description
Add '-EMB-' to model #	Emergency backup (external 25W)

Floating Adjustable: SnapTrim-Line

- 360° twist allows for an easy adjustment after installation
- Unique floating gimbal design adds an architectural touch
- Canless module does not require a housing making it perfect for new construction and remodeling.

2"

SELECT DIMMABLE 90° HIGH CRI JA8 TITLE 24 COMPLIANT Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-FLT-2-5W-5CCT-WH	120V	5w	400	27/30/35/40/50K
LED-SL-FLT-2-5W-5CCT-BLK	120V	5w	400	27/30/35/40/50K

4"

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-FLT-4R-9W-5CCT-WH	120V	9w	700	27/30/35/40/50K

4"- Fire-Rated

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-FLT-4R-9W-5CCT-FR-WH	120V	9w	700	27/30/35/40/50K

Factory Add-Ons	Description
Add '-EMB-' to model #	Emergency backup (external 25W)



4" Round Scoop Downlight: SnapTrim-Line

5-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-SCP-4R-12W-5CCT-WH	120V	12w	900	27/30/35/40/50K

Factory Add-Ons	Description
Add '-EMB-' to model #	Emergency backup (external 25W)



4" Adjustable Sloped Ceiling: SnapTrim-Line

- Beam angle: 38° standard, 24° & 60° available

5-CCT Select

SELECT DIMMABLE 90° HIGH CRI JA8 TITLE 24 COMPLIANT Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-SLP-ADJ-4R-8W-5CCT-WH	120V	8w	600	27/30/35/40/50K
LED-SL-SLP-ADJ-4R-8W-5CCT-BLK	120V	8w	600	27/30/35/40/50K

Factory Add-Ons	Description
Add '-EMB-' to model #	Emergency backup (external 25W)



3" Regressed Downlight: SnapTrim-Line

- External j-box & spring mount clips for easy installation
- Beam angle: 38° standard, 24° & 60° available

5-CCT Select






 Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-3RG-15W-5CCT-WH-R	120V	15w	1100	27/30/35/40/50K

Accessory	Description
DLJBX-3RG-TRIM-WH-SQ	3" Regressed white square trim
DLJBX-3RG-TRIM-BLK-R	3" Regressed black round trim
DLJBX-3RG-TRIM-BLK-SQ	3" Regressed black square trim
Add '-EMB-' to model #	Emergency backup (external 25W)

4" Regressed Downlight: SnapTrim-Line

5-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-4RG-18W-5CCT-WH-R	120V	18w	1500	27/30/35/40/50K
LED-DLJBX-4RG-15W-5CCT-WH-R	120V	15w	1000	27/30/35/40/50K
LED-DLJBX-4RG-15W-5CCT-WH-R-0/10V	120-277V	15w	1100	27/30/35/40/50K

5-CCT Select - Fire Rated

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-4RG-15W-5CCT-FR-WH-R	120V	15w	1500	27/30/35/40/50K


Warm Dimming



Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-4RG-12W-3WD-WH-R	120V	12w	850	30—>18k

Accessory	Description
Add '-EMB-' to model #	Emergency backup (external 25W)
DLJBX-4RG-TRIM-WH-SQ	4" Regressed gimbal white square trim
DLJBX-4RG-TRIM-BLK-R	4" Regressed gimbal black round trim
DLJBX-4RG-TRIM-BLK-SQ	4" Regressed gimbal black square trim
DLJBX-4RG-TRIM-BRZ-R	4" Regressed gimbal bronze round trim
DLJBX-4RG-TRIM-BRZ-SQ	4" Regressed gimbal bronze square trim

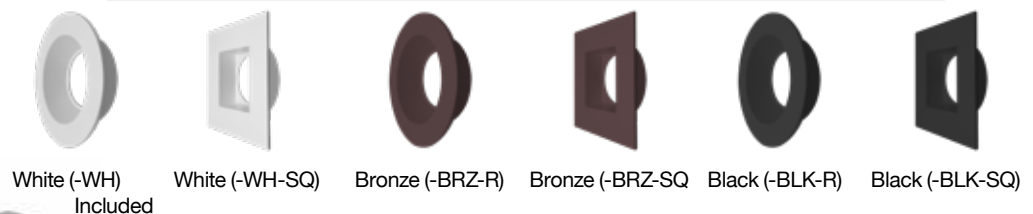


6" Regressed Downlight: SnapTrim-Line

5-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-6RG-24W-5CCT-WH-R	120V	24w	1800	27/30/35/40/50K

Accessory	Description
Add '-EMB-' to model #	Emergency backup (external 25W)
DLJBX-6RG-TRIM-WH-SQ	6" regressed gimbal white square trim
DLJBX-6RG-TRIM-BLK-R	6" regressed gimbal black round trim
DLJBX-6RG-TRIM-BLK-SQ	6" regressed gimbal black square trim

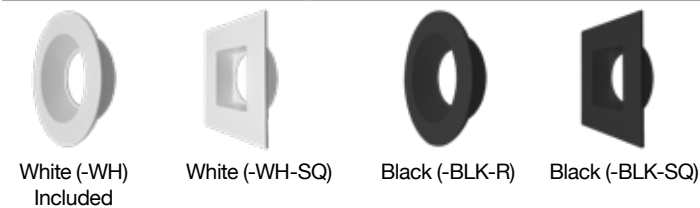

4" Adjustable Downlight: SnapTrim-Line

- External j-box & spring mount clips for easy installation
- Canless module does not require housing
- Beam angle: 38° standard, 24° & 60° available

5-CCT Select

SELECT HIGH CRI 90+ JAB TITLE 24 COMPLIANT Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-ADJ-4-12W-5CCT-WH-R	120V	12w	750	27/30/35/40/50K
LED-DLJBX-ADJ-4-12W-5CCT-BLK-R	120V	12w	750	27/30/35/40/50K
LED-DLJBX-ADJ-4-12W-5CCT-BN-R	120V	12w	750	27/30/35/40/50K
LED-DLJBX-ADJ-4-18W-5CCT-WH-R	120V	18w	1500	27/30/35/40/50K
LED-DLJBX-ADJ-4-18W-5CCT-BLK-R	120V	18w	1500	27/30/35/40/50K

Warm Dimming

WARM DIMMING 3000K 1500K Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-ADJ-4-12W-3WD-WH-R	120V	12w	750	30—>18k

Accessory	Description
JBX-EXT-6'-2PIN	6" Extension cable for fixture to J-box unit
JBX-EXT-10'-2PIN	10" Extension cable for fixture to J-box unit
Add '-EMB' to model #	Emergency backup (external 25W)



Display featuring 10 of our canless downlights. Place a \$3,000+ stock orders of downlights and get a free counter display.

Display

6" Adjustable Downlight: SnapTrim-Line

5-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-ADJ-6-18W-5CCT-WH-R	120V	18w	1500	27/30/35/40/50K
LED-DLJBX-ADJ-6-18W-5CCT-BLK-R	120V	18w	1500	27/30/35/40/50K

Accessory	Description
Add: -24D to Model #	24D Optic
Add: -60D to Model #	60D Optic
Add '-EMB' to model #	Emergency backup (external 25W)

Optic Lens Options

Accessory	Description
OPTIC-35X17-24D	24D Optic: DLJBX-2, DLJBX-TML-2
OPTIC-35X17-60D	60D Optic: DLJBX-2, DLJBX-TML-2
OPTIC-42X14-24D	24D Optic: DLJBX-ADJ-3, ADJ-3RG, SLP-ADJ-4R, TML-GMB-2R, SCP-4R
OPTIC-42X14-60D	60D Optic: DLJBX-ADJ-3, ADJ-3RG, SLP-ADJ-4R, TML-GMB-2R, SCP-4R
OPTIC-50X17-24D	24D Optic:DLJBX-3RG
OPTIC-50x17-60D	60D Optic:DLJBX-3RG
OPTIC-63X22-24D	24D Optic:DLJBX-4RG, SL-FLT-4R, DLJBX-TML-4,
OPTIC-63X22-60D	60D Optic:DLJBX-4RG, SL-FLT-4R, DLJBX-TML-4,





4" Slim Panel Tilt Downlight: SnapTrim-Line

- Canless module does not require housing
- Fixture is adjustable up to 45°
- Accessories including color trims

5-CCT Select

← DIMMABLE → 90° HIGH CRI JAB TITLE 24 COMPLIANT Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-TLT-4R-9W-5CCT-WH	120V	9w	600	27/30/35/40/50K

3-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-TLT-4R-9W-TRI	120V	9w	600	30/40/50k

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)



6" Slim Panel Tilt Downlight: SnapTrim-Line

5-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-TLT-6R-12W-5CCT-WH	120V	12w	800	27/30/35/40/50K

3-CCT Select


Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-TLT-6R-12W-TRI	120V	12w	800	30/40/50k


Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)



6' / 10' Extension Cable



CUNV-NC-ICAT-7H
Universal Pre-Mounting Plate
13 7/8" x 15 1/8"

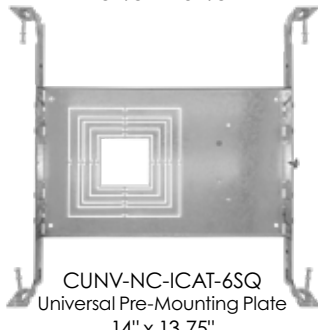


CUNV-NC-ICAT-6SQ
Universal Pre-Mounting Plate
14" x 13 7/8"

Canless LED Downlight Accessories


Accessory	Description
CUNV-NC-ICAT-7H	1" / 2" / 3" / 3.5" / 4" / 6" Universal pre-mounting new construction plate
CUNV-NC-ICAT-6SQ	1" 2 3.5" 4" 5" 6" Canless downlights (only for trimless squares) new construction plate
CUNV-JBX-RI-XL	2" 3" 3.5" 4" 5" 6" Universal construction plate canless downlights
C4-JBX-RI	4" Rough in plate
C6-JBX-RI	6" Rough in plate
C8-JBX-RI	8" Rough in plate
JBX-EXT-6'-2PIN	6' Extension cable for fixture to J-box
JBX-EXT-10'-2PIN	10' Extension cable for fixture to J-box
JBX-EXT-12'-2PIN	12' Extension cable for fixture to J-box
JBX-EXT-6'-TRI	6' Extension cable for fixture to J-box
JBX-EXT-10'-TRI	10' Extension cable for fixture to J-box
LED-EMB-25W-HV-0/10V	Emergency Back Up For Internal Drivers (Works with all 0-10V Dim or <25W fixtures) -Single Sided Flex-



CUNV-JBX-RI-XL
Universal Pre-Mounting Plate
26" x 8.4"



C4-JBX-RI
4" Rough In Plate
6 1/2" x 13 1/4"



C6-JBX-RI
6" Rough In Plate
8 1/2" x 17 1/4"



C8-JBX-RI
8" Rough In Plate
10 1/2" x 26"



3" Slim Panel Downlight: SnapTrim-Line

- Canless module does not require housing
- Check spec sheet for dimmer compatibility. Triac and 0-10V options are available.
- Accessories including color trims (see page 36)

5-CCT Select

SELECT SWITCH DIMMABLE 90 HIGH CRI JA8 TITLE 24 COMPLIANT Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-3R-8W-5CCT-WH	120V	8w	500	27/30/35/40/50K
LED-SL-PNL-3SQ-8W-5CCT-WH	120V	8w	500	27/30/35/40/50K

4" Slim Panel Downlight: SnapTrim-Line

Round 5-CCT & 3-Power Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-4R-3P12W-5CCT-WH	120V	8/10/12w	500/700/840	27/30/35/40/50K

Round - Fire Rated

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-4R-12W-5CCT-FR-WH	120V	12w	840	27/30/35/40/50K

Round Low-Voltage 12V

Use Electronic Low Voltage drivers see CV series

Box Qty. 18

NEW

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-4R-9W-5CCT-12V	120V	9w	750	27/30/35/40/50K

Round 5-CCT Select 0-10V

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-4R-11W-5CCT-0/10V	120V	11w	750	27/30/35/40/50K

Round 3-CCT Select 0-10V

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-4R-11W-TRI-0/10V	120/277V	11w	750	30/40/50k

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)

Square 5-CCT & 3-Power Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-4SQ-3P12W-5CCT-WH	120V	8/10/12w	500/700/840	27/30/35/40/50K

Square - Fire Rated

Box Qty. 18

NEW

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-4SQ-12W-5CCT-FR-WH	120V	12w	840	27/30/35/40/50K

Square 5-CCT Select 0-10V

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-4SQ-11W-5CCT-0/10V	120/277V	11w	750	27/30/35/40/50K

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)

SLPNL Trims

Accessory	Description
SLPNL-TRIM-3R-BLK	3" Round black trim
SLPNL-TRIM-3R-BRZ	3" Round bronze trim
SLPNL-TRIM-3R-BNI	3" Round brushed nickel trim
SLPNL-TRIM-4R-BLK	4" Round black trim
SLPNL-TRIM-4R-BRZ	4" Round bronze trim
SLPNL-TRIM-4R-BNI	4" Round brushed nickel trim
SLPNL-TRIM-4SQ-BLK	4" Square black trim
SLPNL-TRIM-4SQ-BRZ	4" Square bronze trim
SLPNL-TRIM-4SQ-BNI	4" Square brushed nickel trim



BZ BN



BZ BN



6" Slim Panel Downlight: SnapTrim-Line

5-CCT & 3-Power Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-6R-3P15W-5CCT-WH	120V	15/12/9w	1150/950/750	27/30/35/40/50K

5CCT



Round 5-CCT Select - Fire Rated

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-6R-15W-5CCT-FR-WH	120V	15w	1150	27/30/35/40/50K

5CCT



Round 5-CCT Select 0-10V

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-6R-14W-5CCT-0/10V	120/277V	14w	1000	27/30/35/40/50K

5CCT



Square 5-CCT Select

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-6SQ-15W-5CCT-WH	120V	15w	1050	27/30/35/40/50K

5CCT



Square 5-CCT Select - Fire Rated

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-6SQ-15W-5CCT-FR-WH	120V	15w	1150	27/30/35/40/50K

5CCT

Square 3-CCT Select

Box Qty. 18


Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-6SQ-14W-TRI	120V	14w	1000	30/40/50k

3CCT

Square 5-CCT Select 0-10V

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-6SQ-14W-5CCT-0/10V	120/277V	14w	1000	30/40/50k

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)

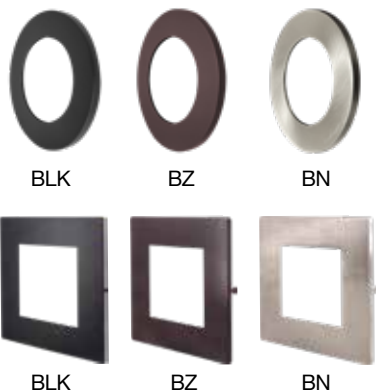

SLPNL Trims

Accessory	Description
SLPNL-TRIM-6R-BLK	6" Round black trim
SLPNL-TRIM-6R-BRZ	6" Round bronze trim
SLPNL-TRIM-6R-BNI	6" Round brushed nickel trim
SLPNL-TRIM-6SQ-BLK	6" Square black trim
SLPNL-TRIM-6SQ-BRZ	6" Square bronze trim
SLPNL-TRIM-6SQ-BNI	6" Square brushed nickel trim



8" Slim Panel Downlight: SnapTrim-Line

Round 5-CCT & 3-Power Select

Box Qty.
18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-8R-3P22W-5CCT-WH	120V	16/19/22w	1600/1400/1200	27/30/35/40/50K



Round 5-CCT Select 0-10V

Box Qty.
18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-8R-22W-5CCT-0/10V	120-277V	22w	1600	27/30/35/40/50K



Square 5-CCT & 3-Power Select

Box Qty.
18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-8SQ-3P22W-5CCT-WH	120V	16/19/22w	1600/1400/1200	27/30/35/40/50K



Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)



10" Slim Panel Downlight: SnapTrim-Line

Round 5-CCT Select 0-10V

Box Qty.
18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-10R-22W-5CCT-0/10v	120/277V	22w	1600	27/30/35/40/50K



Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)



E.T.A. 01/2025

NEW

4" Round Triac Dimmable Models: EcoValue-Line

5-CCT Select



Box Qty.
18

Model	Voltage	Watts	Lumens	Color
ECV-WFR-4-9W-5CCT	120V	9w	720	27/30/35/40/50K



E.T.A. 01/2025

NEW

6" Round Triac Dimmable Models: EcoValue-Line


5-CCT Select



Box Qty.
18

Model	Voltage	Watts	Lumens	Color
ECV-WFR-6-12W-5CCT	120V	12w	1000	27/30/35/40/50K

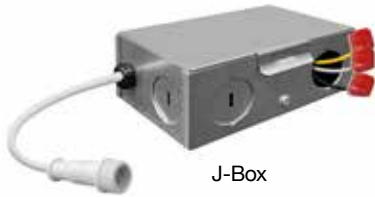



J-Box






LED-EMB-25W-HV-0/10V

6' / 10' Extension Cable

SnapTrim LED Downlight Accessories

Accessory	Description
JBX-11W-HV-0/10V	SL-PNL-4SQ 120/277V 0-10V driver
JBX-11W-277-347V	SL-PNL-4SQ 277-347V driver
JBX-14W-HV-0/10V	SL-PNL-6SQ 120/277V 0-10V driver
JBX-14W-277-347V	SL-PNL-6SQ 277-347V driver
JBX-18W-277-347V	SL-PNL-8R 277-347V driver
CUNV-NC-ICAT-7H	1" 2" 3" 3.5" 4" 5" 6" Universal pre-mounting new construction plate
CUNV-NC-ICAT	2" 3" 4" 6" Universal pre-mounting new construction plate
CUNV-JBX-RI-XL	2" 3" 3.5" 4" 5" 6" Universal construction plate: Canless downlights
CUNV-NC-ICAT-6SQ	1" 2 3.5" 4" 5" 6" New construction plate: Canless downlights (only for trimless squares)
C4-JBX-RI	4" Rough in plate
CUNV-SQM-NC-ICAT	New construction plate: SQM fixtures
C6-JBX-RI	6" Rough In plate
C8-JBX-RI	8" Rough In plate
JBX-EXT-6'-TRI	6' Extension cable for fixture to J-box
JBX-EXT-10'-TRI	10' Extension cable for fixture to J-box
LED-EMB-25W-HV-0/10V	Emergency Back Up For Internal Drivers (Works with all 0-10V Dim or <25W fixtures) -Single Sided Flex-

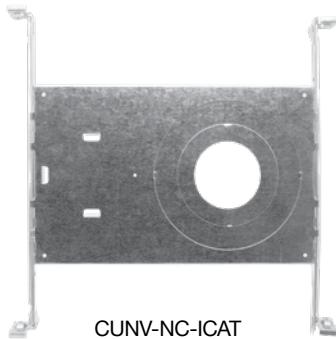
CUNV-NC-ICAT
 Universal Pre-Mounting Plate
 5 3/10" x 14 1/2"

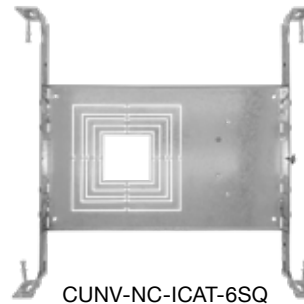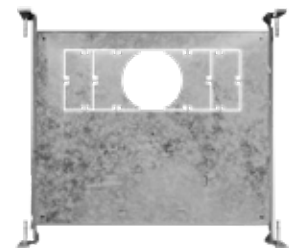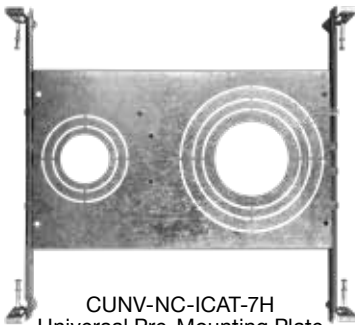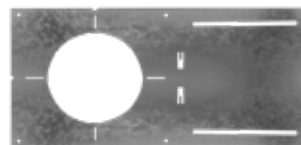CUNV-JBX-RI-XL
 Universal Pre-Mounting Plate
 8.4" x 26"

CUNV-NC-ICAT-6SQ
 Universal Construction Plate
 14" x 13.75"

CUNV-SQM-NC-ICAT
 Universal Pre-Mounting Plate
 14 3/4" x 11 3/4"

CUNV-NC-ICAT-7H
 Universal Pre-Mounting Plate
 13 7/8" x 15 1/8"

C4-JBX-RI
 4" Rough In Plate
 6 1/2" x 13 1/4"

C6-JBX-RI
 6" Rough In Plate
 8 1/2" x 17 1/4"

C8-JBX-RI
 8" Rough In Plate
 10 1/2" x 26"




4" Trimless Multiple Head Downlights

- Beam angle 20° standard, 38° and 60° available
- 360° rotation and 15° tilt gimble light source
- Canless module does not require housing

Single Head

SELECT OR SWITCH DIMMABLE 90° HIGH CRI JA8 TITLE 24 Box Qty. 18


Model	Voltage	Watts	Lumens	Color
LED-SQM1-TML-4-15W-5CCT-WH-20	120V	15w	1000	27/30/35/40/50K
LED-SQM1-TML-4-15W-5CCT-BLK-20	120V	15w	1000	27/30/35/40/50K

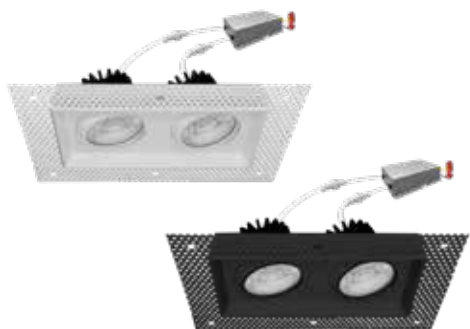

Double Head

Box Qty. 8

Model	Voltage	Watts	Lumens	Color
LED-SQM2-TML-4-30W-5CCT-WH-20	120V	30w	2000	27/30/35/40/50K
LED-SQM2-TML-4-30W-5CCT-BLK-20	120V	30w	2000	27/30/35/40/50K

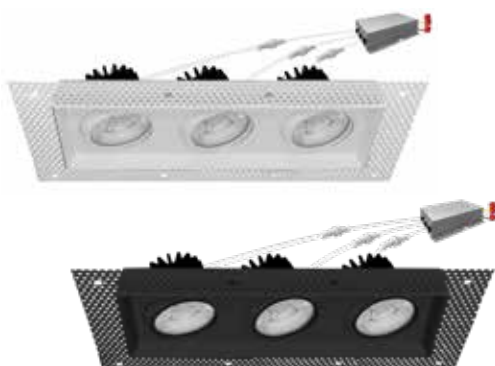

Triple Head

Box Qty. 8

Model	Voltage	Watts	Lumens	Color
LED-SQM3-TML-4-45W-5CCT-WH-20	120V	45w	3000	27/30/35/40/50K
LED-SQM3-TML-4-45W-5CCT-BLK-20	120V	45w	3000	27/30/35/40/50K



Pre-installed Accessory Model	Description
Add: -20D to Model #	20D Optic
Add: -38D to Model #	38D Optic
Add: -60D to Model #	60D Optic
Add '-EMB' to model #	Emergency backup (external 25W)





4" Multiple Head Downlights

- Beam angle 38° standard, 24° and 60° available
- 360° rotation and 8° tilt gimble light source
- External j-box & spring mount clips for easy installation
- Canless module does not require housing

Single Head




Model	Voltage	Watts	Lumens	Color
LED-SQM1-4-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K
LED-SQM1-4-15W-5CCT-BLK	120V	15w	1000	27/30/35/40/50K



Double Head

Box Qty.
8


Model	Voltage	Watts	Lumens	Color
LED-SQM2-4-30W-5CCT-WH	120V	30w	2000	27/30/35/40/50K
LED-SQM2-4-30W-5CCT-BLK	120V	30w	2000	27/30/35/40/50K

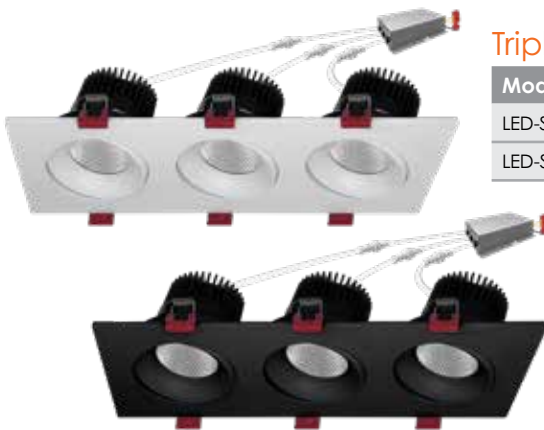

Triple Head


Box Qty.
8

Model	Voltage	Watts	Lumens	Color
LED-SQM3-4-45W-5CCT-WH	120V	45w	3000	27/30/35/40/50K
LED-SQM3-4-45W-5CCT-BLK	120V	45w	3000	27/30/35/40/50K

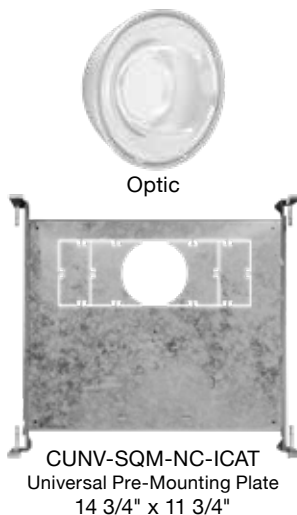

Pre-installed Accessory Model	Description
Add: -20D to Model #	20D Optic
Add: -38D to Model #	38D Optic
Add: -60D to Model #	60D Optic
Add '-EMB' to model #	Emergency backup (external 25W)

Accessory	Description
CUNV-SQM-NC-ICAT	New construction plate: SQM fixtures

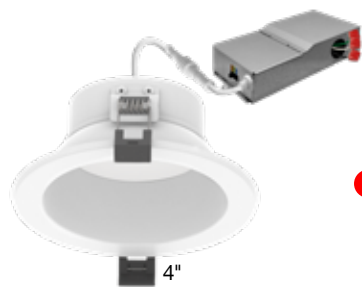

4"



6"



8"



-BLK



-CSH-WH



-GR



CUNV-NC-RI-J-JBX
Universal Construction Plate
21" x 17"

4" / 6" / 8" Commercial Downlight External J-Box

- 0-10V dimmable
- 10ft. & 20ft. extension cords available

5-CCT & 3-Power Select

Box Qty. 6

NEW	Model	Voltage	Watts	Lumens	Color
	LED-CMDEX-4-3M12-5CCT-CUNV	120-347V	12/9/6	See Chart	27/30/35/40/50K
	LED-CMDEX-6-3M24-5CCT-CUNV	120-347V	24/16/12	See Chart	27/30/35/40/50K
	LED-CMDEX-8-3M30-5CCT-CUNV	120-347V	30/22/16	See Chart	27/30/35/40/50K

4-3M12	
WATT	LUMENS
6	650
9	900
12	1,100

6-3M24	
WATT	LUMENS
12	1,100
16	1,500
24	1,950

8-3M30	
WATT	LUMENS
16	1,500
22	2,000
30	2,500

Commercial Downlight Trims

Box Qty.
12

NEW	Accessory	Description
	CMDEX-TRIM-4-CSH-WH	4" CMDEX: Clear-specular haze reflector
	CMDEX-TRIM-4-BLK	4" CMDEX: Black reflector
	CMDEX-TRIM-6-CSH-WH	6" CMDEX: Clear-specular haze reflector
	CMDEX-TRIM-6-BLK	6" CMDEX: Black reflector
	CMDEX-TRIM-8-CSH-WH	8" CMDEX: Clear-specular haze reflector
	CMDEX-TRIM-8-BLK	8" CMDEX: Black reflector

Accessories for CMD-3M Series

NEW	Accessory Model	Description
	GR-4-WH	4" Goof ring, inner dim: 4" Outer Dim: 8"
	GR-6-WH	6" Goof ring, inner dim: 6.3" Outer Dim: 10.5"
	GR-8-WH	8" Goof ring, inner dim: 8" Outer Dim: 12.5"
	GR-10-WH	10" Goof ring, inner dim: 9" Outer Dim: 14.1"
	JBOX-ALM	Junction box (6 knock-outs)
	CUNV-NC-RI-J-JBX	4/6/8/10" Commercial new construction plate with joist bar + J-box
NEW	EXT-10FT	10' Extension cable for remote mounting
NEW	EXT-20FT	20' Extension cable for remote mounting


Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)



4-3M19		6-3M19	
WATT	LUMENS	WATT	LUMENS
9	750	9	800
14	1,000	14	1,200
19	1,500	19	1,600

6-3M30		8-3M29	
WATT	LUMENS	WATT	LUMENS
15	1,500	16.5	1,500
20	2,000	23	2,000
30	3,000	29	2,500

8-3M36		10-3M38	
WATT	LUMENS	WATT	LUMENS
21	2,500	21	2,000
30	3,500	30	2,500
38	3,900	38	3,300

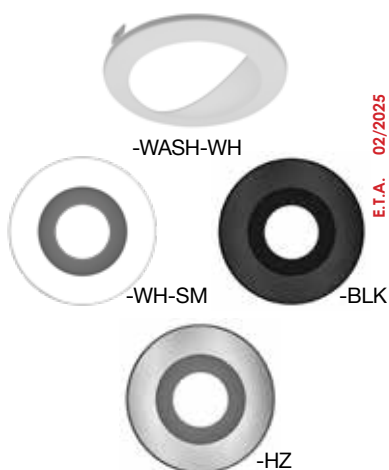

E.T.A. 02/2025

NEW

NEW

NEW

4" / 6" / 8" / 10" Commercial Downlight

- 4" & 6": TRI mode dimming: 0-10V, Triac, ELV down to 5%
- 8" & 10": 0-10V dimmable down to 5%
- 27" Flex whip included on each fixture

5-CCT & 3-Power Select

Model	Voltage	Watts	Lumens	Color
LED-CMD-4-3M19-5CCT-UNV	120-277V	19/14/9	See Chart	27/30/35/40/50K
LED-CMD-6-3M19-5CCT-UNV	120-277V	19/13/9w	See Chart	27/30/35/40/50K
LED-CMD-6-3M30-5CCT-CUNV	120-277V	30/20/15w	See Chart	27/30/35/40/50K
LED-CMD-8-3M29-5CCT-UNV	120-277V	29/23/16.5w	See Chart	27/30/35/40/50K
LED-CMD-8-3M36-5CCT-CUNV	120-277V	22/32/36w	See Chart	27/30/35/40/50K
LED-CMD-10-3M38-5CCT-UNV	120-277V	38/30/21w	See Chart	27/30/35/40/50K

Wall Wash Trims

- 85° beam angle

Box Qty.
24

Accessory	Description
CMD-4-WASH-WH	4" CMD: Wall wash trim
CMD-6-WASH-WH	6" CMD: Wall wash trim
CMD-8-WASH-WH	8" CMD: Wall wash trim

Trim Accessories for CMD-3M Series

Box Qty.
12

Accessory	Description
CMD-TRIM-4-CSH-WH-SM	4" CMD: Clear-specular haze reflector + white trim
CMD-TRIM-4-HZ-SM	4" Clear-specular haze reflector
CMD-TRIM-4-BLK-SM	4" Black reflector
CMD-TRIM-6-CSH-WH-SM	6" CMD: Clear-specular haze reflector + white trim
CMD-TRIM-6-HZ-SM	6" Clear-specular haze reflector
CMD-TRIM-6-BLK-SM	6" Black reflector
CMD-TRIM-8-CSH-WH-SM	8" CMD: Clear-specular haze reflector + white trim
CMD-TRIM-8-HZ-SM	8" Clear-specular haze reflector
CMD-TRIM-8-BLK-SM	8" Black reflector
CMD-TRIM-10-HZ-SM	10" Clear-specular haze reflector
CMD-TRIM-10-BLK-SM	10" Black reflector

4" / 6" Square Commercial Downlight

- 4" & 6": TRI mode dimming: 0-10V, Triac, ELV down to 5%
- 8" & 10": 0-10V dimmable down to 5%
- 27" Flex whip included on each fixture

Model	Voltage	Watts	Lumens	Color
LED-CMDSQ-4-3M13-5CCT-UNV	120-277V	13/9/6w	See Chart	27/30/35/40/50K
LED-CMDSQ-6-3M16-5CCT-UNV	120-277V	16/12/8w	See Chart	27/30/35/40/50K
LED-CMDSQ-6-3M30-5CCT-UNV	120-277V	30/20/15w	See Chart	27/30/35/40/50K

NEW

NEW

NEW

4-3M13

WATT	LUMENS
6	600
9	850
13	1200

6-3M16

WATT	LUMENS
8	750
12	1100
16	1500

6-3M30

WATT	LUMENS
15	1500
20	2000
30	2850

Accessories for CMD-3M Series

Accessory Model	Description
GR-4-WH	4" Goof ring, inner dim: 4" outer dim: 8"
GR-6-WH	6" Goof ring, inner dim: 6.3" outer dim: 10.5"
GR-8-WH	8" Goof ring, inner dim: 8" outer dim: 12.5"
GR-10-WH	10" Goof ring, inner dim: 9" outer dim: 14.1"
JBOX-ALM	Junction box (6 knock-outs)
CUNV-NC-RI-J-JBX	4/6/8/10" Commercial new construction plate with joist bar + J-box
LED-EMB-25W-HV-0/10V	Emergency back up for internal drivers (works with all 0-10V dim or <25W fixtures)

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)



CUNV-NC-RI-J-JBX
Universal Construction Plate
21" x 17"



3M20		3M30	
WATT	LUMENS	WATT	LUMENS
10	750	20	1,700
12	1,000	24	2,000
20	1,500	30	2,400

3M55		3M56	
WATT	LUMENS	WATT	LUMENS
32	3,200	35	3,500
40	4,000	45	4,000
55	5,000	56	5,000

4" / 6" / 8" / 10" Commercial Downlight Module

- Choose between 3 wattages
- 24°-45° field adjustable beam angle, in 5° increments
- Must purchase trim for each module
- 4" trim is only compatible with 3M20, 3M30 only

5-CCT & Single CCT w/ 3-Power Select



Box Qty.
6

Model	Voltage	Watts	Lumens	Color
LED-CADM-3M20-5CCT-UNV	120-277V	20/12/10w	See Chart	27/30/35/40/50K
LED-CADM-3M30-5CCT-UNV	120-277V	30/24/20w	See Chart	27/30/35/40/50K
LED-CADM-3M55-30K-UNV	120-277V	55/40/32w	See Chart	3000k
LED-CADM-3M55-35K-UNV	120-277V	55/40/32w	See Chart	3500k
LED-CADM-3M56-5CCT-UNV	120-277V	56/45/35w	See Chart	27/30/35/40/50K

SCCT

SCCT

Wall Wash Trims

- 85° beam angle

Box Qty.
24

Accessory	Description
CMD-4-WASH-WH	4" CMD: Wall wash trim
CMD-6-WASH-WH	6" CMD: Wall wash trim
CMD-8-WASH-WH	8" CMD: Wall wash trim

4" / 6" / 8" / 10" Commercial Downlight Trims

Box Qty.
6

Model	Description
CADM-4-CSH	4" Clear-specular haze reflector/white trim (3M20, 3M30 & 3M35 only)
CADM-4-CSH-BLK	4" Clear-specular haze reflector/black trim (3M20, 3M30 & 3M35 only)
CADM-4-CSH-SQ	4" Clear-specular haze reflector/white square trim (3M20, 3M30 & 3M35 only)
CADM-4-WH	4" White reflector + trim (3M20 & 3M35 only)
CADM-6-CSH	6" Clear-specular haze reflector/white trim
CADM-6-CSH-BLK	6" Clear-specular haze reflector/black trim
CADM-6-CSH-SQ	6" Clear-specular haze reflector/white square trim (3M20, 3M30 & 3M35 only)
CADM-6-WH	6" White reflector + trim
CADM-8-CSH	8" Clear-specular haze reflector/white trim
CADM-8-CSH-BLK	8" Clear-specular haze reflector/black trim
CADM-8-CSH-SQ	8" Clear-specular haze reflector/white square trim (3M20, 3M30 & 3M35 only)
CADM-8-WH	8" White reflector + trim
CADM-10-CSH	10" Clear-specular haze reflector/white trim
CADM-10-WH	10" White reflector + trim

* Custom color trims are available

Accessories for CADM Series

Accessory Model	Description
GR-4-WH	4" Goof ring, inner dim: 4.9" outer dim: 6.5"
GR-6-WH	6" Goof ring, inner dim: 6.3" outer dim: 10.5"
GR-8-WH	8" Goof ring, inner dim: 8" outer dim: 12.5"
GR-10-WH	10" Goof ring, inner dim: 9" outer dim: 14.1"
JBOX-ALM	Junction box (6 knock-outs)
CUNV-NC-RI-J-JBX	New construction plate: 4" 6" 8" 10" CADM or CMD round
CUNV-NC-SQI-J-JBX	New construction plate: 4" 6" 8" CADM square
CUNV-NC-ICAT-7H	New construction plate: 1" 2" 3" 3.5" 4" 5" 6" canless downlights
CUNV-JBX-RI-XL	Universal construction plate: 2" 3" 3.5" 4" 5" 6" canless downlights



24°-45°
Adjustable
Beam Angle



Twist-On for
Easy Installation



-CSH



-WH



-BLK



-SQ




-WASH-WH


GR




J-BOX ALM
4.46" W x 3.04" D x 1.37" H

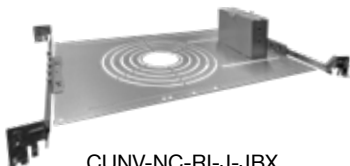

CUNV-NC-RI-J-JBX
21.2" W x 12" D x 1.6" H
(Assembly Required)



CUNV-NC-SQI-J-JBX
21.2" W x 12" D x 1.6" H
(Assembly Required)

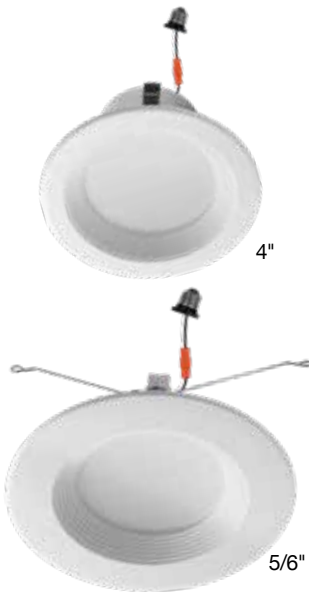

Smart Downlight RGB+W

- RGB+W technology: Tunable from 27K-50K + RGB colors
- Dimmable and controllable via bluetooth from your smartphone
- Music mode: RGB colors dance to music
- Suitable for retrofit or new construction
- Set timing schedule and group fixtures together
- Connect to multiple phones
- Control your lights with WIFI

4" Smart Retrofit Kit Downlight RGB+W

Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-ECODL-4-10W-RGB+W	120V	10.5w	800	RGB+W

5/6" Smart Retrofit Kit Downlight RGB+W

Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-ECODL-5/6-12W-RGB+W	120V	12w	1000	RGB+W

Pre-installed Accessory Model Description

Add '-EMB-' to model # Emergency backup (external 25W)



4" SnapTrim Round Downlight RGB+W

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-4R-9W-RGB+W-WH	120V	9w	600	RGB+W



6" SnapTrim Round Downlight RGB+W

Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-SL-PNL-6R-12W-RGB+W-WH	120V	12w	1000	RGB+W



6" Cusp Disk RGB+W

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-CDSK-6-15W-RGB+W-WH	120V	15w	1000	RGB+W



7" Round Slimline Disk RGB+W

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-SLDSKR-7-15W-RGB+W-WH	120V	15w	1000	RGB+W



Envision
CONNECT



Download on
APP STORE



COLOR



WHITE



SCENE



MUSIC RHYTHM



Final
Production

4" / 6" SnapTrim Downlight

- Baffled trim design
- Integrated j-box & spring mount clips for easy installation
- Compatible with most dimmers (e.g. Lutron DVCL-153P)
- Canless module does not require housing

Single CCT

Box Qty.
12

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-4B-7W-40K	120V	7w	550	4000k
LED-DLJBX-6B-9W-27K	120V	9w	650	2700k

4" & 5/6" RDL Downlights

- Canless model, no housing required
- Triac dimmable down to 5%

Internal J-Box

Box Qty.
24

Model	Voltage	Watts	Lumens	Color
LED-RDL-JBX-4-15W-5CCT-WH-SM	120V	15w	1125lm	27/30/35/40/50K
LED-RDL-JBX-5/6-15W-5CCT-WH-SM	120V	15w	1125lm	27/30/35/40/50K



2" / 4" / 6" RDL Downlights

- Canless model, no housing required
- Triac dimmable down to 5%

External J-Box

Box Qty.
24

NEW

Model	Voltage	Watts	Lumens	Color
LED-RDL-EX-2-3P8-5CCT-WH-SM	120V	8/6/4w	See Chart	27/30/35/40/50K
LED-RDL-EX-4-3P12-5CCT-WH-SM	120V	12/10/8w	See Chart	27/30/35/40/50K
LED-RDL-EX-6-3P18-5CCT-WH-SM	120V	18/15/12w	See Chart	27/30/35/40/50K

2-3P8		4-3P12		6-3P18	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
4	275	8	560	12	700
6	410	10	700	15	1,100
8	560	12	960	18	1,500



4" & 5/6" RDL Downlights

- Compatible with 4" or 6" housings
- Triac dimmable down to 5%
- Title 24 connector (E26 adapter included)

Retrofit Kit ECOVALUE Models

Box Qty.
RDL-4- 60
RDL-5/6- 36

E.T.A. 01/2025

NEW

Model	Voltage	Watts	Lumens	Color
ECV-RDL-4-10W-5CCT-WH-SM	120V	10w	800	27/30/35/40/50K
ECV-RDL-5/6-15W-5CCT-WH-SM	120V	15w	1200	27/30/35/40/50K



4" & 5/6" RDL Downlights

- Compatible with 4" or 6" housings
- Triac dimmable down to 5%
- Title 24 connector (E26 adapter included)

Retrofit Kit Models

Box Qty.
RDL-4- 60
RDL-5/6- 36

Model	Voltage	Watts	Lumens	Color
LED-RDL-4-PC-CCT-WH-SM	120V	12/10/8w	See Chart	27/30/35/40/50K
LED-RDL-5/6-PC-CCT-WH-SM	120V	18/15/12w	See Chart	27/30/35/40/50K

RDL-4	
WATT	LUMENS
8	560
10	680
12	800

RDL-5/6	
WATT	LUMENS
12	900
15	1,100
18	1,300

4" & 5/6" RDL Downlights

- Compatible with 4" or 6" housings
- Triac dimmable down to 5%
- Title 24 connector (E26 adapter included)

Retrofit Kit Models

Box Qty.
RDL-4- 60
RDL-5/6- 36

NEW

Model	Voltage	Watts	Lumens	Color
LED-RDL-4-3P12-5CCT-WH-SM	120V	12/10/8w	See Chart	27/30/35/40/50K
LED-RDL-5/6-3P18-5CCT-WH-SM	120V	18/14/10w	See Chart	27/30/35/40/50K

3P12	
WATT	LUMENS
8	500
10	700
12	1,000

RDL-5/6	
WATT	LUMENS
10	800
14	1,200
18	1,500

4" & 5/6" RDL Downlights - 0-10V

- Compatible with 4" or 6" housings
- 0-10V dimmable down to 5%
- Title 24 connector (E26 adapter included)

Retrofit Kit Models: Multi-Volt

Box Qty.
RDL-4- 60
RDL-5/6- 36

Model	Voltage	Watts	Lumens	Color
LED-RDL-4-3P12-5CCT-UNV-0/10V	120-277V	12/10/8w	See Chart	27/30/35/40/50K
LED-RDL-5/6-3P18-5CCT-UNV-0/10V	120-277V	18w/14/10w	See Chart	27/30/35/40/50K

3P12	
WATT	LUMENS
8	600
10	850
12	1,100

3P18	
WATT	LUMENS
10	700
14	1,100
18	1,500



Watt Selection
5-CCT Selection



RDL-6CLIP



BLK-SM

BZ-SM

BN-SM



BLK-BFL

BZ-BFL

BN-BFL

Pre-installed Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 25W)
RDL-5/6CLIP	Tension clip for 5/6" downlight. For use in old housings

RDL Trims

Accessory Model	Description
RDL-TRIM-4-BLK-SM	4" Black trim smooth
RDL-TRIM-4-BZ-SM	4" Bronze trim smooth
RDL-TRIM-4-BN-SM	4" Brushed nickel trim smooth
RDL-TRIM-4-WH-BFL	4" White trim baffle
RDL-TRIM-4-BLK-BFL	4" Black trim baffle
RDL-TRIM-4-BZ-BFL	4" Bronze trim baffle
RDL-TRIM-4-BN-BFL	4" Brushed nickel trim baffle
RDL-TRIM-5/6-BLK-SM	5/6" Black trim smooth
RDL-TRIM-5/6-BZ-SM	5/6" Bronze trim smooth
RDL-TRIM-5/6-BN-SM	5/6" Brushed nickel trim smooth
RDL-TRIM-5/6-WH-BFL	5/6" White trim baffle
RDL-TRIM-5/6-BLK-BFL	5/6" Black trim baffle
RDL-TRIM-5/6-BRZ-BFL	5/6" Bronze trim baffle
RDL-TRIM-5/6-BN-BFL	5/6" Brushed nickel trim baffle

DISPLAY
Display featuring 10 of our canless downlights. Place a \$3,000+ stock orders of downlights and get a free counter display.



E.T.A. 04/2025

NEW

4" / 6" LED External J-Box Square Downlight

- Canless model, no housing required
- Triac dimmable down to 5%

5-CCT + 3-Power Selectable

Box Qty. 12

Model	Voltage	Watts	Lumens	Color	SCCT
LED-DL-SQ-EX-4-3P12-5CCT-WH-SM	120V	12/10/8w	960/700/560	27/30/35/40/50K	
LED-DL-SQ-EX-6-3P18-5CCT-WH-SM	120V	18/15/12w	1500/1100/700	27/30/35/40/50K	



4" / 6" Retrofit Kit Square Downlight

- Compatible with 4" or 6" housings
- Triac dimmable down to 5%
- Title 24 connector (E26 adapter included)

Retrofit Kit Models

Box Qty. 12

Model	Voltage	Watts	Lumens	Color	SCCT
LED-DL-SQ-4-11W-5CCT	120V	11w	750	27/30/35/40/50K	
LED-DL-SQ-6-14W-5CCT	120V	14w	1100	27/30/35/40/50K	



E.T.A. 10/2025

NEW

4" & 5/6" Square Downlights - 0-10V

- Compatible with 4" or 6" housings
- 0-10V dimmable down to 5%
- Title 24 connector (E26 adapter included)

Retrofit Kit Models: Multi-Volt

Box Qty. 12

Model	Voltage	Watts	Lumens	Color	SCCT
LED-DL-SQ-4-9W-5CCT-UNV-0/10V	120-277V	9w	765	27/30/35/40/50K	
LED-DL-SQ-5/6-13W-5CCT-UNV-0/10V	120-277V	13w	1100	27/30/35/40/50K	



Accessory Model	Description
LED-EMB-25W-HV-0/10V-2P	Emergency back up for internal drivers (works with all 0-10V dim or <25W fixtures single sided flex)



-BLK

-BZ

RDL Trims

Box Qty. 50

Accessory Model	Description
DL-SQ-4-TRIM-BLK-SM	4" black smooth trim
DL-SQ-4-TRIM-BZ-SM	4" bronze smooth trim
DL-SQ-6-TRIM-BLK-SM	6" black smooth trim
DL-SQ-6-TRIM-BZ-SM	6" bronze smooth trim



4" ADL Retrofit Kit Downlight

- Fits into standard 4" recessed can
- Title 24 connector (E26 adapter included)
- Compatible with most dimmers down to 5%

Single CCT

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-ADL-4-10W-40K	120V	10w	665	3000k
LED-ADL-4-10W-50K	120V	10w	665	4000k

Final Production



4" 12V Innovate Retrofit Kit Downlight

- Easy-mount spring clips allow tool-less retrofit installation
- Heavy-duty die-cast aluminum heatsink
- Only ideal with magnetic transformers
- Dimmable with low voltage dimmers
- Uses standard MR16 connector

5-CCT Select

Box Qty. 24

Model	Voltage	Watts	Lumens	Color
LED-EDL-4-10W-5CCT-WH-12V	12V	10w	600	27/30/35/40/50K



5-CCT Select

Box Qty. 24

NEW

Model	Voltage	Watts	Lumens	Color
LED-EDL-SQ-4-10W-5CCT-WH-12V	12V	10w	600	27/30/35/40/50K



Adjustable Retrofit Kit Downlight

- Adjustable fixture allows 360° free rotation, and 60° pitch angle
- 5CCT Color Selectable (27/30/35/40/50K)
- Title 24 connector (E26 adapter included)

4" Models

Box Qty. 24

Model	Voltage	Watts	Lumens	Color
LED-DL-ADJ-4-10W-5CCT-WH	120V	10w	750	27/30/35/40/50K
LED-DL-ADJ-4-10W-5CCT-BLK	120V	10w	750	27/30/35/40/50K



5/6" Models

Box Qty. 16

Model	Voltage	Watts	Lumens	Color
LED-DL-ADJ-5/6-16.5W-5CCT-WH	120V	16.5w	1200	27/30/35/40/50K
LED-DL-ADJ-5/6-16.5W-5CCT-BLK	120V	16.5w	1200	27/30/35/40/50K




5/6" Models

Box Qty. 16

Model	Voltage	Watts	Lumens	Color
LED-DL-ADJ-5/6-16.5W-WW	120V	16.5w	1200	3000k

Final Production



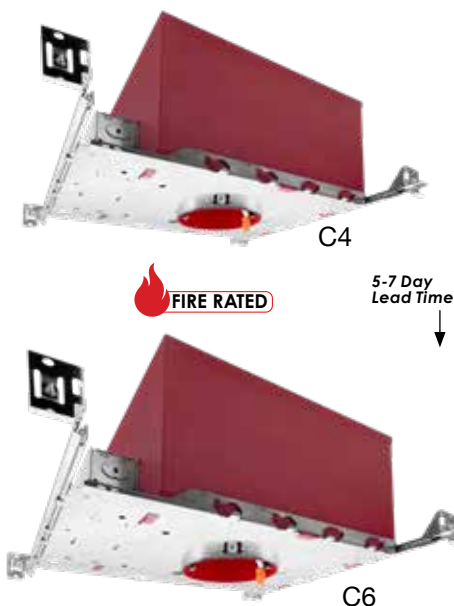


LED Cans (IC-Rated)

- Features Title 24 quick connect for LED trims
- 0/10V: Made to order, compatible with 0-10V fixtures

Fire-Rated Models

Box Qty.
4


Model	Voltage	Description
C4-NC-ICAT-LED-FR	120-277V	4" Fire rated IC can (new construction)
C6-NC-ICAT-LED-FR	120-277V	6" Fire rated IC can (new construction)
C4-NC-ICAT-LED-FR-0/10V	120-277V	4" Fire rated IC can (new construction)
C6-NC-ICAT-LED-FR-0/10V	120-277V	6" Fire rated IC can (new construction)

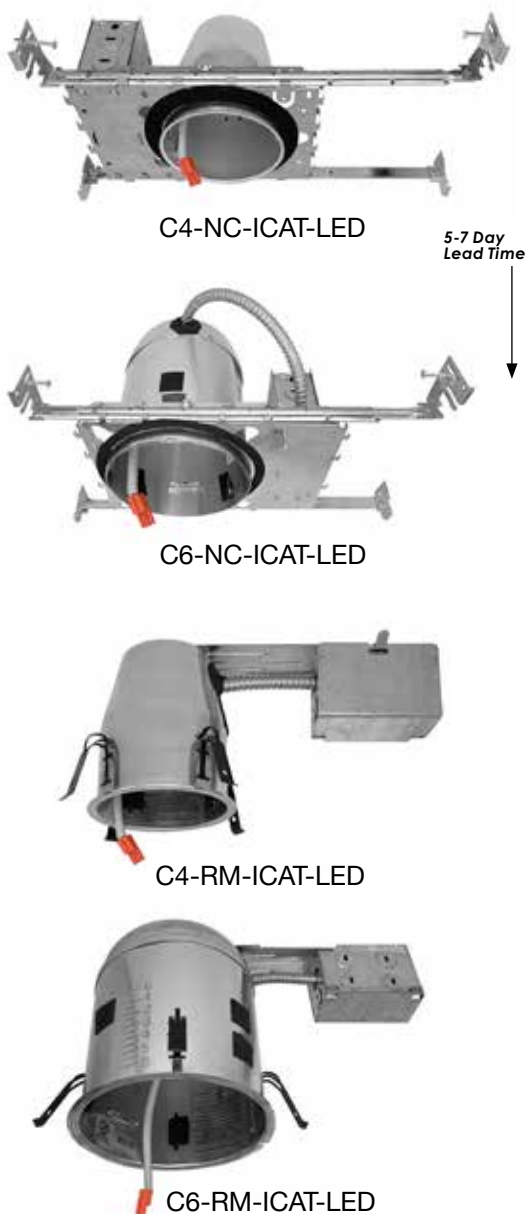

Regular Models

Box Qty.
6

Model	Voltage	Description
C4-NC-ICAT-LED	120-277V	4" IC rated can (new construction)
C4-RM-ICAT-LED	120-277V	4" IC rated can (remodel)
C6-NC-ICAT-LED	120-277V	6" IC rated can (new construction)
C6-RM-ICAT-LED	120-277V	6" IC rated can (remodel)
C4-NC-ICAT-LED-0/10V	120-277V	4" IC rated can (new construction)
C4-RM-ICAT-LED-0/10V	120-277V	4" IC rated can (remodel)
C6-NC-ICAT-LED-0/10V	120-277V	6" IC rated can (new construction)
C6-RM-ICAT-LED-0/10V	120-277V	6" IC rated can (remodel)

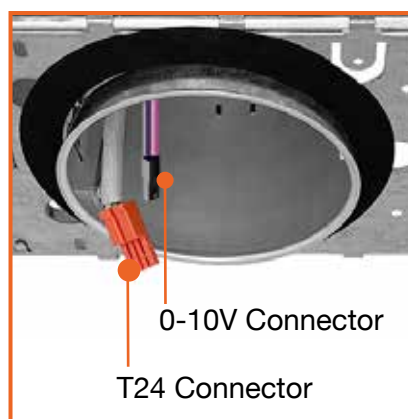

0-10V Connection

Trimless Surface Downlight

- Ultra thin, easy to install, and perfect for any kitchens, corridors
- Compatible with 30/40 junction box or recessed can installation
- Super thin modern frame



Shown with E26 Base



Shown with E26 Base



LED-EMB-25W-HV-0/10V

5" 5-CCT Select

SCCT DIMMABLE 90° HIGH CRI JA8 TITLE 24 COMPLIANT Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-TSM-5R-12W-5CCT-WH	120V	12w	850	27/30/35/40/50K

5" Single CCT

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-TSM-5R-12W-30K-BLK	120V	12w	850	3000k
LED-TSM-5R-12W-30K-BN	120V	12w	850	3000k

7" 5-CCT Select

SCCT Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-TSM-7R-15W-5CCT-WH	120V	15w	1100	27/30/35/40/50K

7" Single CCT

Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-TSM-7R-15W-30K-BLK	120V	15w	1100	3000k
LED-TSM-7R-15W-30K-BN	120V	15w	1100	3000k

7" Emergency Backup

Box Qty. 20

Model	Voltage	Watts	Lumens
TSM-7R-EMB-UNV	120V	15w	1100
TSM-7R-EMB-UNV-EMPTY	-	-	-

9" 5-CCT Select

SCCT Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-TSM-9R-18W-5CCT-WH	120V	18w	1300	27/30/35/40/50K

9" Single CCT

Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-TSM-9R-18W-30K-WH	120V	18w	1300	3000k
LED-TSM-9R-18W-30K-BLK	120V	18w	1300	3000k
LED-TSM-9R-18W-30K-BN	120V	18w	1300	3000k

9" Emergency Backup

Box Qty. 10

Model	Voltage	Watts	Lumens
TSM-9R-EMB-UNV	120V	18w	1300
TSM-9R-EMB-UNV-EMPTY	-	-	-

11" 5-CCT Select

SCCT Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-TSM-11R-20W-5CCT-WH	120V	20w	1500	27/30/35/40/50K

11" Single CCT

Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-TSM-11R-20W-30K-WH	120V	20w	1500	3000k
LED-TSM-11R-20W-30K-BLK	120V	20w	1500	3000k
LED-TSM-11R-20W-30K-BN	120V	20w	1500	3000k

Converter Clips

Box Qty. 20

Model	Description
TSM-4CLIP	TSM-5: 4" Recessed Can Converter
TSM-6CLIP	TSM-7: 6" Recessed Can Converter

Accessory Model	Description
LED-EMB-25W-HV-0/10V	Emergency back up for internal drivers (works with all 0-10V dim or <25W fixtures) single sided flex

Slim Surface Downlight: PIR + Daylight Sensor

- Compatible with 30/40 junction box or recessed can installation
- Title 24 connector (E26 adapter included)

Triac Dimmable









 Box Qty. 20

NEW


Model	Voltage	Watts	Lumens	Color
LED-SLDSKR-5-12W-5CCT-WH-BMS	120-277V	12w	750	27/30/35/40/50K
LED-SLDSKR-7-13W-5CCT-WH-BMS	120-277V	13w	1,050	27/30/35/40/50K
LED-SLDSKR-12-23W-5CCT-WH-BMS	120-277V	23w	1950	27/30/35/40/50K

5CCT

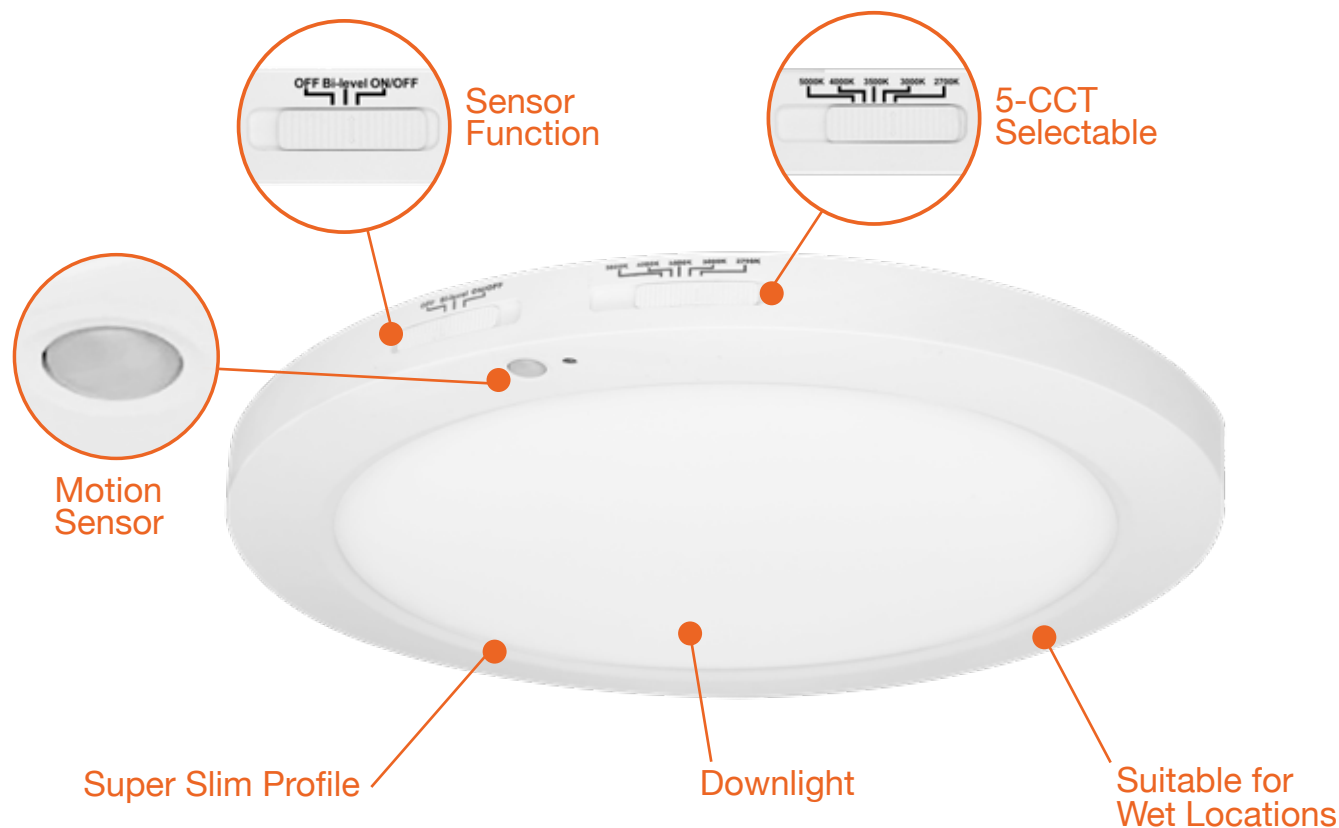

3 SENSOR SETTINGS

- OFF: Sensor will be inactive
- ON/OFF: Fixture will turn off after 1 minute
- Bi-Level: Fixture will dim to 30% after 1 minute, never turns off

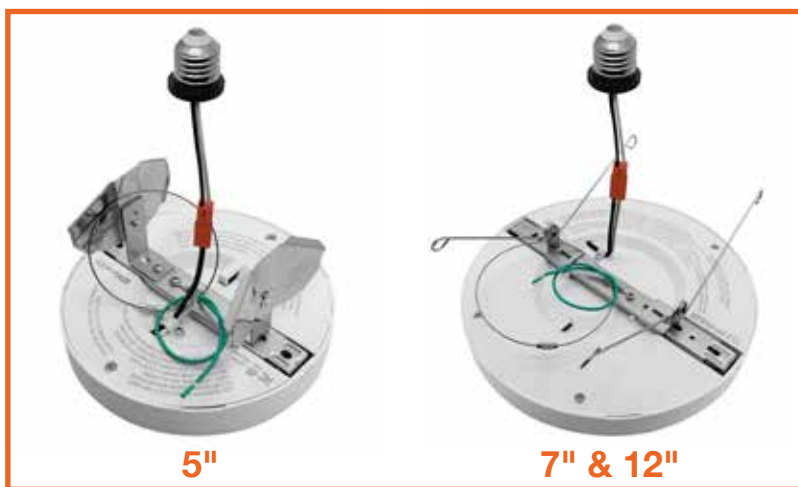

RETROFIT KIT CAN CONVERTER

Slim Surface Downlight: Round

- Edge-lit design provides even light distribution
- Compatible with 30/40 junction box or E26 recessed can installation
- - 0-10V version only 40
- Wet location rated
- Newly updated CCT switch, allows for installation into pancake J-box

Box Qty.
5- 20
7- 20
12- 6
15- 5
19- 4

Triac Dimmable



Model	Voltage	Watts	Lumens	Color
LED-SLSKR-5-10W-5CCT-WH	120V	10w	650	27/30/35/40/50K
LED-SLSKR-7-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K
LED-SLSKR-12-22W-5CCT-WH	120V	22w	1400	27/30/35/40/50K
LED-SLSKR-12-24W-5CCT-WH	120V	24w	1800	27/30/35/40/50K
LED-SLSKR-15-30W-5CCT-WH	120V	30w	2000	27/30/35/40/50K
LED-SLSKR-15-30W-5CCT-BN	120V	30w	2000	27/30/35/40/50K
LED-SLSKR-19-35W-TRI-WH	120V	35w	2200	50/40/30k
LED-SLSKR-19-35W-5CCT-WH	120V	35w	2200	27/30/35/40/50K
LED-SLSKR-19-35W-5CCT-BLK	120V	35w	2200	27/30/35/40/50K
LED-SLSKR-19-35W-5CCT-BN	120V	35w	2200	27/30/35/40/50K
NEW LED-SLSKR-24-40W-5CCT-WH	120V	40w	2700	27/30/35/40/50K
NEW LED-SLSKR-24-40W-5CCT-BL	120V	40w	2700	27/30/35/40/50K

0-10V 120-277V

Box Qty.
5- 20 7- 20
12- 6

Model	Voltage	Watts	Lumens	Color
LED-SLSKR-5-10W-5CCT-WH-0/10V	120-277V	10w	650	27/30/35/40/50K
LED-SLSKR-7-15W-5CCT-WH-0/10V	120-277V	15w	1000	27/30/35/40/50K
LED-SLSKR-12-22W-5CCT-WH-0/10V	120-277V	22w	1450	27/30/35/40/50K
LED-SLSKR-15-30W-5CCT-WH-0/10V	120-277V	30w	2000	27/30/35/40/50K

Round Trim Options

Box Qty.
20

Model	Description
SLSKR-5-TRIM-BLK	5" Round snap on trim black
SLSKR-5-TRIM-BRZ	5" Round snap on trim bronze
SLSKR-5-TRIM-BNI	5" Round snap on trim brushed nickel
SLSKR-7-TRIM-BLK	7" Round snap on trim black
SLSKR-7-TRIM-BRZ	7" Round snap on trim bronze
SLSKR-7-TRIM-BNI	7" Round snap on trim brushed nickel
SLSKR-12-TRIM-BLK	12" Round snap on trim black
SLSKR-12-TRIM-BRZ	12" Round snap on trim bronze
SLSKR-12-TRIM-BNI	12" Round snap on trim brushed nickel
NEW SLSKR-15-TRIM-BLK	15" Round snap on trim black
NEW SLSKR-15-TRIM-BRZ	15" Round snap on trim bronze
NEW SLSKR-15-TRIM-BNI	15" Round snap on trim brushed nickel

Round Accessories

Box Qty.
7- 20
12- 6

Accessory Model	Description
SLSKR-7-EMB-UNV	7" Round EM backup for all models
SLSKR-7-EMB-EMPTY-UNV	7" Round backup empty body for all models
SLSKR-12-EMB-UNV	12" Round EM backup for all models
SLSKR-12-EMB-EMPTY-UNV	12" Round backup empty body for all models

Converter Clips

Box Qty.
4- 20
7- 50 12- 50


Accessory Model	Description
SLSK-4CLIP	SLSK-5: 4" Recessed Can Converter
SLSK-7-6CLIP	SLSK-7: 7" Recessed Can Converter
SLSK-12-6CLIP	SLSK-12: 7" Recessed Can Converter



2'/4'/6' Pendant Stem Mount

Box Qty.
6

Accessory Model	Description
STM-JBX-6-WH	Stem pendant mount for surface mount fixtures
STM-JBX-6-BLK	Stem pendant mount for surface mount fixtures

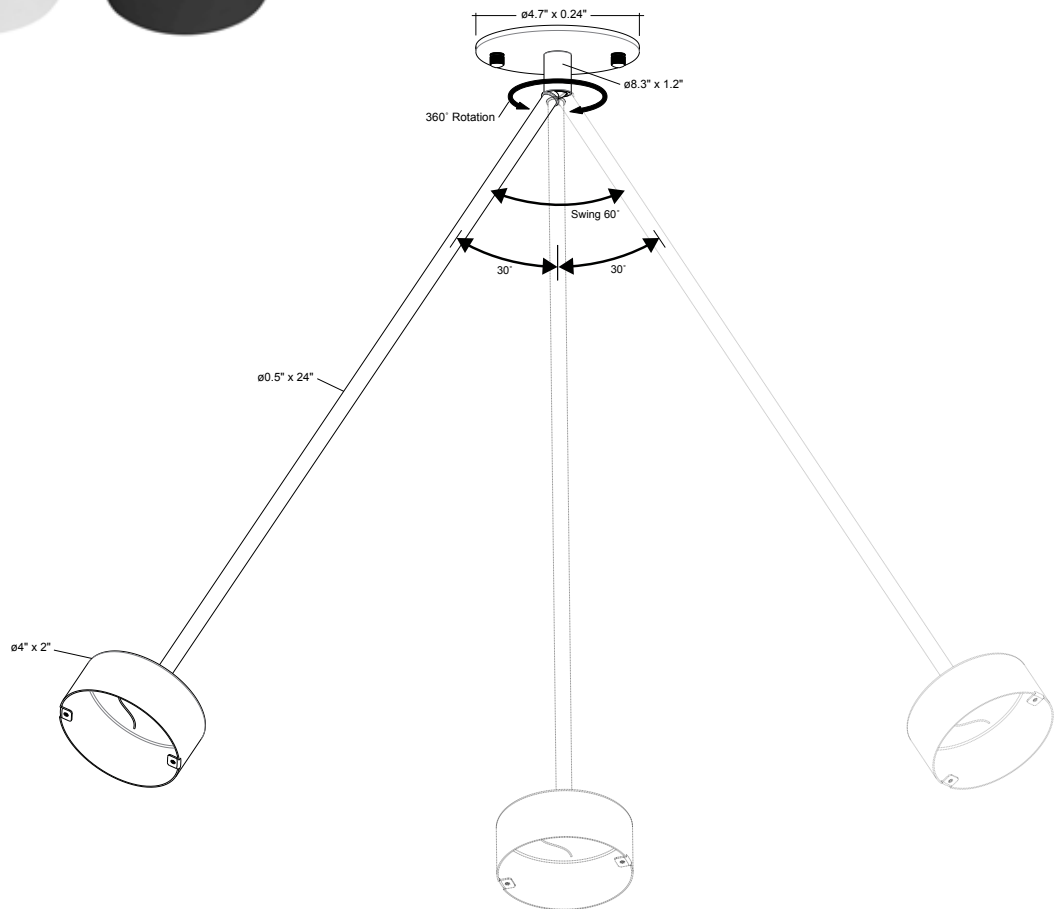




5"



7"



12"



-BLK



-BNI



-BRZ

Slim Surface Downlight: Square

- Edge-lit design provides even light distribution
- Compatible with 30/40 junction box or E26 recessed can installation
- - 0-10V version only 40
- Wet location rated
- Newly updated CCT switch, allows for installation into pancake J-box

Triac-Dimmable



Model	Voltage	Watts	Lumens	Color
LED-SLDSKSQ-5-10W-5CCT-WH	120V	10w	650	27/30/35/40/50K
LED-SLDSKSQ-5-10W-TRI	120V	10w	650	30/40/50k
LED-SLDSKSQ-7-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K
LED-SLDSKSQ-12-22W-5CCT-WH	120V	22w	1450	27/30/35/40/50K

5CCT

3CCT

0-10V 120-277V

Box Qty.
20

Model	Voltage	Watts	Lumens	Color
LED-SLDSKSQ-5-10W-30K-WH-0/10V	120-277V	10w	650	3000k
LED-SLDSKSQ-5-10W-5CCT-WH-0/10V	120-277V	10w	650	27/30/35/40/50K
LED-SLDSKSQ-7-15W-5CCT-WH-0/10V	120-277V	15w	1000	30/40/50k
LED-SLDSKSQ-7-15W-TRI-0/10V	120-277V	15w	1000	30/40/50k

5CCT

3CCT


Square Trim Options

Model	Description
SLDSKSQ-5-TRIM-BLK	5" Square snap on trim black
SLDSKSQ-5-TRIM-BRZ	5" Square snap on trim bronze
SLDSKSQ-5-TRIM-BNI	5" Square snap on trim brushed nickel
SLDSKSQ-7-TRIM-BLK	7" Square snap on trim black
SLDSKSQ-7-TRIM-BRZ	7" Square snap on trim bronze
SLDSKSQ-7-TRIM-BNI	7" Square snap on trim brushed nickel
SLDSKSQ-12-TRIM-BLK	12" Square snap on trim black
SLDSKSQ-12-TRIM-BRZ	12" Square snap on trim bronze
SLDSKSQ-12-TRIM-BNI	12" Square snap on trim brushed nickel

Converter Clips

Box Qty.
4- 20
7 - 50 - 12- 50

Accessory Model	Description
SLDSK-4CLIP	SLDSK-5: 4" Recessed Can Converter
SLDSK-7-6CLIP	SLDSK-7: 7" Recessed Can Converter
SLDSK-12-6CLIP	SLDSK-12: 7" Recessed Can Converter

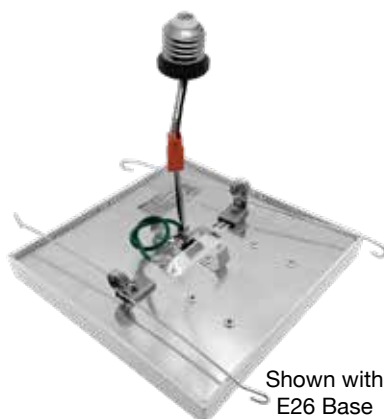
Shown with
E26 Base



-BZ

-BN

Shown with
E26 Base

4" Cusp Disk Downlight

- Compatible with 30/40 junction box or E26 recessed can installation
- Fixture is damp rated. Silicone sealant required for wet location
- Newly updated CCT switch, allows for installation into pancake J-box

5-CCT Select

 Box Qty.
20

Model	Voltage	Watts	Lumens	Color
LED-CDSK-4-10W-5CCT-WH	120V	10w	650	27/30/35/40/50K
LED-CDSK-4-10W-5CCT-BZ	120V	10w	650	27/30/35/40/50K



3-CCT Select

Box Qty.
20

Model	Voltage	Watts	Lumens	Color
LED-CDSK-4-10W-TRI-BN	120V	10w	650	30/40/50k



6" Cusp Disk Downlight: EcoValue Line

5-CCT Select

 Box Qty.
20

Model	Voltage	Watts	Lumens	Color
ECV-DSM-6-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K



6" Cusp Disk Downlight

5-CCT Select

 Box Qty.
20

Model	Voltage	Watts	Lumens	Color
LED-CDSK-6-15W-5CCT-WH	120V	15w	1000	27/30/35/40/50K
LED-CDSK-6-15W-5CCT-BZ	120V	15w	1000	27/30/35/40/50K
LED-CDSK-6-15W-5CCT-BLK	120V	15w	1000	27/30/35/40/50K



3-CCT Select

Box Qty.
20

Model	Voltage	Watts	Lumens	Color
LED-CDSK-6-15W-TRI-BN	120V	15w	1000	30/40/50k



Converter Clips


Accessory Model	Description
CDSK-4-CLIP	CDSK-4: 4" Recessed Can Converter
CDSK-6-CLIP	CDSK-6: 6" Recessed Can Converter



-BLK

-BZ

-BN

Shown with
E26 Base

8" Cusp Disk

5-CCT Select

Box Qty.
20

Model	Voltage	Watts	Lumens	Color
LED-CDSK-8-27W-5CCT-WH	120V	27w	2100	50/40/35/30/27K





4" Cusp Disk w/ PIR Sensor

- Motion sensor turns off after one minute
- Compatible with 30/40 junction box or E26 recessed can installation
- Fixture is damp rated. Silicone sealant required for wet location
- This item is not dimmable
- Newly updated CCT switch, allows for installation into pancake J-box
- Closet rated

5-CCT Select

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-CDSK-4-10W-5CCT-WH-PIR	120V	10w	650	27/30/35/40/50K



Shown with E26 Base



6" Cusp Disk w/ PIR Sensor

5-CCT Select

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-CDSK-6-15W-5CCT-WH-PIR	120V	15w	1000	27/30/35/40/50K



Cylinder Downlight: Snaptrim Model

- Rotation 350° (horizontal) adjustable to 90° (vertical)
- Canless module does not require housing

5-CCT Select

Box Qty. 18

NEW

Model	Voltage	Watts	Lumens	Color
LED-DLJBX-3-CYL-ADJ-5CCT-WH	120V	15w	1000	27/30/35/40/50K
LED-DLJBX-3-CYL-ADJ-5CCT-BL	120V	15w	1000	27/30/35/40/50K



Up to 90° Angle



CACM Cylinder Modules: ARCY-Line

5-CCT + 3- Power Select

- Deep reflector lens reduces glare and optimizes even beam distribution
- Push-in/pull-out reflector: reflector insert and colors can be swapped
- Adjust the beam angle in the field by hand
- Select-n-Switch technology: 5-CCT + 3-power selectable
- Chip: COB, R9 >50, CRI >90
- Low UGR <22
- Operating Temperature: -13° - 104° F

3" Models

SELECT N SWITCH DIMMABLE 90 HIGH CRI ENERGY STAR Box Qty. 6

Model	Voltage	Watts	Lumens	Color
LED-CACM-3-3P15-5CCT-WH-UNV	120-277V	15/10/5w	130 lm/w	27/30/35/40/50K
LED-CACM-3-3P15-5CCT-BL-UNV	120-277V	15/10/5w	130 lm/w	27/30/35/40/50K

WATT	LUMENS
5	500
10	950
15	1,400



Adjustable Beam

3": 25°-80°

4" Models

SELECT N SWITCH DIMMABLE 90 HIGH CRI ENERGY STAR Box Qty. 6

Model	Voltage	Watts	Lumens	Color
LED-CACM-4-3P15-5CCT-WH-UNV	120-277V	15/10/5w	130 lm/w	27/30/35/40/50K
LED-CACM-4-3P15-5CCT-BL-UNV	120-277V	15/10/5w	130 lm/w	27/30/35/40/50K
LED-CACM-4-3P25-5CCT-WH-UNV	120-277V	25/20/10w	130 lm/w	27/30/35/40/50K
LED-CACM-4-3P25-5CCT-BL-UNV	120-277V	25/20/10w	130 lm/w	27/30/35/40/50K

3P15	
WATT	LUMENS
5	500
10	950
15	1,400

3P25	
WATT	LUMENS
10	1,000
20	2,000
25	2,500



Adjustable Beam

4": 35°-60°

6" Models

SELECT N SWITCH DIMMABLE 90 HIGH CRI ENERGY STAR Box Qty. 6

Model	Voltage	Watts	Lumens	Color
LED-CACM-6-3P25-5CCT-WH-UNV	120-277V	25/20/10	130 lm/w	27/30/35/40/50K
LED-CACM-6-3P25-5CCT-BL-UNV	120-277V	25/20/10	130 lm/w	27/30/35/40/50K
LED-CACM-6-3P40-5CCT-WH-UNV	120-277V	40/35/30w	130 lm/w	27/30/35/40/50K
LED-CACM-6-3P40-5CCT-BL-UNV	120-277V	40/35/30w	130 lm/w	27/30/35/40/50K

3P25	
WATT	LUMENS
10	1,000
20	2,000
25	2,500

3P40	
WATT	LUMENS
30	3,000
35	3,500
40	4,000



Adjustable Beam

6": 35°-60°



STEM
HUNG




CORD
HUNG



SURFACE
MOUNT

Surface Mount Canopy



CACM-SH-SM-WH



CACM-SH-SM-BL

NEW

Model	Description
CACM-SH-SM-WH	Surface Mount Canopy 0.75" Height
CACM-SH-SM-BL	Surface Mount Canopy 0.75" Height

Surface Mount Deep Canopy




CACM-DP-SM-WH



CACM-DP-SM-BL

NEW

Model	Description
CACM-DP-SM-WH	Surface Mount Canopy 2.3" Height for J-box/ Pipe
CACM-DP-SM-BL	Surface Mount Canopy 2.3" Height for J-box/ Pipe



CACM-SH-PDM-WH




CACM-SH-PDM-BL

NEW

Pendant Mount Canopy

Model	Description
CACM-SH-PDM-WH	"Pendant Canopy 0.75"" Height: Fixed or Slanted"
CACM-SH-PDM-BL	"Pendant Canopy 0.75"" Height: Fixed or Slanted"



CACM-DP-PDM-WH




CACM-DP-PDM-BL

NEW

Pendant Deep Mount Canopy

Model	Description
CACM-DP-PDM-WH	Pendant Canopy 2.3" Height: Fixed or Slanted J-box for pipe or EMB
CACM-DP-PDM-BL	Pendant Canopy 2.3" Height: Fixed or Slanted J-box for pipe or EMB

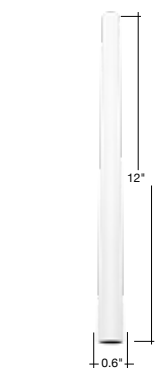

CACM-STM-1FT-WH



CACM-STM-1FT-BL

NEW

Surface Mount Stems

Model	Description
CACM-STM-1FT-WH	1ft Stem Mount - (Connect up to 11ft)
CACM-STM-1FT-BL	1ft Stem Mount - (Connect up to 11ft)

SJT-18-5-7FT-WH
SJT-18-5-12FT-WHSJT-18-5-7FT-BL
SJT-18-5-12FT-BL

NEW

Pendant Mount SJT Cords

Model	Description
SJT-18-5-7FT-WH	7' 5-Wire White Cord
SJT-18-5-7FT-BL	7' 5-Wire Black Cord
SJT-18-5-12FT-WH	12' 5-Wire White Cord
SJT-18-5-12FT-BL	12' 5-Wire Black Cord

Pre-installed Accessory Model	Description
Add '-EMB' to model #	90 Minute Emergency Backup
Add: -7FT to Model #	7' 5-Wire Cord preinstalled
Add: -12FT to Model #	12' 5-Wire Cord preinstalled


22" / 33" / 45" Full Throw Vanity Light

- Triac, ELV, 0-10V Dimmable
- Compatible with 3O/4O J-box
- Full throw light output

5-CCT + 3-Power Selectable

90 DIMMABLE HIGH CRI FC JA8 TITLE 24 COMPLIANT Box Qty. 10

Model	Voltage	Watts	Lumens	Color
LED-VT-SQFT-22-3P19-5CCT-BL	120-277V	19/15/9w	1600/1200/800	27/30/35/40/50K
LED-VT-SQFT-22-3P19-5CCT-BN	120-277V	19/15/9w	1600/1200/800	27/30/35/40/50K
LED-VT-SQFT-33-3P30-5CCT-BL	120-277V	30/23/19w	2600/2000/1600	27/30/35/40/50K
LED-VT-SQFT-33-3P30-5CCT-BN	120-277V	30/23/19w	2600/2000/1600	27/30/35/40/50K
LED-VT-SQFT-45-3P36-5CCT-BL	120-277V	36/29/22w	3000/2500/2000	27/30/35/40/50K
LED-VT-SQFT-45-3P36-5CCT-BN	120-277V	36/29/22w	3000/2500/2000	27/30/35/40/50K

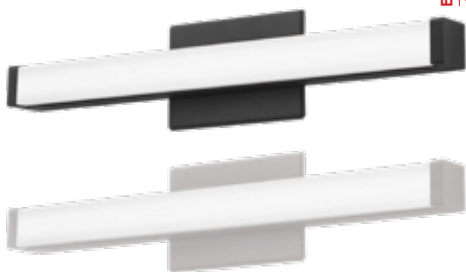

E.T.A. 02/2025


Vanity Light - Adjustable Angle

- Triac & ELV Dimmable
- Compatible with 3O/4O J-box
- Module adjusts up & down

5-CCT Selectable

90 DIMMABLE HIGH CRI FC JA8 TITLE 24 COMPLIANT Box Qty. 10


Model	Voltage	Watts	Lumens	Color
LED-VT-ADJ-24-21W-5CCT-BL	120V	21w	2700	27/30/35/40/50K
LED-VT-ADJ-24-21W-5CCT-BN	120V	21w	2700	27/30/35/40/50K
LED-VT-ADJ-24-21W-5CCT-CH	120V	21w	2700	27/30/35/40/50K

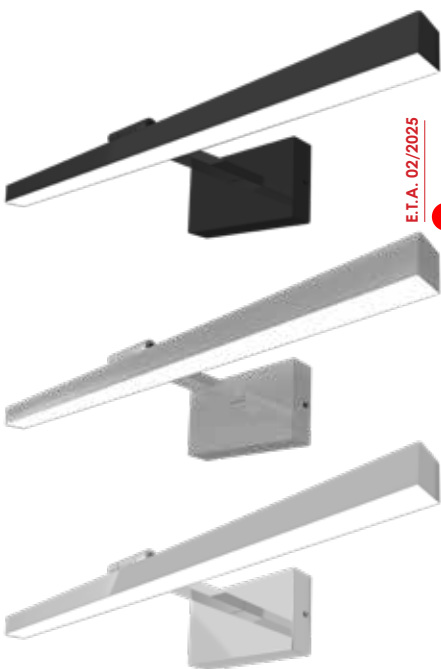

E.T.A. 02/2025



90° Rotatable Angle

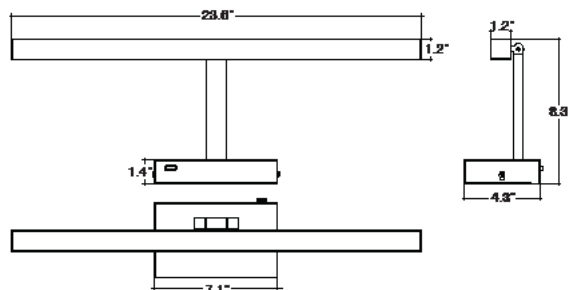

Vanity Light - Indirect

- Triac & ELV Dimmable
- Compatible with 3O/4O J-box
- indirect light, low glare

5-CCT Selectable

90 DIMMABLE HIGH CRI FC JA8 TITLE 24 COMPLIANT Box Qty. 10


Model	Voltage	Watts	Lumens	Color
LED-VT-ID-24-21W-5CCT-WH	120V	21w	2700	27/30/35/40/50K
LED-VT-ID-24-21W-5CCT-BL	120V	21w	2700	27/30/35/40/50K
LED-VT-ID-24-21W-5CCT-BN	120V	21w	2700	27/30/35/40/50K



E.T.A. 02/2025



Indirect Light (Top View)

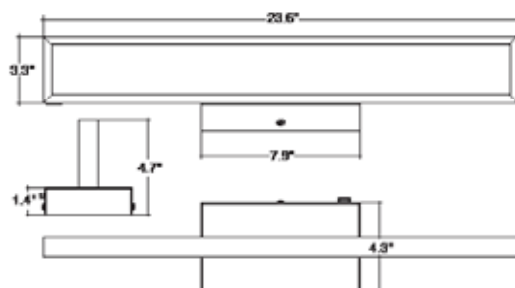



E.T.A. 02/2025

NEW

Vanity Light - Contemporary Round

- Triac & ELV Dimmable
- Compatible with 30/40 J-box
- Downlight only
- Extra long 29" length


5-CCT Selectable

90 DIMMABLE HIGH CRI FC JA8 TITILE 24 COMPLIANT Box Qty. 10

Model	Voltage	Watts	Lumens	Color
LED-VT-CRD-29-21W-5CCT-BL	120V	21w	2700	27/30/35/40/50K
LED-VT-CRD-29-21W-5CCT-BN	120V	21w	2700	27/30/35/40/50K
LED-VT-CRD-29-21W-5CCT-GL	120V	21w	2700	27/30/35/40/50K



Downlight

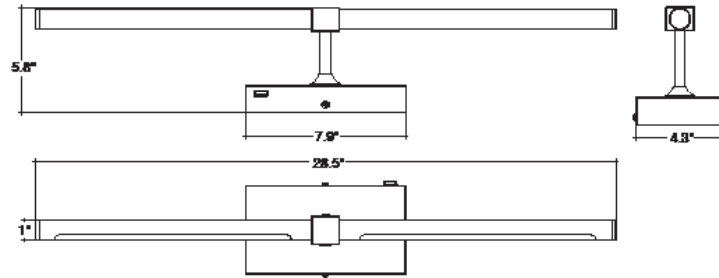

E.T.A. 02/2025

NEW

Vanity Light - Up & Down Light

- Triac & ELV Dimmable
- Compatible with 30/40 J-box
- Up & Down Light


5-CCT Selectable

90 DIMMABLE HIGH CRI FC JA8 TITILE 24 COMPLIANT Box Qty. 10

Model	Voltage	Watts	Lumens	Color
LED-VT-WUP-24-21W-5CCT-BL	120V	21w	1800	27/30/35/40/50K
LED-VT-WUP-24-21W-5CCT-BN	120V	21w	1800	27/30/35/40/50K



Up and Down Light

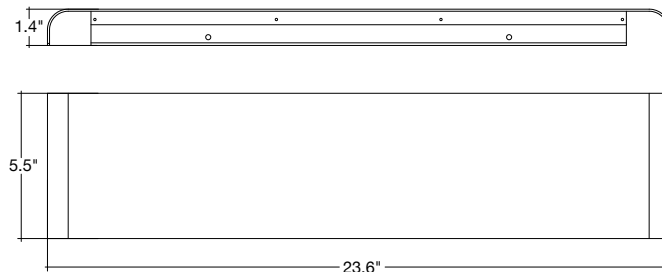



Track Lights

- Rotation 350° (horizontal) adjustable to 90° (vertical)
- Interchangeable beam angle options

- Compatible with 3-wire single circuit track systems (H-Type)
- COB chip and PMMA lens

5-CCT Select



Box Qty.
30D- 24
36D- 12



Model	Voltage	Watts	Lumens	Color
LED-ATH-10W-5CCT-30D-WH	120V	10w	1000	27/30/35/40/50K
LED-ATH-10W-5CCT-30D-BLK	120V	10w	1000	27/30/35/40/50K
LED-ATH-20W-5CCT-36D-WH	120V	20w	2000	27/30/35/40/50K
LED-ATH-20W-5CCT-36D-BLK	120V	20w	2000	27/30/35/40/50K
LED-ATH-30W-5CCT-36D-WH	120V	30w	3000	27/30/35/40/50K
LED-ATH-30W-5CCT-36D-BLK	120V	30w	3000	27/30/35/40/50K

Optic Lens

Box Qty.
12


Model	Description
ATH-10W-24D	Track heads: ACRY-line 24D optic
ATH-10W-60D	Track heads: ACRY-line 60D optic
ATH-20W-24D	Track heads: ACRY-line 24D optic
ATH-20W-60D	Track heads: ACRY-line 60D optic
ATH-30W-24D	Track heads: ACRY-line 24D optic
ATH-30W-60D	Track heads: ACRY-line 60D optic
Replace: -24D to Model #	Factory installed 24D optic
Replace: -60D to Model #	Factory installed 60D optic

Single Circuit 3-Wire Track

Model	Description
TS3-2FT-SM-WH	2' Track single circuit 3-wire
TS3-2FT-SM-BL	2' Track single circuit 3-wire
TS3-4FT-SM-WH	4' Track single circuit 3-wire
TS3-4FT-SM-BL	4' Track single circuit 3-wire
TS3-8FT-SM-WH	8' Track single circuit 3-wire
TS3-8FT-SM-BL	8' Track single circuit 3-wire

Track Accessories

Model	Description
TS3-SM-LIVE-WH	Live end: Required to start a run
TS3-SM-LIVE-BL	Live end: Required to start a run
TS3-SM-CD-WH	Conduit Power Feed: 3-wire power connector with conduit
TS3-SM-CD-BL	Conduit Power Feed: 3-wire power connector with conduit
TS3-SM-END-WH	End cap: Required to end a run
TS3-SM-END-BL	End cap: Required to end a run
TS3-SM-MJ-WH	Mini joiner: Low profile joiner for two straight track sections
TS3-SM-MJ-BL	Mini joiner: Low profile joiner for two straight track sections
TS3-SM-SC-WH	Straight connector: Connect two track sections end to end with a center
TS3-SM-SC-BL	Straight connector: Connect two track sections end to end with a center
TS3-SM-L-WH	L-Connector: Connect two track sections at a right angle
TS3-SM-L-BL	L-Connector: Connect two track sections at a right angle
TS3-SM-T-WH	T-Connector: Connect two track sections at a T angle
TS3-SM-T-BL	T-Connector: Connect two track sections at a T angle
TS3-SM-X-WH	X-Connector: Connect two track sections at an cross angle
TS3-SM-X-BL	X-Connector: Connect two track sections at an cross angle
TS3-SM-FLX-WH	Flexible Connector: Connect two track sections at any angle up to 90°
TS3-SM-FLX-BL	Flexible Connector: Connect two track sections at any angle up to 90°
TS3-SM-FC-WH	Floating Canopy: Track can be connected to existing outlet box along the track.
TS3-SM-FC-BL	Floating Canopy: Track can be connected to existing outlet box along the track.
ATH-SM	Add: -SM to Model #

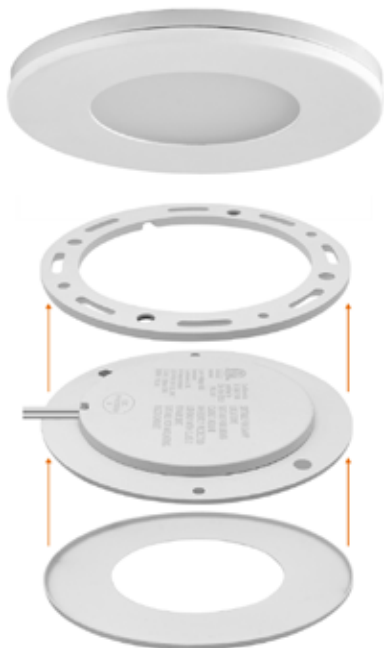

Undercabinet Puck Light

- Mounting options include either recessed or surface mounted
- Embedded magnets allow for easily interchangeable face plate
- Split-wire connectors allow easy daisy-chaining of fixtures
- Dimmable with electronic constant voltage transformer. Do not use magnetic system.
- 5-100% dimming with compatible electronic dimming drivers (See CV drivers)

Single CCT

   Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-PCK-3W-27K-12V	12V	3w	300	2700k
LED-PCK-3W-30K-12V	12V	3w	300	3000k
LED-PCK-3W-40K-12V	12V	3w	300	4000k
LED-PCK-3W-50K-12V	12V	3w	300	5000k
LED-PCK-3W-27K-24V	24V	3w	300	2700k
LED-PCK-3W-30K-24V	24V	3w	300	3000k



-BLK

Undercabinet Puck Light Accessories

Box Qty. 10

Model	Description
LED-PCK-TRIM-BRZ	Undercabinet puck trim (bronze)
LED-PCK-TRIM-BLK	Undercabinet puck trim (black)
LED-PCK-TRIM-SL	Undercabinet puck trim (silver)
LED-PCK-TRIM-BNI	Undercabinet puck trim (nickel)
LED-PCK-TRIM-CP	Undercabinet puck trim (copper)
ET-12V-12W	12W undercabinet transformer



-BZ



-CP



-NCK



-SLVR



Transformer



Work Light High Bay

- Heavy duty material for hard construction environment
- Omni-directional light distribution
- Instant-On to full brightness
- Foldable hook: compact and easy to transport
- Shatter-resistant wire guard on each unit
- On/Off button on each fixture

5000K

8 HIGH CRI FC CERTIFIED Box Qty. 4

15'
18 AWG
Cable

NEW

Model	Voltage	Watts	Lumens	Color
LED-WKL-60W-50K-15	120V	60w	7,800	5000K
LED-WKL-100W-50K-35	120V	100w	13,000	5000K
LED-WKL-150W-50K-35	120V	150w	26,000	5000K



Link up to 12 together

35'
18 AWG
Cable

Link up to 8 together

35'
18 AWG
Cable

Link up to 4 together



Heavy Duty Material

Foldable Spring
Lock Hook35' 18 AWG
Linkable Cord3-Conductor
Chain Link
Port

Instant-On

360° Beam Angle

Metal Guard Protector

Bottom LED Lighting

Work String Lights

- Heavy duty material for hard construction environment
- Omni-directional light distribution
- Instant-On to full brightness
- Lightweight design
- Foldable hook: compact and easy to transport
- Avoid lost carabiner clips

5 Piece

80FC HIGH CRI CERTIFIED Box Qty. 8

Model	Voltage	Watts	Lumens	Color
LED-WKL-SL-5-80W-50K	120V	80w	10,000	5000K



5 Lamp Set

10 Piece

80FC HIGH CRI CERTIFIED Box Qty. 8

Model	Voltage	Watts	Lumens	Color
LED-WKL-SL-10-160W-50K	120V	160w	20,000	5000K



10 Lamp Set





DISPLAY

End Connectors

Daisy chain multiple fixtures


Edge-Lit Technology

Produces uniform, diffuse light

Hardware Knockouts

No external wiring necessary

- Toggles between selectable colors, as well as high & low light intensity modes
- Frosted lens will not yellow or deform over time
- Use jumper connectors to daisy-chain multiple fixtures
- Compatible with most dimmers (e.g. Lutron DVCL-153P)
- Install as a hardwire or use included power cord
- Built-in screws in the front make installation easy

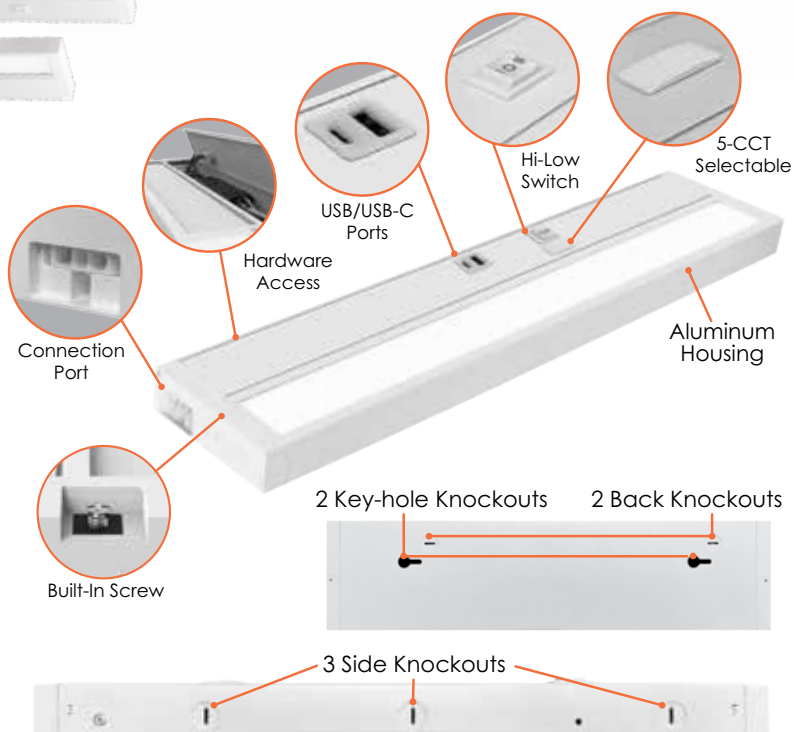

Undercabinet Bar Light

5-CCT Select Triac Dimmable

Box Qty.
8, 11, 14- 12
22, 28, 33, 42- 6

90 JA8
HIGH CRI TITLE 24



Model	Voltage	Watts	Lumens	Color
LED-UC-8I-4W-5CCT-WH	120V	4w	180	27/30/35/40/50K
LED-UC-11I-6W-5CCT-WH	120V	6w	350	27/30/35/40/50K
LED-UC-14I-8W-5CCT-WH	120V	8w	570	27/30/35/40/50K
LED-UC-22I-10W-5CCT-WH	120V	10w	750	27/30/35/40/50K
LED-UC-28I-12W-5CCT-WH	120V	12w	900	27/30/35/40/50K
LED-UC-33I-15W-5CCT-WH	120V	15w	1,050	27/30/35/40/50K
LED-UC-42I-18W-5CCT-WH	120V	18w	1,250	27/30/35/40/50K
LED-UC-8I-4W-5CCT-BZ	120V	4w	180	27/30/35/40/50K
LED-UC-11I-6W-5CCT-BZ	120V	6w	350	27/30/35/40/50K
LED-UC-14I-8W-5CCT-BZ	120V	8w	570	27/30/35/40/50K
LED-UC-22I-10W-5CCT-BZ	120V	10w	750	27/30/35/40/50K
LED-UC-28I-12W-5CCT-BZ	120V	12w	900	27/30/35/40/50K
LED-UC-33I-15W-5CCT-BZ	120V	15w	1,050	27/30/35/40/50K
LED-UC-42I-18W-5CCT-BZ	120V	18w	1,250	27/30/35/40/50K

5-CCT Select w/ USB & USB-C Triac Dimmable

Model	Voltage	Watts	Lumens	Color
LED-UC-11I-6W-5CCT-USB-WH	120V	6w	350	27/30/35/40/50K
LED-UC-14I-8W-5CCT-USB-WH	120V	8w	570	27/30/35/40/50K
LED-UC-22I-10W-5CCT-USB-WH	120V	10w	750	27/30/35/40/50K
LED-UC-28I-12W-5CCT-USB-WH	120V	12w	900	27/30/35/40/50K
LED-UC-42I-18W-5CCT-USB-WH	120V	18w	1,250	27/30/35/40/50K


5-CCT Select w/ USB & USB-C 0-10V Dimmable

Model	Voltage	Watts	Lumens	Color
LED-UC-14I-8W-5CCT-USB-WH-UNV	120-277V	8w	570	27/30/35/40/50K
LED-UC-22I-10W-5CCT-USB-WH-UNV	120-277V	10w	750	27/30/35/40/50K
LED-UC-28I-12W-5CCT-USB-WH-UNV	120-277V	12w	900	27/30/35/40/50K
LED-UC-42I-18W-5CCT-USB-WH-UNV	120-277V	18w	1,250	27/30/35/40/50K

Accessory Model	Description
UC-JUMPER-6"-W	6" UC jumper
UC-JUMPER-12"-W	12" UC jumper
UC-JUMPER-24"-W	24" UC jumper
UC-JUMPER-6"-B	6" UC jumper
UC-JUMPER-12"-B	12" UC jumper
UC-JUMPER-24"-B	24" UC jumper
UC-5'-PC-WH	5' Power cable
UC-5'-PC'-BZ	5' Power cable
UC-JBOX	Undercabinet junction box

Included in the box

Optional Accessories

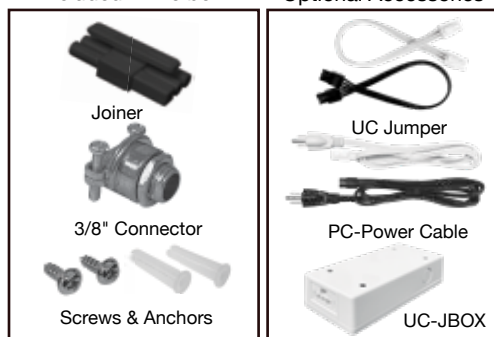

Undercabinet Fixtures: C-Line

(Economical Models) - Hardwire Only

5-CCT Select Triac Dimmable

Box Qty.
11, 18- 24
24, 36, 42- 12

90 JA8
HIGH CRI TITLE 24



Model	Voltage	Watts	Lumens	Color
LED-EUC-11I-6W-5CCT-WH	120V	6w	450	27/30/35/40/50K
LED-EUC-18I-8W-5CCT-WH	120V	8w	600	27/30/35/40/50K
LED-EUC-24I-12W-5CCT-WH	120V	12w	900	27/30/35/40/50K
LED-EUC-36I-15W-5CCT-WH	120V	15w	1,125	27/30/35/40/50K
LED-EUC-42I-18W-5CCT-WH	120V	18w	1,350	27/30/35/40/50K



-SQ-BR-ORB



-SQ-BR-MBL



-RD-BR-ORB



-RD-BR-MBL



-LG-ORB



-LG-MBL

Landscape Floods

- Solid brass construction
- 6 ft (72") SPT-1W 18 gauge wire lead
- High-salt, moisture and UV resistant
- High-temperature silicone ring for a water-tight seal

- High-temperature ceramic socket
- Match with proper transformer
- For outdoor use only
- Lifetime corrosion free warranty

Solid Brass

Box Qty.
SM-SQ - 12
SM-RD - 10
LG-RD - 5

Model	Voltage	Finish	Bulb
FL-SM-SQ-BR-ORB-12V	12V	Oil Rubbed Bronze	G4
FL-SM-SQ-BR-MBL-12V	12V	Matte Black	G4
FL-SM-RD-BR-ORB-12V	12V	Oil Rubbed Bronze	G4
FL-SM-RD-BR-MBL-12V	12V	Matte Black	G4
FL-LG-RD-BR-ORB-12V	12V	Oil Rubbed Bronze	PAR-36
FL-LG-RD-BR-MBL-12V	12V	Matte Black	PAR-36



Spike
Included

Low Voltage: Bullet Spot Lights

- Solid brass construction
- 6 ft (72") SPT-1W 18 gauge wire lead
- High-salt, moisture and UV resistant
- High-temperature silicone ring for a water-tight seal

- High-temperature ceramic socket
- Match with proper transformer
- For outdoor use only
- Lifetime corrosion free warranty

Solid Brass

Box Qty.
10

Model	Voltage	Finish	Bulb
BLT-BR-ORB-12V-1	12V	Oil Rubbed Bronze	MR-11
BLT-BR-MBL-12V-1	12V	Matte Black	MR-11
BLT-BR-ORB-12V-2	12V	Oil Rubbed Bronze	MR-16
BLT-BR-MBL-12V-2	12V	Matte Black	MR-16
BLT-BR-ORB-12V-3	12V	Oil Rubbed Bronze	MR-16
BLT-BR-MBL-12V-3	12V	Matte Black	MR-16
BLT-BR-ORB-12V-4	12V	Oil Rubbed Bronze	MR-16
BLT-BR-MBL-12V-4	12V	Matte Black	MR-16



Spike
Included



-ORB-1



-MBL-1



-ORB-2



-MBL-2



-ORB-3



-MBL-3



-ORB-4



-MBL-4



Low Voltage: MR-16 Bullet Spot Lights

- Aluminum construction
- High-salt, moisture and UV resistant
- High-temperature silicone o-ring for a water-tight seal
- High-temperature ceramic socket

- Compatible with LED or Halogen MR16 up to 50W Max. (not included)
- Match with proper transformer
- For outdoor use only
- 3 year limited warranty

Aluminum

Box Qty. 10

Model	Voltage	Finish	Bulb
BLT-ALM-BZ-12V-2	12V	Bronze	MR-16
BLT-ALM-BL-12V-2	12V	Black	MR-16
BLT-ALM-BZ-12V-3	12V	Bronze	MR-16
BLT-ALM-BL-12V-3	12V	Black	MR-16



Spike Included

Low Voltage: Bullet Flood Lights

- Aluminum construction
- LED integrated
- Push button selectable 5-CCT or 12 RGB scene options
- Beam angle 120°
- Adjustable 180° bracket

- 6.22" aluminum spike (Included)
- High-salt, moisture and UV resistant
- High-temperature silicone o-ring for a water-tight seal
- For outdoor use only
- 3 year limited warranty

Aluminum

Box Qty. 24

Model	Voltage	Watts	Lumens	Color
LED-BLF-5W-RGB+5CCT-ALM-BZ-LV	12-24V AC/DC	5w	300	27/30/35/40/50K
LED-BLF-5W-RGB+5CCT-ALM-BL-LV	12-24V AC/DC	5w	300	27/30/35/40/50K
LED-BLS-5W-RGB+5CCT-ALM-BZ-LV	12-24V AC/DC	5w	450	27/30/35/40/50K
LED-BLS-5W-RGB+5CCT-ALM-BL-LV	12-24V AC/DC	5w	450	27/30/35/40/50K



17 SCENE OPTIONS	
2700K	RED/GREEN/BLUE
3000K	• 2 Second Smooth Color Change
3500K	RED/GREEN/BLUE
4000K	• 2 Second Flash Color Change
5000K	ALL COLORS
WHITE	• 2 Second Smooth Color Change
RED	ALL COLORS
GREEN	• 2 Second Smooth Color Change
BLUE	• 2 Second Flash Color Change
ORANGE	ALL COLORS
PURPLE	• 2 Second Smooth Color Change
CYAN	• 2 Second Flash Color Change
	OFF



Spike Included



Landscape Path Light Stem - 12"/24" Height

- Solid brass construction
- High-salt, moisture and UV resistant
- 8.5" non-metallic spike (Included)
- High-temperature silicone o-ring for a water-tight seal
- High-temperature ceramic socket
- Compatible with LED or Halogen G4 up to 50W Max. (not included)
- Match with proper transformer
- For outdoor use only
- Lifetime corrosion free warranty

Solid Brass

 Box Qty.
10

Model	Voltage	Finish	Bulb
PL-12-BR-ORB-12V	12V	Oil Rubbed Bronze	G4
PL-24-BR-ORB-12V	12V	Oil Rubbed Bronze	G4



PL-H-BR-ORB-1



PL-H-BR-ORB-2



PL-H-BR-ORB-3

Path Light Caps

Solid Brass

 Box Qty.
10

Model	Finish
PL-H-BR-ORB-1	Oil Rubbed Bronze
PL-H-BR-ORB-2	Oil Rubbed Bronze
PL-H-BR-ORB-3	Oil Rubbed Bronze



Landscape Path Light Stem - 12"/24" Height

Solid Brass

 Box Qty.
10

Model	Voltage	Finish	Bulb
PL-12-BR-MBL-12V	12V	Matte Black	G4
PL-24-BR-MBL-12V	12V	Matte Black	G4



PL-H-BR-MBL-1



PL-H-BR-MBL-2



PL-H-BR-MBL-3

Path Light Caps

Solid Brass

 Box Qty.
10

Model	Finish
PL-H-BR-MBL-1	Matte Black
PL-H-BR-MBL-2	Matte Black
PL-H-BR-MBL-3	Matte Black



Low Voltage: Path Lights (Spot Style)

- Solid brass construction
- High-salt, moisture and UV resistant
- 6 ft (72") SPT-1W 18 gauge wire lead
- 8.5" non-metallic spike (Included)
- High-temperature silicone o-ring for a water-tight seal
- High-temperature ceramic socket
- Compatible with LED or Halogen G4 up to 50W Max. (not included)
- Match with proper transformer
- For outdoor use only
- Lifetime corrosion free warranty


Solid Brass

Box Qty.
10

Model	Voltage	Finish	Bulb
PL-S-24-BR-ORB-12V	12V	Oil Rubbed Bronze	G4
PL-S-24-BR-MBL-12V	12V	Matte Black	G4



Spike
Included

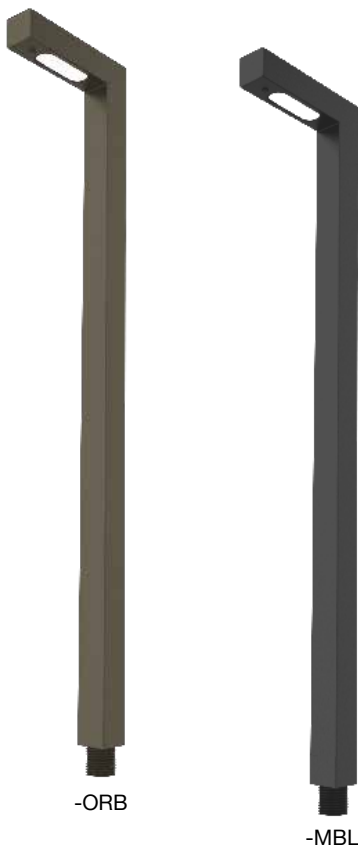

Low Voltage: Path Lights (L Shape)

- Solid brass construction
- High-salt, moisture and UV resistant
- 6 ft (72") SPT-1W 18 gauge wire lead
- 8.5" non-metallic spike (Included)
- High-temperature silicone o-ring for a water-tight seal
- High-temperature ceramic socket
- Compatible with LED or Halogen G4 up to 50W Max. (not included)
- Match with proper transformer
- For outdoor use only
- Lifetime corrosion free warranty

Solid Brass

Box Qty.
10

Model	Voltage	Finish	Bulb
PL-L-22-BR-ORB-12V	12V	Oil Rubbed Bronze	G4
PL-L-22-BR-MBL-12V	12V	Matte Black	G4



Spike
Included



Landscape Path Light Stem - 12"/24" Height

- Aluminum construction
- High-salt, moisture and UV resistant
- 6 ft (72") SPT-1W 18 gauge wire lead
- 8.5" non-metallic spike (Included)
- High-temperature silicone o-ring for a water-tight seal
- High-temperature ceramic socket
- LED G4 or Halogen G4 up to 50W Max.
- Match with proper transformer
- For outdoor use only
- 3 year limited warranty

Aluminum

Box Qty.
10

Model	Voltage	Finish	Bulb
PL-12-ALM-BZ-12V	12V	Bronze	G4
PL-24-ALM-BZ-12V	12V	Bronze	G4



PL-H-ALM-BZ-1



PL-H-ALM-BZ-2



PL-H-ALM-BZ-3

Path Light Caps

Aluminum

Box Qty.
10

Model	Finish
PL-H-ALM-BZ-1	Bronze
PL-H-ALM-BZ-2	Bronze
PL-H-ALM-BZ-3	Bronze



Landscape Path Light Stem - 12"/24" Height

Aluminum

Box Qty.
10

Model	Voltage	Finish	Bulb
PL-12-ALM-BL-12V		Black	G4
PL-24-ALM-BL-12V		Black	G4



PL-H-ALM-BL-1



PL-H-ALM-BL-2



PL-H-ALM-BL-3

Path Light Caps

Aluminum

Box Qty.
10

Model	Finish
PL-H-ALM-BL-1	Black
PL-H-ALM-BL-2	Black
PL-H-ALM-BL-3	Black



Path Light L-Shape Style - 22" Height

- Aluminum construction
- High-salt, moisture and UV resistant
- 6 ft (72") SPT-1W 18 gauge wire lead
- 8.5" non-metallic spike (Included)
- High-temperature silicone ring for a water-tight seal
- High-temperature ceramic socket
- LED G4 or Halogen G4 up to 50W Max.
- Match with proper transformer
- For outdoor use only
- 3 year limited warranty

Aluminum

Box Qty.
10

Model	Voltage	Finish	Bulb
PL-L-22-ALM-BZ-12V	12V	Bronze	G4
PL-L-22-ALM-BL-12V	12V	Black	G4



Spike
Included



-BZ



Spike Included

17 SCENE OPTIONS

2700K		RED/GREEN/BLUE	+ 2 Second Smooth Color Change
3000K		RED/GREEN/BLUE	+ 2 Second Flash Color Change
3500K		ALL COLORS	+ 2 Second Smooth Color Change
4000K		ALL COLORS	+ 2 Second Flash Color Change
5000K		ALL COLORS	+ 2 Second Smooth Color Change
WHITE		ALL COLORS	+ 2 Second Flash Color Change
RED		OFF	
GREEN			
BLUE			
ORANGE			
PURPLE			
CYAN			

Landscape Path Light Stem - 21" Height

- Aluminum construction
- LED integrated
- Push button selectable 5-CCT or 12 RGB scene options
- 6 ft (72") SPT-1W 20 gauge wire lead
- 6.24" aluminum spike (Included)
- High-salt, moisture and UV resistant
- High-temperature silicone o-ring for a water-tight seal
- For outdoor use only
- 3 year limited warranty

SCCT + RGB Box Qty. 25

Model	Voltage	Watts	Lumens	Color
LED-PL-21-5W-RGB+5CCT-ALM-BZ-LV	12-24V AC/DC	5w	200	27/30/35/40/50K



PL-H-ALM-BZ-TR



PL-H-ALM-BZ-FL



PL-H-ALM-BZ-DM



PL-H-ALM-BZ-DC



PL-H-ALM-BZ-TX



PL-H-ALM-BZ-DT

Path Light Caps

Aluminum

Box Qty. 48

Model	Finish
PL-H-ALM-BZ-TR	Bronze
PL-H-ALM-BZ-FL	Bronze
PL-H-ALM-BZ-DM	Bronze
PL-H-ALM-BZ-DC	Bronze
PL-H-ALM-BZ-TX	Bronze
PL-H-ALM-BZ-DT	Bronze



-BL



Spike Included

17 SCENE OPTIONS

2700K		RED/GREEN/BLUE	+ 2 Second Smooth Color Change
3000K		RED/GREEN/BLUE	+ 2 Second Flash Color Change
3500K		ALL COLORS	+ 2 Second Smooth Color Change
4000K		ALL COLORS	+ 2 Second Flash Color Change
5000K		ALL COLORS	+ 2 Second Smooth Color Change
WHITE		ALL COLORS	+ 2 Second Flash Color Change
RED		OFF	
GREEN			
BLUE			
ORANGE			
PURPLE			
CYAN			

Landscape Path Light Stem - 21" Height

Aluminum

SCCT + RGB Box Qty. 25

Model	Voltage	Watts	Lumens	Color
LED-PL-21-5W-RGB+5CCT-ALM-BL-LV	12-24V AC/DC	5w	200	27/30/35/40/50K



PL-H-ALM-BL-TR



PL-H-ALM-BL-FL



PL-H-ALM-BL-DM



PL-H-ALM-BL-DC



PL-H-ALM-BL-TX



PL-H-ALM-BL-DT

Path Light Caps

Aluminum

Box Qty. 48

Model	Finish
PL-H-ALM-BL-TR	Black
PL-H-ALM-BL-FL	Black
PL-H-ALM-BL-DM	Black
PL-H-ALM-BL-DC	Black
PL-H-ALM-BL-TX	Black
PL-H-ALM-BL-DT	Black



Landscape Path Light L-Shape - 21" Height

- Aluminum construction
- LED integrated
- Push button selectable 5-CCT or 12 RGB scene options
- 6 ft (72") SPT-1W 20 gauge wire lead
- 6.24" aluminum spike (Included)
- High-salt, moisture and UV resistant
- High-temperature silicone o-ring for a water-tight seal
- For outdoor use only
- 3 year limited warranty

Aluminum

SCCT + RGB ETL FC Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-PL-L-21-5W-RGB+5CCT-ALM-BZ-LV	12-24V AC/DC	5w	200	27/30/35/40/50K
LED-PL-L-21-5W-RGB+5CCT-ALM-BL-LV	12-24V AC/DC	5w	200	27/30/35/40/50K



17 SCENE OPTIONS

2700K		RED/GREEN/BLUE	
3000K		+ 2 Second Smooth Color Change	
3500K		RED/GREEN/BLUE	
4000K		+ 2 Second Flash Color Change	
5000K		ALL COLORS	
WHITE		+ 2 Second Smooth Color Change	
RED		ALL COLORS	
GREEN		+ 2 Second Flash Color Change	
BLUE		ALL COLORS	
ORANGE		+ 2 Second Smooth Color Change	
PURPLE		+ 2 Second Flash Color Change	
CYAN		OFF	



Path Light: 3-Column 15" Height

- Aluminum construction
- LED integrated
- 6 ft (72") SPT-1W 20 gauge wire lead
- 6.24" aluminum spike (Included)
- High-salt, moisture and UV resistant
- High-temperature silicone o-ring for a water-tight seal
- For outdoor use only
- 3 year limited warranty

Aluminum

8 HIGH CRI ETL FC Box Qty. 12

Model	Voltage	Watts	Lumens	Color
LED-PL-3C-15-3W-5CCT-ALM-BZ-LV	12-24V AC/DC	3w	150	27/30/35/40/50K
LED-PL-3C-15-3W-5CCT-ALM-BL-LV	12-24V AC/DC	3w	150	27/30/35/40/50K





-BR-ORB



-BR-MBL

In-Ground Light: Flat Open Lens

- Solid brass construction
- High-salt, moisture and UV resistant
- High-temperature silicone o-ring for a water-tight seal
- High-temperature ceramic socket
- Compatible with LED or Halogen MR16 up to 50W Max. (not included)
- Match with proper transformer
- For outdoor use only
- Lifetime corrosion free warranty

Solid Brass

 Box Qty.
10

Model	Voltage	Finish	Bulb
IGL-FL-BR-ORB-12V	12V	Oil Rubbed Bronze	MR-16
IGL-FL-BR-MBL-12V	12V	Matte Black	MR-16



-BR-ORB



-BR-MBL

In-Ground Light: Ribbed Lens

Solid Brass

 Box Qty.
10

Model	Voltage	Finish	Bulb
IGL-RB-BR-ORB-12V	12V	Oil Rubbed Bronze	MR-16
IGL-RB-BR-MBL-12V	12V	Matte Black	MR-16



-BR-ORB



-BR-MBL

In-Ground Light: Half Moon Lens

Solid Brass

 Box Qty.
10

Model	Voltage	Finish	Bulb
IGL-HM-BR-ORB-12V	12V	Oil Rubbed Bronze	MR-16
IGL-HM-BR-MBL-12V	12V	Matte Black	MR-16



-BR-ORB



-BR-MBL

In-Ground Light: 3-Light Covered Lens

Solid Brass

 Box Qty.
10

Model	Voltage	Finish	Bulb
IGL-3L-BR-ORB-12V	12V	Oil Rubbed Bronze	MR-16
IGL-3L-BR-MBL-12V	12V	Matte Black	MR-16



-BZ



-BL

In-Ground Light - Flat Open Lens

- Aluminum construction
- LED integrated
- Push button selectable 5-CCT or 12 RGB scene options
- Beam angle 60°
- 3 ft (36") SPT-1W 20 gauge wire lead

- High-salt, moisture and UV resistant
- High-temperature silicone o-ring for a water-tight seal
- For outdoor use only
- 3 year limited warranty

Aluminum

5CCT + RGB Box Qty. 24

Model	Voltage	Watts	Lumens	Color
LED-IGL-FL-5W-RGB+5CCT-ALM-BZ-LV	12-24V AC/DC	5w	350	27/30/35/40/50K
LED-IGL-FL-5W-RGB+5CCT-ALM-BL-LV	12-24V AC/DC	5w	350	27/30/35/40/50K

17 SCENE OPTIONS

2700K	3000K	3500K	4000K	5000K	WHITE	RED	GREEN	BLUE	ORANGE	PURPLE	CYAN	RED/GREEN/BLUE + 2 Second Smooth Color Change	RED/GREEN/BLUE + 2 Second Flash Color Change	ALL COLORS + 2 Second Smooth Color Change	ALL COLORS + 2 Second Flash Color Change	ALL COLORS + 2 Second Smooth Color Change	ALL COLORS + 2 Second Flash Color Change	OFF
-------	-------	-------	-------	-------	-------	-----	-------	------	--------	--------	------	--	---	--	---	--	---	-----



-ORB



-MBL

Landscape Deck Light

Solid Brass

Box Qty. 40

Model	Voltage	Finish	Bulb
DL-BR-ORB-12V	12V	Oil Rubbed Bronze	G4
DL-BR-MBL-12V	12V	Matte Black	G4



-BZ

In-Ground Light: Small: Flat Open Lens

Aluminum

Box Qty. 30

Model	Voltage	Watts	Lumens	Color
LED-IGLS-FL-9W-5CCT-ALM-BZ-LV	12-24V AC/DC	5w	700	50/40/35/30/27K



-BZ

In-Ground Light: Small: Ribbed Open Lens

Aluminum

Box Qty. 30

Model	Voltage	Watts	Lumens	Color
LED-IGLS-RB-9W-5CCT-ALM-BZ-LV	12-24V AC/DC	9w	700	27/30/35/40/50K



-BZ

In-Ground Light: Small: Shroud Open Lens

Aluminum

Box Qty. 30

Model	Voltage	Watts	Lumens	Color
LED-IGLS-SH-9W-5CCT-ALM-BZ-LV	12-24V AC/DC	9w	700	27/30/35/40/50K



Hardscape Replaceable - 4"

- Solid brass construction
- LED integrated
- Push button selectable 5-CCT or 12 RGB scene options
- High-salt, moisture and UV resistant

- High-temperature silicone for a water-tight seal
- For outdoor use only
- Lifetime corrosion free warranty

Solid Brass

Box Qty. 40

Model	Voltage	Watts	Lumens	Color
LED-HS-4I-2W-RGB+5CCT-BR-ORB-LV	9-17V	2w	200	27/30/35/40/50K

17 SCENE OPTIONS

2700K	RED	RED/GREEN/BLUE
3000K	GREEN	+ 2 Second Smooth Color Change
3500K	BLUE	RED/GREEN/BLUE
4000K	ORANGE	+ 2 Second Flash Color Change
5000K	PURPLE	ALL COLORS
WHITE	CYAN	+ 2 Second Smooth Color Change
		ALL COLORS
		+ 2 Second Flash Color Change
		OFF



Hardscape Replaceable - 7"

- Solid brass construction
- LED integrated
- Push button selectable 5-CCT or 12 RGB scene options
- High-salt, moisture and UV resistant

- High-temperature silicone for a water-tight seal
- For outdoor use only
- Lifetime corrosion free warranty

Solid Brass

Box Qty. 40

Model	Voltage	Watts	Lumens	Color
LED-HS-7I-3W-RGB+5CCT-BR-ORB-LV	9-17V	3w	200	27/30/35/40/50K

17 SCENE OPTIONS

2700K	RED	RED/GREEN/BLUE
3000K	GREEN	+ 2 Second Smooth Color Change
3500K	BLUE	RED/GREEN/BLUE
4000K	ORANGE	+ 2 Second Flash Color Change
5000K	PURPLE	ALL COLORS
WHITE	CYAN	+ 2 Second Smooth Color Change
		ALL COLORS
		+ 2 Second Flash Color Change
		OFF



Hardscape Replaceable - 12"

- Solid brass construction
- LED integrated
- Push button selectable 5-CCT or 12 RGB scene options
- High-salt, moisture and UV resistant

- High-temperature silicone for a water-tight seal
- For outdoor use only
- Lifetime corrosion free warranty

Solid Brass

Box Qty. 40

Model	Voltage	Watts	Lumens	Color
LED-HS-12I-4W-RGB+5CCT-BR-ORB-LV	9-17V	4w	200	27/30/35/40/50K

17 SCENE OPTIONS

2700K	RED	RED/GREEN/BLUE
3000K	GREEN	+ 2 Second Smooth Color Change
3500K	BLUE	RED/GREEN/BLUE
4000K	ORANGE	+ 2 Second Flash Color Change
5000K	PURPLE	ALL COLORS
WHITE	CYAN	+ 2 Second Smooth Color Change
		ALL COLORS
		+ 2 Second Flash Color Change
		OFF



Hardscape Replaceable - 7"

- Aluminum construction
- LED integrated
- Push button selectable 5-CCT or 12 RGB scene options
- High-salt, moisture and UV resistant

- High-temperature silicone o-ring for a water-tight seal
- For outdoor use only
- 3 year limited warranty


Aluminum

Box Qty. 40

Model	Voltage	Watts	Lumens	Color
LED-HS-7I-5W-RGB+5CCT-ALM-BZ-LV	12-14V	7w	250	27/30/35/40/50K

17 SCENE OPTIONS

2700K	RED	RED/GREEN/BLUE
3000K	GREEN	+ 2 Second Smooth Color Change
3500K	BLUE	RED/GREEN/BLUE
4000K	ORANGE	+ 2 Second Flash Color Change
5000K	PURPLE	ALL COLORS
WHITE	CYAN	+ 2 Second Smooth Color Change
		ALL COLORS
		+ 2 Second Flash Color Change
		OFF

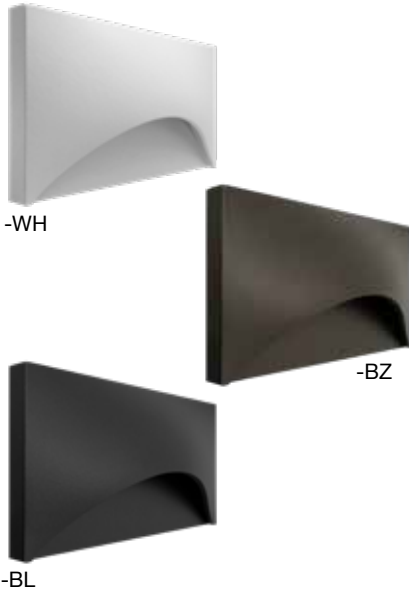


Landscape Step Light Horizontal - Semi-Circle

- Aluminum construction
- LED Integrated
- High-salt, moisture and UV resistant
- Match with proper transformer
- For outdoor use only
- 3 year limited warranty

Aluminum

80 HIGH CRI Box Qty. 48

Model	Voltage	Watts	Lumens	Color
LED-STEP-SC-3W-5CCT-HZ-ALM-WH-LV	12-24V	3w	100	27/30/35/40/50K
LED-STEP-SC-3W-5CCT-HZ-ALM-BZ-LV	12-24V	3w	100	27/30/35/40/50K
LED-STEP-SC-3W-5CCT-HZ-ALM-BL-LV	12-24V	3w	100	27/30/35/40/50K

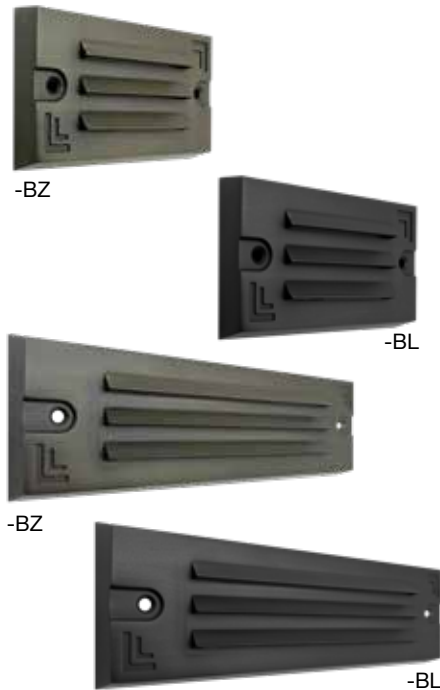

Surface Mount Step Light 5" / 9" Width - Louver

- Solid brass construction
- LED Integrated
- High-salt, moisture and UV resistant
- Match with proper transformer
- For outdoor use only
- Lifetime corrosion free warranty

Solid Brass

80 HIGH CRI Box Qty. 30

Model	Voltage	Watts	Lumens	Color
LED-STEP-LVR-SM-5-3W-5CCT-BR-ORB-LV	9-17V	3w	60	27/30/35/40/50K
LED-STEP-LVR-SM-5-3W-5CCT-BR-MBL-LV	9-17V	3w	60	27/30/35/40/50K
LED-STEP-LVR-SM-9-5W-5CCT-BR-ORB-LV	9-17V	5w	100	27/30/35/40/50K
LED-STEP-LVR-SM-9-5W-5CCT-BR-MBL-LV	9-17V	5w	100	27/30/35/40/50K



Surface Mount Step Light 5" Width - Louver

- Aluminum construction
- LED Integrated
- High-salt, moisture and UV resistant
- Match with proper transformer
- For outdoor use only
- 3 year limited warranty

Aluminum

80 HIGH CRI Box Qty. 30

Model	Voltage	Watts	Lumens	Color
LED-STEP-LVR-SM-5-4W-5CCT-ALM-BZ-LV	12-24V	4w	60	27/30/35/40/50K
LED-STEP-LVR-SM-5-4W-5CCT-ALM-BL-LV	12-24V	4w	60	27/30/35/40/50K





Transformers

 Box Qty.
1

Model	Voltage	Finish
WMT-LV-150W-SS	12, 13, 14, 15v	Stainless Steel
WMT-LV-300W-SS	12, 13, 14, 15v	Stainless Steel
WMT-LV-600W-SS	12, 13, 14, 15v	Stainless Steel



MT-LV-PG



DT-LV-PG

Timers

 Box Qty.
100

Model	Voltage	Finish
MT-LV-PG	120	White
DT-LV-PG	120	White



Photocell

Box Qty.
10

Model	Voltage	Finish
PC-SVL-UNV-1/2"	120	Black



Brass Stake 10" Heavy Duty

Solid Brass

Box Qty.
20

Model	Finish
STK-HD-1/2-BR	Brass



BR-ORB



BR-MBL

Brass 1/2" Surface Mount

Solid Brass

Box Qty.
50

Model	Finish
SM-1/2-BR-ORB	Oil Rubbed Bronze
SM-1/2-BR-MBL	Matte Black



Brass Tree Mount

Solid Brass

Box Qty.
50

Model	Finish
SM3-1/2-BR-ORB	Oil Rubbed Bronze
SM3-1/2-BR-MBL	Matte Black




BrassStake Cover

Solid Brass

Box Qty.
50

Model	Finish
STKC-1/2-BR-ORB	Oil Rubbed Bronze
STKC-1/2-BR-MBL	Matte Black



Landscape Gutter Mount

Solid Brass

Box Qty.
100

Model	Material
GM-1/2-BR-SS	Stainless Steel




1/2" Surface Mount

Aluminum

Box Qty.
48

Model	Finish
SM-1/2-ALM-BZ	Bronze
SM-1/2-ALM-BL	Black

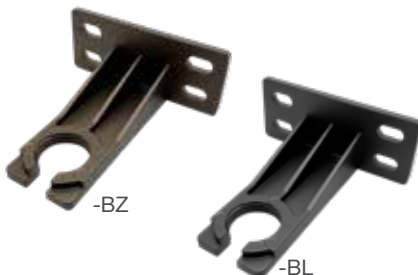

Gutter Mount

Aluminum

Box Qty.
48

Model	Finish
GM-1/2-ALM-BZ	Bronze
GM-1/2-ALM-BL	Black



Path Light Cover

Aluminum

Box Qty.
24

Model	Finish
PL-AT-1/2-ALM-BZ	Bronze
PL-AT-1/2-ALM-BL	Black



LED Step Lights

- Available in white, bronze, or black finish
- 3 faceplates included in the box: horizontal angled louvre, vertical angled louvre, and flat frosted lens
- Rated for indoor and outdoor use (IP67)
- Non-dimmable

90 HIGH CRI
Box Qty. 24

Model	Voltage	Watts	Lumens	Color
LED-STEP-AGL-2W-27K-120V-WH	120V	2w	150	2700k
LED-STEP-AGL-2W-27K-120V-BLK	120V	2w	150	2700k
LED-STEP-AGL-2W-27K-120V-BZ	120V	2w	150	2700k
LED-STEP-AGL-2W-30K-120V-WH	120V	2w	150	3000k
LED-STEP-AGL-2W-30K-120V-BLK	120V	2w	150	3000k
LED-STEP-AGL-2W-30K-120V-BZ	120V	2w	150	3000k
LED-STEP-AGL-2W-40K-120V-WH	120V	2w	150	4000k
LED-STEP-AGL-2W-40K-120V-BLK	120V	2w	150	4000k
LED-STEP-AGL-2W-40K-120V-BZ	120V	2w	150	4000k



LED ARCY Step Lights

- Available in white, brushed nickel and black
- Vertical (VT) or Horizontal (HZ) versions available
- Rated for indoor and outdoor use (IP67)
- Non-dimmable

5-CCT Select

90 HIGH CRI
Box Qty. 18

Model	Voltage	Watts	Lumens	Color
LED-STEP-ARC-3W-5CCT-HZ-WH	120V	3w	150	27/30/35/40/50K
LED-STEP-ARC-3W-5CCT-VT-WH	120V	3w	150	27/30/35/40/50K
LED-STEP-ARC-3W-5CCT-HZ-BLK	120V	3w	150	27/30/35/40/50K
LED-STEP-ARC-3W-5CCT-VT-BLK	120V	3w	150	27/30/35/40/50K
LED-STEP-ARC-3W-5CCT-HZ-BN	120V	3w	150	27/30/35/40/50K
LED-STEP-ARC-3W-5CCT-VT-BN	120V	3w	150	27/30/35/40/50K





Emergency Exit Sign (Single/Double Sided)

- Film protectant for extra shatter protection (food industry OK)
- Non-dimmable
- For indoor use only
- Red and green selectable

Box Qty.
12

Model	Voltage	Watts	Color
LED-EM-EXT-RG-WH	120-277V	3w	Red/Green selectable
LED-EM-EXT-RG-BL	120-277V	3w	Red/Green selectable



Emergency Exit Sign Combo (Single/Double Sided)

- Test switch and charge indicator
- Non-Dimmable
- Film protectant for extra shatter protection (food industry OK)
- For indoor use only

Box Qty.
10

Model	Voltage	Watts	Lumens	Color
LED-EM-EXT-G-WH-CMB	120-277V	3.5w	140	Green



Emergency Exit Sign Combo (Single/Double Sided)

- Test switch and charge indicator
- Non-dimmable
- Film protectant for extra shatter protection (food industry OK)
- For indoor use only
- Red and green selectable

Box Qty.
10

Model	Voltage	Watts	Lumens	Color
LED-EM-EXT-RG-WH-CMB	120-277V	3.5w	140	Red/Green selectable
LED-EM-EXT-RG-BL-CMB	120-277V	3.5w	140	Red/Green selectable



Emergency Exit Sign (Single/Double Sided)

- Film protectant for extra shatter protection (food industry OK)
- Non-dimmable
- For indoor use only
- Remote capable

Box Qty.
8

Model	Voltage	Watts	Lumens	Color
LED-EM-EXT-G-WH-CMB-RC	120-277V	3.5w	140	Green



Emergency Exit Sign (Single/Double Sided)

- Film protectant for extra shatter protection (food industry OK)
- Non-dimmable
- For indoor use only
- Remote capable
- Red and green selectable

Box Qty.
8

Model	Voltage	Watts	Lumens	Color
LED-EM-EXT-RG-WH-CMB-RC	120-277V	3.5w	140	Red/Green



Single Remote Head

- Film protectant for extra shatter protection (food industry OK)
- Non-dimmable
- For indoor and outdoor use
- Only compatible with RC-EMB

Box Qty.
20

Model	Voltage	Watts	Lumens	Color
LED-EM-RC-1	120-277V	1.5w	160	5000K
LED-EM-RC-2	120-277V	3w	320	5000K



Edge-Lit Emergency Exit Sign Single or Double Sided

- Film protectant for extra shatter protection (food industry OK)
- Non-dimmable
- For indoor use only

Box Qty.
12

NEW

Model	Voltage	Watts	Lumens	Color
LED-EM-EXT-EL-RG	120-277V	3w	N/A	Red/Green



E.T.A. 01/2025

Emergency LED Light

- Film protectant for extra shatter protection (food industry OK)
- Non-dimmable
- For indoor use only

Box Qty.
12

NEW

Model	Voltage	Watts	Lumens	Color
LED-EM-DH	120-277V	3w	140	5000k
LED-EM-DH-HO	120-277V	6w	650	5000k



Emergency LED Light Compact

- Film protectant for extra shatter protection (food industry OK)
- Non-dimmable
- For indoor use only

Box Qty.
12

Model	Voltage	Watts	Lumens	Color	CRI
LED-EM-DHC-WH	120-277V	3w	N/A	5000k	N/A
LED-EM-DHC-BL	120-277V	3w	N/A	5000k	N/A



Slim Wall Pack: EGG-Line

- Die-cast aluminum housing
- Polycarbonate lens and mirror reflector
- Lithium battery 4.8V 1800mAh
- Backup time up to 90 min.
- EMB- Emergency Back-up
- Emergency mode- 690 lumens

3-CCT Select

Box Qty.
10

Model	Voltage	Watts	Lumens	Color
LED-WPE-15W-TRI-PC-BZ	120-277V	15w	1950	30/40/50k
LED-WPE-15W-TRI-PC-BZ-EMB	120-277V	15w	1950	30/40/50k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required.
Please contact us for pricing based on qty. for custom finish orders.



Corn Bulbs - 3-Color and 3-Power Selectable

- Select between 3 different wattages and 3 different colors
- Includes 4K surge protection
- Multiple base types available
- Twist-C technology

Box Qty.
3M36- 12
3M54- 12
3M80- 6
3M120- 6



3-CCT & 3-Power Select

Model	Voltage	Watts	Lumens	Color
LED-CRN-3M36-TRI-E26	120-277V	18/27/36w	145lm/w	30/40/50k
LED-CRN-3M36-TRI-EX39	120-277V	18/27/36w	145lm/w	30/40/50k
LED-CRN-3M54-TRI-E26	120-277V	36/45/54w	145lm/w	30/40/50k
LED-CRN-3M54-TRI-EX39	120-277V	36/45/54w	145lm/w	30/40/50k
LED-CRN-3M80-TRI-EX39	120-277V	54/63/80w	145lm/w	30/40/50k
LED-CRN-3M120-TRI-EX39	120-277V	80/100/120w	145lm/w	30/40/50k



Accessory Model	Description
HB01DMS-A	Bi-level motion + daylight sensor
HB03R	Controller for HB01DMS-A (controls multiple)

WATT	LUMENS
18	2,610
27	3,915
36	5,220
45	6,525
54	7,830
63	9,135
80	11,600
100	14,500
120	17,400

3-CCT Selectable



3 Power Selectable



E26 Base



EX39 Base




Optional Motion
+ Daylight Sensor



HB03R
Controller for
HB01DMS-A



HB01DMS-A
Bi Level Motion Sensor and
Daylight Harvesting Sensor

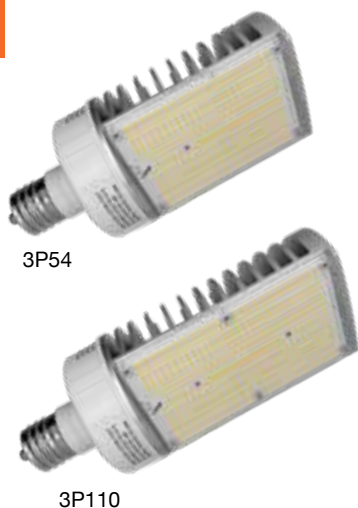

Corn Bulbs: Directional

- IP Rating: IP64 Wet Location
- Beam Angle: 120°
- Base: EX39
- 3-CCT: 30/40/50K
- Aluminum housing for heat dissipation
- Suitable for use in existing fixtures - Ballast bypass required
- Connect directly to 120-277V power
- Instant-On to full brightness

3-CCT & 3-Power Select

80+ HIGH CRI Box Qty. 6

Model	Voltage	Watts	Lumens	Color
LED-CRNDL-3P54-TRI-EX39	120-277V	54/45/36w	145lm/w	30/40/50k
LED-CRNDL-3P110-TRI-EX39	120-277V	110/95/75w	145lm/w	30/40/50k

3P54		3P110	
WATT	LUMENS	WATT	LUMENS
36	4,320	75	9,000
45	5,400	95	11,400
54	6,480	110	13,200



Includes
Support Cables



Directional Retrofit Lamp

- IP Rating: IP64 Wet Location
- Beam Angle: 120°
- Base: EX39
- 3-CCT: 30/40/50K
- Aluminum housing for heat dissipation
- Suitable for use in existing fixtures - Ballast bypass required
- Connect directly to 120-277V power
- Instant-On to full brightness

5000K & 3-Power Select

80+ HIGH CRI Box Qty. 6

Model	Voltage	Watts	Lumens	Color
LED-FLL-3P54-50K-EX39	120-277V	54/45/36w	145lm/w	5000K
LED-FLL-3P115-50K-EX39	120-277V	115/95/75w	145lm/w	5000K

3P54		3P115	
WATT	LUMENS	WATT	LUMENS
36	4,140	75	8,625
45	5,175	95	10,926
54	6,210	115	13,225



Includes
Support Cables



High Bay Replacement Lamp

- IP Rating: Wet Location IP64
- Beam Angle: 100°
- Base: EX39
- Aluminum housing for heat dissipation
- Suitable for use in existing fixtures - Ballast bypass required
- Connect directly to 120-277V power
- Instant-On to full brightness

3-CCT & 3-Power Select

80+ HIGH CRI Box Qty. 6

Model	Voltage	Watts	Lumens	Color
LED-RHBL-3P120-TRI-EX39	120-277V	120/100/80w	145lm/w	30/40/50k
LED-RHBL-3P160-TRI-EX39	120-277V	160/140/120w	145lm/w	30/40/50k

3P120		3P160	
WATT	LUMENS	WATT	LUMENS
80	12,800	120	19,200
100	16,000	140	22,400
120	19,200	160	25,600



Includes
Support Cables



E.T.A. 01/2025

NEW

MR-Series: SCAPE-Line

- Triac & ELV dimmable
- Direct replacement for halogen bulbs

MR-8 Series

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-MR8-2.5W-27K-38D-BL	9-17V	2.5w	220	2700k
LED-MR8-2.5W-30K-38D-BL	9-17V	2.5w	220	3000k



E.T.A. 01/2025

NEW

MR-Series: SCAPE-Line

- Triac & ELV dimmable
- Direct replacement for halogen bulbs

MR-11 Series

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-MR11-2.5W-27K-38D-BL	9-17V	2.5w	220	2700k
LED-MR11-2.5W-30K-38D-BL	9-17V	2.5w	220	3000k



E.T.A. 01/2025

NEW

MR-Series: Beam Angle Selectable

- Triac & ELV dimmable
- Direct replacement for halogen bulbs


MR-16 Series

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-MR16-4W-27K-3B-BL	9-17V	4w	350	2700k
LED-MR16-4W-30K-3B-BL	9-17V	4w	350	3000k
LED-MR16-7W-27K-3B-BL	9-17V	7w	600	2700k
LED-MR16-7W-30K-3B-BL	9-17V	7w	600	3000k



Adjustable
Beam Angle
20° / 40° / 60°

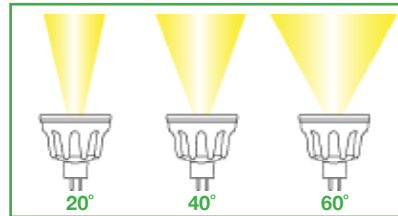

E.T.A. 01/2025

NEW

MR-Series: Beam Angle Adjustable + 5-CCT

- Triac & ELV dimmable
- Direct replacement for halogen bulbs


MR-16 Series

Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-MR16-5W-5CCT-4B-BL	9-17V	5w	530	27/30/35/40/50k
LED-MR16-8W-5CCT-4B-BL	9-17V	8w	700	27/30/35/40/50k



15° / 30° / 60°
Replaceable Lens

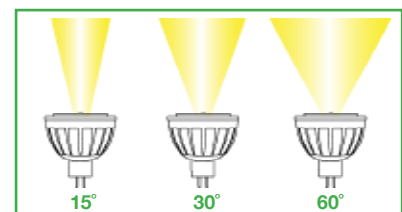



GX23 PL Lamp Type A+B

- Compatible with existing ballast or direct AC wiring
- Easily upgrade fluorescent fixtures, no rewiring required
- Not dimmable

8 HIGH CRI  Box Qty. 50

Model	Voltage	Watts	Lumens	Color
LED-PL-GX23-6W-40K	120-277V	6w	600	4000k
LED-PL-GX23-6W-50K	120-277V	6w	600	5000k



G24 PL Lamp Type A+B

- Easily upgrade fluorescent fixtures, no rewiring required
- Not dimmable
- Compatible with existing ballast or direct AC wiring

8 HIGH CRI  Box Qty. 50

Model		Voltage	Watts	Lumens	Color
LED-PL-G24-7W-40K	13W Equivalent	120-277V	7w	650	4000k
LED-PL-G24-7W-50K	13W Equivalent	120-277V	7w	650	5000k
LED-PL-G24-11W-30K	13W Equivalent	120-277V	11w	1,300	3000k
LED-PL-G24-11W-40K	13W Equivalent	120-277V	11w	1,300	4000k
LED-PL-G24-11W-50K	13W Equivalent	120-277V	11w	1,300	5000k

2G11 PL Lamp

- Compatible with existing ballast
- Easily upgrade fluorescent fixtures, no rewiring required
- Not dimmable

8 HIGH CRI  Box Qty. 50

Final
Production

Model	Voltage	Watts	Lumens	Color
LED-PL-2G11-15W-30K	120V	15w	1600lm	3000k





Filament LED Bulbs

- Compatible with most dimmers
- View spec sheets for JA8 Models

3-CCT & 3-Power Select




 Box Qty. 40

Model	Voltage	Watts	Lumens	Color
LED-FLM-A19-HM-4W-18K	120V	4w	400	1800k



A19

Box Qty. 40

Model	Voltage	Watts	Lumens	Color
LED-FLM-A19-8.5W-30K-D	120V	8.5w	550	3000k
LED-FLM-A19-4W-30K-12V	12v	4w	550	3000k
LED-FLM-A19-10W-27K	120V	10w	1,000	2700k



Candelabra

Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-FLM-E12T-4W-30K-12V	12v	4w	400	3000k
LED-FLM-E12T-4W-27K	120V	4w	400	2700k
LED-FLM-E12T-4W-30K	120V	4w	400	3000k
LED-FLM-E12T-4W-60K	120V	4w	400	6000k
LED-FLM-E12FL-4W-27K	120V	4w	400	2700k
LED-FLM-E12T-6W-27K	120V	6w	600	2700k
LED-FLM-E12T-6W-30K	120V	6w	600	3000k
LED-FLM-E12T-6W-40K	120V	6w	600	4000k



ST64 Edison

Box Qty. 40

Model	Voltage	Watts	Lumens	Color
LED-FLM-ST64-4W-18K	120V	4w	400	1800k
LED-FLM-ST64-5W-30K	120V	5w	400	3000k



Globes

Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-FLM-G16.5C-4W-27K	120V	4w	400	2700k
LED-FLM-G16.5M-4W-27K	120V	4w	400	2700k
LED-FLM-G25-5W-27K	120V	4w	400	2700k



Tubular

Box Qty. 40

Model	Voltage	Watts	Lumens	Color
LED-FLM-T30-4W-18K	120V	4w	400	1800k
LED-FLM-T30-5W-30K	120V	5w	400	3000k
LED-FLM-T30-5W-50K	120V	5w	400	5000k





5-CCT LED Bulbs

- Triac-dimmable
- Direct replacement for halogen bulbs
- Must be purchased in inner carton quantities

A Series

DIMMABLE 90 HIGH CRI TITLE 20 COMPLIANT JA8 TITLE 24 COMPLIANT ETL LISTED Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-A19-9W-5CCT	120V	9w	800lm	27/30/35/40/50k
LED-A21-15W-5CCT	120V	15w	1600lm	27/30/35/40/50k



Carton Qty.	A19	A21
Inner Carton	10	10
Master Carton	100	100



GU24 Series

DIMMABLE 90 HIGH CRI TITLE 20 COMPLIANT JA8 TITLE 24 COMPLIANT ETL LISTED Box Qty. 100

NEW

Model	Voltage	Watts	Lumens	Color
LED-A19GU24-9W-5CCT	120V	9w	800lm	27/30/35/40/50k



Carton Qty.	GU24
Inner Carton	10
Master Carton	100



BR Series

DIMMABLE 90 HIGH CRI TITLE 20 COMPLIANT JA8 TITLE 24 COMPLIANT ETL LISTED Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-BR20-6W-5CCT	120V	6w	450lm	27/30/35/40/50k
LED-BR30-8.5W-5CCT	120V	8.5w	650lm	27/30/35/40/50k
LED-BR40-13W-5CCT	120V	13w	1050lm	27/30/35/40/50k



Carton Qty.	BR20	BR30	BR40
Inner Carton	10	6	6
Master Carton	100	48	48



PAR Series

DIMMABLE 90 HIGH CRI TITLE 20 COMPLIANT JA8 TITLE 24 COMPLIANT ETL LISTED Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-P20-7W-5CCT	120V	7w	450lm	27/30/35/40/50k
LED-P30-10W-5CCT	120V	10w	750lm	27/30/35/40/50k
LED-P38-13W-5CCT	120V	13w	1000lm	27/30/35/40/50k



Carton Qty.	P20	P30	P38
Inner Carton	10	6	6
Master Carton	100	48	48



GU10 Series

DIMMABLE 90 HIGH CRI TITLE 20 COMPLIANT JA8 TITLE 24 COMPLIANT ETL LISTED Box Qty. 100

NEW

Model	Voltage	Watts	Lumens	Color
LED-GU10-6.5W-5CCT	120V	6.5w	500lm	27/30/35/40/50k



Carton Qty.	GU10
Inner Carton	10
Master Carton	100





A19 6-Pack Screw-Base LED Non-Dimmable Bulb

- High intensity: ready to replace existing 60W halogen
- Suitable for use in existing fixtures
- Sold in a 6-pack



Model	Voltage	Watts	Lumens	Color
LED-A19-9W-30K-ND6	120V	9w	800	3000k



Final
Production
↓

A21 Screw-Base LED Bulb

- High intensity: ready to replace existing 100W halogen
- Suitable for use in existing fixtures
- Compatible with most dimmers



Model	Voltage	Watts	Lumens	Color
LED-A21-16W-30K-HD	120V	16w	1,600	3000k
LED-A21-16W-40K-HD	120V	16w	1,600	4000k
LED-A21-16W-50K-HD	120V	16w	1,600	5000k



A19 GU24 Bulb

- High intensity: ready to replace existing 65W halogen
- Suitable for use in existing fixtures
- Compatible with most dimmers



Model	Voltage	Watts	Lumens	Color
LED-A19GU24-9W-WW	120V	9w	800	3000k



PAR38 12K Jewelry Bulb

- Shine our new 12,000K bulb on diamonds to add an extra sparkle
- Very powerful COB Chip provides 3,000 lumens
- Universal voltage 120-277 for commercial applications



Model	Voltage	Watts	Lumens	Color
LED-PAR38-32W-12K-UNV	120/277V	32w	3,000	12000k



Final
Production
↓

Candelabra Bulbs

- E12 'candelabra' base
- '-ND' models are non-dimmable
- '-D' models are dimmable



Model	Voltage	Watts	Lumens	Color
LED-E12-5W-30K-D	120V	5w	280	3000k
LED-E12-3W-27K-ND	120V	3w	280	2700k



MR Series Bulbs

- Ideal replacements for MR-base halogens
- Integrated aluminum heatsink



Model	Voltage	Watts	Lumens	Color
LED-MR11-3W-30K-2PK	12V	3w	280	3000k
LED-MR11-3W-50K-2PK	12V	3w	280	5000k
LED-MR16-5W-27K-HD	12V	5w	350	2700k
LED-MR16-5W-30K-HD	12V	5w	350	3000k
LED-MR16-7W-27K-HD	12V	7w	500	2700k
LED-MR16-7W-30K-HD	12V	7w	500	3000k
LED-MR16-7W-40K-HD	12V	7w	500	4000k
LED-MR16-7W-50K-HD	12V	7w	500	5000k
LED-MR16-9W-D-DIM	12V	9w	500	6500k



G9 Bulbs

- Drop-in G9 halogen replacement
- Compatible with most dimmers

8 HIGH CRI DIMMABLE ETL LISTED JA8 TITLE 24 COMPLIANT LAW Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-G9-5W-HL-30K	120V	5w	500	3000k
LED-G9-5W-HL-40K	120V	5w	500	4000k



G9 Bulbs

- Drop-in G9 halogen replacement
- Compatible with most dimmers

8 HIGH CRI DIMMABLE ETL LISTED JA8 TITLE 24 COMPLIANT LAW Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-G9-4.5W-27K	120V	4.5w	450	2700k
LED-G9-4.5W-30K	120V	4.5w	450	3000k



Bayonet Base Bulbs

- Available in single and double contact (-SC & -DC)
- Drop-in 12V halogen replacement

8 HIGH CRI DIMMABLE ETL LISTED JA8 TITLE 24 COMPLIANT LAW Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-BNWP-3W-WW-SC	12V	3w	280	3000k
LED-BNWP-3W-CW-SC	12V	3w	280	4000k
LED-BNWP-3W-WW-DC	12V	3w	280	3000k



Wedge-Base Bulbs

- Available in single and double contact (-SC & -DC)
- Drop-in 12V halogen replacement
- Compatible with most dimmers

8 HIGH CRI DIMMABLE ETL LISTED JA8 TITLE 24 COMPLIANT LAW Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-WGWP-3W-WW	12V AC/DC	3w	280	3000k



Bi-Pin 12V Bulbs

- Pin-compatible drop-in replacement for 12V halogens
- Compatible with most dimmer modules
- Fully waterproof silicone enclosure

8 HIGH CRI Box Qty. 100

Model	Voltage	Watts	Lumens	Color
LED-G4WP-1.5W-SW	12V AC/DC	1.5w	110	2700k
LED-G4WP-1.5W-WW	12V AC/DC	1.5w	110	3000k
LED-G4WP-1.5W-CW	12V AC/DC	1.5w	110	4000k
LED-G4WP-2.5W-SW	12V AC/DC	2.5w	210	2700k
LED-G4WP-2.5W-WW	12V AC/DC	2.5w	210	3000k
LED-G4WP-2.5W-CW	12V AC/DC	2.5w	210	4000k
LED-G4WP-3.5W-SW	12V AC/DC	3.5w	280	2700k
LED-G4WP-3.5W-WW	12V AC/DC	3.5w	280	3000k
LED-G4WP-3.5W-CW	12V AC/DC	3.5w	280	4000k
LED-GY6.35-4W-27K	12V AC/DC	4w	350	2700k
LED-GY6.35-4W-30K	12V AC/DC	4w	350	3000k



PAR LUX Series Bulb (40°)

- Ideal for landscape lighting (IP67)
- Compatible with most dimmers
- Integrated aluminum heatsink

DIMMABLE 8 HIGH CRI CERTIFIED Box Qty. 20

Model	Voltage	Watts	Lumens	Color
LED-PAR36-13W-W	12V	13w	1600	3000k



120V Architectural Striplights

- Lumen & watt ratings are per-foot
- Compatible with most dimmer modules
- Cutable every 18"
- Available in 100ft rolls



Model	Voltage	Watts	Lumens	Color
ST-2835-120V-4W-30K	120V	4w/ft	320/ft	3000k
ST-2835-120V-4W-40K	120V	4w/ft	320/ft	4000k
ST-2835-120V-4W-50K	120V	4w/ft	320/ft	5000k



ST-POWSET-18
ST-POWSET-36
ST-POWSET-72



ST-JBX-POW-1200-36"
ST-POW-UNV-400W-36"

120V Architectural Striplight Accessories

Box Qty.
100

Model	Voltage	Watts	Lumens	Color
ST-POWSET-18	120V	N/A	N/A	White
ST-POWSET-36	120V	N/A	N/A	White
ST-POWSET-72	120V	N/A	N/A	White
ST-JBX-POW-1200W-36"	120V	N/A	N/A	White
ST-POW-UNV-400W-36"	120V	N/A	N/A	White
ST-JUMPER-6	120V	N/A	N/A	White
ST-JUMPER-12	120V	N/A	N/A	White
ST-120-WP-COUP	120V	N/A	N/A	Clear
120V-STRAP-100PK	120V	N/A	N/A	N/A
ST-COUP-PIN-25PK	120V	N/A	N/A	N/A
ST-END-CAP-20PK	120V	N/A	N/A	N/A



ST-JUMPER-6
ST-JUMPER-12



ST-120-WP-COUP



120V-STRAP-100PK




ST-COUP-PIN



ST-END-CAP

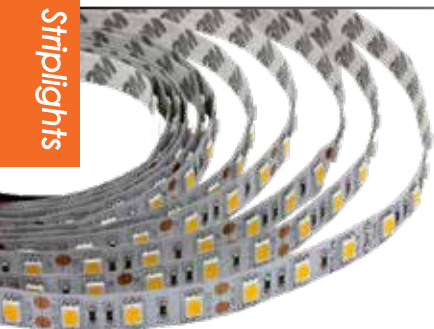

Final
Production

Low Voltage Striplights (12V)

- Lumen & watt ratings are per-foot
- Mains-dimmable with magnetic transformer
- Available in 16.4ft rolls





 Box Qty.
20

Model	Voltage	Watts	Lumens	Color
LED-TP-3528-12V-DL	12V DC	1.5w/ft	120/ft	5000k
LED-TP-3528-12V-R	12V DC	1.5w/ft	120/ft	Red
LED-TP-3528-12V-B	12V DC	1.5w/ft	120/ft	Blue
LED-TP-3528-12V-G	12V DC	1.5w/ft	120/ft	Green
LED-TP-2835-12V-DL	12V DC	2.2w/ft	180/ft	5000k
LED-TP-5050-12V-DL	12V DC	4w/ft	285/ft	5000k



Low Voltage Striplights (24V)





 Box Qty.
20

Model	Voltage	Watts	Lumens	Color
LED-TP-2216-2W-24V95-WW	24V DC	2w/ft	150/ft	3000k
LED-TP-2216-2W-24V95-DL	24V DC	2w/ft	150/ft	5000k
LED-TP-2216-3W-24V95-DL	24V DC	3w/ft	225/ft	5000k
LED-TP-2216-4W-24V95-DL	24V DC	4w/ft	300/ft	5000k

Final
Production



Constant Voltage Triac Dimmable Transformers

Box Qty.
20W- 12
12V 60- 12
12V 150- 6
24V 60- 6

Model	Voltage	Watts
CV-12V-DC-20W-DIM	Input: 120-277V Output: 12V DC	20w
CV-12V-DC-60W-DIM	Input: 120-277V Output: 12V DC	60w
CV-12V-DC-150W-DIM	Input: 120-277V Output: 12V DC	150w
CV-24V-DC-60W-DIM	Input: 120-277V Output: 24V DC	60w



Waterproof Junction Box Coupling

Box Qty.
100


Model	Item Description
JBX-WP-3P	Waterproof J-box coupling: 3-wire
JBX-WP-4P	Waterproof J-box coupling: 4-wire
JBX-WP-5P	Waterproof J-box coupling: 5-wire
JBX-WP-6P	Waterproof J-box coupling: 6-wire



Flex Whips: Snap On Connect + I-Shape Connector

Box Qty.
100

Model	Item Description
FLX-WHIP-6'-5	"6 Feet Long 5 Wire Flex Whip Black/white/green/purple/gray"
FLX-WHIP-6'-6	"6 Feet Long 6 Wire Flex Whip Black/white/green/purple/gray/red"

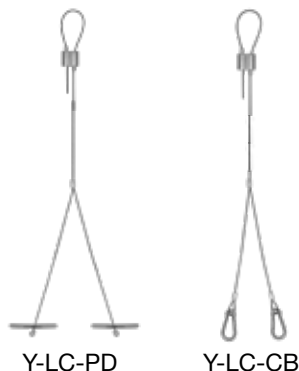

Suspension Kits & Chain Kits

Model	Item Description
NEW SK-10FT-Y-LC-PD	Suspension kit: 10' Y-shape, loop top, paddle bottom (adjustable length)
NEW SK-20FT-Y-LC-PD	Suspension kit: 20' Y-shape, loop top, paddle bottom (adjustable length)
NEW SK-10FT-Y-LC-CB	Suspension kit: 10' Y-shape, loop top, carabiner bottom (adjustable length)
NEW SK-20FT-Y-LC-CB	Suspension kit: 20' Y-shape, loop top, carabiner bottom (adjustable length)
LED-PNL-2X4-SK	Suspension kit: Panels, troffers
SK-9FT-ADJ-2	Suspension Kit: 9ft for linear fixtures: Wraps, Strips and Vapors
CK-6FT-V	6ft Chain hanging kit



CK-6FT-V



Step Down Transformer

 Box Qty.
10

Model	Input	Watt
STD-480-277-465A-FLX	120-277V	<1W



Surge Protectors

 Box Qty.
10

Model	Input	Watt
SG-20KV-UNV	120-277V	<1W
SG-20KV-HV	277-480V	<1W



Button Photocell Universal

 Box Qty.
10

Model	Input	Output
PC-BTN-UNV-1/2"	120/277V	25-48v DC
PC-BTN-UNV-3/8"	120/277V	25-48v DC
PC-SVL-UNV-1/2"	120/277V	25-48v DC
PC-TWL-RC	120/277V	25-48v DC
PC-TWL-UNV	120/277V	25-48v DC
PC-TWL-HV	120/277V	25-48v DC



S-TWC-MW-1
TWC-DL



S-TWC-PIR-1
S-TWC-PIR-ON/OFF



S-LINE-R



S-BMS-EXT-1



S-BMS-INT-1

S-Line Sensors

Model	Item Description	Output Voltage	Watts	Box Qty. 1
S-TWC-MW-1	Twist-C microwave sensor Brightness: 100% / hold time: 10 min. Bi-level dim: 50% stand by time: 10 min. sensitivity: 100% daylight: enabled"	12V	<1W	
S-TWC-PIR-1	"Twist-C microwave sensor Brightness: 100% / hold time: 10 min. Bi-level dim: 50% stand by time: 10 min. sensitivity: 100% daylight: enabled"	12V	<1W	
S-TWC-PIR-ON/OFF	PIR On/Off Only: Twist-C 3-Pin	12V	<1W	
S-AUD-PIR-1	PIR Bi-Level + Daylight: Audio Jack	12V	<1W	
S-SN-PIR-1	PIR Bi-Level + Daylight: Snap-In	12V	<1W	
S-BMS-INT-1	Internal Microwave Bi-Level + Daylight	12V	<1W	
S-BMS-EXT-1	External Microwave Bi-Level + Daylight	12V	<1W	
S-LINE-R	Remote for S-LINE Series Sensors	12V	<1W	
TWC-DL	Twist-C daylight sensor: Dusk to dawn, works like a photocell	12V	<1W	



S-TWC-PIR-BT
S-AUD-PIR-BT
S-SN-PIR-BT

S-Line Sensors - Bluetooth NLC Listed - EnvisionLS App

Model	Item Description	Output Voltage	Watts	ENV LS
S-TWC-PIR-BT	PIR Bi-Level + Daylight: Twist-C Bluetooth EnVisionLS App	12V	<1W	
S-AUD-PIR-BT	PIR Bi-Level + Daylight: Audio Jack Bluetooth EnVisionLS App	12V	<1W	
S-SN-PIR-BT	PIR Bi-Level + Daylight: Snap-In ENVISIONLS	12V	<1W	
S-CM-PIR-LV-BT	PIR Bi-Level + Daylight: Ceiling Sensor ENVISIONLS	12-24V	<1W	
S-WM-PIR-CUNV-BT	PIR Bi-Level + Daylight: Wall Sensor ENVISIONLS	120-277V	<1W	



S-TWC-PIR-SL



S-AUD-PIR-SL



S-SN-PIR-SL



S-CM-PIR-LV-SL

S-Line Sensors - Bluetooth NLC Listed - Silvaair

Model	Item Description	Output Voltage	Watts	S
S-TWC-PIR-SL	PIR Bi-Level + Daylight: Twist-C SILVAIR	12V	<1W	
S-AUD-PIR-SL	PIR Bi-Level + Daylight: Audio Jack SILVAIR	12V	<1W	
S-SN-PIR-SL	PIR Bi-Level + Daylight: Snap-In SILVAIR	12V	<1W	
S-CM-PIR-LV-SL	PIR Bi-Level + Daylight: Ceiling Sensor SILVAIR	12-24V	<1W	
S-WM-PIR-CUNV-SL	PIR Bi-Level + Daylight: Wall Sensor SILVAIR	120-277V	<1W	
S-WS-120V-USB-SL	PIR Bi-Level + Daylight: Wall Outlet 3-Prong + USB SILVAIR	120V	<1W	
SGW-102	Gateway: Scheduling, Energy Monitoring, Remote Monitoring, System Diagnostics	120V	<1W	



S-WM-PIR-CUNV-SL



S-WS-120V-USB



SGW-102



S-TWC-90

Sensor Accessories

Box Qty.
1

Model	Item Description	Voltage	Watts
S-TWC-90	S-Line 90DG Receptacle Extender	12V	<1w
S-TWC-J-90	S-Line: 3-pin Jumper Extender	12V	<1w

S-Line Sensors - Bluetooth NLC Listed EnVision SMART App

Box Qty.
1

Model	Item Description	Voltage	Watts
S-PP-BT	S-Line: Dimmable power pack. Dim any 0-10V fixture.	12V	<1w
S-LINE-DIM-BT	Dimmer for S-LINE Series Bluetooth Sensors	12V	<1w



S-PP-BT



S-LINE-DIM-BT



HB01DMS-A



HB03R

HB-Line Sensors

Box Qty.
1

Model	Item Description	Voltage	Watts
HB01DMS-A	Bi Level Motion Sensor w/ Daylight Harvesting, Works with ARL2, RHB, LHB, CRN Twist-C Technology (Remote Required: S-LINE-R)	12V	<1w
HB03R	Remote for HB-Line Series	12V	<1w



HD406VRH-D-WH

H-Line Sensors

Box Qty.
1

Model	Item Description	Voltage	Watts
HD406VRH-D-WH	Bi level motion sensor w/ daylight harvesting white finish with side 1/2" knock out -remote control compatible	120-277V	<1w
HD407V-CR	Bi level motion sensor w/ daylight harvesting detachable version w/ external sensor -remote control compatible	120-277V	<1w
HD016VCR-8	Bi level motion sensor w/ daylight harvesting internal version w/ antenna -remote control compatible	120-277V	<1w
HD03R	Remote for H-line sensors	120-277V	<1w
HD05R	Remote for H-line sensors w/ screen	120-277V	<1w



HD407V-CR



HD016VCR-8



HD03R



HD05R

Smart Sensors

- Universal input voltage (100-277v AC, 50/60Hz)
- Constant output power (auto-sensing output)
- Selectable emergency power (3/5/8W)
- UL Listed for field installation

Box Qty. 1

Model	Item Description	Voltage	Watts
SMART-MOD-BT	Smart bluetooth module - dim, group, controls, via bluetooth (connect to any 0-10V dim fixture)	120-277V	<1w
SMART-MOD-WF	Smart wifi module - dim, group, controls, via wifi (connect to any triac dimmable fixture)	120-277V	<1w
SMART-MOD-BT-GTW	Gateway: Add time control, smart home capability	120-277V	<1w





Battery Backup (30W High Voltage)

- Universal input voltage (100-347v AC, 50/60Hz)
- Constant output power (auto-sensing output)
- UL Listed for field installation
- Battery protection: over/under voltage, over-temp., short circuit
- Backup runtime: 90 minutes
- For use with internal driver - includes round UFO highbay EM kit



Box Qty.
4

NEW

NEW

Model	Input	Watt	Output
LED-EMB-30W-HV-UFO-BL	120/347V	30W	175V DC
LED-EMB-30W-HV-UFO-WH	120/347V	30W	175V DC
UFO-TEST-CTR	N/A	N/A	N/A



Battery Backup (15W Low Voltage Double Flex)

- For use with external driver fixtures including: flat panels, troffers, high bays, wraps, etc.



Box Qty.
4

Model	Input	Watt	Output
LED-EMB-15W-LV	120/277V	15W	25-48V DC



Battery Backup (23W Low Voltage Single Flex)

- For use with external driver fixtures including: flat panels, troffers, high bays, wraps, etc.



Box Qty.
4

Model	Input	Watt	Output
LED-EMB-23W-HV-T8	120/277V	23W	120V DC



Battery Backup (15W Low Voltage Single Flex)

- For use with external driver fixtures including: flat panels, troffers, high bays, wraps, etc.



Box Qty.
4

Model	Input	Watt	Output
LED-EMB-15W-LV-S	120/277V	15W	25-48V DC



Battery Backup (30W High Voltage Single Flex)

- For use with external driver fixtures including: flat panels, troffers, high bays, wraps, etc.



Box Qty.
4

NEW

Model	Input	Watt	Output
LED-EMB-30W-HV-480-0/10V	277/480V	30W	400V DC



Battery Backup (Split Design)

- Universal input voltage (100-277v AC, 50/60Hz)
- Constant output power (auto-sensing output)
- UL Listed for field installation
- Battery protection: over/under voltage, over-temp., short circuit
- Backup runtime: 90 minutes
- For use with external driver w/ internal housing space: wall packs, canopy, etc.



Model	Input	Watt	Output	Costs
LED-EMB-8W-HV-0/10V	120/277V	8W	120-277V	\$90.00
LED-EMB-8W-HV-0/10V-2P	120/277V	8W	120-277V	\$90.00
LED-EMB-15W-HV-0/10V-2P	120/277V	15W	120-277V	\$95.00
LED-EMB-16W-HV-0/10V	120/277V	16W	120-277V	\$95.00
LED-EMB-25W-HV-0/10V-2P	120/277V	25W	120-277V	\$100.00
LED-EMB-32W-HV-0/10V	120/277V	32W	120-277V	\$100.00
LED-EMB-40W-HV-0/10V	120/277V	40W	120-277V	\$145.00
LED-EMB-25W-HV-2P	120/277V	25W	120-277V	\$100.00
LED-EMB-23W-HV-T8	120/277V	23W	120-277V	\$100.00
LED-EMB-30W-HV-480-0/10V	277-480V	30W	277-480V	\$180.00



LED-EMB-4W
LED-EMB-8W
LED-EMB-20W

Battery Backup (Split Design)

- Universal input voltage (100-277v AC, 50/60Hz)
- Constant output power (auto-sensing output)
- UL Listed for field installation
- Battery protection: over/under voltage, over-temp., short circuit
- Backup runtime: 90 minutes
- CW: Cold weather EMB



Model	Input	Watt	Output	Costs
LED-EMB-4W-LV-INT	120/277V	4W	35-56V DC	\$90.00
LED-EMB-5W-LV-RD-INT	120/277V	5W	25-90V DC	\$90.00
LED-EMB-8W-LV-INT	120/277V	8W	36-56V DC	\$95.00
LED-EMB-8W-LV-INT-150	120/277V	8W	60-150V DC	\$95.00
NEW LED-EMB-8W-LV-INT-30-300	120/277V	8W	36-56V DC	\$95.00
NEW LED-EMB-8W-LV-INT-CW	120/277V	8W	36-56V DC	\$210.00
LED-EMB-8W-LV-INT-150-CW	120/277V	8W	60-150V DC	\$210.00
LED-EMB-20W-LV-INT	120/277V	20W	60-150V DC	\$100.00



LED-EMB-8W-CW

Displays



Retrofit Display
DISPLAY-RDL



Back



Undercabinet Display
DISPLAY-UC



Canless Downlight Display
DISPLAY-DLJBX

EnVisionLED.



EnVisionSCAPE



EnVision LED Lighting, Inc.
Phone: 323.604.0066

www.envisionledlighting.com



SCAN FOR PDF VERSION