



LED Security Flood Light Motion Detection + Night Light



Adjustable Brightness

- 1 Ambient Off: Double head uses 25W + ambient light is off.
- 2 25W: Double head uses 25W + 3W ambient light.
- 3 16W: Double head uses 16W + 3W ambient light.



Photocell


Turn to the left to turn off the light control function, and when it is adjusted to the far right, less daylight is required to activate the photocell.



Light will always stay ON



Light will turn OFF at night time (less sensitive)

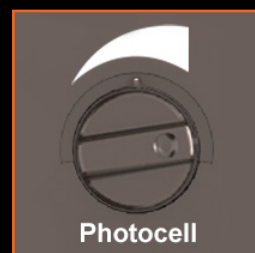

Light will turn OFF at night time (more sensitive)

Adjustable Hold Time

- 1 Test: Test mode
- 2 1M: The light stays ON for 1 minute upon motion being sensed.
- 3 5M: The light stays ON for 5 minutes upon motion being sensed.



Motion Sensor

Adjust the sensitivity to motion being detected.
Left is less sensitive. Right is the most sensitive




Motion Sensor

Low Motion Sensitivity



Motion Sensor

Mid Motion Sensitivity



Motion Sensor

High Motion Sensitivity



3-CCT Selectable

Set the light color temperature - 3000K / 4000K / 5000K




CCT

3000K



CCT

4000K




CCT

5000K






Angles: Each head individually rotates
90° up or down and left to right

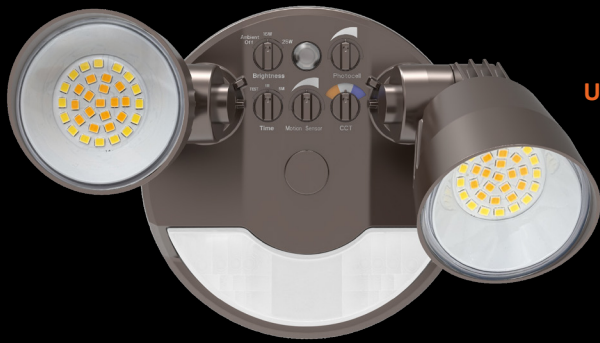

90°
Up & Down
Rotation

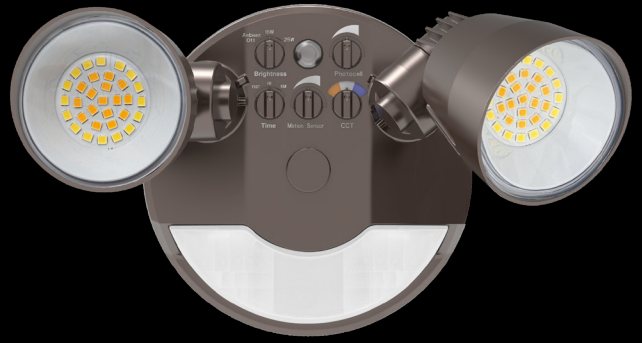

90°
Left & Right
Twist

Available in 3 Color Finishes



Applications

Residential



Outdoor Corridor



Alleyways





envisionledlighting.com

EnVision LED Lighting

P- 323-604-0066 M-F, 5am to 5pm PST

Information

cs@envisionledlighting.com

Orders

orders@envisionledlighting.com

View Latest Catalog

[**CLICK HERE**](#)



envisionled



envisionled



envision-led