


4" & 6" Smart Retrofit Downlight

RGB+W Wifi Control

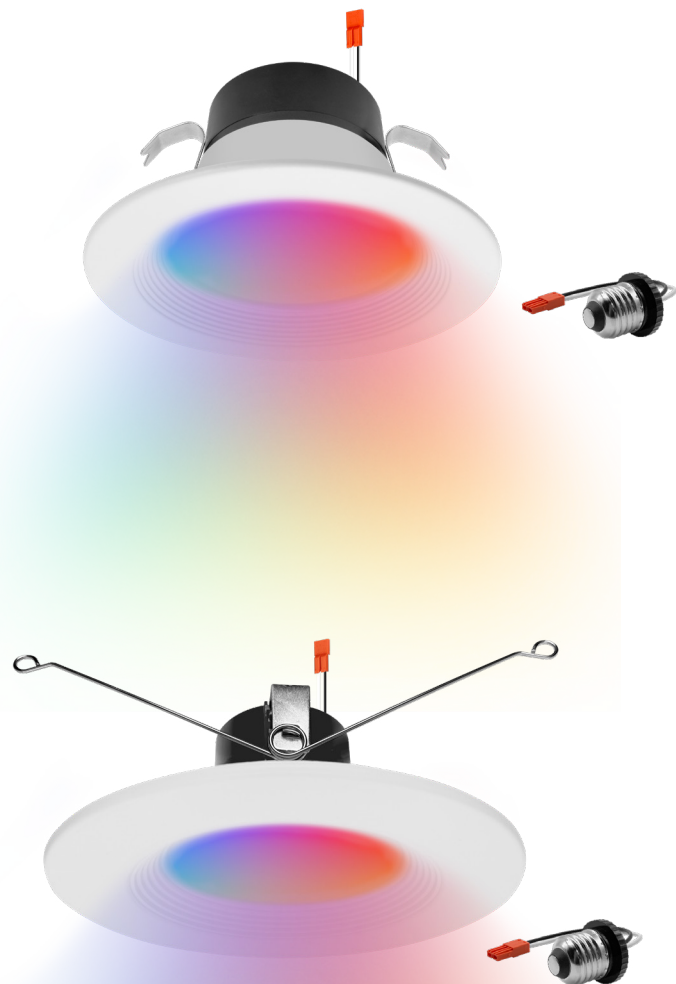

Detail Specifications:

- CCT: RGB + W
- 2700-6500K Tunable Downlight
- RGB+W
- Finish: White Baffle
- Wet Location Rated
- Beam Angle: 100°
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -40° - 114° F
- Lens: Frosted acrylic, non-yellowing
- Average life (L70) of 50,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- Wi-Fi Enabled with "EnVision Connect" App
- Available on Apple App Store & Google Play
- Google Home and Amazon Alexa Compatible
- Fixture includes orange led quick connect and E26 base adapter
- Ideal for use in both remodel and new construction applications
- Di-cast aluminum housing and trim for better heat dissipation

Driver Options:

- Built in 2.5Kv Surge Protector
- Flicker Free
- Dimmable down to 5% only with ENVISION SMART HOME APP
- This item is not compatible with wall dimmers

Mounting & Installation:

- 4": Tension clip springs fit into most 4" compatible recessed cans
- 6": Springs clips fit into most 5 & 6" compatible recessed cans
- Retrofit into existing housing with E26 socket
- Can be removed from below the ceiling for service or replacement

Certifications:

- ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- Meets LM-79 & LM-80 Standards
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with ASTM E119, CAN ULC S101
- 5 Year Limited Warranty

Item

LED-ECODL-4-10W-RGB+W

800lm

LED-ECODL-5/6-12W-RGB+W

1000lm

Optional Accessories (Order Separately)

Housings & Cans

Fire Rated Housings & Cans

C4-NC-ICAT-LED

4" IC Rated Can:

New Construction

C4-RM-ICAT-LED

4" IC Rated Can:

Retrofit

C6-NC-ICAT-LED

6" IC Rated Can:

New Construction

C6-RM-ICAT-LED

6" IC Rated Can:

Retrofit

C4-NC-ICAT-LED-FR

4" IC Rated Can:

New Construction


C6-NC-ICAT-LED-FR

6" IC Rated Can:


Retrofit

Specs and model numbers are subject to change with or without notice.

FEATURES



4in. Version
Installation
Clips

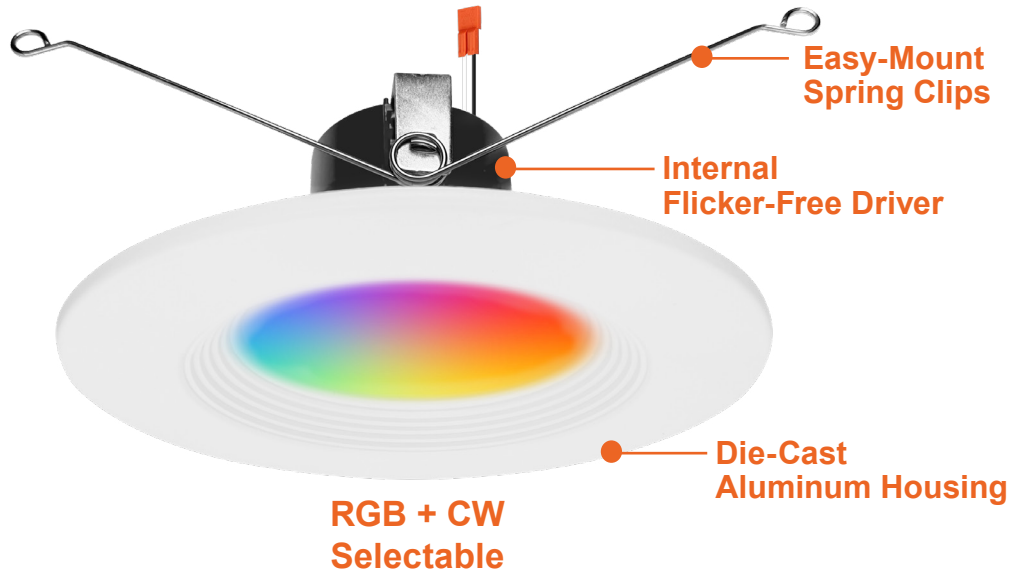





RGB+W



DIMMABLE




DIMENSIONS

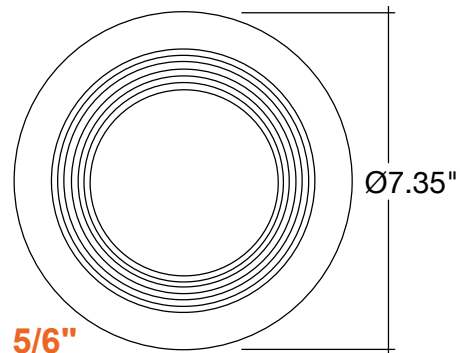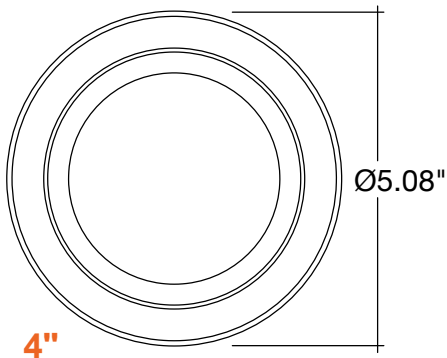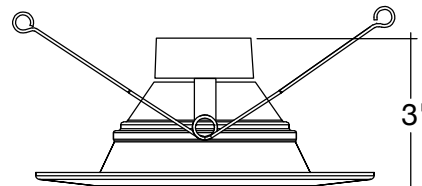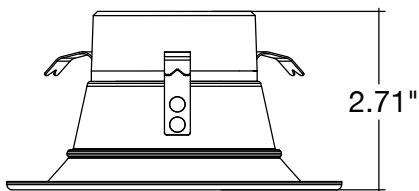




C4-RM-ICAT-LED-0/10V
C6-RM-ICAT-LED-0/10V

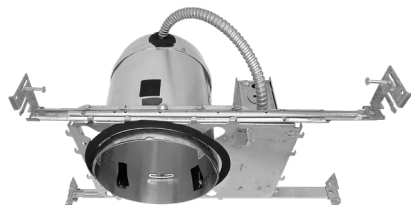

C4-NC-ICAT-LED-0/10V
C6-NC-ICAT-LED-0/10V

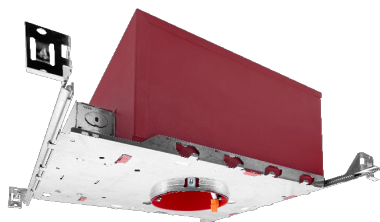

C4-NC-ICAT-LED-FR-0/10V
C6-NC-ICAT-LED-FR-0/10V

Model	Voltage	Watts	Lumens	Color
LED-ECODL-4-10W-RGB+W	120V	10.5w	800	RGB+W
LED-ECODL-5/6-12W-RGB+W	120V	12w	1000	RGB+W

HOUSING & CANS

Model	Voltage	Description
C4-NC-ICAT-LED-0/10V	120-277V	4" IC Rated Can (New Construction)
C4-RM-ICAT-LED-0/10V	120-277V	4" IC Rated Can (Remodel)
C6-NC-ICAT-LED-0/10V	120-277V	6" IC Rated Can (New Construction)
C6-RM-ICAT-LED-0/10V	120-277V	6" IC Rated Can (Remodel)

FIRE RATED HOUSING & CANS

Model	Voltage	Description
C4-NC-ICAT-LED-FR-0/10V	120-277V	4" Fire Rated IC Can (New Construction)
C6-NC-ICAT-LED-FR-0/10V	120-277V	6" Fire Rated IC Can (New Construction)