



Low Voltage: Path Lights (Shade)

Solid Brass – Architectural Models



- Detail Specifications:**
- Finish: Oil Rubbed Bronze or Matte Black
 - Housing: Corrosion Resistant Solid Brass
 - Lamp Type:
 - G4 Bulbs 12V (not included)
 - 35W Halogen Max
 - LED bulbs available
 - IP Rating: Wet Location IP65
 - Lens: Clear glass

- Applications:**
- Landscape
 - Walkways & Pathways
 - Security Lighting
 - Hospitality, Multi-Family
 - Outdoor Corridors
 - General Outdoor Lighting
 - Residential, Commercial

- Product Information:**
- Heat resistant glass lens
 - Water tight silicone ring for waterproofing
 - Stem Options: 12" or 24" Height
 - Shade Options: various options available
 - Stem and shade sold separately
 - Packaging: Retail color box
 - Master box quantity: 10pcs.

- Driver Options:**
- Compatible with 12V Low Voltage Drivers

- Mounting & Installations:**
- Wire: 6' (72") SPT-1W 18 gauge wire lead
 - Spike: 8.3" Non-metallic spike included
 - Optional brass spike available
 - Sold brass pipe with 1/2" knuckle stem


- Warranty:**
- Lifetime Anti-Corrosion Warranty

Oil Rubbed Bronze Stem Options	Oil Rubbed Bronze Shade Options	Matte Black Stem Options	Oil Rubbed Bronze Shade Options	1 Bulb Options
PL-12-BR-ORB-12V 12" Height PL-24-BR-ORB-12V 24" Height	PL-H-BR-ORB-1 Style 1 PL-H-BR-ORB-2 Style 2 PL-H-BR-ORB-3 Style 3	PL-12-BR-MBL-12V 12" Height PL-24-BR-MBL-12V 24" Height	PL-H-BR-MBL-1 Style 1 PL-H-BR-MBL-2 Style 2 PL-H-BR-MBL-3 Style 3	LED-G4WP-1.5W-SW 2700K LED-G4WP-1.5W-WW 3000K LED-G4WP-1.5W-CW 4000K LED-G4WP-2.5W-SW 2700K LED-G4WP-2.5W-WW 3000K LED-G4WP-2.5W-CW 4000K LED-G4WP-3.5W-SW 2700K LED-G4WP-3.5W-WW 3000K LED-G4WP-3.5W-CW 4000K


Optional Accessories on Page 3

Specs and model numbers are subject to change with or without notice. Customization of product is available.

FEATURES

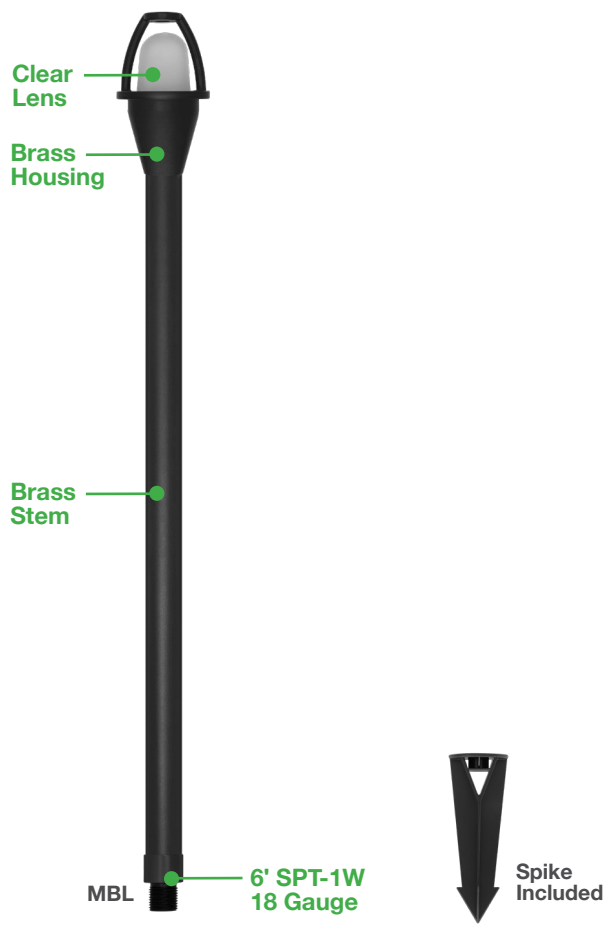

DIMENSIONS

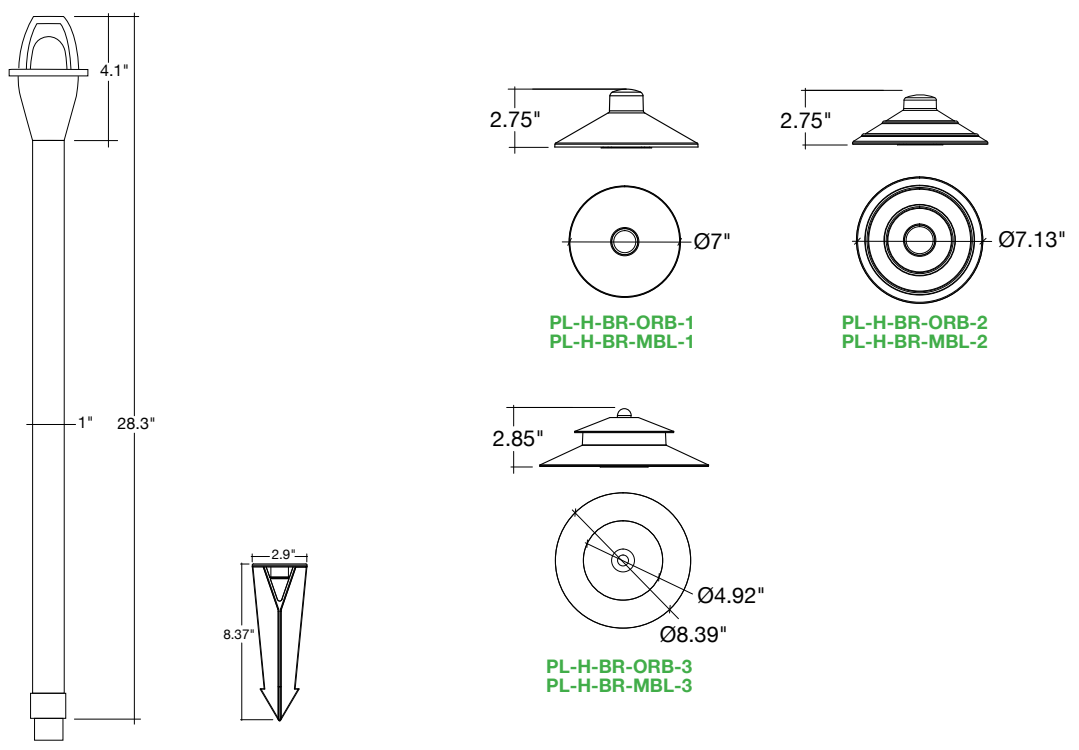



LED-G4WP-1.5W-SW
LED-G4WP-1.5W-WW
LED-G4WP-1.5W-CW



LED-G4WP-2.5W-SW
LED-G4WP-2.5W-WW
LED-G4WP-2.5W-CW



LED-G4WP-3.5W-SW
LED-G4WP-3.5W-WW
LED-G4WP-3.5W-CW



STK-HD-1/2-BR



SM-1/2-BR-ORB



SM-1/2-BR-MBL



SM-1/2-ALM-BZ



SM-1/2-ALM-BL



SM3-1/2-BR-ORB



SM3-1/2-BR-MBL



STKC-1/2-BR-ORB



STKC-1/2-BR-MBL



PL-AT-1/2-ALM-BZ



PL-AT-1/2-ALM-BL

Model	Voltage	Color
PL-12-BR-ORB-12V	12V	Oil Rubbed Bronze
PL-24-BR-ORB-12V	12V	Oil Rubbed Bronze
PL-12-BR-MBL-12V	12V	Matte Black
PL-24-BR-MBL-12V	12V	Matte Black

BULBS

Model	Voltage	Watts	Lumens	Color
LED-G4WP-1.5W-SW	12V AC/DC	1.5w	110	2700k
LED-G4WP-1.5W-WW	12V AC/DC	1.5w	110	3000k
LED-G4WP-1.5W-CW	12V AC/DC	1.5w	110	4000k
LED-G4WP-2.5W-SW	12V AC/DC	2.5w	210	2700k
LED-G4WP-2.5W-WW	12V AC/DC	2.5w	210	3000k
LED-G4WP-2.5W-CW	12V AC/DC	2.5w	210	4000k
LED-G4WP-3.5W-SW	12V AC/DC	3.5w	280	2700k
LED-G4WP-3.5W-WW	12V AC/DC	3.5w	280	3000k
LED-G4WP-3.5W-CW	12V AC/DC	3.5w	280	4000k

STAKE

Model	Voltage
STK-HD-1/2-BR	Brass Stake 10" Heavy Duty

SURFACE MOUNT

Model	Description
SM-1/2-BR-ORB	Brass Stake 10" Heavy Duty (Oil Rubber Bronze)
SM-1/2-BR-MBL	Brass 1/2" Surface Mount (Matte Black)
SM-1/2-ALM-BZ	Aluminum 1/2" Surface Mount (Bronze)
SM-1/2-ALM-BL	Aluminum 1/2" Surface Mount (Black)

TREE MOUNT

Model	Description
SM3-1/2-BR-ORB	Brass Stake 10" Heavy Duty (Oil Rubber Bronze)
SM3-1/2-BR-MBL	Brass 1/2" Surface Mount (Matte Black)

STAKE COVER

Model	Description
STKC-1/2-BR-ORB	Brass Stake Cover(Oil Rubbed Bronze)
STKC-1/2-BR-MBL	Brass Stake Cover(Matte Black)

PATH LIGHT COVER

Model	Description
PL-AT-1/2-ALM-BZ	Path Light Cover (Bronze)
PL-AT-1/2-ALM-BL	Path Light Cover (Black)