



2" LED Canless Downlight: SnapTrim-Line

Canless Series

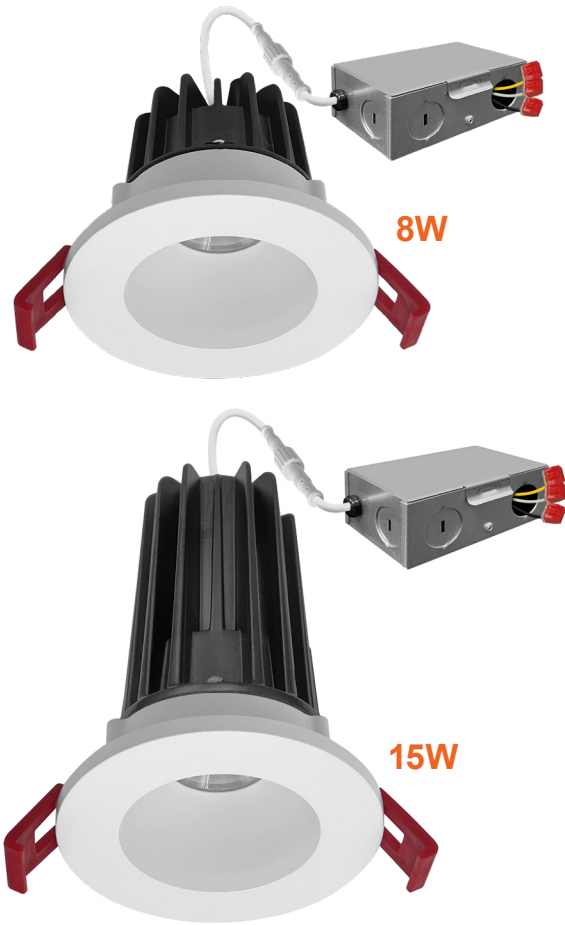

Project: _____ Part #: _____
Type: _____

Canless



Detail Specification:

- Finish: White, Black, Round, Square
- IP54 Wet Location Rated
- Beam Angle: 38° standard, other options available
- Chip: COB Chip, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Clear COB
- Average life (L70) of 50,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- 5-CCT Selectable: 27/30/35/40/50K or warm dimming 30 to 18K
- Various sizes, finishes, and trims available
- Standard white round trim included: optional trims available
- Metal housing and trim for better heat dissipation
- Optional emergency backup available: delivers full lumens in EM mode
- SnapTrim Canless: Spring clips with remote j-box eliminates can

Driver Options:

- 120V Triac Dimmable
- Built in 2.5kV Surge Protector
- Flicker Free

Mounting & Installation:

- Cut Out Dimension: 2-3/4"
- Optional new construction plate available
- This fixture does not fit into a recessed can
- No housing needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

Certifications:

- ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight

Series	Emergency	Beam Angle
LED-DLJBX-2-8W-5CCT-W/W-SM 2" 8W • 600 Lumens	(Blank) No Emergency Backup	(Blank) 38° Degree
LED-DLJBX-2-6W-3WD-W/W-S 2" 6W • 450 Lumens	EMB Emergency Backup	24D 24° Degree
LED-DLJBX-2-12W-3WD-W/W-S 2" 12W • 850 Lumens	EMB Emergency Backup	60D 60° Degree
LED-DLJBX-2-15W-5CCT-W/W-S 2" 15W • 1,000 Lumens	EMB Emergency Backup	60D 60° Degree
LED-DLJBX-2-15W-5CCT-W/W-S-0/10V 2" 15W • 120-277V • 0-10V Dim 1,000 Lumens	EMB Emergency Backup	60D 60° Degree


Optional Accessories (Order Separately)

Trim Options	New Construction Plates	Extension Cables	Emergency Backup 1 (field install)	Optics
DLJBX-2-TRIM-BLK-S Black Smooth Reflector & Round Trim	CUNV-NC-ICAT-7H Universal Plate with hanging bars (Round fixtures only)	JBX-EXT-6'-2PIN 6' Extension	LED-EMB-15W-HV-0/10V-2P Up to 14W fixtures	OPTIC-35X17-24D Field Installable
DLJBX-2-TRIM-BZ-S Bronze Smooth Reflector & Round Trim	CUNV-JBX-RI-XL Universal Rough In Plate Extra long (Round fixtures only)	JBX-EXT-10'-2PIN 10' Extension	LED-EMB-25W-HV-0/10V-2P Up to 24W fixtures	OPTIC-35X17-60D Field Installable
DLJBX-2-TRIM-BN-S Brushed Nickel Smooth Reflector & Round Trim		JBX-EXT-12'-2PIN 12' Extension		60 Degree Lens
DLJBX-2-TRIM-CH-S Chrome Smooth Reflector & Round Trim				
DLJBX-2-TRIM-WH-BFL White Baffle Reflector & Round Trim				
DLJBX-2-TRIM-BL-BFL Black Baffle Reflector & Round Trim				
DLJBX-2-TRIM-BZ-BFL Black Baffle Reflector & Round Trim				
DLJBX-2-TRIM-WH-S-SQ White Square Trim (Reflector not included)				
DLJBX-2-TRIM-BL-S-SQ Black Square Trim (Reflector not included)				
DLJBX-2-TRIM-BZL-S-SQ Bronze Square Trim (Reflector not included)				
DLJBX-2-TRIM-BN-S-SQ Brushed Nickel Square Trim (Reflector not included)				


1. Field installable. Lasts 90 minutes.

Specs and model numbers are subject to change with or without notice.


FEATURES

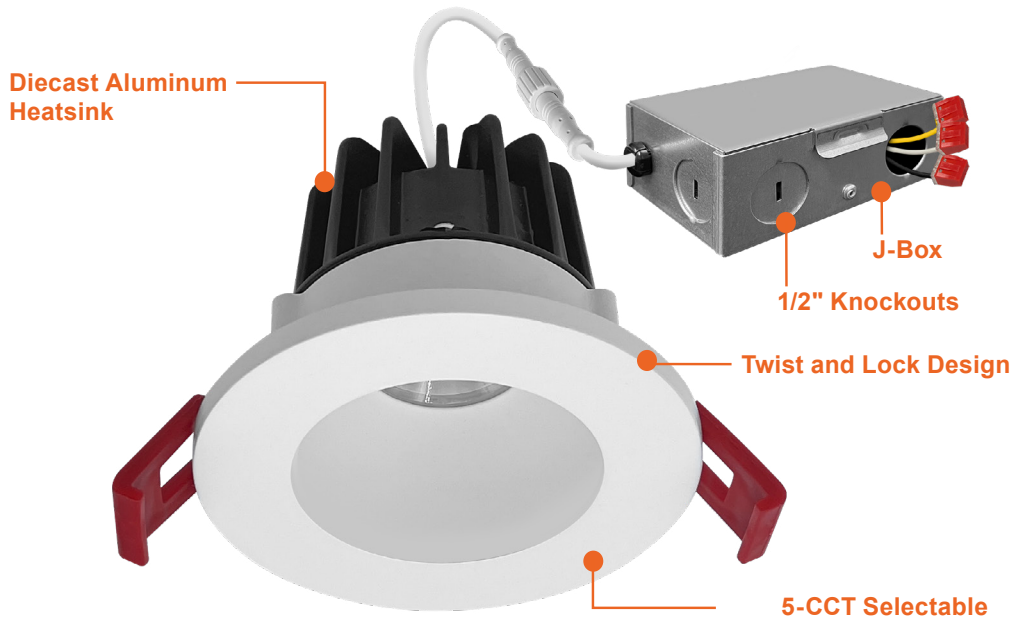

DIMENSIONS

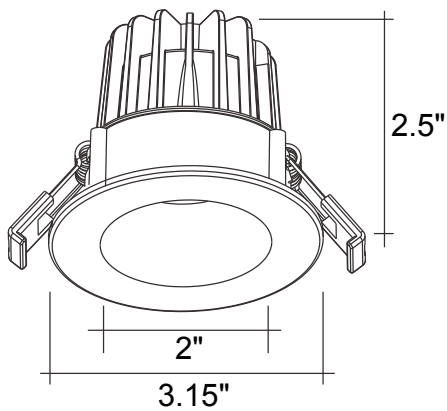

6W/8W

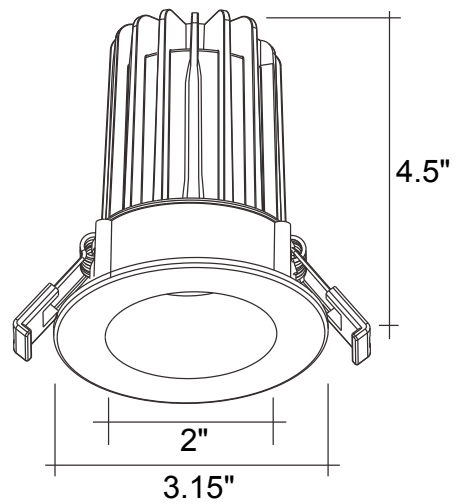

12W/15W

ACCESSORIES



White



Black



Bronze



Chrome



Nickel



White




Black




Bronze



Nickel



CUNV-NC-ICAT-7H
Universal Pre-Mounting Plate
13 7/8" x 15 1/8"



CUNV-JBX-RI-XL
7" x 26"



JBX-EXT
6' / 10' / 12' Extension Cable



LED-EMB-15W-HV-0/10V-2P
LED-EMB-25W-HV-0/10V-2P



OPTIC-35X17-24D
OPTIC-3.5X17-60D

Fixture Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-2-6W-3WD-W/W-S	120V	6W	450	30K-18K	>90
LED-DLJBX-2-8W-5CCT-WW-SM	120V	8W	600	27/30/35/40/50k	>90
LED-DLJBX-2-12W-3WD-W/W-S	120V	12W	850	30K-18K	>90
LED-DLJBX-2-15W-5CCT-W/W-S	120V	15W	1000	27/30/35/40/50k	>90
LED-DLJBX-2-15W-5CCT-W/W-S-0/10V	120-277V	15W	1000	27/30/35/40/50k	>90

TRIMS

Trim Model	Description
DLJBX-2-TRIM-BLK-S	2" Black In and Out Smooth Trim (Reflector and Trim Included)
DLJBX-2-TRIM-BL-BFL	2" Black In and Out Baffle Trim (Reflector and Trim Included)
DLJBX-2-TRIM-BZ-S	2" Bronze In and Out Smooth Trim (Reflector and Trim Included)
DLJBX-2-TRIM-BZ-BFL	2" Bronze In and Out Baffle Trim (Reflector and Trim Included)
DLJBX-2-TRIM-BN-S	2" Brushed Nickel In and Out Smooth Trim (Reflector and Trim Included)
DLJBX-2-TRIM-CH-S	2" Chrome In and Out Smooth Trim (Reflector and Trim Included)
DLJBX-2-TRIM-WH-BFL	2" White In and Out Baffle Trim (Reflector and Trim Included)
DLJBX-2-TRIM-BN-S-SQ	2" Brushed Nickel Smooth Square Trim (Trim only, Reflector Not Included)
DLJBX-2-TRIM-BL-S-SQ	2" Black Smooth Square Trim (Trim only, Reflector Not Included)
DLJBX-2-TRIM-BZ-SQ	2" Bronze Smooth Square Trim (Trim only, Reflector Not Included)
DLJBX-2-TRIM-WH-S-SQ	2" White Smooth Square Trim (Trim only, Reflector Not Included)

CONSTRUCTION PLATES

Accessory	Description
CUNV-NC-ICAT-7H	1" 2"3" 3.5" 4" 5" 6" Universal Pre-Mounting New Construction Plate (Round fixtures only)
CUNV-JBX-RI-XL	Universal tough in plate Extra Long (Round fixtures only)

EXTENSION CABLE

Accessory	Description
JBX-EXT-6'-2PIN	6' Extension Cable
JBX-EXT-10'-2PIN	10" Extension Cable
JBX-EXT-12'-2PIN	12" Extension Cable

EMERGENCY BACKUP

Accessory	Description
LED-EMB-15W-HV-0/10V-2P	Up to 14W fixtures
LED-EMB-25W-HV-0/10V-2P	Up to 24W fixtures

OPTICS

Accessory	Description
OPTIC-35X17-24D	Field Installable 24 Degree Lens
OPTIC-35X17-60D	Field Installable 60 Degree Lens

TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.
TRIAC/ELV Dimmers

Lutron	Leviton	Legrand	Cooper
AYCL-153P	NTELV-300P	6633	ADTP703TU 9540
DV-600PR	S-600P	6674	H703PTW DAL06P
DVCL-153P	CT-600P	6602	
MACL-153MH	CTCL-153P	IPL06	
MRF2-6CL	TG-600P		
D-600P	TCCL-153P		