

EcoValue 4" & 6" Round Retrofit Downlights

5-CCT Selectable



4"



5/6"



**E26 Base
Included**

Detail Specifications:

- Finish: White Smooth or Baffle
- Black, Bronze, Brushed Nickel (Smooth & Baffle options)
- Wet Location Rated
- 5-CCT Selectable: 27/30/35/40/50K
- Beam Angle: 100°
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -40° - 114° F
- Lens: Frosted acrylic, non-yellowing
- Average life (L70) of 30,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- Fixture includes orange led quick connect and E26 base adapter
- Ideal for use in both remodel and new construction applications
- Metal housing and trim for better heat dissipation
- Select-n-Switch Technology: 5-CCT Selectable

Driver Options:

- 120V Triac Dimmable down to 5%
- Built in 2.5Kv Surge Protector
- AC Technology

Mounting & Installation:

- 4": Tension clip springs fit into most 4" compatible recessed cans
- 6": Springs clips fit into most 5 & 6" compatible recessed cans
- Retrofit into existing housing with E26 socket
- Can be removed from below the ceiling for service or replacement

Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- Meets LM-79 & LM-80 Standards
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- 3 Year Limited Warranty

Series

ECV-RDL-4-10W-5CCT-WH-SM
10W • 800LM • Smooth Trim
ECV-RDL-4-10W-5CCT-WH-BFL
10W • 800LM • Baffle Trim
ECV-RDL-5/6-15W-5CCT-WH-SM
15W • 1,200LM • Smooth Trim
ECV-RDL-5/6-15W-5CCT-WH-BFL
15W • 1,200LM • Baffle Trim


Optional Accessories (Order Separately)

4" Trim Options	6" Trim Options	Housing & Cans	Fire Rated Housings & Cans
RDL-TRIM-4-BLK-SM Black Smooth	RDL-TRIM-5/6-BLK-SM Black Smooth	C4-NC-ICAT-LED 4" IC Rated Can:	C4-NC-ICAT-LED-FR 4" IC Rated Can:
RDL-TRIM-4-BZ-SM Bronze Smooth	RDL-TRIM-5/6-BZ-SM Bronze Smooth	C4-RM-ICAT-LED New Construction	C6-NC-ICAT-LED-FR New Construction
RDL-TRIM-4-BN-SM Brushed Nickel Smooth	RDL-TRIM-5/6-BN-SM Brushed Nickel Smooth	C6-NC-ICAT-LED 4" IC Rated Can:	C6-RM-ICAT-LED 6" IC Rated Can:
RDL-TRIM-4-WH-BFL White Baffle	RDL-TRIM-5/6-WH-BFL White Baffle	C6-RM-ICAT-LED Retrofit	C6-NC-ICAT-LED-FR New Construction
RDL-TRIM-4-BLK-BFL Black Baffle	RDL-TRIM-5/6-BLK-BFL Black Baffle	C6-NC-ICAT-LED 6" IC Rated Can:	
RDL-TRIM-4-BZ-BFL Bronze Baffle	RDL-TRIM-5/6-BZ-BFL Bronze Baffle	C6-RM-ICAT-LED New Construction	
RDL-TRIM-4-BN-BFL Brushed Nickel Baffle	RDL-TRIM-5/6-BN-BFL Brushed Nickel Baffle	C6-RM-ICAT-LED Retrofit	
RDL-TRIM-4-CUSTOM Custom Color	RDL-TRIM-5/6-CUSTOM Custom Color		



1. Field installable. Lasts 90 minutes.

Specs and model numbers are subject to change with or without notice. Customization of product is available.

FEATURES


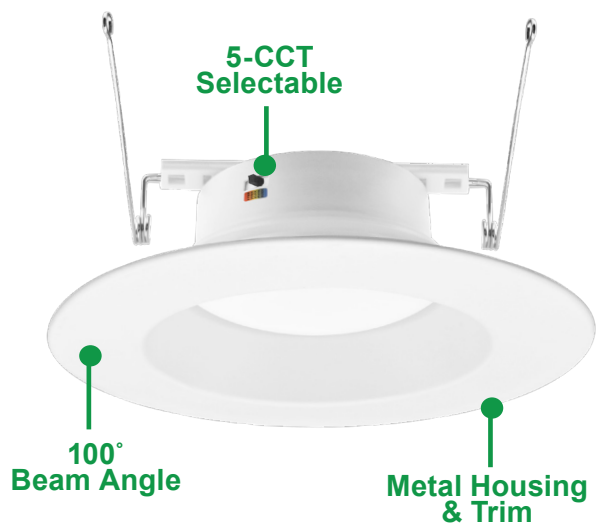


DIMENSIONS

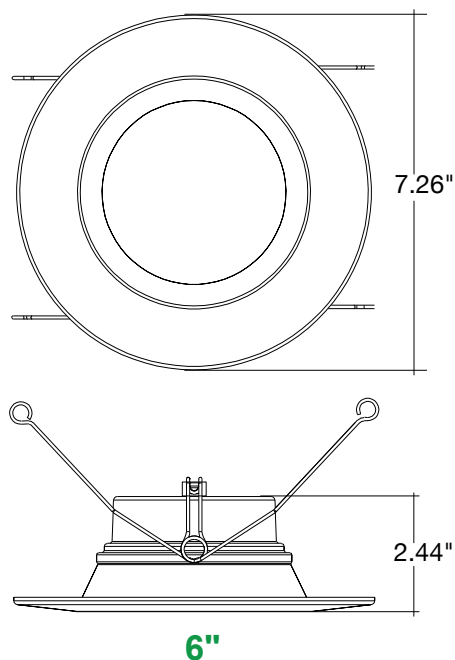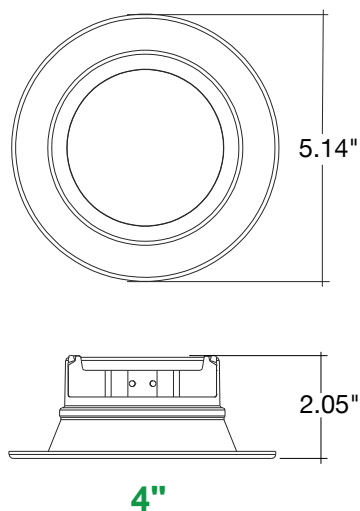

Specs and model numbers are subject to change with or without notice. Customization of product is available.

ACCESSORIES

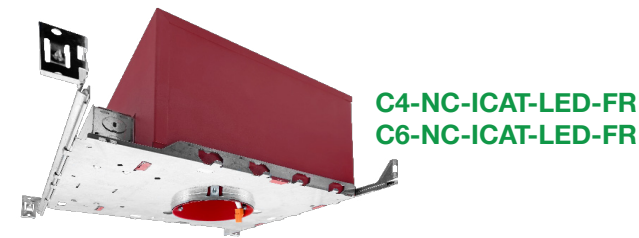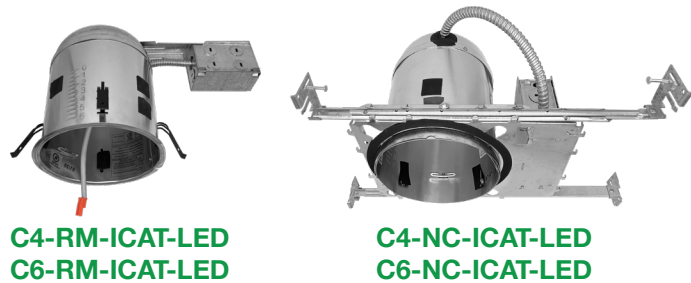

Model	Voltage	Watts	Lumens	Color	CRI
ECV-RDL-4-10W-5CCT-WH-SM	120V	10w	800lm	27/30/35/40/50K	>90
ECV-RDL-4-10W-5CCT-WH-BFL	120V	10w	800lm	27/30/35/40/50K	>90
ECV-RDL-5/6-15W-5CCT-WH-SM	120V	15w	1,200lm	27/30/35/40/50K	>90
ECV-RDL-5/6-15W-5CCT-WH-BFL	120V	15w	1,200lm	27/30/35/40/50K	>90

TRIMS

Accessory Model	Description
RDL-TRIM-4-BLK-SM	4" Black Trim Smooth
RDL-TRIM-4-BZ-SM	4" Bronze Trim Smooth
RDL-TRIM-4-BN-SM	4" Brushed Nickel Trim Smooth
RDL-TRIM-4-WH-BFL	4" White Trim Baffle
RDL-TRIM-4-BLK-BFL	4" Black Trim Baffle
RDL-TRIM-4-BZ-BFL	4" Bronze Trim Baffle
RDL-TRIM-4-BN-BFL	4" Brushed Nickel Trim Baffle
RDL-TRIM-4-CUSTOM	4" Custom Trim
RDL-TRIM-5/6-BLK-SM	5/6" Black Trim Smooth
RDL-TRIM-5/6-BZ-SM	5/6" Bronze Trim Smooth
RDL-TRIM-5/6-BN-SM	5/6" Brushed Nickel Trim Smooth
RDL-TRIM-5/6-WH-BFL	5/6" White Trim Baffle
RDL-TRIM-5/6-BLK-BFL	5/6" Black Trim Baffle
RDL-TRIM-5/6-BRZ-BFL	5/6" Bronze Trim Baffle
RDL-TRIM-5/6-BN-BFL	5/6" Brushed Nickel Trim Baffle
RDL-TRIM-5/6-CUSTOM	5/6" Custom Trim

HOUSING & CANS

Model	Voltage	Description
C4-NC-ICAT-LED	120-277V	4" IC Rated Can (New Construction)
C4-RM-ICAT-LED	120-277V	4" IC Rated Can (Remodel)
C6-NC-ICAT-LED	120-277V	6" IC Rated Can (New Construction)
C6-RM-ICAT-LED	120-277V	6" IC Rated Can (Remodel)

FIRE RATED HOUSING & CANS

Model	Voltage	Description
C4-NC-ICAT-LED-FR	120-277V	4" Fire Rated IC Can (New Construction)
C6-NC-ICAT-LED-FR	120-277V	6" Fire Rated IC Can (New Construction)

TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

Lutron	Leviton
TG-600PR-WH	6672
S-600PR-WH	6674
CTCL-153PDH-WH	DSL06
SLV-600P-AL	PD-6WCL
DV-600PR-WH	MACL-153M//MA-R
SCL-153PH-WH	

Specs and model numbers are subject to change with or without notice. Customization of product is available.